



Redis

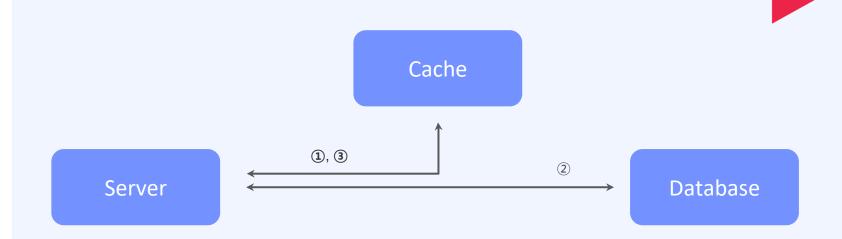

cache aside pattern

Redis

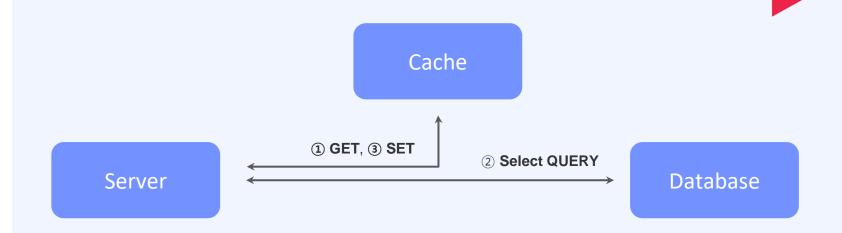

cache aside pattern

## Cache 실습



## **Quick reference**

- Maintained by:
   the Docker Community and the MySQL Team
- Where to get help:
   the Docker Community Slack, Server Fault, Unix & Linux, or Stack Overflow

## Supported tags and respective Dockerfile links

- 8.0.33, 8.0, 8, latest, 8.0.33-oracle, 8.0-oracle, 8-oracle, oracle
- 8.0.33-debian, 8.0-debian, 8-debian, debian
- 5.7.42, 5.7, 5, 5.7.42-oracle, 5.7-oracle, 5-oracle
- 5.7.42-debian, 5.7-debian, 5-debian

## Quick reference (cont.)

- Where to file issues: https://github.com/docker-library/mysql/issues
- · Supported architectures: (more info)

Redis

→ docker run -e MYSQL\_ROOT\_PASSWORD=fastcampus -d -p 3306:3306 mysql:8 3d433a50f168a55ba51256326c2e539e81ed9a69c62da65fc5e9dde6c1f91d75 Cache 실습
Redis

```
~ docker ps
CONTAINER ID IMAGE
                          COMMAND
                                                  CREATED
                                                                   STATUS
                                                                                  PORTS
                                                                                                                     NAMES
3d433a50f168
              mysal:8
                          "docker-entrypoint.s.."
                                                  23 minutes ago
                                                                  Up 23 minutes
                                                                                  0.0.0.0:3306->3306/tcp, 33060/tcp
                                                                                                                     distracted_hodakin
              redis:6.2
                                                                                                                     elastic_hermann
                          "docker-entrypoint.s..."
                                                  2 days ago
                                                                   Up 2 days
                                                                                  0.0.0.0:6379->6379/tcp
```

```
→ ~ docker exec -it 3d433a50f168 mysql -p
Enter password:
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 15
Server version: 8.0.33 MySQL Community Server - GPL

Copyright (c) 2000, 2023, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

```
Cache 실습
```

```
mysql> create database fastsns;
Query OK, 1 row affected (0.01 sec)
```

```
mysql> use fastsns;
Database changed
```

2

Redis

