



Migrating Workloads on Azure / AWS

NetApp Solutions

NetApp
September 19, 2023

This PDF was generated from <https://docs.netapp.com/us-en/netapp-solutions/ehc/azure/azure-migrate-vmware-hcx.html> on September 19, 2023. Always check docs.netapp.com for the latest.

Table of Contents

Migrating Workloads on Azure / AVS 1

 TR-4940: Migrate workloads to Azure NetApp Files datastore using VMware HCX - Quickstart guide 1

Migrating Workloads on Azure / AVS

TR-4940: Migrate workloads to Azure NetApp Files datastore using VMware HCX - Quickstart guide

Author(s): NetApp Solutions Engineering

Overview: Migrating virtual machines with VMware HCX, Azure NetApp Files datastores, and Azure VMware solution

One of the most common use cases for the Azure VMware Solution and Azure NetApp Files datastore is the migration of VMware workloads. VMware HCX is a preferred option and provides various migration mechanisms to move on-premises virtual machines (VMs) and its data to Azure NetApp Files datastores.

VMware HCX is primarily a migration platform that is designed to simplify application migration, workload rebalancing, and even business continuity across clouds. It is included as part of Azure VMware Solution Private Cloud and offers many ways to migrate workloads and can be used for disaster recovery (DR) operations.

This document provides step-by-step guidance for provisioning Azure NetApp Files datastore followed by downloading, deploying, and configuring VMware HCX, including all its main components in on-premises and the Azure VMware Solution side including Interconnect, Network Extension, and WAN optimization for enabling various VM migration mechanisms.



VMware HCX works with any datastore type as the migration is at the VM level. Hence this document is applicable to existing NetApp customers and non-NetApp customers who are planning to deploy Azure NetApp Files with Azure VMware Solution for a cost-effective VMware cloud deployment.

High-level steps

This list provides the high-level steps necessary to install and configure HCX Cloud Manager on the Azure cloud side and install HCX Connector on-premises:

1. Install HCX through the Azure portal.
2. Download and deploy the HCX Connector Open Virtualization Appliance (OVA) installer in the on-premises VMware vCenter Server.
3. Activate HCX with the license key.
4. Pair the on-premises VMware HCX Connector with Azure VMware Solution HCX Cloud Manager.
5. Configure the network profile, compute profile, and service mesh.
6. (Optional) Perform network extension to avoid re-IP during migrations.
7. Validate the appliance status and ensure that migration is possible.
8. Migrate the VM workloads.

Prerequisites

Before you begin, make sure the following prerequisites are met. For more information, see this [link](#). After the prerequisites, including connectivity, are in place, configure and activate HCX by generating the license key from the Azure VMware Solution portal. After the OVA installer is downloaded, proceed with the installation process as described below.



HCX advanced is the default option and VMware HCX Enterprise edition is also available through a support ticket and supported at no additional cost.

- Use an existing Azure VMware solution software-defined data center (SDDC) or create a private cloud by using this [NetApp link](#) or this [Microsoft link](#).
- Migration of VMs and associated data from the on-premises VMware vSphere- enabled data center requires network connectivity from the data center to the SDDC environment. Before migrating workloads, [set up a site-to-site VPN or Express route global reach connection](#) between the on-premises environment and the respective private cloud.
- The network path from on-premises VMware vCenter Server environment to the Azure VMware Solution private cloud must support the migration of VMs by using vMotion.
- Make sure the required [firewall rules and ports](#) are allowed for vMotion traffic between the on-premises vCenter Server and SDDC vCenter. On the private cloud, routing on the vMotion network is configured by default.
- Azure NetApp Files NFS volume should be mounted as a datastore in Azure VMware Solution. Follow the steps detailed in this [link](#) to attach Azure NetApp Files datastores to Azure VMware Solutions hosts.

High Level Architecture

For testing purposes, the lab environment from on-premises used for this validation was connected through a site-to-site VPN, which allows on-premises connectivity to Azure VMware Solution.




Solution Deployment

Follow the series of steps to complete the deployment of this solution:

Step 1: Install HCX through Azure Portal using the Add-ons option

To perform the installation, complete the following steps:

1. Log in to the Azure Portal and access the Azure VMware Solution private cloud.
2. Select the appropriate private cloud and access Add-ons. This can be done by navigating to **Manage > Add-ons**.
3. In the HCX Workload Mobility section, click **Get Started**.

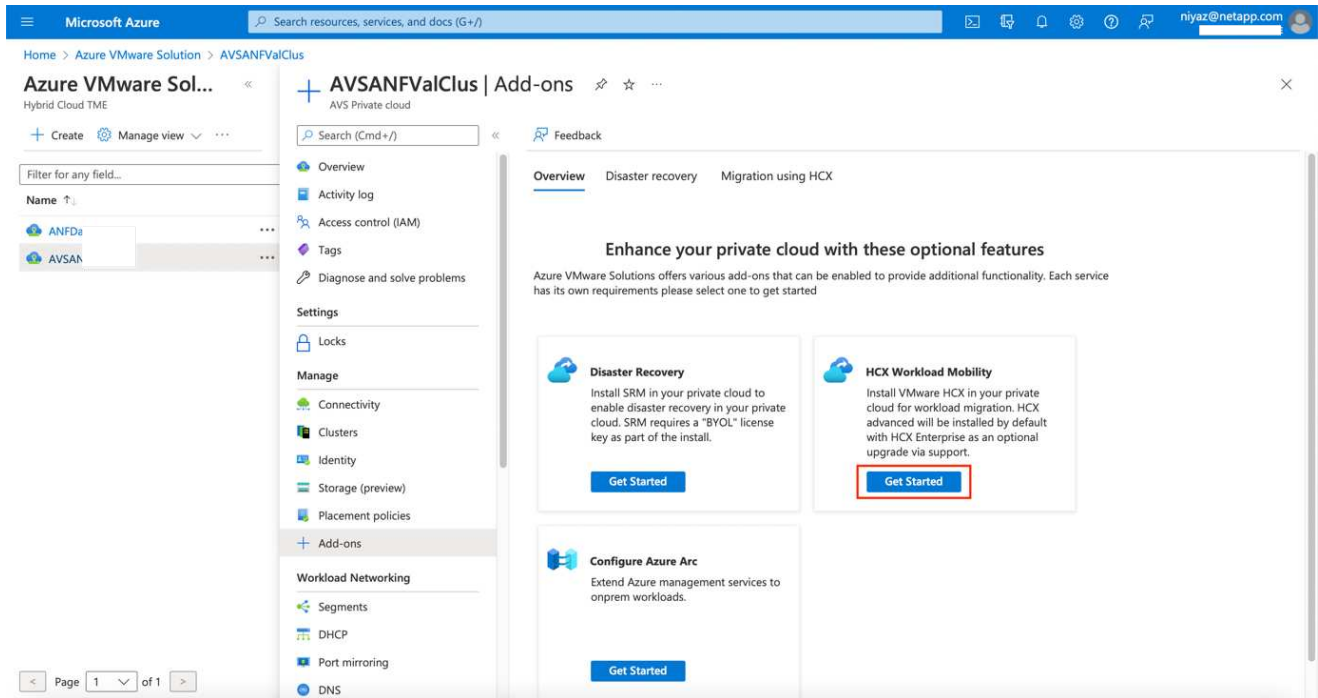

1. Select the **I Agree with Terms and Conditions** option and click **Enable and Deploy**.



The default deployment is HCX Advanced. Open a support request to enable the Enterprise edition.



The deployment takes approximately 25 to 30 minutes.

Microsoft Azure

Search resources, services, and docs (G+/I)

niyaz@netapp.com

Home > Azure VMware Solution > AVSANFValClus

Azure VMware Sol...

Hybrid Cloud TME

Create

Manage view

Filter for any field...

Name

ANFD

AVSA

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Settings

Locks

Manage

Connectivity

Clusters

Identity

Storage (preview)

Placement policies

Add-ons

Workload Networking

Segments

DHCP

Port mirroring

DNS

AVSANFValClus | Add-ons

AVS Private cloud

Feedback

Search (Cmd+I)

Overview

Disaster recovery

Migration using HCX

HCX is an application mobility platform that is designed for simplifying application migration, workload rebalancing, and business continuity across data centers and clouds. [Learn more.](#)

☒ I agree with terms and conditions.
By selecting above, you hereby acknowledge that HCX is not FedRamp compliant at this time and to be used at own risk.

HCX plan HCX Advanced

Enable and deploy

Page 1 of 1

Step 2: Deploy the installer OVA in the on-premises vCenter Server


For the on-premises Connector to connect to the HCX Manager in Azure VMware Solution, make sure the appropriate firewall ports are open in the on-premises environment.

To download and install HCX Connector in the on-premises vCenter Server, complete the following steps:

1. From the Azure portal, go to the Azure VMware Solution, select the private cloud, and select **Manage > Add-ons > Migration** using HCX and copy the HCX Cloud Manager portal to download the OVA file.




Use the default CloudAdmin user credentials to access the HCX portal.

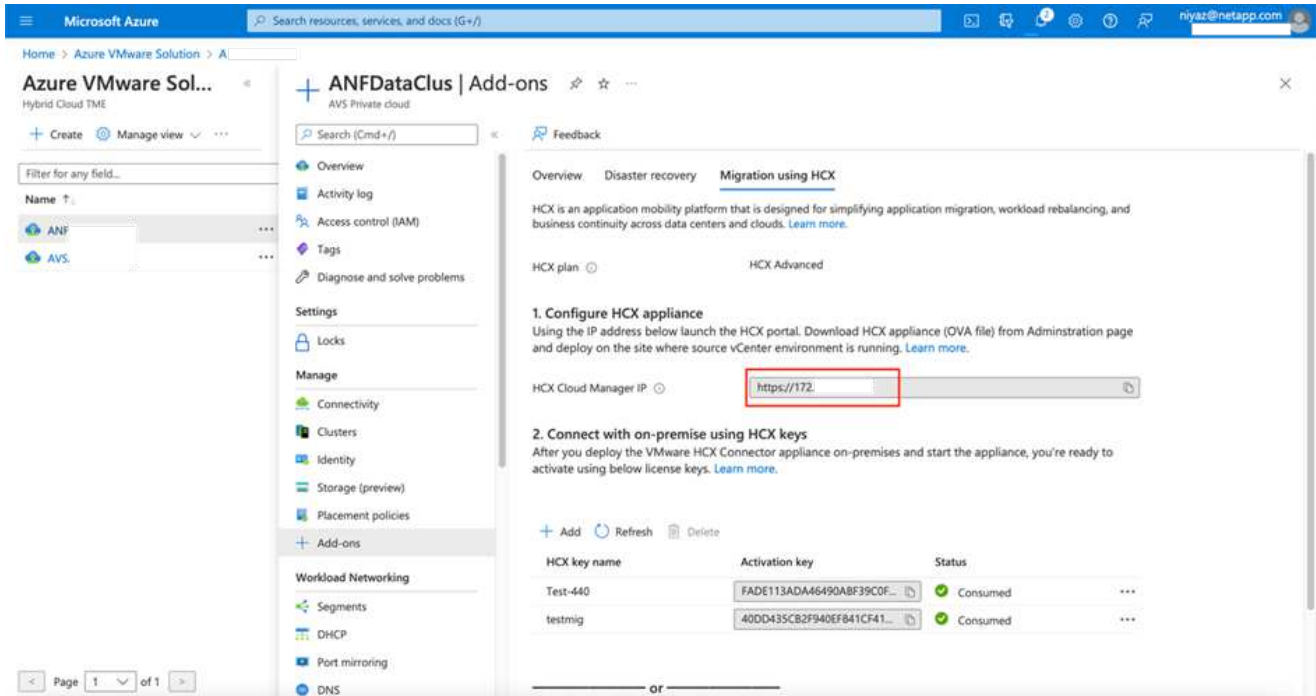


1. After you access the HCX portal with cloudadmin@vsphere.local using the jumphost, navigate to **Administration > System Updates** and click **Request Download Link**.



Either download or copy the link to the OVA and paste it into a browser to begin the download process of the VMware HCX Connector OVA file to deploy on the on-premises vCenter Server.

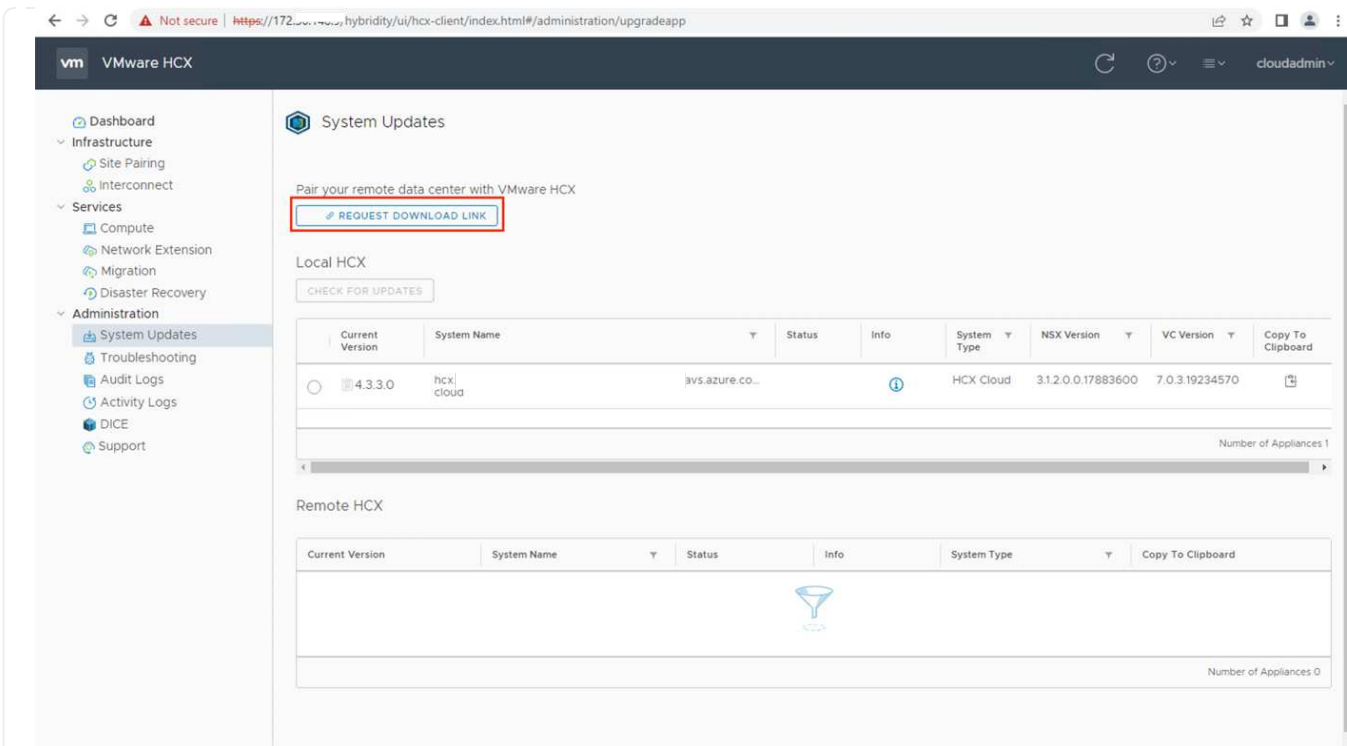

1. After the OVA is downloaded, deploy it on to the on-premises VMware vSphere environment by using the **Deploy OVF Template** option.

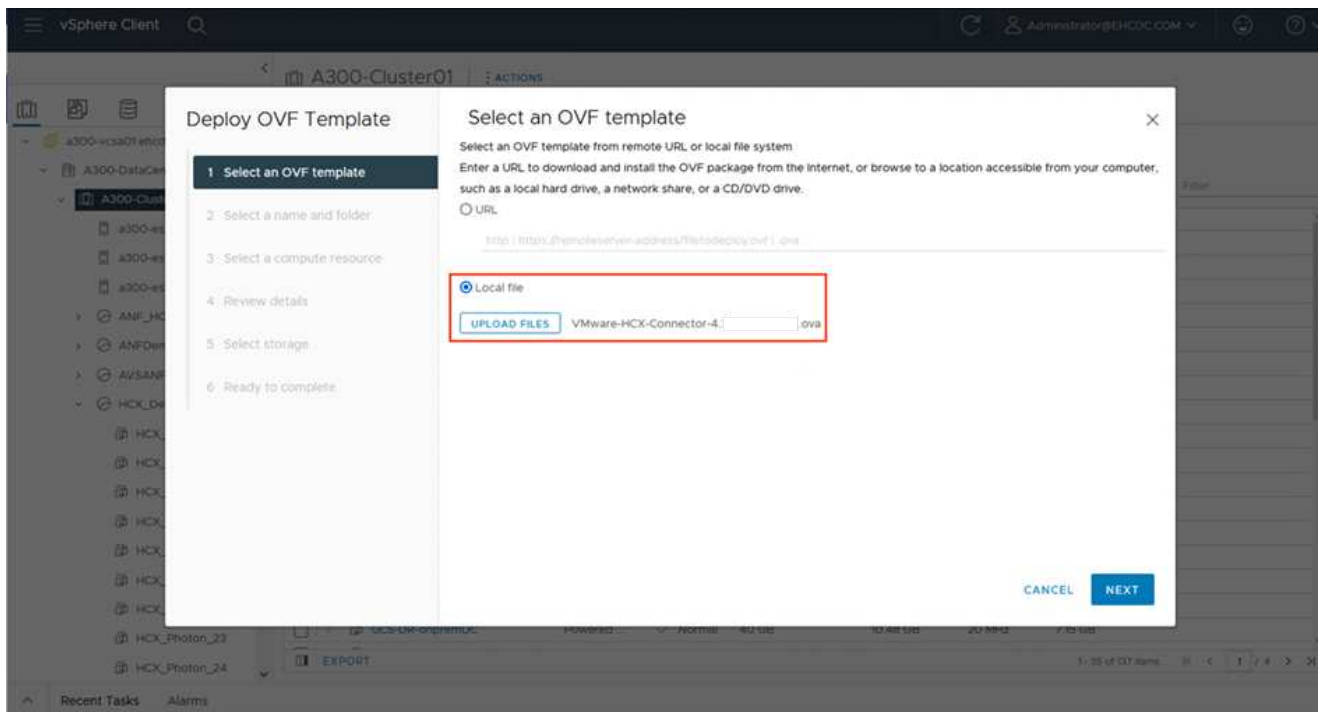

1. Enter all the required information for the OVA deployment, click **Next**, and then click **Finish** to deploy the VMware HCX connector OVA.




Power on the virtual appliance manually.


For step-by-step instructions, see the [VMware HCX User Guide](#).

Step 3: Activate HCX Connector with the license key

After you deploy the VMware HCX Connector OVA on-premises and start the appliance, complete the following steps to activate HCX Connector. Generate the license key from the Azure VMware Solution portal and activate it in VMware HCX Manager.

1. From the Azure portal, go to the Azure VMware Solution, select the private cloud, and select **Manage > Add-ons > Migration using HCX**.
2. Under **Connect with on-premise Using HCX keys**, click **Add** and copy the activation key.

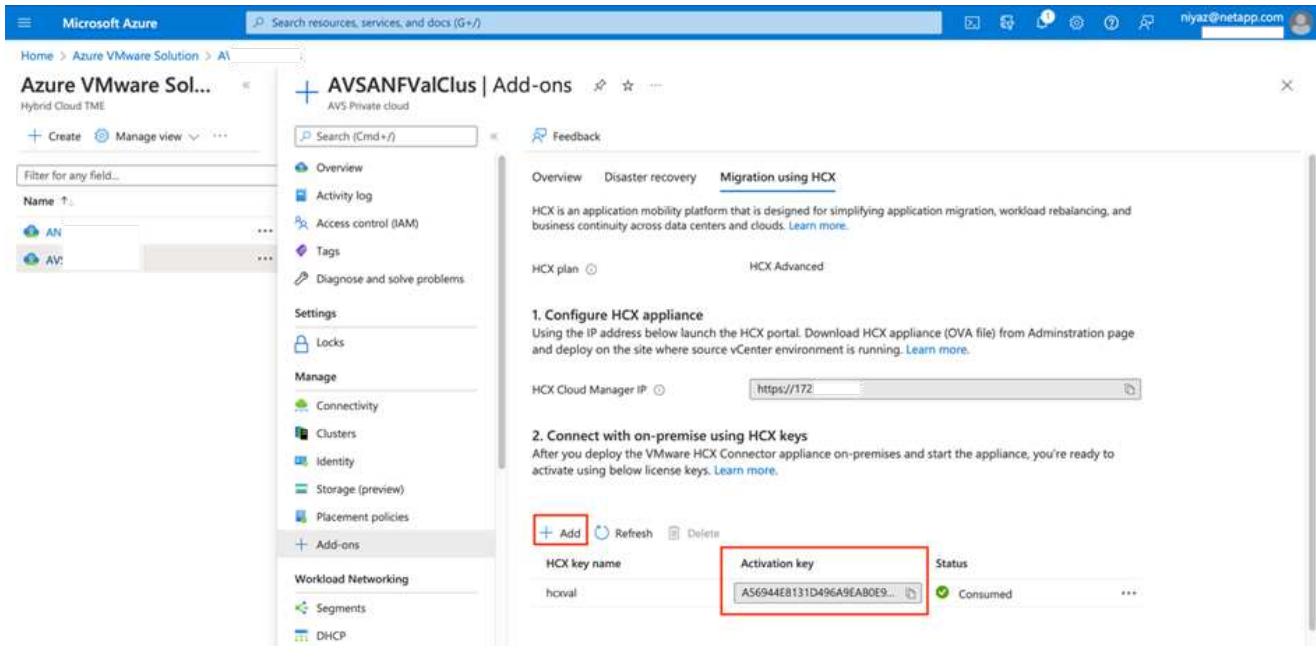

 A separate key is required for each on-premises HCX Connector that is deployed.


1. Log into the on-premises VMware HCX Manager at <https://hcxmanagerIP:9443> using administrator credentials.

 Use the password defined during the OVA deployment.

1. In the licensing, enter the key copied from step 3 and click **Activate**.

 The on-premises HCX Connector should have internet access.

1. Under **Datacenter Location**, provide the nearest location for installing the VMware HCX Manager on-premises. Click **Continue**.
2. Under **System Name**, update the name and click **Continue**.
3. Click **Yes, Continue**.
4. Under **Connect your vCenter**, provide the fully qualified domain name (FQDN) or IP address of vCenter Server and the appropriate credentials and click **Continue**.

 Use the FQDN to avoid connectivity issues later.

1. Under **Configure SSO/PSC**, provide the Platform Services Controller's FQDN or IP address and click **Continue**.



Enter the VMware vCenter Server FQDN or IP address.

1. Verify that the information entered is correct and click **Restart**.
2. After the services restart, vCenter Server is displayed as green on the page that appears. Both vCenter Server and SSO must have the appropriate configuration parameters, which should be the same as the previous page.



This process should take approximately 10 to 20 minutes and for the plug-in to be added to the vCenter Server.

The screenshot shows the VMware HCX Manager dashboard for a device named VMware-HCX-440. The top navigation bar includes links for Dashboard, Appliance Summary, Configuration, and Administration. The main content area displays system metrics and configuration details.

System Metrics:

- CPU:** Free 688 MHz, Used 1407 MHz, Capacity 2095 MHz, 67% usage.
- Memory:** Free 2316 MB, Used 9691 MB, Capacity 12008 MB, 81% usage.
- Storage:** Free 98G, Used 29G, Capacity 127G, 23% usage.

Configuration Details:

- FQDN:** VMware-HCX-440.ehcdc.com
- IP Address:** 172.2
- Version:** 4.4.1.0
- Uptime:** 20 days, 21 hours, 9 minutes
- Current Time:** Tuesday, 13 September 2022 07:44:11 PM UTC


Service Status:

- NSX:** Status is empty, with a **MANAGE** button.
- vCenter:** Status is green (indicating success), with the URL <https://a300-vcsa01.ehcdc.com> and a **MANAGE** button.
- SSO:** Status is green (indicating success), with the URL <https://a300-vcsa01.ehcdc.com> and a **MANAGE** button.

Step 4: Pair on-premises VMware HCX Connector with Azure VMware Solution HCX Cloud Manager

After HCX Connector is installed in both on-premises and Azure VMware Solution, configure the on-premises VMware HCX Connector for Azure VMware Solution private cloud by adding the pairing. To configure the site pairing, complete the following steps:


1. To create a site pair between the on-premises vCenter environment and Azure VMware Solution SDDC, log in to the on-premises vCenter Server and access the new HCX vSphere Web Client plug-in.

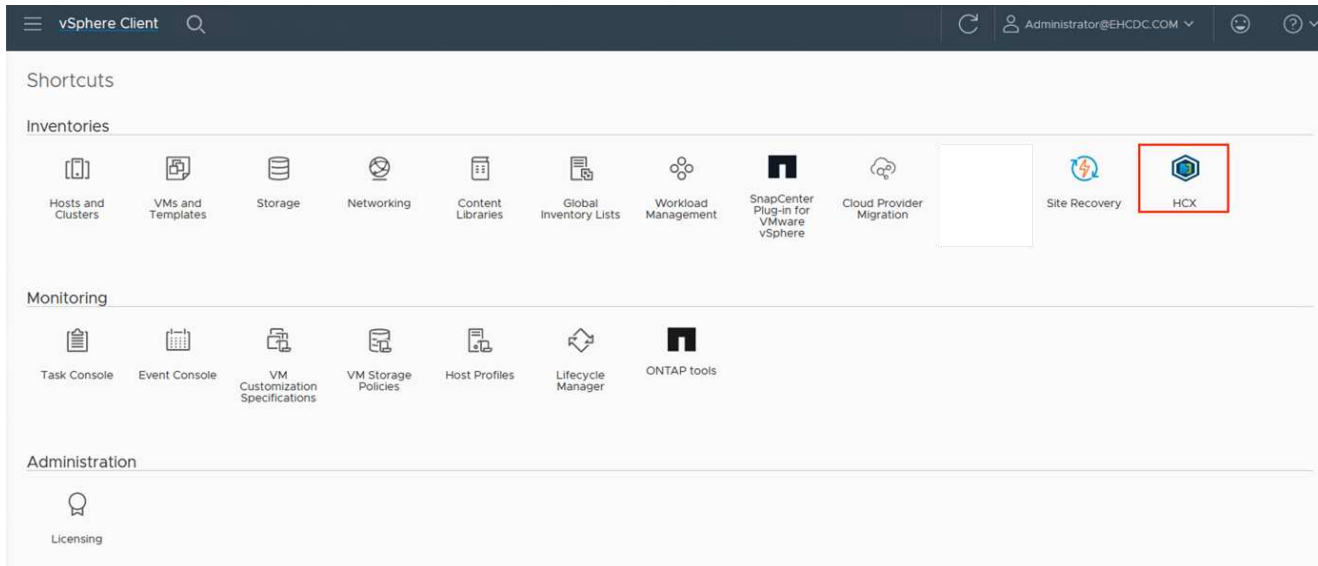

1. Under Infrastructure, click **Add a Site Pairing**.



Enter the Azure VMware Solution HCX Cloud Manager URL or IP address and the credentials for CloudAdmin role for accessing the private cloud.

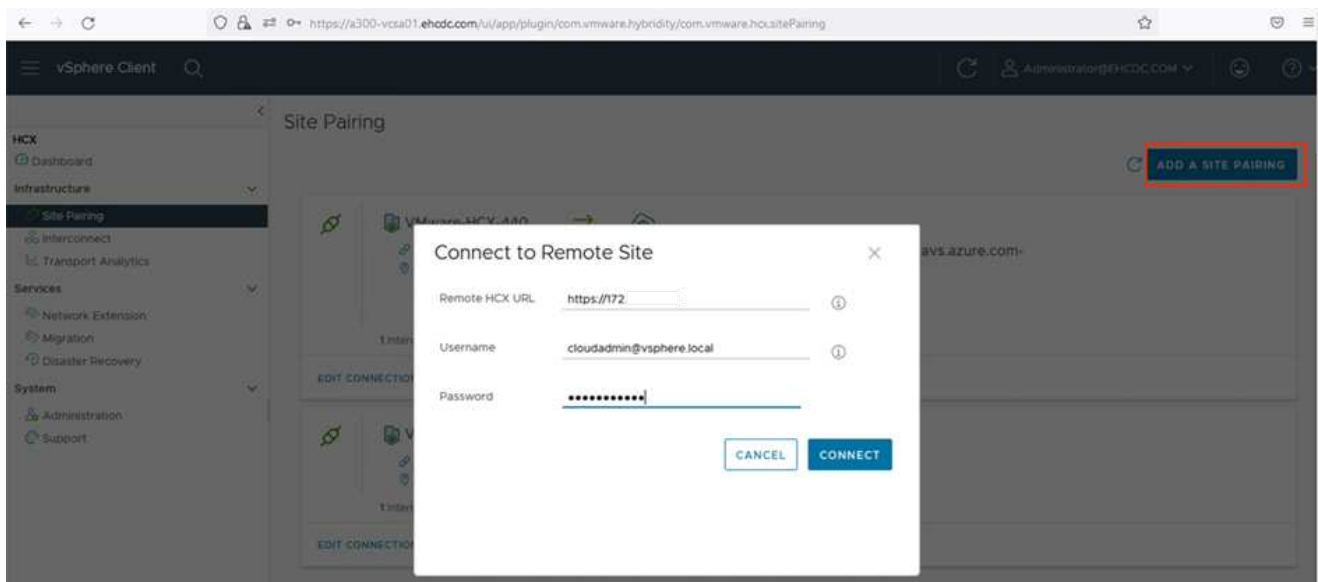


1. Click **Connect**.



VMware HCX Connector must be able to route to HCX Cloud Manager IP over port 443.

1. After the pairing is created, the newly configured site pairing is available on the HCX Dashboard.

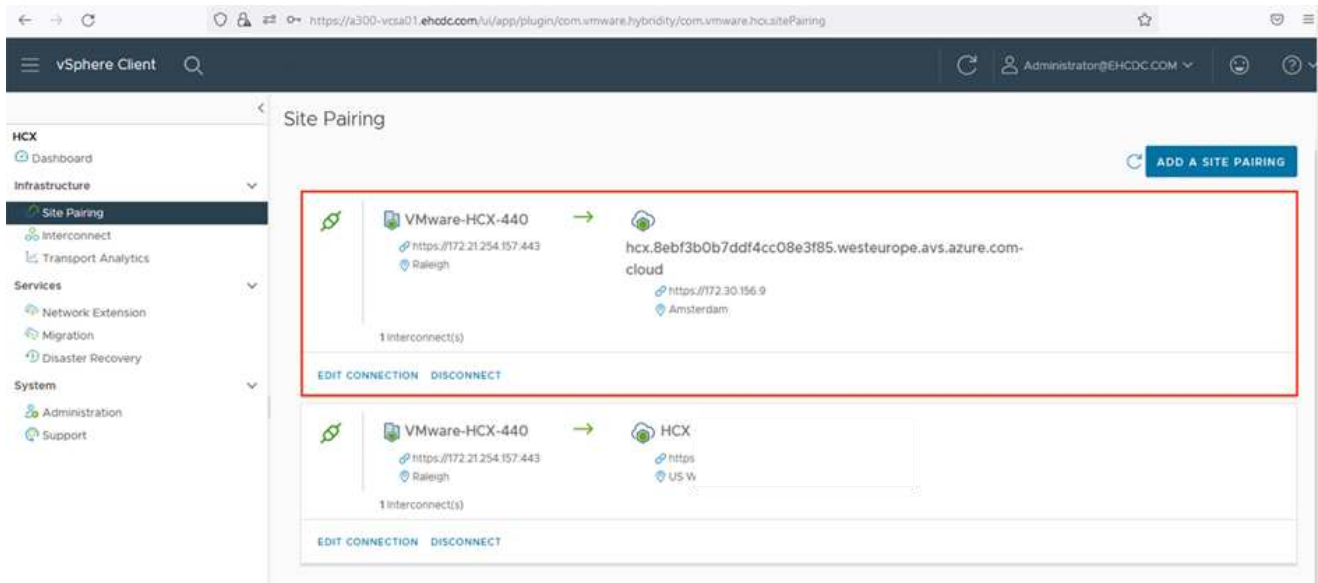


Step 5: Configure the network profile, compute profile, and service mesh

The VMware HCX Interconnect service appliance provides replication and vMotion-based migration capabilities over the internet and private connections to the target site. The interconnect provides encryption, traffic engineering, and VM mobility. To create an Interconnect service appliance, complete the followings steps:

1. Under Infrastructure, select **Interconnect > Multi-Site Service Mesh > Compute Profiles > Create Compute Profile**.



The compute profiles define the deployment parameters including the appliances that are deployed and which portion of the VMware data center are accessible to HCX service.

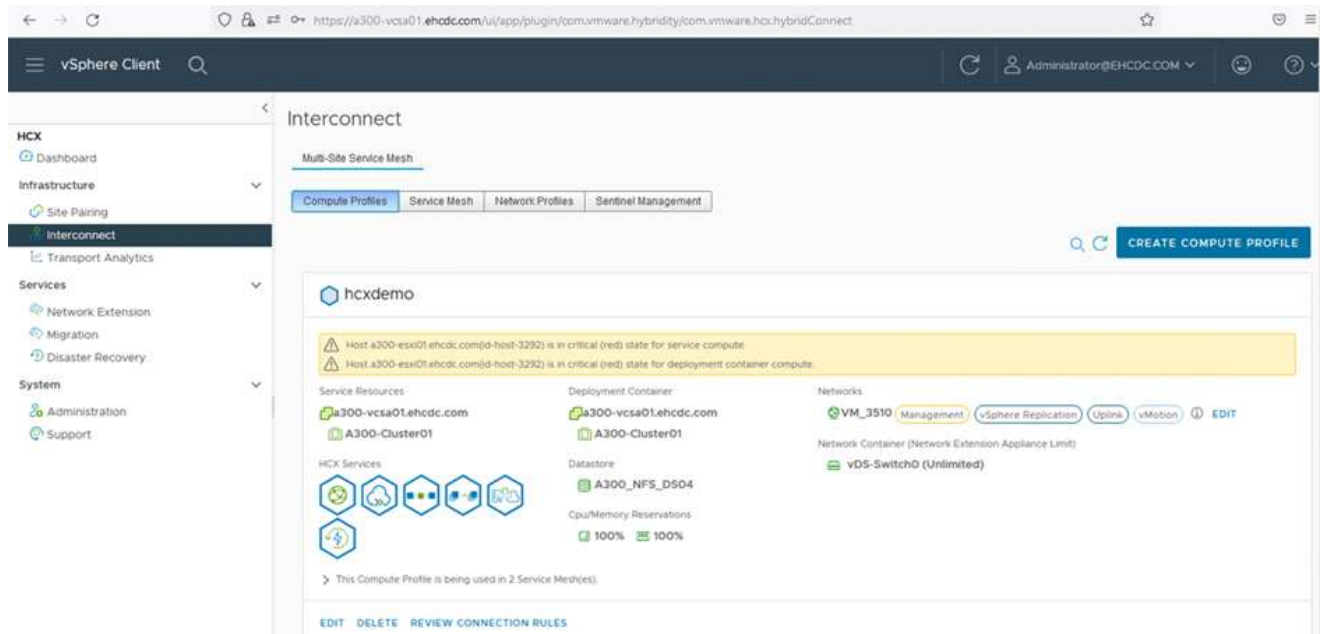

1. After the compute profile is created, create the network profiles by selecting **Multi-Site Service Mesh > Network Profiles > Create Network Profile**.

The network profile defines a range of IP address and networks that are used by HCX for its virtual appliances.




This step requires two or more IP addresses. These IP addresses are assigned from the management network to the Interconnect Appliances.



1. At this time, the compute and network profiles have been successfully created.
2. Create the Service Mesh by selecting the **Service Mesh** tab within the **Interconnect** option and select the on-premises and Azure SDDC sites.
3. The Service Mesh specifies a local and remote compute and network profile pair.



As part of this process, the HCX appliances are deployed and automatically configured on both the source and target sites in order to create a secure transport fabric.

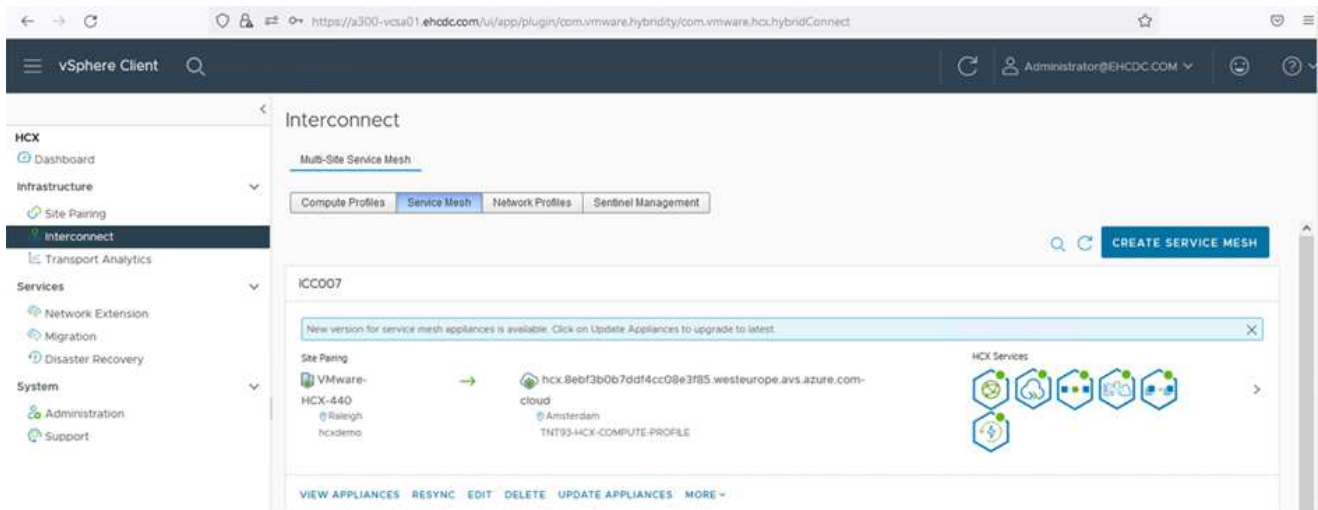

1. This is the final step of configuration. This should take close to 30 minutes to complete the deployment. After the service mesh is configured, the environment is ready with the IPsec tunnels successfully created to migrate the workload VMs.

←

→

67%

https://a300-vcua01.ehcd.com/ui/app/plugin/com.vmware.hybridity/com.vmware.hcx.hybridConnect

Administrative@EHCD.COM

Interconnect

Multi-Site Service View

Compute Profiles

Service View

Network Profiles

Service Management

←

IC007

EDIT SERVICE VIEW

Topology

Appliances

Tasks

IC000-000

IC000-001

IC000-002

IC000-003

IC000-004

IC000-005

IC000-006

IC000-007

IC000-008

IC000-009

IC000-010

IC000-011

IC000-012

IC000-013

IC000-014

IC000-015

IC000-016

IC000-017

IC000-018

IC000-019

IC000-020

IC000-021

IC000-022

IC000-023

IC000-024

IC000-025

IC000-026

IC000-027

IC000-028

IC000-029

IC000-030

IC000-031

IC000-032

IC000-033

IC000-034

IC000-035

IC000-036

IC000-037

IC000-038

IC000-039

IC000-040

IC000-041

IC000-042

IC000-043

IC000-044

IC000-045

IC000-046

IC000-047

IC000-048

IC000-049

IC000-050

IC000-051

IC000-052

IC000-053

IC000-054

IC000-055

IC000-056

IC000-057

IC000-058

IC000-059

IC000-060

IC000-061

IC000-062

IC000-063

IC000-064

IC000-065

IC000-066

IC000-067

IC000-068

IC000-069

IC000-070

IC000-071

IC000-072

IC000-073

IC000-074

IC000-075

IC000-076

IC000-077

IC000-078

IC000-079

IC000-080

IC000-081

IC000-082

IC000-083

IC000-084

IC000-085

IC000-086

IC000-087

IC000-088

IC000-089

IC000-090

IC000-091

IC000-092

IC000-093

IC000-094

IC000-095

IC000-096

IC000-097

IC000-098

IC000-099

IC000-100

IC000-101

IC000-102

IC000-103

IC000-104

IC000-105

IC000-106

IC000-107

IC000-108

IC000-109

IC000-110

IC000-111

IC000-112

IC000-113

IC000-114

IC000-115

IC000-116

IC000-117

IC000-118

IC000-119

IC000-120

IC000-121

IC000-122

IC000-123

IC000-124

IC000-125

IC000-126

IC000-127

IC000-128

IC000-129

IC000-130

IC000-131

IC000-132

IC000-133

IC000-134

IC000-135

IC000-136

IC000-137

IC000-138

IC000-139

IC000-140

IC000-141

IC000-142

IC000-143

IC000-144

IC000-145

IC000-146

IC000-147

IC000-148

IC000-149

IC000-150

IC000-151

IC000-152

IC000-153

IC000-154

IC000-155

IC000-156

IC000-157

IC000-158

IC000-159

IC000-160

IC000-161

IC000-162

IC000-163

IC000-164

IC000-165

IC000-166

IC000-167

IC000-168

IC000-169

IC000-170

IC000-171

IC000-172

IC000-173

IC000-174

IC000-175

IC000-176

IC000-177

IC000-178

IC000-179

IC000-180

IC000-181

IC000-182

IC000-183

IC000-184

IC000-185

IC000-186

IC000-187

IC000-188

IC000-189

IC000-190

IC000-191

IC000-192

IC000-193

IC000-194

IC000-195

IC000-196

IC000-197

IC000-198

IC000-199

IC000-200

IC000-201

IC000-202

IC000-203

IC000-204

IC000-205

IC000-206

IC000-207

IC000-208

IC000-209

IC000-210

IC000-211

IC000-212

IC000-213

IC000-214

IC000-215

IC000-216

IC000-217

IC000-218

IC000-219

IC000-220

IC000-221

IC000-222

IC000-223

IC000-224

IC000-225

IC000-226

IC000-227

IC000-228

IC000-229

IC000-230

IC000-231

IC000-232

IC000-233

IC000-234

IC000-235

IC000-236

IC000-237

IC000-238

IC000-239

IC000-240

IC000-241

IC000-242

IC000-243

IC000-244

IC000-245

IC000-246

IC000-247

IC000-248

IC000-249

IC000-250

IC000-251

IC000-252

IC000-253

IC000-254

IC000-255

IC000-256

IC000-257

IC000-258

IC000-259

IC000-260

IC000-261

IC000-262

IC000-263

IC000-264

IC000-265

IC000-266

IC000-267

IC000-268

IC000-269

IC000-270

IC000-271

IC000-272

IC000-273

IC000-

Step 6: Migrate workloads

Workloads can be migrated bidirectionally between on-premises and Azure SDDCs using various VMware HCX migration technologies. VMs can be moved to and from VMware HCX-activated entities using multiple migration technologies such as HCX bulk migration, HCX vMotion, HCX Cold migration, HCX Replication Assisted vMotion (available with HCX Enterprise edition), and HCX OS Assisted Migration (available with the HCX Enterprise edition).


To learn more about various HCX migration mechanisms, see [VMware HCX Migration Types](#).

Bulk migration

This section details the bulk migration mechanism. During a bulk migration, the bulk migration capability of HCX uses vSphere Replication to migrate disk files while recreating the VM on the destination vSphere HCX instance.

To initiate bulk VM migrations, complete the following steps:


1. Access the **Migrate** tab under **Services > Migration**.

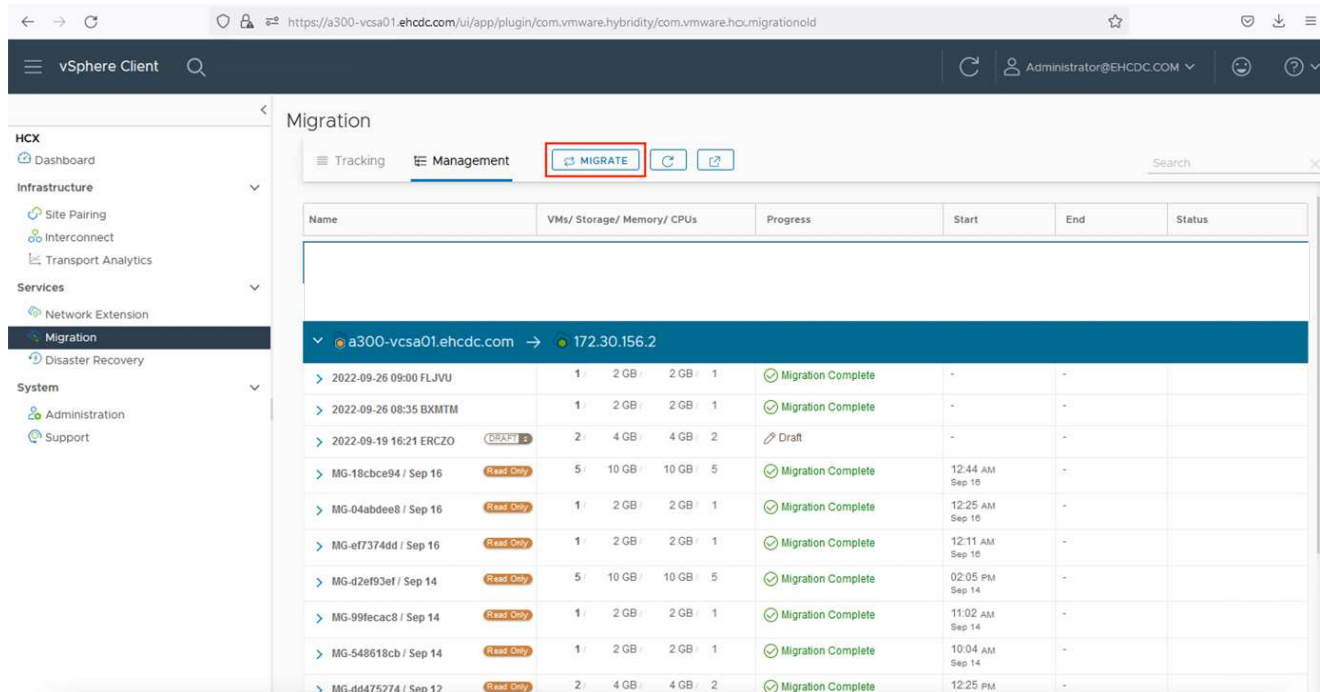


The screenshot shows the VMware HCX Migration Management interface. The 'MIGRATE' button is highlighted with a red box. Below it is a table showing migration progress for various VMs.

Name	VMs/ Storage/ Memory/ CPUs	Progress	Start	End	Status
a300-vcsa01.ehcdc.com → 172.30.156.2					
> 2022-09-26 09:00 FLJVU	1 / 2 GB / 2 GB / 1	✓ Migration Complete	-	-	
> 2022-09-26 08:35 BXTMT	1 / 2 GB / 2 GB / 1	✓ Migration Complete	-	-	
> 2022-09-19 16:21 ERCZO	2 / 4 GB / 4 GB / 2	✗ Draft	-	-	
> MG-18cbce94 / Sep 16	5 / 10 GB / 10 GB / 5	✓ Migration Complete	12:44 AM Sep 16	-	
> MG-04abdee8 / Sep 16	1 / 2 GB / 2 GB / 1	✓ Migration Complete	12:25 AM Sep 16	-	
> MG-ef7374dd / Sep 16	1 / 2 GB / 2 GB / 1	✓ Migration Complete	12:11 AM Sep 16	-	
> MG-d2ef93ef / Sep 14	5 / 10 GB / 10 GB / 5	✓ Migration Complete	02:05 PM Sep 14	-	
> MG-99fecac8 / Sep 14	1 / 2 GB / 2 GB / 1	✓ Migration Complete	11:02 AM Sep 14	-	
> MG-548618cb / Sep 14	1 / 2 GB / 2 GB / 1	✓ Migration Complete	10:04 AM Sep 14	-	
> MG-d4475274 / Sep 12	2 / 4 GB / 4 GB / 2	✓ Migration Complete	12:25 PM	-	

1. Under **Remote Site Connection**, select the remote site connection and select the source and destination. In this example, the destination is Azure VMware Solution SDDC HCX endpoint.
2. Click **Select VMs for Migration**. This provides a list of all the on-premises VMs. Select the VMs based on the match:value expression and click **Add**.
3. In the **Transfer and Placement** section, update the mandatory fields (**Cluster**, **Storage**, **Destination**, and **Network**), including the migration profile, and click **Validate**.

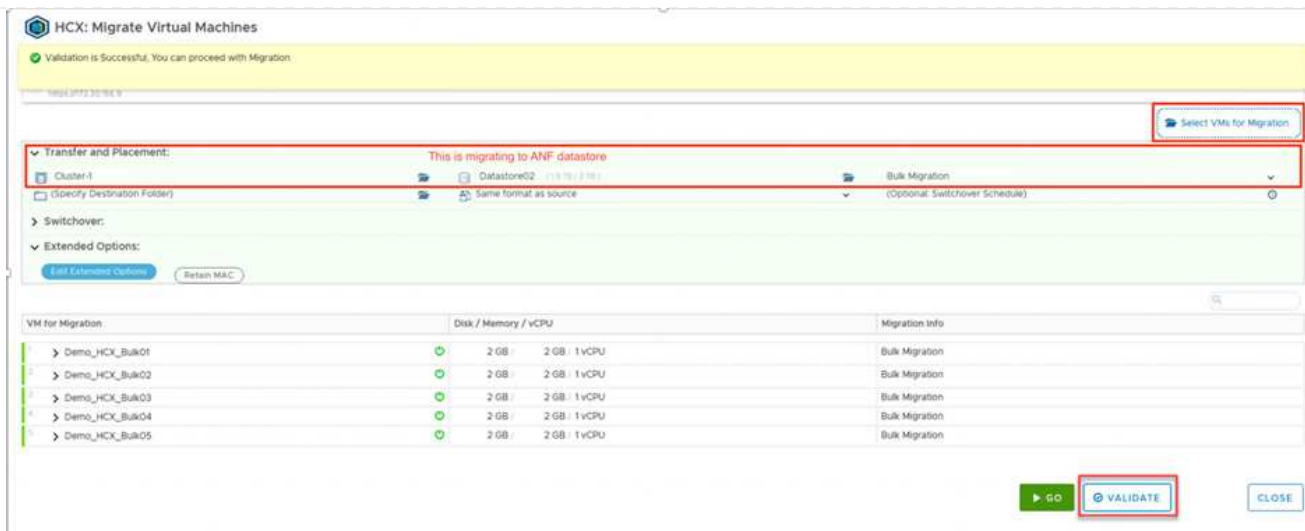


1. After the validation checks are complete, click **Go** to initiate the migration.

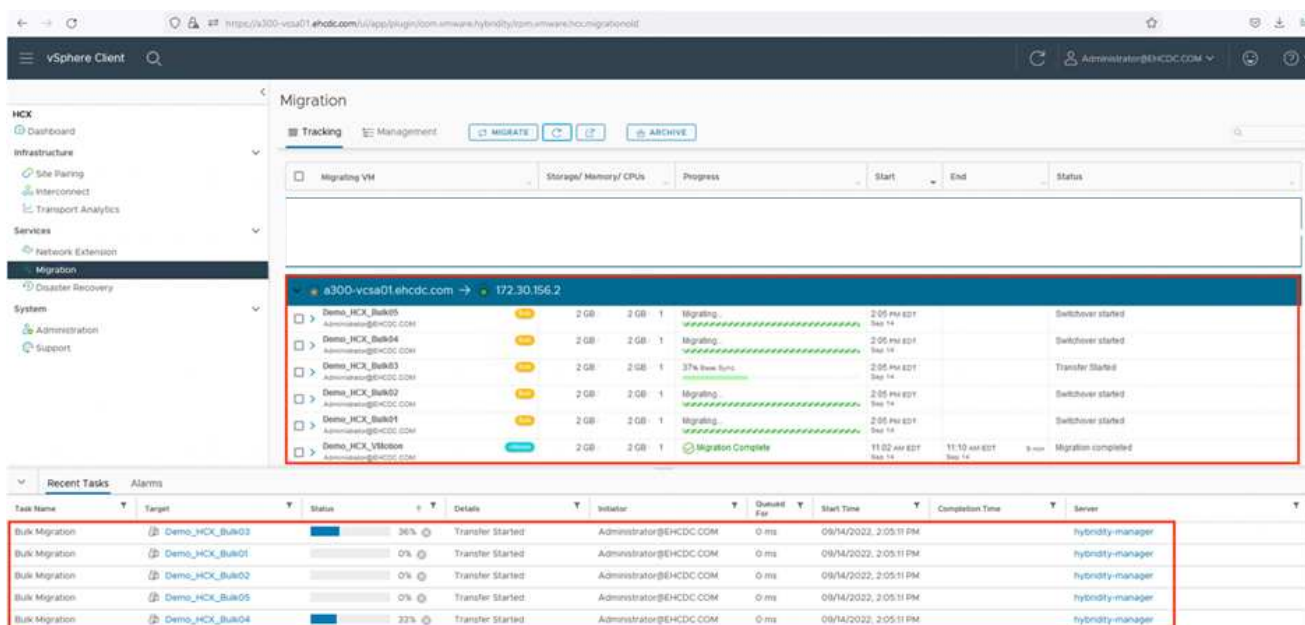

During this migration, a placeholder disk is created on the specified Azure NetApp Files datastore within the target vCenter to enable replication of the source VM disk's data to the placeholder disks. HBR is triggered for a full sync to the target, and after the baseline is complete, an incremental sync is performed based on the recovery point objective (RPO) cycle. After the full/incremental sync is complete, switchover is triggered automatically unless a specific schedule is set.

1. After the migration is complete, validate the same by accessing the destination SDDC vCenter.

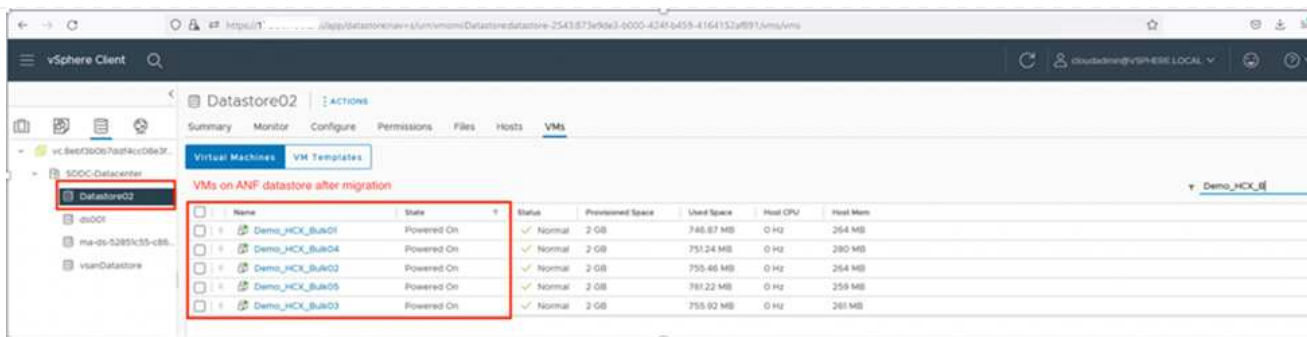


For additional and detailed information about various migration options and on how to migrate workloads from on-premises to Azure VMware Solution using HCX, see [VMware HCX User Guide](#).

To learn more about this process, feel free to watch the following video:

Workload Migration using HCX

Here is a screenshot of HCX vMotion option.

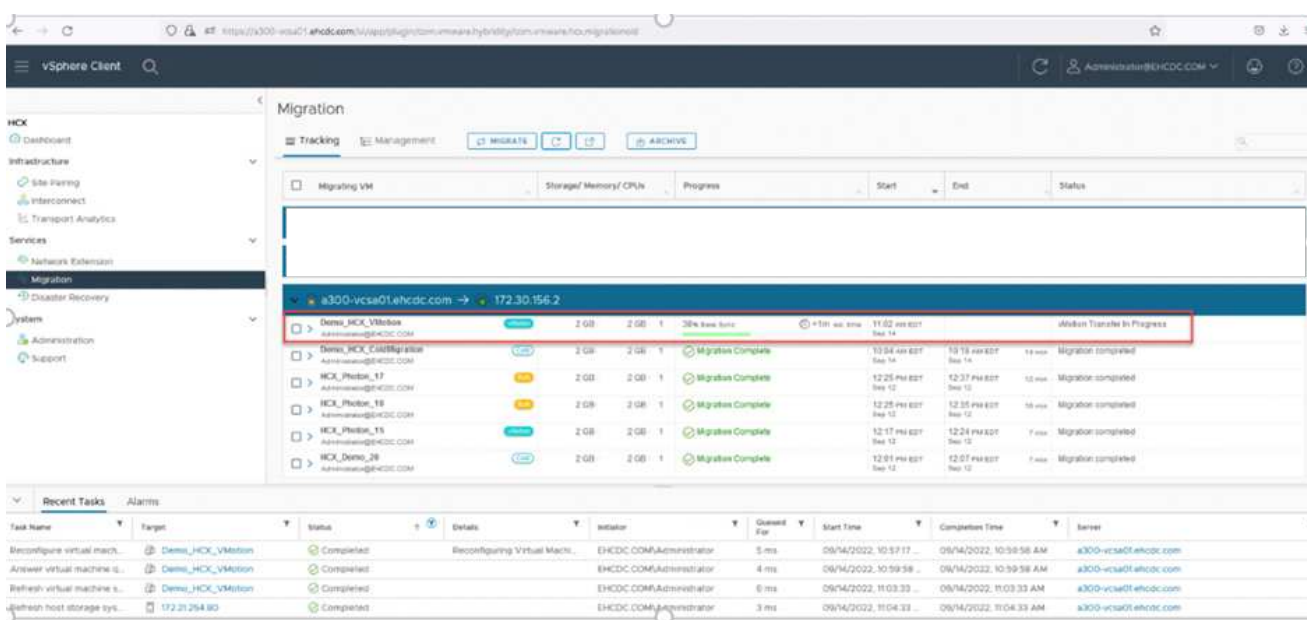

To learn more about this process, feel free to watch the following video:

HCX vMotion



Make sure sufficient bandwidth is available to handle the migration.



The target ANF datastore should have sufficient space to handle the migration.

Conclusion

Whether you're targeting all-cloud or hybrid cloud and data residing on any type/vendor storage in on-premises, Azure NetApp Files and HCX provide excellent options to deploy and migrate the application workloads while reducing the TCO by making the data requirements seamless to the application layer.

Whatever the use case, choose Azure VMware Solution along with Azure NetApp Files for rapid realization of cloud benefits, consistent infrastructure, and operations across on-premises and multiple clouds, bidirectional portability of workloads, and enterprise-grade capacity and performance. It is the same familiar process and procedures used to connect the storage and migrate VMs using VMware vSphere Replication, VMware vMotion, or even network file copy (NFC).

Takeaways

The key points of this document include:

- You can now use Azure NetApp Files as a datastore on Azure VMware Solution SDDC.
- You can easily migrate data from on-premises to Azure NetApp Files datastore.
- You can easily grow and shrink the Azure NetApp Files datastore to meet the capacity and performance requirements during migration activity.

Where to find additional information

To learn more about the information described in this document, refer to the following website links:

- Azure VMware Solution documentation

<https://docs.microsoft.com/en-us/azure/azure-vmware/>

- Azure NetApp Files documentation

<https://docs.microsoft.com/en-us/azure/azure-netapp-files/>

- VMware HCX User Guide

<https://docs.vmware.com/en/VMware-HCX/4.4/hcx-user-guide/GUID-BFD7E194-CFE5-4259-B74B-991B26A51758.html>

Copyright information

Copyright © 2023 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.