



NetApp Astra Control Center Overview

NetApp Solutions

NetApp
August 18, 2021


This PDF was generated from https://docs.netapp.com/us-en/netapp-solutions/containers/rh-os-n_astra_register.html on August 18, 2021. Always check docs.netapp.com for the latest.

Table of Contents

- NetApp Astra Control Center Overview: Red Hat OpenShift with NetApp 1
 - Astra Control Center Installation Prerequisites 2
 - Install Astra Control Center 2
 - Register your Red Hat OpenShift Clusters with the Astra Control Center 12
 - Choose the applications to protect. 16
 - Protect your applications 18

NetApp Astra Control Center Overview: Red Hat OpenShift with NetApp

NetApp Astra Control Center offers a rich set of storage and application-aware data management services for stateful Kubernetes workloads, deployed in an on-premises environment, powered by NetApp's trusted data protection technology.

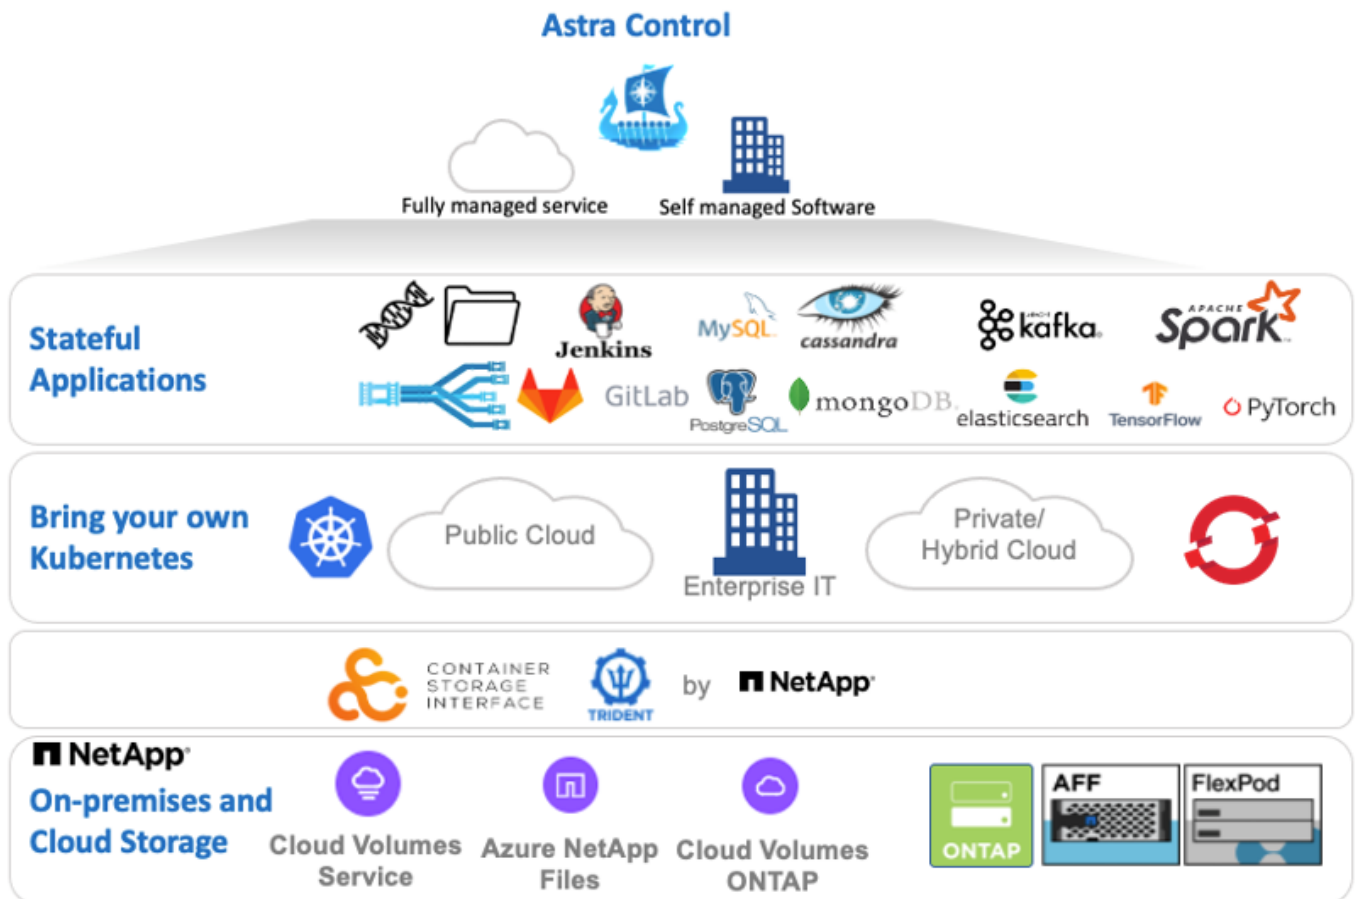

NetApp Astra Control Center can be installed to a Red Hat OpenShift cluster which has Astra Trident storage orchestrator deployed, configured with storage classes, and storage backends to NetApp ONTAP storage systems.

For the installation and configuration of Astra Trident to support Astra Control Center, see the section in this document, [here](#).

In a cloud-connected environment, Astra Control Center uses Cloud Insights to provide advanced monitoring and telemetry. In the absence of a Cloud Insights connection, limited (7-days worth of metrics) monitoring and telemetry will be available and also exported to Kubernetes native monitoring tools (Prometheus/Grafana) through open metrics endpoints.

Astra Control Center is fully integrated into the NetApp AutoSupport/Active IQ ecosystem to provide support for users, provide assistance with troubleshooting, and display usage statistics.

In addition to the paid version of Astra Control Center, a 90-day evaluation license will be made available to customers. The evaluation version will be supported through the email and community (Slack channel). Customers have access to these and other knowledge-base articles and the documentation available from the

in-product support dashboard.

To get started with NetApp Astra Control Center, visit <https://cloud.netapp.com/astra>.

Astra Control Center Installation Prerequisites

1. One or more Red Hat OpenShift clusters.



Currently versions 4.6 EUS and 4.7 are supported.

2. Astra Trident must be already installed and configured on each Red Hat OpenShift cluster.
3. One or more NetApp ONTAP storage systems running ONTAP 9.5 or greater.



It's best practice for each OpenShift install at a site to have a dedicated SVM for persistent storage. Multi-site deployments would require additional storage systems.

4. A Trident storage backend must be configured on each OpenShift cluster with an SVM backed by an ONTAP cluster.
5. A default StorageClass configured on each OpenShift cluster with Astra Trident as the storage provisioner.
6. A load balancer must be installed and configured on each OpenShift cluster for load balancing and exposing OpenShift Services.



Refer to the link [here](#) for information about load balancers that have been validated for this purpose.

7. A private image registry must be configured to host the NetApp Astra Control Center images.



Refer the link [here](#) to install and configure an OpenShift private registry for this purpose.

8. You must have Cluster-Admin access to the Red Hat OpenShift cluster.
9. You must have Admin access to NetApp ONTAP clusters.
10. An admin workstation with docker or podman, tridentctl, and oc or kubectl tools installed and added to your \$PATH.



Docker or Podman installations must be at least version 20.10.

Install Astra Control Center

1. Log into NetApp Support Site and download the latest version of NetApp Astra Control Center. This requires a license to be attached to your NetApp account. Once you download the tarball, transfer it to the admin workstation.



To get started with a trial license for Astra Control, visit the site [here](#)

2. Unpack the tar ball and change the working directory to the resulting folder.

```
[netapp-user@rhel7 ~]$ tar -vxzf astra-control-center-21.08.57.tar.gz  
[netapp-user@rhel7 ~]$ cd astra-control-center-21.08.57
```

3. Before we start the installation, we need to push the Astra Control Center images to an image registry.



You can choose to do this with either Docker or Podman, instructions for both are provided in this step.

podman

- a. Export the registry FQDN with the organization/namespace/project name as a environment variable 'registry'.

```
[netapp-user@rhel7 ~]$ export registry=astra-registry.apps.ocp-vmw.cie.netapp.com/netapp-astra
```

- b. Log into the registry.

```
[netapp-user@rhel7 ~]$ podman login -u ocp-user -p password --tls-verify=false astra-registry.apps.ocp-vmw.cie.netapp.com
```

- c. Create a shell script file and paste the below content in it.

```
[netapp-user@rhel7 ~]$ vi push-images-to-registry.sh

for astraImageFile in $(ls images/*.tar); do
    astraImage=$(podman load --input ${astraImageFile} | sed
's/Loaded image(s): //' )
    podman tag $astraImage $registry/$(echo $astraImage | sed
's/^[^\/]\\+\\/' )
    podman push $registry/$(echo $astraImage | sed 's/^[^\/]\\+\\/' )
done
```



If you are using untrusted certificates for your registry, edit the shell script and use `--tls-verify=false` for the podman push command - `podman push $registry/$(echo $astraImage | sed 's/^[^\/]\\+\\/') --tls-verify=false`

- d. Make the file executable.

```
[netapp-user@rhel7 ~]$ chmod +x push-images-to-registry.sh
```

- e. Execute the shell script.

```
[netapp-user@rhel7 ~]$ ./push-images-to-registry.sh
```

docker

- a. Export the registry FQDN with the organization/namespace/project name as a environment variable 'registry'.

```
[netapp-user@rhel7 ~]$ export registry=astra-registry.apps.ocp-vmw.cie.netapp.com/netapp-astra
```

b. Log into the registry.

```
[netapp-user@rhel7 ~]$ docker login -u ocp-user -p password --tls-verify=false astra-registry.apps.ocp-vmw.cie.netapp.com
```

c. Create a shell script file and paste the below content in it.

```
[netapp-user@rhel7 ~]$ vi push-images-to-registry.sh

for astraImageFile in $(ls images/*.tar); do
    astraImage=$(docker load --input ${astraImageFile} | sed
's/Loaded image: //' )
    docker tag $astraImage $registry/$(echo $astraImage | sed
's/^[^\/]\+\///')
    docker push $registry/$(echo $astraImage | sed 's/^[^\/]\+\///')
done
```



If you are using untrusted certificates for your registry, edit the shell script and use `--tls-verify=false` for the docker push command - `docker push $registry/$(echo $astraImage | sed 's/^[^\/]\+\///') --tls-verify=false`

d. Make the file executable.

```
[netapp-user@rhel7 ~]$ chmod +x push-images-to-registry.sh
```

e. Execute the shell script.

```
[netapp-user@rhel7 ~]$ ./push-images-to-registry.sh
```

4. The next step is to upload the image registry TLS certificates to the OpenShift nodes. For that, create a configmap in openshift-config namespace using the TLS certificates and patch it to the cluster image config to make the certificate trusted.

```
[netapp-user@rhel7 ~]$ oc create configmap default-ingress-ca -n
openshift-config --from-file=astra-registry.apps.ocp
-vmw.cie.netapp.com=tls.crt

[netapp-user@rhel7 ~]$ oc patch image.config.openshift.io/cluster
--patch '{"spec":{"additionalTrustedCA":{"name":"default-ingress-ca"}}}'
--type=merge
```



If you are using OpenShift internal registry with default TLS certificates from the ingress operator with a route, you will still need to follow the above step to patch the certificates to the route hostname. To extract the certificates from ingress operator, you can use the command `- oc extract secret/router-ca --keys=tls.crt -n openshift-ingress-operator`

5. Create a namespace `acc-operator-system` for installing the Astra Control Center Operator.

```
[netapp-user@rhel7 ~]$ oc create ns acc-operator-system
```

6. Create a secret with credentials to log into the image registry in `acc-operator-system` namespace.

```
[netapp-user@rhel7 ~]$ oc create secret docker-registry astra-registry-
cred --docker-server=astra-registry.apps.ocp-vmw.cie.netapp.com --docker
-username=ocp-user --docker-password=password -n acc-operator-system
secret/astra-registry-cred created
```

7. Edit the Astra Control Center Operator CR `astra_control_center_operator_deploy.yaml` which is a set of all resources Astra Control Center deploys. In the operator CR, find the deployment definition for `acc-operator-controller-manager` and enter the FQDN for your registry along with the organization name as it was given while pushing the images to registry (in this example, `astra-registry.apps.ocp-vmw.cie.netapp.com/netapp-astra`) by replacing the text `[your.registry.goes.here]` and provide the name of the secret we just created. Verify other details of the operator, save and close.

```
[netapp-user@rhel7 ~]$ vim astra_control_center_operator_deploy.yaml

apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    control-plane: controller-manager
    name: acc-operator-controller-manager
    namespace: acc-operator-system
spec:
  replicas: 1
  selector:
```



```

matchLabels:
  control-plane: controller-manager
template:
  metadata:
    labels:
      control-plane: controller-manager
  spec:
    containers:
      - args:
        - --secure-listen-address=0.0.0.0:8443
        - --upstream=http://127.0.0.1:8080/
        - --logtostderr=true
        - --v=10
        image: astra-registry.apps.ocp-vmw.cie.netapp.com/netapp-
astra/kube-rbac-proxy:v0.5.0
        name: kube-rbac-proxy
        ports:
          - containerPort: 8443
            name: https
      - args:
        - --health-probe-bind-address=:8081
        - --metrics-bind-address=127.0.0.1:8080
        - --leader-elect
        command:
          - /manager
        env:
          - name: ACCOP_LOG_LEVEL
            value: "2"
        image: astra-registry.apps.ocp-vmw.cie.netapp.com/netapp-
astra/acc-operator:21.05.68
        imagePullPolicy: IfNotPresent
        livenessProbe:
          httpGet:
            path: /healthz
            port: 8081
          initialDelaySeconds: 15
          periodSeconds: 20
        name: manager
        readinessProbe:
          httpGet:
            path: /readyz
            port: 8081
          initialDelaySeconds: 5
          periodSeconds: 10
        resources:
          limits:

```

```
      cpu: 100m
      memory: 150Mi
    requests:
      cpu: 100m
      memory: 50Mi
    securityContext:
      allowPrivilegeEscalation: false
    imagePullSecrets: [name: astra-registry-cred]
    securityContext:
      runAsUser: 65532
    terminationGracePeriodSeconds: 10
```

8. Create the operator by running the following command.

```
[netapp-user@rhel7 ~]$ oc create -f
astra_control_center_operator_deploy.yaml
```

9. Create a dedicated namespace for installing all the Astra Control Center resources.

```
[netapp-user@rhel7 ~]$ oc create ns netapp-astra-cc
namespace/netapp-astra-cc created
```

10. Create the secret for accessing image registry in that namespace.

```
[netapp-user@rhel7 ~]$ oc create secret docker-registry astra-registry-
cred --docker-server= astra-registry.apps.ocp-vmw.cie.netapp.com
--docker-username=ocp-user --docker-password=password -n netapp-astra-cc
secret/astra-registry-cred created
```

11. Next step is to edit the Astra Control Center CRD file `astra_control_center_min.yaml` and fill the FQDN, image registry details, administrator email address and other details.

```
[netapp-user@rhel7 ~]$ vim astra_control_center_min.yaml

apiVersion: astra.netapp.io/v1
kind: AstraControlCenter
metadata:
  name: astra
spec:
  astraVersion: "21.08.57"
  astraAddress: "astra-control-center.cie.netapp.com"
  autoSupport:
    enrolled: true
  email: "solutions_tme@netapp.com"
  imageRegistry:
    name: "astra-registry.apps.ocp-vmw.cie.netapp.com/netapp-astra"
# use your registry
  secret: "astra-registry-cred" # comment out if not
needed
```

12. Create the Astra Control Center CRD in the namespace created for it.

```
[netapp-user@rhel7 ~]$ oc apply -f astra_control_center_min.yaml -n
netapp-astra-cc
astracontrolcenter.astra.netapp.io/astra created
```



The above file `astra_control_center_min.yaml` is the minimum version of the Astra Control Center CRD. If you want to create the CRD with more control like defining storageclass other than default for creating PVCs or providing SMTP details for mail notifications, you can edit the file `astra_control_center.yaml`, fill those details and use it to create the CRD.

Installation Verificaton

1. It might take several minutes for the installation to complete. Verify that all the pods and services in `netapp-astra-cc` namespace are up and running.

```
[netapp-user@rhel7 ~]$ oc get all -n netapp-astra-cc
```

2. Check the `acc-operator-controller-manager` logs to ensure that the installation is completed.

```
[netapp-user@rhel7 ~]$ oc logs deploy/acc-operator-controller-manager -n
acc-operator-system -c manager -f
```



The following message should be displayed to indicate the successful installation of Astra Control Center

```
{"level":"info","ts":1624054318.029971,"logger":"controllers.AstraControlCenter","msg":"Successfully Reconciled AstraControlCenter in [seconds]s","AstraControlCenter":"netapp-astra-cc/astra","ae.Version":"[21.08.57]"}
```

3. The username for logging into Astra Control Center is the email address of the administrator provided in the CRD file and the password is a string 'ACC-' appended to the Astra Control Center UUID. Run the following command –

```
[netapp-user@rhel7 ~]$ oc get astracontrolcenters -n netapp-astra-cc
NAME      UUID
astra     345c55a5-bf2e-21f0-84b8-b6f2bce5e95f
```



In this example, the password is – `ACC-345c55a5-bf2e-21f0-84b8-b6f2bce5e95f`

4. Now log into the Astra Control Center GUI by browsing to the FQDN you provided in the CRD file.

▲ Not secure | astra-control-center-ui.cie.netapp.com/login/?contextId=40e0408a-5301-41e9-afd4-e355a2720763 ☆

NetApp

Log In to NetApp Astra Control Center

Email


Password

LOGIN

Astra Control Center

Manage, protect,
and migrate your
Kubernetes
applications with
just a few clicks!


5. When you log into Astra Control Center GUI for the first time using the admin email address provided in CRD, you will need to change the password.

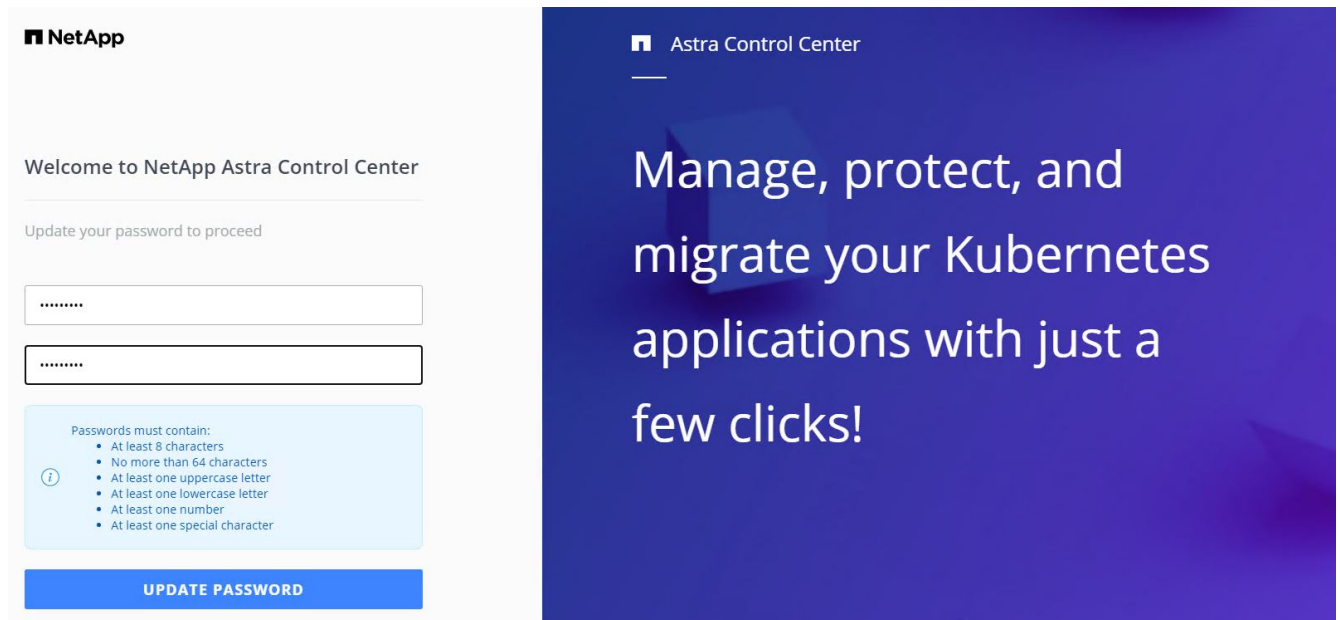

6. If you wish to add a user to Astra Control Center, go to [Account](#) → [Users](#) and click on [Add](#) and enter the details of the user and click [Add](#).

users.' At the bottom of the modal are 'Cancel' and 'Add' buttons."/>

7. Astra Control Center requires a license for all of its functionalities to work. To add a license, go to [Account](#) → [License](#), click on [Add License](#) and upload the license file.

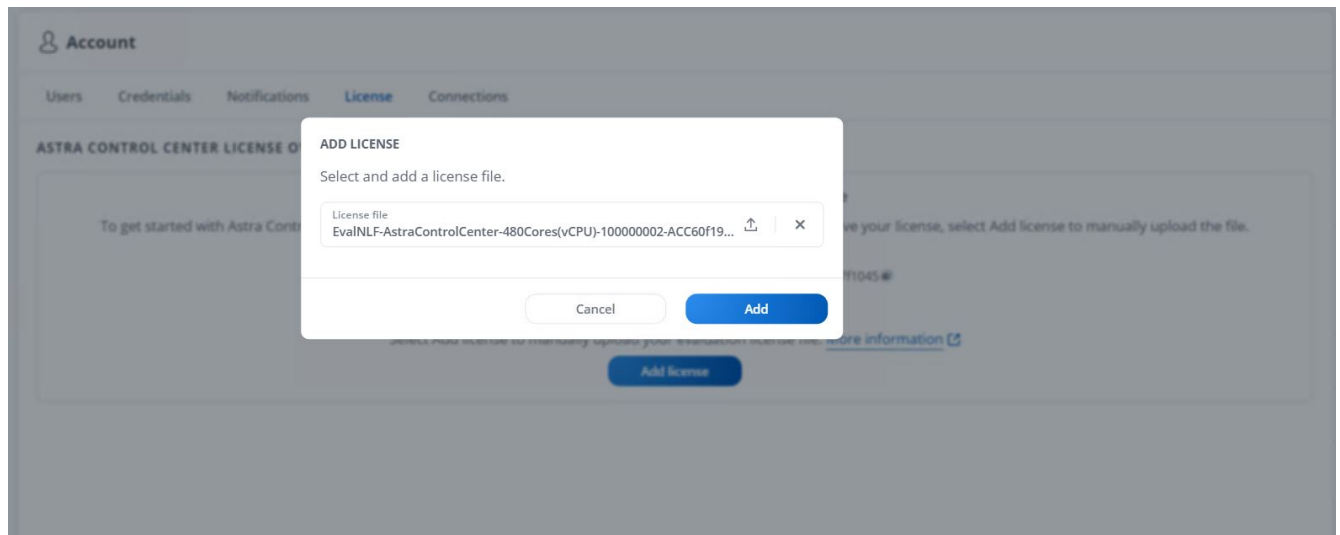

If you encounter issues with the install or configuration of NetApp Astra Control Center, the knowledge base of known issues is available [here](#).


Next: [Register your Red Hat OpenShift Clusters: Red Hat OpenShift with NetApp](#).

Register your Red Hat OpenShift Clusters with the Astra Control Center


To enable the Astra Control Center to manage your workloads, you must first register your Red Hat OpenShift cluster.

Register Red Hat OpenShift clusters

1. The first step is to add the OpenShift clusters to the Astra Control Center and manage them. Go to Clusters and click Add a Cluster, upload the kubeconfig file for the OpenShift cluster, and click Select Storage.

 **Add cluster**

STEP 1/3: CREDENTIALS



CREDENTIALS



Provide Astra Control access to your Kubernetes and OpenShift clusters by entering a kubeconfig credential.

Follow [instructions](#) on how to create a dedicated admin-role kubeconfig.

Upload file

Paste from clipboard

Kubeconfig YAML file
ocp-vmw kubeconfig.txt

Credential name
ocp-vmw

ADDING A CLUSTER

Adding a cluster is needed for Astra Control to discover your Kubernetes applications.

Select a cloud provider and input credentials to get started.

Read more in [Clusters](#).

Cancel

Configure storage →



The kubeconfig file can be generated to authenticate with a username and password or a token. Tokens expire after a limited amount of time and might leave the registered cluster unreachable. NetApp recommends using a kubeconfig file with a username and password to register your OpenShift clusters to Astra Control Center.

2. Astra Control Center detects the eligible storage classes. Now select the way that storageclass provisions volumes using Trident backed by an SVM on NetApp ONTAP, and click Review. In the next pane, verify the details and click Add Cluster.

STORAGE

Existing storage classes are discovered and verified as eligible for use with Astra Control. You can use your existing default, or choose to set a new default at this time.
Applications with persistent volumes on eligible storage classes are validated for use with Astra Control.

Set default	Storage class	Storage provisioner	Reclaim policy	Binding mode	Eligible
<input checked="" type="radio"/>	ocp-trident <small>Default</small>	csi.trident.netapp.io	Delete	Immediate	
<input type="radio"/>	ocp-trident-iscsi	csi.trident.netapp.io	Delete	Immediate	
<input type="radio"/>	project-1-sc	csi.trident.netapp.io	Delete	Immediate	
<input type="radio"/>	thin	kubernetes.io/vsphere-volume	Delete	Immediate	

[← Select credentials](#)
[Review →](#)

- Register both OpenShift clusters as described in step 1. When added, the clusters move to the Discovering status while Astra Control Center inspects them and installs the necessary agents. Cluster status changes to Running after they are successfully registered.


The screenshot shows the Astra Control Center interface. On the left is a sidebar with navigation links: Dashboard, Apps, Clusters (selected), Backends, Buckets, Account, Activity, and Support. The main panel is titled 'Clusters' and contains a table with the following data:

Name	Ready	Type	Version	Actions
ocp-vmw		Red Hat OpenShift	v1.20.0+df9c838	Running
ocp-vmware2		Red Hat OpenShift	v1.20.0+c8905da	Running



All Red Hat OpenShift clusters to be managed by Astra Control Center should have access to the image registry that was used for its installation as the agents installed on the managed clusters will pull the images from that registry.

- Import ONTAP clusters as storage resources to be managed as backends by Astra Control Center. When OpenShift clusters are added to Astra and a storageclass is configured, it automatically discovers and inspects the ONTAP cluster backing the storageclass but does not import it into the Astra Control Center to be managed.

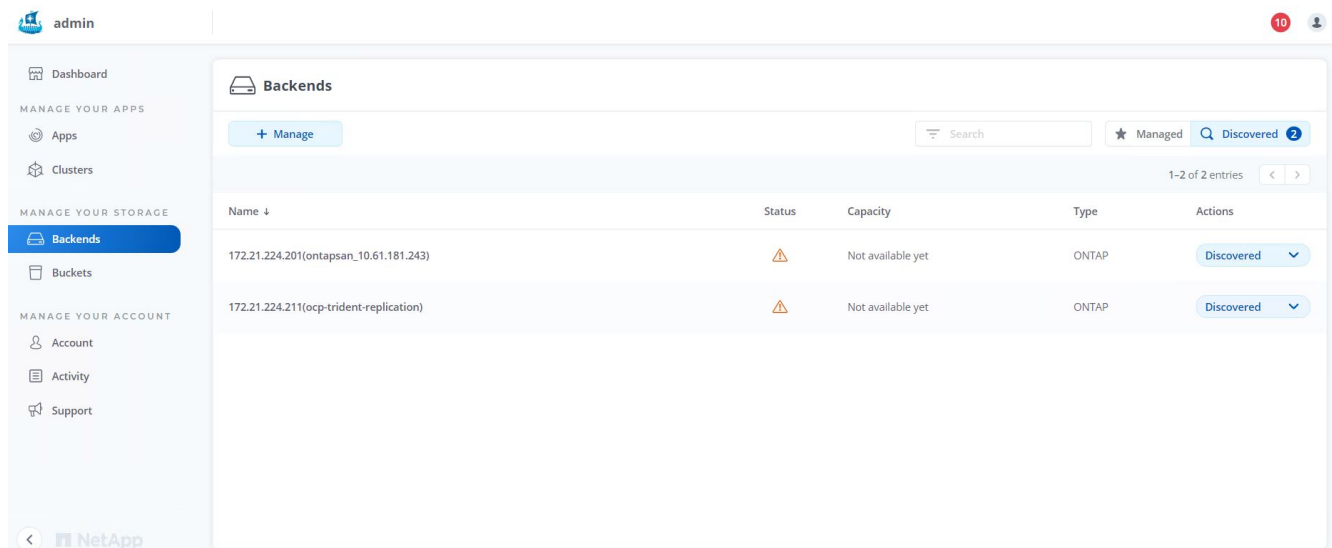

- To import the ONTAP clusters, go to Backends, and click the dropdown, and select Manage next to the ONTAP cluster to be managed. Enter the ONTAP cluster credentials, click Review Information, and then click Import Storage Backend.

Manage ONTAP storage backend

STEP 1/2: CREDENTIALS

CREDENTIALS

Enter cluster administrator credentials for the ONTAP storage backend you want to manage.

Cluster management IP address
172.21.224.201

User name
admin

Password

MANAGE STORAGE BACKEND

Storage backends provide storage to your Kubernetes applications.

Managing storage clusters in Astra Control as a storage backend will allow you to get linkages between PVs and the storage backend. You will also see capacity and health details of the storage backend, including performance metrics if Astra Control is connected to Cloud Insights.


Read more in [Storage backend](#).

ONTAP

Cancel

Review information →

- After the backends are added, the status changes to Available. These backends now have the information about the persistent volumes in the OpenShift cluster and the corresponding volumes on the ONTAP system.

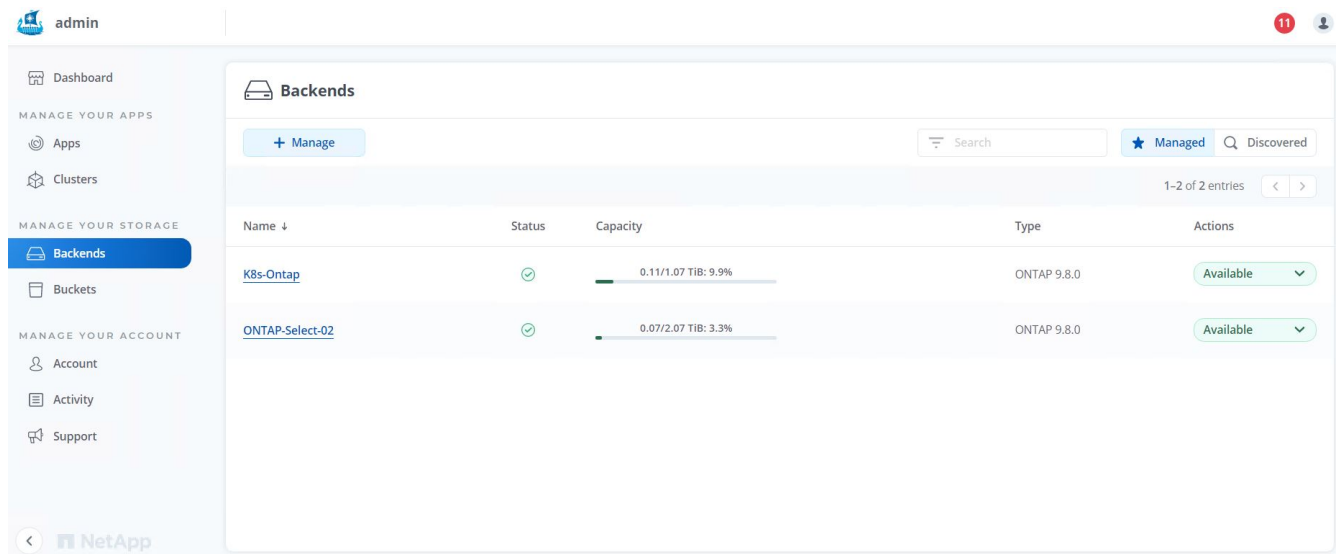

- For backup and restore across OpenShift clusters using Astra Control Center, you must provision an object storage bucket that supports the S3 protocol. Currently supported options are ONTAP S3, StorageGRID, and AWS S3. For the purpose of this installation, we are going to configure an AWS S3 bucket. Go to Buckets, click Add bucket, and select Generic S3. Enter the details about the S3 bucket and credentials to access it, click the checkbox "Make this bucket the default bucket for the cloud," and then click Add.

Add bucket
✕

STORAGE BUCKET

Enter the access details of your existing object store bucket to allow Astra Control to store your application backups.

Type

Generic S3

Existing bucket name

ocp-vmware2-astra-cc

Description (optional)

S3 server name or IP address

s3.us-east-1.amazonaws.com

☒ Make this bucket the default bucket for this cloud

SELECT CREDENTIALS

Astra Control requires S3 access credentials with the roles necessary to facilitate Kubernetes application data management.

Add

Use existing

Access ID

AMW5TFCFDSU6HWSZXABD

Secret key

.....

Credential name

AWS-S3

Cancel

Add ✓

ADDING STORAGE BUCKETS

Astra Control stores backups in your existing object store buckets. The first bucket added for a selected cloud will be designated as the default bucket for backup and clone operations.

Read more in [storage buckets](#)


Next: Choose the Applications To Protect: Red Hat OpenShift with NetApp.

Choose the applications to protect


After you have registered your Red Hat OpenShift clusters, you can discover the applications that are deployed and manage them via the Astra Control Center.

Manage applications

1. After the OpenShift clusters and ONTAP backends are registered with the Astra Control Center, the control center automatically starts discovering the applications in all the namespaces that are using the storageclass configured with the specified ONTAP backend.

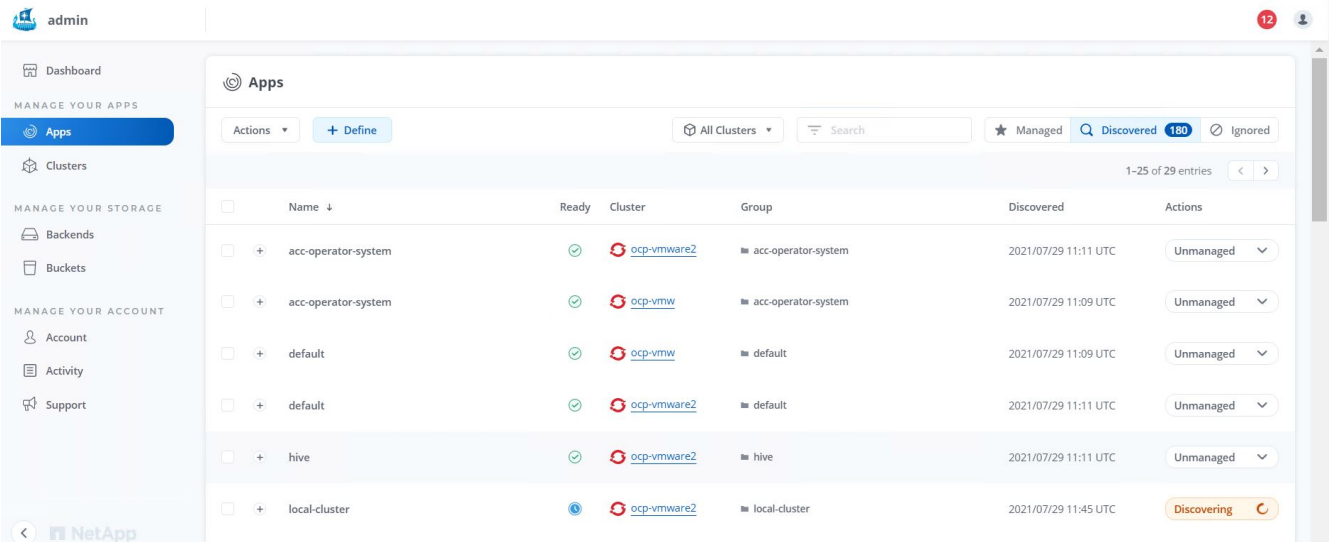

2. Navigate to Apps > Discovered and click the dropdown menu next to the application you would like to manage using Astra. Then click Manage.

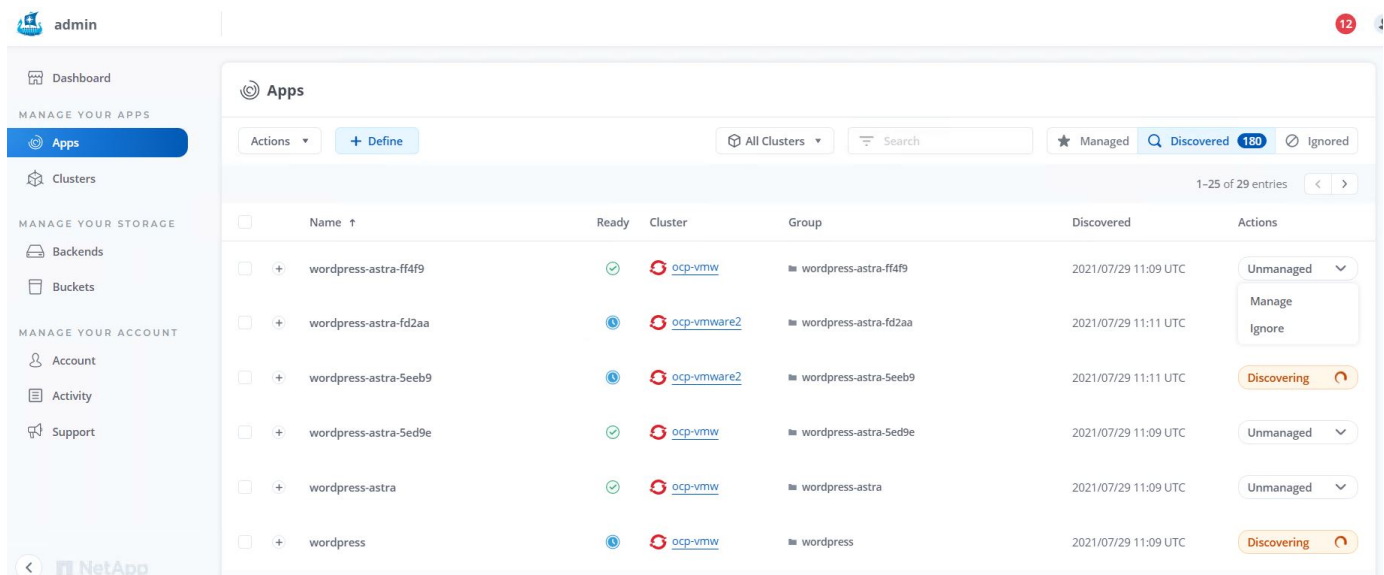

1. The application enters the Available state and can be viewed under the Managed tab in the Apps section.

Apps

Actions

+ Define

All Clusters

Search

★ Managed

Discovered

175

Ignored

1-1 of 1 entries

<input type="checkbox"/>	Name	Ready	Protected	Cluster	Group	Discovered	Actions
<input type="checkbox"/>	wordpress-astra-ff4f9	<div><div></div></div>	<div><div></div></div>	<div><div></div><div>ocp-vmw</div></div>	<div><div></div>wordpress-astra-ff4f9</div>	2021/07/29 11:09 UTC	<div>Available</div> <div></div>

Next: [Protect Your Applications: Red Hat OpenShift with NetApp.](#)


Protect your applications

After application workloads are managed by Astra Control Center, you can configure the protection settings for those workloads.

Creating an application snapshot

A snapshot of an application creates an ONTAP Snapshot copy that can be used to restore or clone the application to a specific point in time based on that Snapshot copy.

1. To take a snapshot of the application, navigate to the Apps > Managed tab and click the application you would like to make a Snapshot copy of. Click the dropdown menu next to the application name and click Snapshot.

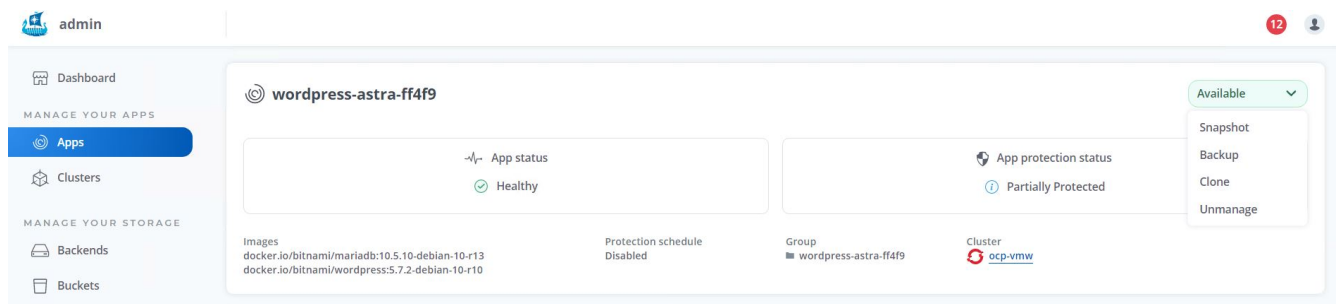

The screenshot shows the Astra Control Center interface. On the left is a sidebar with navigation options: Dashboard, Apps (selected), Clusters, Backends, and Buckets. The main content area displays details for the application 'wordpress-astra-ff4f9'. It shows the application status as 'Healthy' and the app protection status as 'Partially Protected'. Below this, there are sections for Images (docker.io/bitnami/mariadb:10.5.10-debian-10-r13 and docker.io/bitnami/wordpress:5.7.2-debian-10-r10), Protection schedule (Disabled), Group (wordpress-astra-ff4f9), and Cluster (ocp-vmw). A dropdown menu is open next to the application name, showing options: Available, Snapshot, Backup, Clone, and Unmanage.

2. Enter the snapshot details, click Review, and then click Snapshot. It takes about a minute to create the snapshot, and the status becomes Available after the snapshot is successfully created.

Snapshot Application

STEP 1/2: DETAILS

X

SNAPSHOT DETAILS

Name

wordpress-astra-ff4f9-snapshot-20210729120451

OVERVIEW

Application snapshots

Astra Control can take a quick snapshot of your application configuration and persistent storage. Enter a snapshot name to get started.

Read more in [Protect apps](#).

Application

wordpress-astra-ff4f9

Namespace

wordpress-astra-ff4f9

Cluster

ocp-vmw

Cancel

Review →

Creating an application backup

A backup of an application captures the active state of the application and the configuration of it's resources, coverts them into files, and stores them in a remote object storage bucket.

For the backup and restore of managed applications in the Astra Control Center, you must configure superuser settings for the backing ONTAP systems as a prerequisite. To do so, enter the following commands.

```
ONTAP::> export-policy rule modify -vserver ocp-trident -policyname
default -ruleindex 1 -superuser sys
ONTAP::> export-policy rule modify -policyname default -ruleindex 1 -anon
65534 -vserver ocp-trident
```

1. To create a backup of the managed application in the Astra Control Center, navigate to the Apps > Managed tab and click the application that you want to take a backup of. Click the dropdown menu next to the application name and click Backup.

admin

12

Dashboard

MANAGE YOUR APPS

Apps

Clusters

MANAGE YOUR STORAGE

Backends

Buckets

wordpress-astra-ff4f9

Available

App status

Healthy

App protection status

Partially Protected

Images

docker.io/bitnami/mariadb:10.5.10-debian-10-r13
docker.io/bitnami/wordpress:5.7.2-debian-10-r10

Protection schedule

Disabled

Group

wordpress-astra-ff4f9

Cluster

ocp-vmw


Snapshot

Backup

Clone

Unmanage

2. Enter the backup details, select the object storage bucket to hold the backup files, click Review, and, after reviewing the details, click Backup. Depending on the size of the application and data, the backup can take several minutes, and the status of the backup becomes Available after the backup is completed successfully.

 **Backup application**

STEP 1/2: DETAILS


✕

BACKUP DETAILS

Name
wordpress-astra-ff4f9-backup-20210729120857

☐ Backup from an existing snapshot ?

BACKUP DESTINATION


Bucket
ocp-vmware2-astra-cc 


OVERVIEW


Application backups

Astra Control can take a backup of your application configuration and persistent storage. Persistent storage backups are transferred to your object store. Enter a backup name to get started.

Read more in [Application backups](#).

 Application
wordpress-astra-ff4f9

 Namespace
wordpress-astra-ff4f9

 Cluster
ocp-vmw

Cancel

Review →

Restoring or cloning an application

At the push of a button, you can restore an application to the originating cluster or clone it to a remote cluster for dev/test or application protection and disaster recovery purposes.

1. To restore or clone an application, navigate to the Apps > Managed tab and click the app in question. Click the dropdown menu next to the application name and click Clone.

 **wordpress-astra-ff4f9**

App status
Healthy

App protection status
Partially Protected

Images
docker.io/bitnami/mariadb:10.5.10-debian-10-r13
docker.io/bitnami/wordpress:5.7.2-debian-10-r10

Protection schedule
Disabled

Group
wordpress-astra-ff4f9

Cluster
ocp-vmw

Available

Snapshot

Backup

Clone

Unmanage

2. Enter the details of the new namespace, select the cluster you want to restore or clone it to, and choose if you want to restore or clone it from an existing snapshot or from a backup of the current state of the application. Then click Review and click Clone after you have reviewed the details.

Clone application

STEP 1/2: DETAILS

×

CLONE DETAILS

Clone name

wordpress-astra-ff4f9-9e4b6

Clone namespace

wordpress-astra-ff4f9-9e4b6

Destination cluster

ocp-vmw

✓ Clone from an existing snapshot or backup

?

CLONE SOURCE

Filter

Snapshots

Backups

App Backup	Ready	On-Schedule/On-Demand	Created ↑
<div></div> <div>wordpress-astra-ff4f9-backup-20210729120857</div>	<div>✓</div>	<div>🕒</div> <div>On-Demand</div>	<div>2021/07/29 11:57 UTC</div>

Cancel

Review →

OVERVIEW

Application cloning

Astra Control can create a clone of your application configuration and persistent storage. Persistent storage backups are transferred from your object store, so choosing a clone from an existing backup will complete the fastest. Enter a clone name to get started.

Read more in [Clone apps](#).

App

wordpress-astra-ff4f9

Namespace

wordpress-astra-ff4f9

Cluster

ocp-vmw

- The new application goes to the Discovering state while Astra Control Center creates the application on the selected cluster. After all the resources of the application are installed and detected by Astra, the application goes to the Available state.

Dashboard

MANAGE YOUR APPS

Apps

Clusters

MANAGE YOUR STORAGE

Backends

Buckets

MANAGE YOUR ACCOUNT

Account

Activity

Support

Apps

Actions

+ Define

🔍

Search

★ Managed

🔍 Discovered 179

🚫 Ignored

1-2 of 2 entries

<input type="checkbox"/>	Name ↓	Ready	Protected	Cluster	Group	Discovered	Actions
<input type="checkbox"/>	wordpress-astra-ff4f9	✓	🔒	ocp-vmw	wordpress-astra-ff4f9	2021/07/29 11:09 UTC	Available
<input type="checkbox"/>	wordpress-astra-ff4f9-9e4b6	✓	⚠️	ocp-vmw	wordpress-astra-ff4f9-9e4b6	2021/07/29 13:24 UTC	Available

Next: Solution Validation/Use Cases: Red Hat OpenShift with NetApp.

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.