


## Specification of *aclk\_event\_log\_t* (ACLK Event)

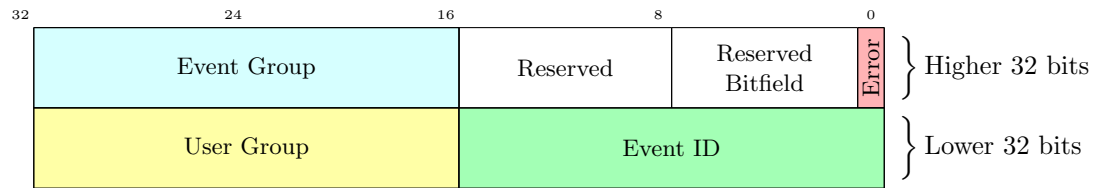

### 1 Descriptions of the fields

- **Event Group** - Logical Grouping of events related to similar topic/area.
- **Reserved (Res. Bitfield)** - Reserved for future use.
- **Error** - If set this event is Error instead of information / regular event.
- **User Group** - Some submodules like *mqtt.websockets* might want to group events originating from them in their own logical subgroups. This allows for such use case. Currently unused but that will change.