CyberTasker v2.9.1 - Administration Guide

> [!WARNING] This document contains restricted system information. Unauthorized distribution is a violation of Weyland-Yutani corporate security protocols.

Welcome to the CyberTasker Administration Console documentation. This guide outlines the advanced features and responsibilities of an Operative with `admin` clearance.

1. System Initialization (The `install.php` Protocol)

When deploying CyberTasker to a new server grid, the database is initially empty. Navigating to the root directory will automatically trigger the `install.php` sequence. You can select your operational language from the dropdown menu, which will automatically become the system default for the master account.

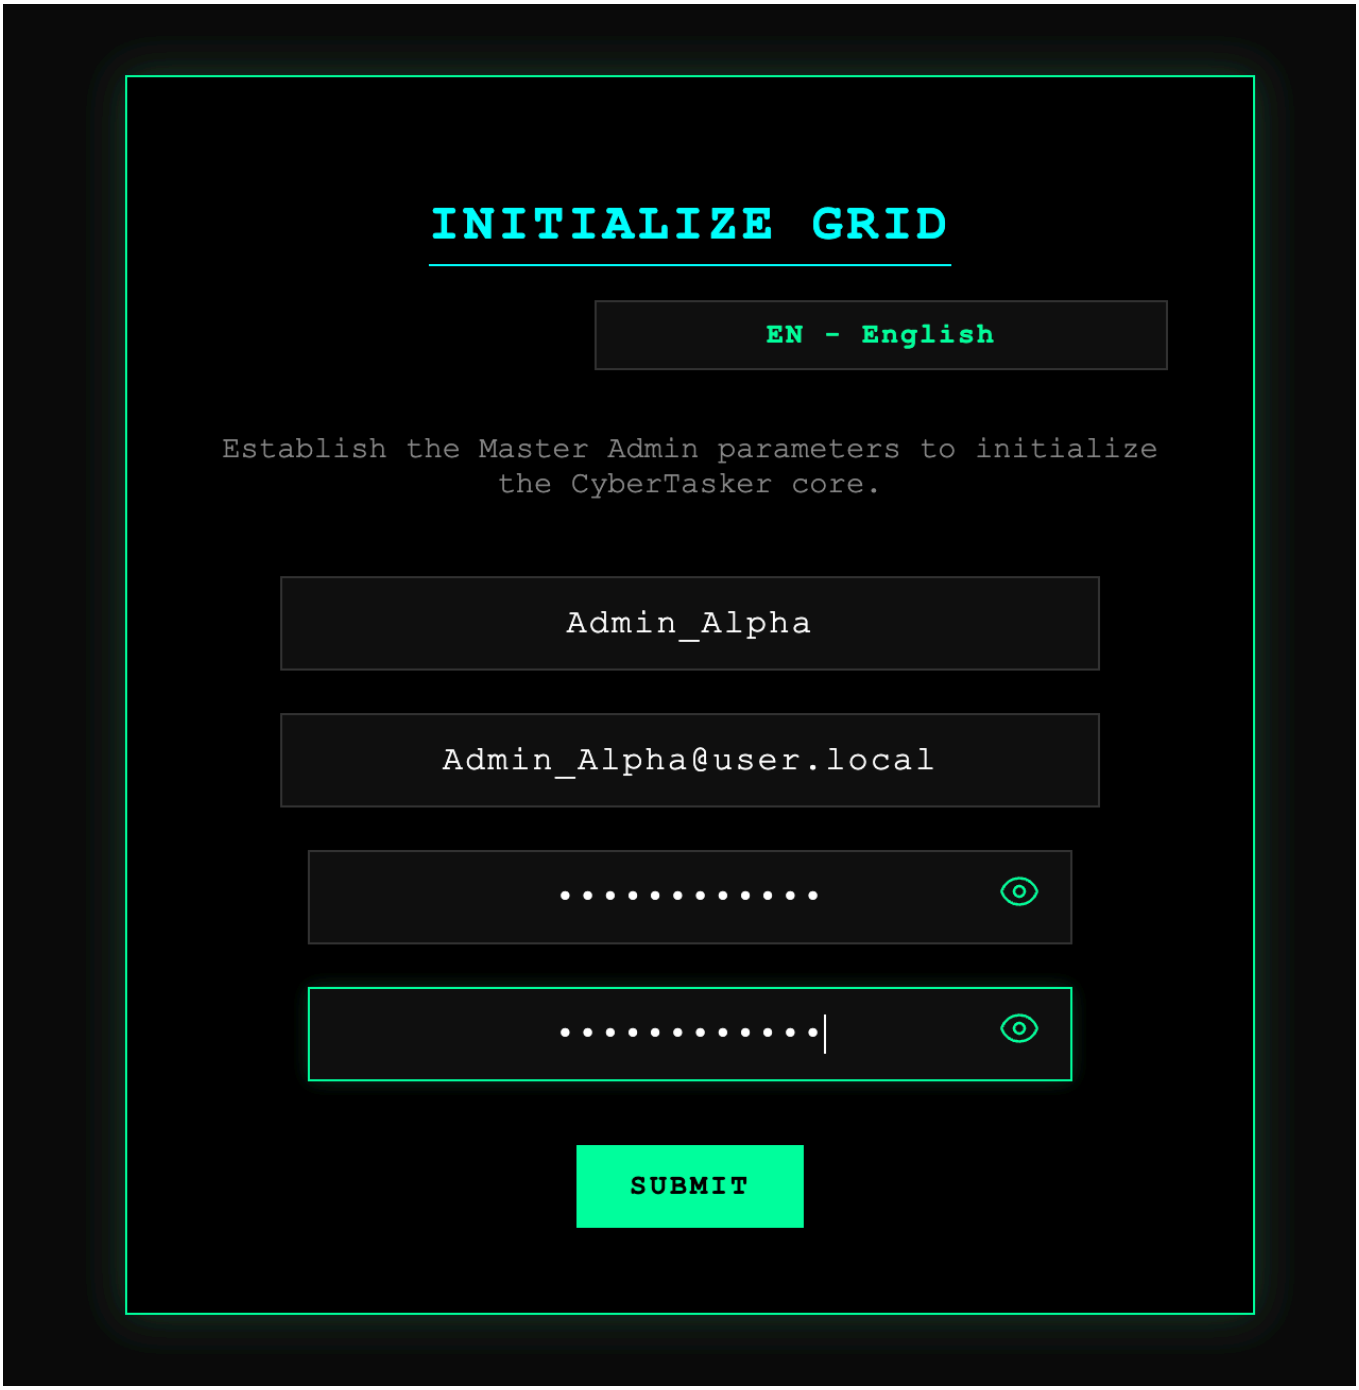

Zero-Config Auto-Lock

CyberTasker features a self-locking installation mechanism: * **First Run:** The installer detects an empty grid, creates the necessary SQLite/MySQL tables, and injects the initial test user dataset. The Administrator must provide a **Codename (Username)**, an **Email Address**, and a robust **Access Key** (Password) during this step. * **Subsequent Runs:** Once the `users` table exists, the installer **locks itself**. If you attempt to access `install.php` again to force a database schema update, you **must** be actively logged in as an `admin`. * If a standard user or an unauthenticated visitor hits the installer, they receive a severe `[ ACCESS DENIED ]` warning, protecting the database from malicious resets.

2. The Administration Console

Log in with your administrator credentials and click the **"TERMINAL"** (Admin) icon in the side navigation to access the master grid.

2.1 Operative Oversight (The Datagrid)

The main panel displays a paginated list of all registered Operatives.

- **Promote / Downgrade:** You can forcefully alter the clearance level of any user. Promote a trusted `user` to `admin`, or downgrade a rogue `admin` back to standard `user` status.

- **Reset Cypher (Password Reset):** If an Operative is locked out of their neural link, use the `RESET PWD` function. This will forcefully overwrite their password to the system default (`password`) and flag them to change it upon their next login.
- **Erase (Account Termination):** The `ERASE` button permanently deletes the user's account, all of their directives, sub-routines, and attached files from the database. **This action cannot be undone.**
- **Automated Ghost Purge (Background):** Note that the system core helps maintain database hygiene automatically. Any unverified operatives or accounts left entirely stagnant past the maximum corporate retention limit are deleted automatically via scheduled cron jobs before major grid upgrades, minimizing manual oversight.

ADMINISTRATION CONSOLE

[X]

SEARCH RECRUITS...

✓ USER TEST_USER_018 TERMINATED.

ID ↑	CODENAME	ROLE	VERIFIED	HISTORY	ACTIONS
#1	Admin_Alpha	ADMIN	✓ VERIFIED	JO 2026-03-03 LG NEVER	DOWNGRADE RESET PWD ERASE
#2	Op_Beta	USER 2FA	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD 2FA OFF ERASE
#3	Test_User_001	USER	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD ERASE
#7	Test_User_005	USER	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD ERASE
#8	Test_User_006	USER	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD ERASE
#18	Test_User_016	USER	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD ERASE
#21	Test_User_019	USER	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD ERASE
#22	Test_User_020	USER	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD ERASE
#23	Test_User_021	USER	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD ERASE
#24	Test_User_022	USER	✓ VERIFIED	JO 2026-03-03 LG NEVER	PROMOTE RESET PWD ERASE

TOTAL RECRUITS: 99

« ‹ 1 / 10 › »

⚙ SYSTEM POLICIES

Enforce Email 2FA
Force an Email 2FA fallback code to be dispatched to active operatives attempting to log in without a TOTP authenticator.

Strict Password Policy
Enforce heavy encryption protocols (Min 12 chars, Upper, Number, Special).

🗄 DATABASE MAINTENANCE

Purge Inactive Operatives
Permanently delete accounts (and their data) that have not logged in for the selected duration.

1 Year(s) PURGE INACTIVE

Purge Unverified Ghost Accounts
Permanently delete accounts that have never been verified and were

PURGE UNVERIFIED

2.2 Bio-Lock (2FA) Management

Security is paramount. The Admin grid allows you to monitor the 2FA status of all personnel. * Users with active Time-Based One-Time Passwords (TOTP) will display a green `[2FA]` badge next to their role. * **Emergency Override:** If an Operative loses their authenticator device and their backup codes, an Admin can click the red **`2FA OFF`** button to forcefully disable the Bio-Lock for that specific user, allowing them to log in with just their password.

2.3 System Version Display

To ensure your grid is synchronized with current security updates, the absolute system version (e.g., `CyberTracker v2.6.0`) is continuously displayed at the bottom of the Admin Console. Use this version string when establishing contact for strategic support.

3. Global System Policies

At the bottom of the Administration Console, you have access to global environment variables.

Strict Password Policy

By toggling the `Strict Password Policy` switch: * **Disabled (Default):** Operatives can use simple passwords (e.g., `password123`) for rapid testing and deployment. * **Enabled:** The system enforces cryptographic-grade security. All new passwords (during registration or profile updates) must be at least 12 characters long and contain a mix of uppercase, lowercase, numbers, and special symbols.

Enforce Email 2FA

By toggling the `Enforce Email 2FA` switch: * **Disabled (Default):** Operatives without an active Authenticator App (TOTP) can log in with just their password. * **Enabled:** An automatic **Emergency Override Code** (6-digit PIN) is dispatched to the operative's registered Email Address if they attempt to log in without a TOTP token. This acts as a forced, universal Two-Factor Authentication fallback across the grid. Operatives will also see a persistent warning banner in their profile until they secure their account natively.

4. Diagnostics & Maintenance

- **Mail Logs & Development:** CyberTasker relies on PHP's `mail()` function for dispatching notifications (e.g., password reset tokens, 2FA fallback codes). For system-level debugging, developers can hook into `api/helpers/mail_helper.php` to analyze dispatch headers.

> **End of Guide** Maintain constant vigilance over the grid, Admin. (v2.9)