

BOOKSTORE

My bookshelf



Read



Not read



Pretend to
have read

Project

Simple Bookstore

[Home](#) [Books](#)

Books
https://m.media-amazon.com/images/I/71FTb9X6wsL._AC_UF1000,1000_QL80_.jpg

Add New Book

Title

Enter book title

Author

Enter author name


Year

Enter publication year

Image URL

Enter image URL (optional)

Add Book

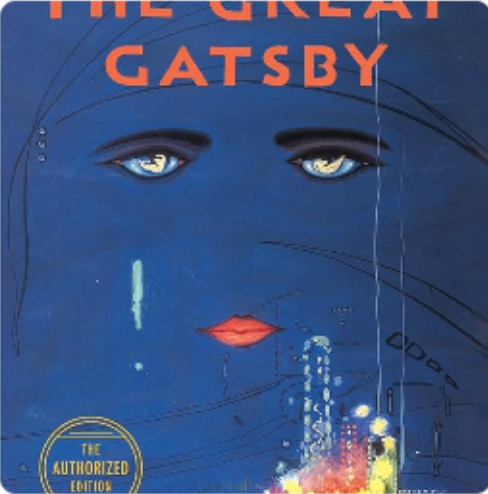

The Great Gatsby

by F. Scott Fitzgerald

Published: 1925

Delete




1984

by George Orwell

Published: 1949

Delete

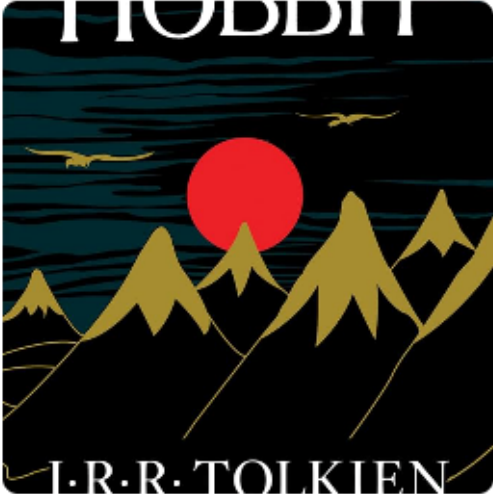


The Hobbit

by J.R.R. Tolkien

Published: 1937

Delete

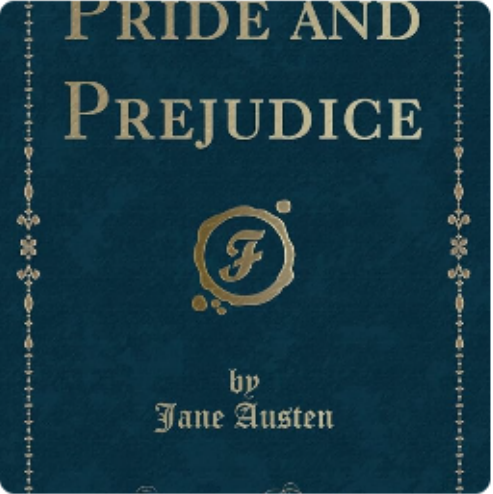

Pride and Prejudice

by Jane Austen

Published: 1813

Delete

W4-D24

Form with Validation

Add New Book

Title

Author

Year

Image URL

Add Book

BookForm

```
● ● ●  
#[derive(Debug, Clone, Default, Serialize, Deserialize, Validate)]  
pub struct BookForm {  
    #[validate(length(min = 3, message = "Title must be at least 3 characters."))]  
    pub title: String,  
    #[validate(length(min = 3, message = "Author must be at least 3 characters."))]  
    pub author: String,  
    #[validate(range(  
        min = 1000,  
        max = 2100,  
        message = "Year must be between 1000 and 2100."  
    ))]  
    pub year: u32,  
    pub img_url: String,  
}
```


Components

```
<FormProvider form=form>
  <Form class="max-w-md">
    <FormSet>
      <FormGroup>
        <FormField field="name">
          <FormLabel>Name</FormLabel>
          <FormInput attr:placeholder="John Doe" />
          <FormError />
        </FormField>
      </FormGroup>
      <FormGroup>
        <FormField field="age">
          <FormLabel>Age</FormLabel>
          <FormInput attr:r#type="number" attr:placeholder="25" />
          <FormError />
        </FormField>
      </FormGroup>
    </FormSet>
  </Form>
</FormProvider>
```

Reminders



```
CREATE TABLE IF NOT EXISTS books (  
    uid UUID PRIMARY KEY NOT NULL DEFAULT gen_random_uuid(),  
    title CHARACTER VARYING(255) NOT NULL,  
    author CHARACTER VARYING(255) NOT NULL,  
    year INTEGER NOT NULL,  
    img_url CHARACTER VARYING(1024),  
    created_at TIMESTAMPTZ NOT NULL DEFAULT now(),  
    updated_at TIMESTAMPTZ NOT NULL DEFAULT now()  
);
```

Let's code!

Tomorrow, we **deploy** it! 😎

Your turn!