

# **Extensible YANG** Model for YANG-Push Notifications

I-D: draft-ietf-netconf-notif-envelope-02

**A. Huang Feng**, INSA-Lyon  
P. Francois, INSA-Lyon  
T. Graf, Swisscom  
B. Claise, Huawei

July 24th 2025

# Extensible YANG model for YANG-Push Notifications

Proposal of this I-D

- Structure defined as a notification containing
  - event-time
  - metadata(s)
  - contents


structure envelope:

+-- event-time	yang:date-and-time
+-- hostname?	inet:host
+-- sequence-number?	yang:counter32
+-- contents?	<anydata>


```
{
  "ietf-yp-notification:envelope": {
    "event-time": "2024-10-10T08:00:11.22Z",
    "contents": {
      "ietf-yang-push:push-update": {
        "id": 1011,
        "datastore-contents": {
          "ietf-interfaces:interfaces": [
            {
              "interface": {
                "name": "eth0",
                "oper-status": "up"
              }
            }
          ]
        }
      }
    }
  }
}
```

JSON example without metadata

## Configured Subscriptions

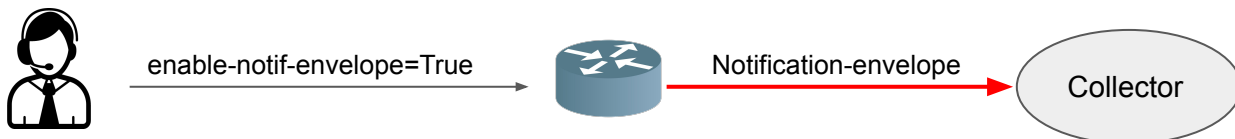

## Dynamic Subscriptions

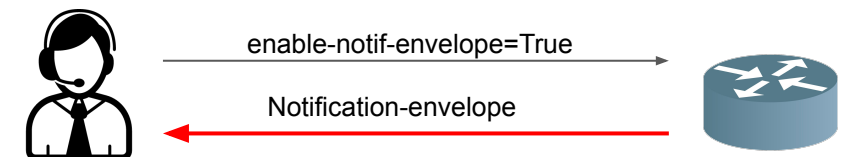

# Extensible YANG model for YANG-Push Notifications

## Changes since -01

- (1) The “contents” leaf MUST be located at the end of the structure (Feedback Rob)
- (2) Fixed examples
- (3) SID-file updated (Thanks Andy for the proposal)
- (4) Added a non-normative appendix showing how to extend the header
- (5) Other editorial changes

# Extensible YANG model for YANG-Push Notifications

## Status of the draft

- Reached consensus (based on interim and ML)
  - Core ideas has remained stable
- One last discussion on the mailing list with Andy and Reshad [1]
  - Andy raised that tearing down all existing sessions when the global switch changes is too *disruptive* for the client
  - Proposal from Andy/Reshad discussed whether a per-subscription switch was a better fit

[1] [https://mailarchive.ietf.org/arch/msg/netconf/aih-HWWo8RSJ3\\_fLznNKPgUKqEI/](https://mailarchive.ietf.org/arch/msg/netconf/aih-HWWo8RSJ3_fLznNKPgUKqEI/)

# Extensible YANG model for YANG-Push Notifications

## Global vs Per-subscription config switch

- Background:
  - Initial proposal: centralize the config switch with an RPC
    - This added complexity in operations
  - Discussion at the interim:
    - Per-subscription config switch is too complex to manage in current implementations
    - *Rather have a global config switch*
    - Voted the approach:  
<https://datatracker.ietf.org/doc/polls-interim-2025-netconf-02-202502101000/>
    - Preference for a **global Switch + tearing down sessions to simplify corner-cases**
  - Mailing list [1]:
    - Andy feedback is that the global switch is too disruptive and suggests per-subscription config switch


[1] [https://mailarchive.ietf.org/arch/msg/netconf/aih-HWWo8RSJ3\\_fLznNKPgUKqEI/](https://mailarchive.ietf.org/arch/msg/netconf/aih-HWWo8RSJ3_fLznNKPgUKqEI/)

# Extensible YANG model for YANG-Push Notifications


## Global vs Per-subscription config switch

- Question to the group:
  - Which type of configuration switch do you fancy?

Use case 1

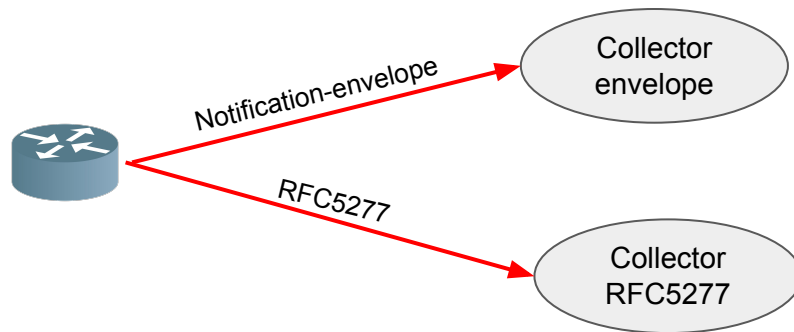

Use case 2



# Extensible YANG model for YANG-Push Notifications

What's next?

- All issues/requests have been addressed
- Request a **WG Last Call** to get latest comments
- Side Meeting on **Friday 09:30 – 10:30** at *El Escorial*: Demo about how to use YANG-Push MVP 1 (including draft-ietf-netconf-notif-envelope) with Message Broker Integration.

**BACKUP**



# Extensible YANG model for YANG-Push Notifications

Proposal of this I-D

- YANG Notification structure for **YANG-Push Notifications** [RFC 8639/8641]
  - (1) Option to “opt-in” to this notification envelope
  - (2) Able to discover the capability of this new header through “ietf-notification-capabilities”
  - (3) Extensible header defined in YANG 1.1
  - (4) Definition of each encoding (XML, JSON, CBOR)
  - (5) Defines the first base extensions (I-D.tgraf-netconf-notif-sequencing; I-D.tgraf-netconf-yang-push-observation-time)

# Extensible YANG model for YANG-Push Notifications

## Reminder on current proposal

- Initial proposal was centralizing requests via an RPC call
  - Feedback: complex to manage
- Current proposal:
  - Switch headers using “/sn:subscriptions/inotenv:enable-notification-envelope”

```
module: ietf-yp-notification

augment /sn:subscriptions:
  +--rw enable-notification-envelope?  boolean
  +--rw metadata
```

- When switching this node, existing Subscriptions are tore down:

When there are existing subscriptions and a client changes the node 'enable-notification-envelope', all existing subscriptions MUST be terminated. The publisher MUST send a 'subscription-terminated' notification to all the existing subscriptions using the header configured prior to the change. Any new subscription after the change use the header defined by the node 'enable-notification-envelope', i.e. encoded as Section 3.3.1 when enabled and as defined in [RFC5277] if disabled.

# YANG model for NETCONF Event Notifications

Interim 2024-09-19 – draft-ahuang-netconf-notif-yang

- <https://datatracker.ietf.org/doc/minutes-interim-2024-netconf-02-202409191300/>
- Thorough review of draft-ahuang-netconf-notif-yang/YANG-Push/NETCONF Event Notifications
- Conclusion
  - draft-ahuang-netconf-notif-yang fixes a **gap** for YANG-Push but might be worth putting the effort on a brand new header
  - We need:
    - Bypass RFC5277, thus use YANG-Push only
    - Extensible header
      - be able to add new metadata (sequencing, versioning, others...)
    - A client should be able to “opt-in”
      - Clients that don’t support this new header should continue working seamlessly
    - The notification should be a YANG-based solution
    - Fix JSON and CBOR underspecification
      - including CBOR-SID allocation

# Extensible YANG model for YANG-Push Notifications

## (1) Option to “opt-in” through a YANG-Push Subscription

- Configuration on Globally on the server via the RPC “enable-notif-envelope”

```
rpcs:
  +---x enable-notif-envelope
    +---w input
      +---w enable-notification-envelope?  boolean
      +---w metadata
```

Currently  
Default=False



enable-notification-envelope=false



Old Header as RFC5277

Collector



enable-notification-envelope=true



New envelope Header

Collector

# Extensible YANG model for YANG-Push Notifications

(2) Able to discover the capability of this new header


- Augmentation on notification capabilities (RFC9196)

module: ietf-yp-notification

```
augment /sn:subscriptions:
  +--ro enable-notification-envelope?  boolean
  +--ro metadata
augment /sysc:system-capabilities/notc:subscription-capabilities:
  +--ro notification-metadata
  +--ro notification-envelope?  boolean
  +--ro metadata
  +--ro hostname-sequence-number?  boolean
```

module: ietf-yp-observation

```
augment /yp:push-update:
  +--ro timestamp?      yang:date-and-time
  +--ro point-in-time?  enumeration
augment /yp:push-change-update:
  +--ro timestamp?      yang:date-and-time
  +--ro point-in-time?  enumeration
augment /sysc:system-capabilities/notc:subscription-capabilities:
  +--ro yang-push-observation-supported?
    inotifseq:notification-support
    {yang-push-observation-timestamp}?
```

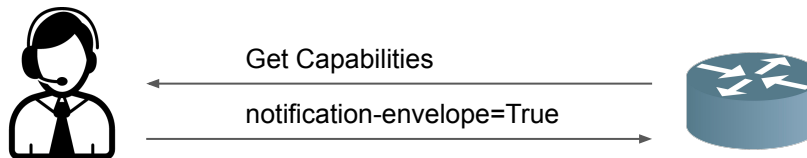

# Extensible YANG model for YANG-Push Notifications

## (3) Extensible header defined in YANG


- Structure defined as a notification containing
  - event-time
  - metadata(s)
  - notification-contents

```
structure envelope:  
  +-- event-time          yang:date-and-time  
  +-- hostname?          inet:host  
  +-- sequence-number?   yang:counter32  
  +-- notification-contents? <anydata>
```


```
{  
  "ietf-yp-notification:envelope": {  
    "event-time": "2024-10-10T08:00:11.22Z",  
    "notification-contents": {  
      "ietf-yang-push:push-update": {  
        "id": 1011,  
        "datastore-contents": {  
          "ietf-interfaces:interfaces": [  
            {  
              "interface": {  
                "name": "eth0",  
                "oper-status": "up"  
              }  
            }  
          ]  
        }  
      }  
    }  
  }  
}
```

JSON example without metadata

### Configured Subscriptions

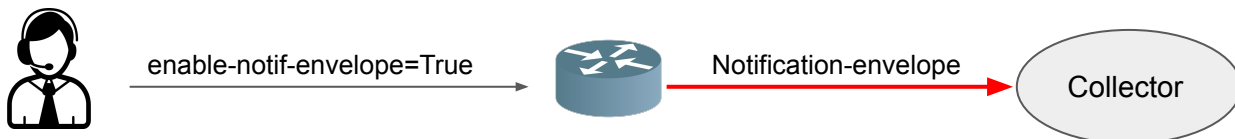

### Dynamic Subscriptions

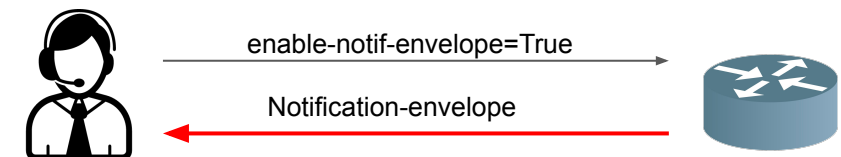

# Extensible YANG model for YANG-Push Notifications

## (4) Definition of each encoding (XML, JSON, CBOR)

- Explicit definition of the content of the “envelope” (solving gap for JSON and CBOR)
  - Definition of the namespace (urn:ietf:params:xml:ns:netconf:notification:2.0)
  - Mandatory event-time node
  - Mandatory notification-contents node
  - Metadata present when configured

A YANG notification encoded in XML is structured as a root "envelope" container. The namespace of this container is the namespace defined in the YANG module "ietf-yp-notification":

```
urn:ietf:params:xml:ns:netconf:notification:2.0
```

Two mandatory child nodes within the "envelope" container are expected, representing the event time and the notification payload. The "event-time" node is defined within the same XML namespace as the "envelope" container. The "event-time" node MUST be compliant with [\[RFC3339\]](#). Other metadata defined within the YANG module defined in [Section 5](#) MUST use the same XML namespace. See [Section 3.4](#) for more details.

# Extensible YANG model for YANG-Push Notifications

## (5) Extensions for hostname and sequence-number

- Definition of hostname and sequence-number extensions (draft-tgraf-netconf-notif-sequencing)
  - **Present** by default when the envelope is enabled
  - Discovery of support of this header through RFC9196

```
structure envelope:
  +-- event-time          yang:date-and-time
  +-- hostname?           inet:host
  +-- sequence-number?    yang:counter32
  +-- notification-contents? <anydata>
```

```
{
  "ietf-yp-notification:envelope": {
    "event-time": "2023-03-25T08:30:11.22Z",
    "hostname": "example-router",
    "sequence-number": 1,
    "notification-contents": {
      "ietf-yang-push:push-update": {
        "id": 6666,
        "datastore-contents": {
          "ietf-interfaces:interfaces": [
            {
              "interface": {
                "name": "eth0",
                "type": "iana-if-type:ethernetCsmacd",
                "oper-status": "up",
                "mtu": 1500
              }
            }
          ]
        }
      }
    }
  }
}
```