

CS 4530: Fundamentals of Software Engineering

Module 6: Concurrency Patterns in Typescript


Jon Bell, Adeel Bhutta, Mitch Wand
Khoury College of Computer Sciences

Learning Goals for this Lesson

- At the end of this lesson, you should be prepared to:
 - Explain the difference between JS run-to-completion semantics and interrupt-based semantics.
 - Given a simple program using `async/await`, work out the order in which the statements in the program will run.
 - Write simple programs that create and manage promises using `async/await`
 - Write simple programs to mask latency with concurrency by using non-blocking IO and `Promise.all` in TypeScript.

Our goal is to mask latency with concurrency

- Consider: a 1Ghz CPU executes an instruction every 1 ns
- Almost anything else takes forever (approximately)

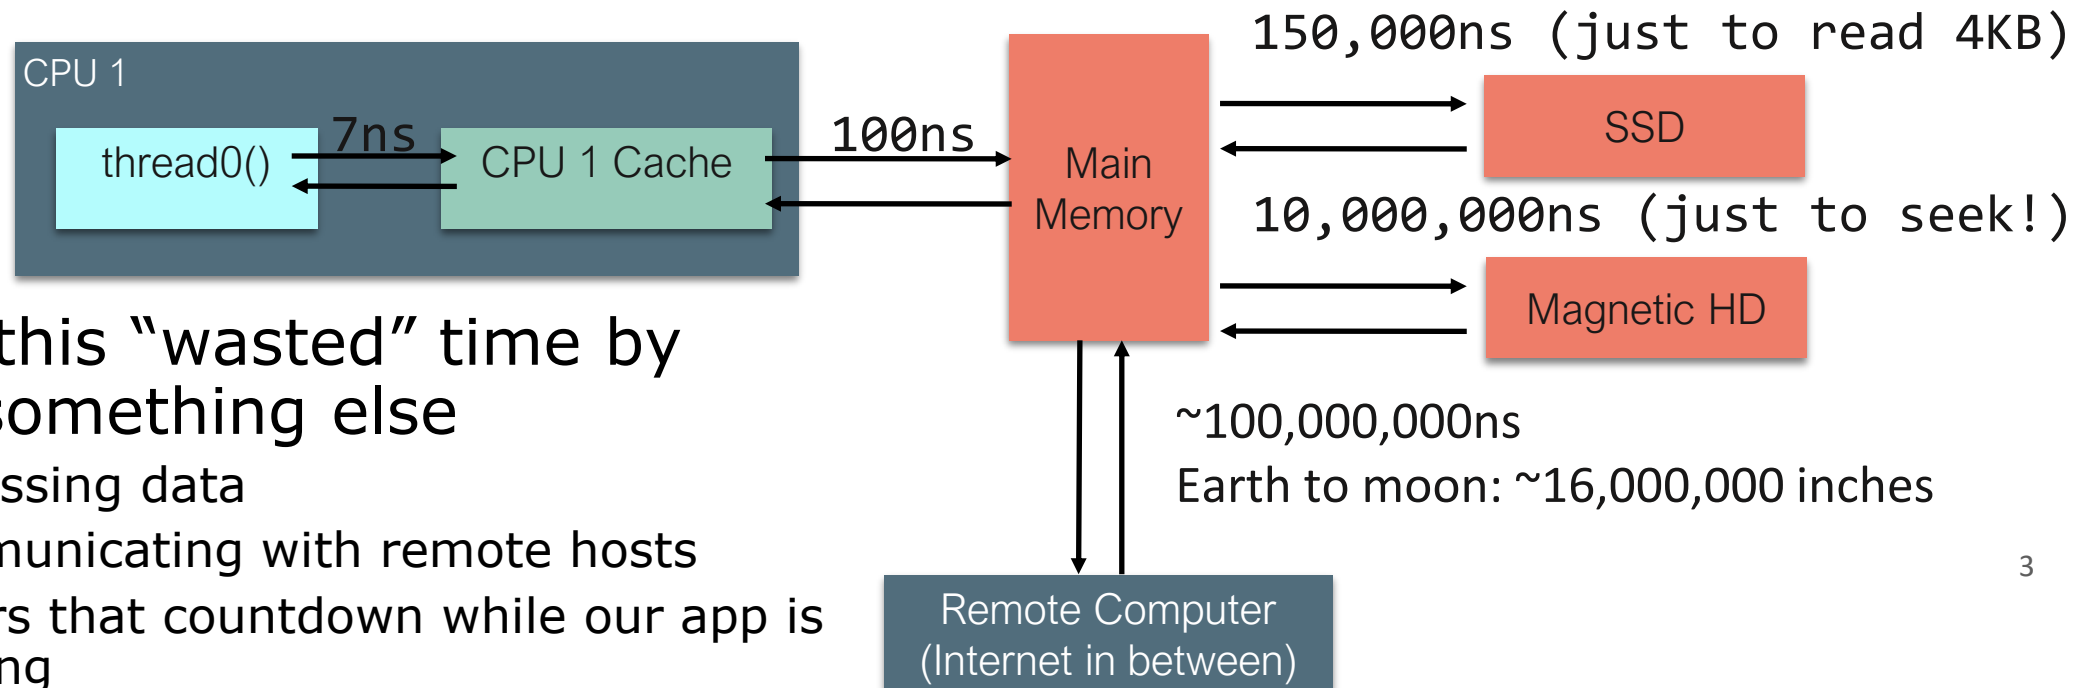

- Utilize this “wasted” time by doing something else
 - Processing data
 - Communicating with remote hosts
 - Timers that countdown while our app is running
 - Waiting for users to provide input

We achieve this goal using two techniques:

1. cooperative multiprocessing
2. non-blocking IO

Most OS's use pre-emptive multiprocessing

- OS manages multiprocessing with multiple threads of execution
- Processes may be interrupted at unpredictable times
- Inter-process communication by shared memory
- Data races abound
- Really, really hard to get right: need critical sections, semaphores, monitors (all that stuff you learned about in op. sys.)

Cooperative multiprocessing maintains a pool of **promises**.

- Typescript maintains a pool of processes, called promises.
- A promise always executes until it is completed
 - This is called "run-to-completion semantics"
- A promise can create other promises to be added to the pool.
- Promises interact mostly by passing values to one another; data races are minimized.

A promise can be in one of exactly 4 states


- **Executing**
 - there is only one of these; we call it the "current promise" or the "current computation"
- **Ready** for execution
- **Waiting** for some event
 - Typically for some other promise to complete
- **Terminated**
 - The technical term is "resolved".

Computations always run until they are completed.

- Along the way, it may create promises that can be run anytime after the current computation is completed (i.e. they are in the "ready" state)
- It may also create promises that are in the "waiting" state-- waiting for some event, at which time they become "ready".
- When the current computation is completed, the operating system (e.g. node.js) chooses some "ready" process to become the next current computation.

Create promises with **async**

- Async functions create and return promises
- Here, `f`
 1. creates a promise to produce a "1".
 2. Marks it as ready and puts it in the process pool.
 3. Returns that promise as its value.

```
src > promises > TS asyncNoAwait.ts >  f
1  async function f(n:number) {return n}
2
3  const k: Promise<number>
4  const k = f(1)
```

Example0.ts

```
async function f (n) {  
    console.log("entering f")  
    return n  
}
```

```
function main() {  
    const p = f(1);  
    console.log('p =', p)  
}
```

```
main()
```

```
$ npx ts-node example0.ts  
entering f  
p = Promise { 1 }
```

Use async/await to create a promise that waits for some other promise to complete

```
async function example() {  
    doThisNow();  
    const p1 = somePromise();  
    const response = await p1  
    doThisLater();  
}
```

1. Executes doThisNow()
2. Evaluates somePromise() {which should return a promise}. Puts that promise in the pool, and marks it as **ready**.
3. Puts in the pool a promise to doThisLater(), and marks it as **waiting** for the completion of the promise **p1**.
4. Last, it returns the promise p1 to its caller.

A running example: asyncExample.ts

```
export async function example(n:number) {  
    doThisNow(n);  
    const p1 = somePromise(n);  
    console.log('p1 =', p1)  
    const response = await p1  
    doThisLater(n);  
}
```

```
function doThisNow (n) {console.log("doThisNow", n)}  
async function somePromise (n) {return `somePromise ${n}`}  
function doThisLater (n) {console.log("doThisLater", n)}
```

Simplest example

```
import { example } from "../asyncExample"

function main () {
  console.log("calling example(1)")
  example(1)
  console.log("returning to main")
  console.log("main finished\n")
}

main()
```

```
export async function
example(n:number) {
  doThisNow(n);
  const p1 = somePromise(n);
  console.log('p1 =', p1)
  const response = await p1
  doThisLater(n);
}
```

```
$ npx ts-node example1.ts
calling example(1)
doThisNow 1
p1 = Promise { 'somePromise 1' }
returning to main
main finished
```

src/async-await/example1.ts

You can start multiple threads

```
import { example }
  from "./asyncExample";

async function main() {
  example(1)
  example(2)
  example(3)
  console.log("main finished\n")
}

main()
```

src/async-await/example2.ts

```
$ npx ts-node example2.ts
doThisNow 1
p1 = Promise { 'somePromise 1' }
doThisNow 2
p1 = Promise { 'somePromise 2' }
doThisNow 3
p1 = Promise { 'somePromise 3' }
main finished

doThisLater 1
doThisLater 2
doThisLater 3
```

Use await to make promises execute sequentially

src/async-await/example3.ts

```
import { example }
  from "../asyncExample";

async function main() {
  await example(1)
  await example(2)
  await example(3)
  console.log("main finished\n")
}

main()
console.log("example3 finished\n")
```

```
$ npx ts-node example3.ts
doThisNow 1
p1 = Promise { 'somePromise 1' }
example3 finished

doThisLater 1
doThisNow 2
p1 = Promise { 'somePromise 2' }
doThisLater 2
doThisNow 3
p1 = Promise { 'somePromise 3' }
doThisLater 3
main finished
```

Use Promise.all to synchronize on the completion of several promises

```
async function forkJoin() {  
  console.log("forkJoin started")  
  const promises  
    = [example(1), example(2), example(3)]  
  console.log(promises)  
  await Promise.all(promises)  
  console.log("forkJoin finished\n")  
}  
  
async function main() {  
  forkJoin()  
  console.log("main finished\n")  
}
```

src/async-await/example4.ts

```
$ npx ts-node example4.ts  
forkJoin started  
doThisNow 1  
p1 = Promise { 'somePromise 1' }  
doThisNow 2  
p1 = Promise { 'somePromise 2' }  
doThisNow 3  
p1 = Promise { 'somePromise 3' }  
[ Promise { <pending> }, Promise {  
  <pending> }, Promise { <pending> } ]  
main finished  
  
doThisLater 1  
doThisLater 2  
doThisLater 3  
forkJoin finished
```


But where does the non-blocking IO come from?

We achieve this goal using two techniques:

1. cooperative multiprocessing
2. non-blocking IO 

Answer: JS/TS has some primitives for starting a non-blocking computation

- These are things like http requests, I/O operations, or timers.
- Each of these returns a promise that you can **await**. The promise runs while it is pending, and produces the response from the http request, or the contents of the file, etc.
- You will hardly ever call one of these primitives yourself; usually they are wrapped in a convenient procedure, e.g., we write

```
    axios.get('https://rest-example.covey.town')
```

to make an http request, or

```
    fs.readFile(filename)
```

to read the contents of a file.

Pattern for starting a concurrent computation

```
async function makeRequest(requestNumber:number) {  
    // some code (to be executed now)  
    const response =  
        await axios.get('https://rest-example.covey.town')  
    // more code (to be executed after the .get() returns.)  
}
```

- The http request is sent immediately.
- A promise is created to run the *more code* after the http call returns (i.e., the code after “awaits” is blocked)
- The caller of `makeRequest` resumes immediately.

The pattern in action

```
export async function makeRequest(requestNumber:number) {  
  console.log(`makeRequest is about to start request ${requestNumber}`);  
  const response = await axios.get('https://rest-exa  
  console.log(`makeRequest resumes request ${request  
  console.log(`makeRequest reports that for request  
  response.data);  
}
```

```
console.log("main thread is about to call makeRequest"  
makeRequest(1000);  
console.log("main thread continues after makeRequest r  
console.log("end of main thread")
```

1. Axios.get starts the http request in the background, and
2. Creates a promise to do the code after the await.
3. The call to makeRequest returns.

\$ npx ts-node example1
main thread is about to call makeRequest
makeRequest is about to start request 1000
main thread continues after makeRequest returns
end of main thread

4. The main thread finishes.
5. The computation resumes the promise

makeRequest resumes request 1000
makeRequest reports that for request '1000', server replied: This is GET number 200 on the current server

Running several requests concurrently

```
import makeRequest from './makeRequest';
import timeIt from './timeIt'

async function makeThreeSimpleRequests() {
  makeRequest(1);
  makeRequest(2);
  makeRequest(3);
  console.log("Three requests made; main thread finishes")
}

timeIt("main thread", makeThreeSimpleRequests)
```

src/requests/example2.ts

Requests are made in order

But the response for request 3 arrived at the server before request 1.

```
$ npx ts-node example2
```

```
makeRequest is about to start request 1
```

```
makeRequest is about to start request 2
```

```
makeRequest is about to start request 3
```

```
Three requests made; main thread finishes
```

```
Elapsed time for main thread: 41.064 milliseconds
```

```
makeRequest reports that for request '3', server replied: This is GET number 223 on the current server
```

```
makeRequest reports that for request '1', server replied: This is GET number 224 on the current server
```

```
makeRequest reports that for request '2', server replied: This is GET number 225 on the current server
```

```
import makeRequest from './makeRequest';
import timeIt from './timeIt'

async function makeThreeSerialRequests() {
  await makeRequest(1);
  await makeRequest(2);
  await makeRequest(3);
  console.log("Three requests made; main thread finishes")
}

timeIt("main thread", makeThreeSerialRequests)
```

await
makes your
code more
sequential

```
$ npx ts-node example3
makeRequest is about to start request 1
makeRequest reports that for request '1', server rep
number 232 on the current server
makeRequest is about to start request 2
makeRequest reports that for request '2', server replied: This is GET
number 233 on the current server
makeRequest is about to start request 3
makeRequest reports that for request '3', server replied: This is GET
number 234 on the current server
Three requests made; main thread finishes
Elapsed time for main thread: 800.270 milliseconds
```

Second request doesn't start
until first request returns

Promise.all waits for all of the promises in a list to finish

```
async function makeThreeConcurrentRequests() {  
  const p1 : Promise<void> = makeRequest(1);  
  const p2 : Promise<void> = makeRequest(2);  
  const p3 : Promise<void> = makeRequest(3);  
  const thePromises = [p1,p2,p3]  
  await Promise.all(thePromises)  
  console.log(`main thread reports: thePromises = [${thePromises}]`)  
  console.log(`main thread finishes`)  
}
```

src/requests/example4.ts

```
timeIt("main thread", makeThreeConcurrentRequests)
```

Main thread doesn't resume until
ALL of the promises are satisfied

```
$ npx ts-node example5
```

makeRequest is about to start request 1

makeRequest is about to start request 2

makeRequest is about to start request 3

makeRequest reports that for request '2', server replied: This is GET number 259 on the current server

makeRequest reports that for request '1', server replied: This is GET number 260 on the current server

makeRequest reports that for request '3', server replied: This is GET number 261 on the current server

main thread reports: thePromises = [[object Promise],[object Promise],[object Promise]]

main thread finishes

Elapsed time for main thread: 256.518 milliseconds

Visualizing Promise.all (1)

Sequential version: ~206 msec

```
async function makeThreeSerialRequests():  
Promise<void> {  
    await makeOneGetRequest(1);  
    await makeOneGetRequest(2);  
    await makeOneGetRequest(3);  
    console.log('Heard back from all of the  
requests')  
}
```

“Don’t make another request
until you got the last response
back”

Concurrent version: ~80 msec

```
async function makeThreeConcurrentRequests():  
Promise<void> {  
    await Promise.all([  
        makeOneGetRequest(1),  
        makeOneGetRequest(2),  
        makeOneGetRequest(3)  
    ])  
    console.log('Heard back from all of the requests')  
}
```

“Make all of the requests now,
then wait for all of the
responses”

Visualizing Promise.all (2)


Sequential version: ~206 msec

```
async function makeThreeSerialRequests():  
  Promise<void> {  
    await makeOneGetRequest(1);  
    await makeOneGetRequest(2);  
    await makeOneGetRequest(3);  
    console.log('Heard back from all of the  
requests')  
  }
```

Concurrent version: ~80 msec

```
async function makeThreeConcurrentRequests():  
  Promise<void> {  
    await Promise.all([  
      makeOneGetRequest(1),  
      makeOneGetRequest(2),  
      makeOneGetRequest(3)  
    ])  
    console.log('Heard back from all of the requests')  
  }
```


Time →



s send

r receive

Time →

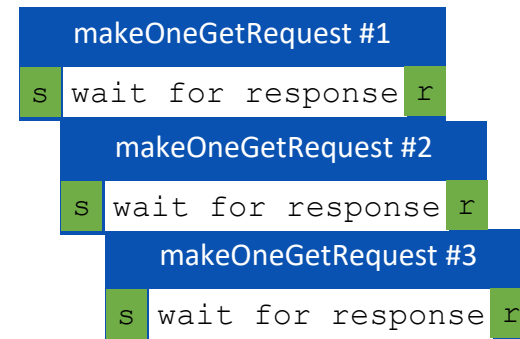

An Example Task Using the Transcript Server

- Given an array of StudentIDs:
 - Request each student's transcript, and save it to disk so that we have a copy, and calculate its size
 - Once all of the pages are downloaded and saved, print out the total size of all of the files that were saved

Generating a promise for each student

```
async function asyncGetStudentData(studentID: number) {  
  const returnValue =  
    await axios.get(`https://rest-example.covey.town/transcripts/${studentID}`)  
  return returnValue  
}
```

```
async function asyncProcessStudent(studentID: number) : Promise<number> {  
  // wait to get the student data  
  const response = await asyncGetStudentData(studentID)  
  // asynchronously write the file  
  await fsPromises.writeFile(  
    dataFileName(studentID),  
    JSON.stringify(response.data))  
  // last, extract its size  
  const stats = await fsPromises.stat(dataFileName(studentID))  
  const size : number = stats.size  
  return size  
}
```

Calling await also gives other processes a chance to run.

src/transcripts/simple.ts

Running the student processes concurrently


src/transcripts/simple.ts

```
async function runClientAsync(studentIDs:number[]) {  
  console.log(`Generating Promises for ${studentIDs}`);  
  const studentPromises =  
    studentIDs.map(studentID => asyncProcessStudent(studentID)) ;  
  console.log('Promises Created!');  
  console.log('Satisfying Promises Concurrently')  
  const sizes = await Promise.all(studentPromises);  
  console.log(sizes)  
  const totalSize = sum(sizes)  
  console.log(`Finished calculating size: ${totalSize}`);  
  console.log('Done');  
}
```

Map-promises pattern: take a list of elements and generate a list of promises, one per element

Output


```
runClientAsync([411,412,423])
```



```
$ npx ts-node simple.ts  
Generating Promises for 411,412,423  
Promises Created!  
Satisfying Promises Concurrently  
[ 151, 92, 145 ]  
Finished calculating size: 388  
Done
```

But what if there's an error?


```
runClientAsync([411,412,87065,423,23044])
```



```
$ npx ts-node transcripts/simple.ts  
Generating Promises for 411,412,87065,423,23044  
Promises Created!  
Satisfying Promises Concurrently
```

```
<blah blah blah>\node_modules\axios\lib\core\createError.js:16  
  var error = new Error(message);  
                ^
```

```
Error: Request failed with status code 404
```



Need to catch the error

```
type StudentData = {isOK: boolean, id: number, payload?: any }

/** asynchronously retrieves student data, */
async function asyncGetStudentData(studentID: number): Promise<StudentData> {
  try {
    const returnValue =
      await axios.get(`https://rest-example.covey.town/transcripts/${studentID}`)
    return { isOK: true, id: studentID, payload: returnValue }
  } catch (e) {
    return { isOK: false, id: studentID }
  }
}
```

Catch the error and transmit it in a form the rest of the caller can handle.

src/transcripts/handle-errors.ts

And recover from the error...


```
async function asyncProcessStudent(studentID: number): Promise<number> {  
  // wait to get the student data  
  const response = await asyncGetStudentData(studentID)  
  if (!(response.isOK)) {  
    console.error(`bad student ID ${studentID}`)  
    return 0  
  } else {  
    await fsPromises.writeFile(  
      dataFileName(studentID),  
      JSON.stringify(response.payload.data))  
    // last, extract its size  
    const stats = await fsPromises.stat(dataFileName(studentID))  
    const size: number = stats.size  
    return size  
  }  
}
```

Design decision: if we have a bad student ID, we'll print out an error message, and count that as 0 towards the total.

src/transcripts/handle-errors.ts

New output

```
runClientAsync([411,32789,412,423,10202040])
```



```
$ npx ts-node transcripts/handle-errors.ts  
Generating Promises for 411,32789,412,423,10202040  
Promises Created!  
Wait for all promises to be satisfied  
bad student ID 32789  
bad student ID 10202040  
[ 151, 0, 92, 145, 0 ]  
Finished calculating size: 388  
Done
```

Pattern for testing an async function

```
import axios from 'axios'

async function echo(str: string) : Promise<string> {
  const res =
    await axios.get(`https://httpbin.org/get?answer=${str}`)
  return res.data.args.answer
}

test('request should return its argument', async () => {
  expect.assertions(1)
  await expect(echo("33")).resolves.toEqual("33")
})
```

src/jest/jest-example.test.ts

General Rules for Writing Asynchronous Code

- You can't return a value from a promise to an ordinary procedure.
 - You can only send the value to another promise that is awaiting it.
- Call async procedures only from other async functions or from the top level.
- Break up any long-running computation into **async/await** segments so other processes will have a chance to run.
- Leverage concurrency when possible
 - Use **promise.all** if you need to wait for multiple promises to return.
- Check for errors with **try/catch**

Odds and Ends You Should Know About

This is not Java!

```
let x : number = 10
```

```
async function asyncDouble() {  
    // start an asynchronous computation and wait for the result  
    await makeOneGetRequest(1);  
    x = x * 2 // statement 1  
}
```

```
async function asyncIncrementTwice() {  
    // start an asynchronous computation and wait for the result  
    await makeOneGetRequest(2);  
    x = x + 1; // statement 2  
    // nothing can happen between these two statements!!  
    x = x + 1; // statement 3  
}
```

```
async function run() {  
    await Promise.all([asyncDouble(), asyncIncrementTwice()])  
    console.log(x)  
}
```

- In Java, you could get an interrupt between statement 2 and statement 3.
- In TS/JS statement 3 is guaranteed to be executed **immediately** after statement 2!
- No interrupt is possible.

But you can still have a data race

```
let x : number = 10
```


```
async function asyncDouble() {  
    // start an asynchronous computation and wait for the result  
    await makeOneGetRequest(1);  
    x = x * 2 // statement 1  
}
```

```
async function asyncIncrementTwice() {  
    // start an asynchronous computation and wait for the result  
    await makeOneGetRequest(2);  
    x = x + 1; // statement 2  
    x = x + 1; // statement 3  
}
```

```
async function run() {  
    await Promise.all([asyncDouble(), asyncIncrementTwice()])  
    console.log(x)  
}
```

Async/await code is compiled into promise/then code

```
async function
makeThreeSerialRequests() {
1.  console.log('Making first
request');
2.  await makeOneGetRequest();
3.  console.log('Making second
request');
4.  await makeOneGetRequest();
5.  console.log('Making third
request');
6.  await makeOneGetRequest();
7.  console.log('All done!');
}
makeThreeSerialRequests();
```



```
console.log('Making first request');
makeOneGetRequest().then( () => {
    console.log('Making second request');
    return makeOneGetRequest();
}).then( () => {
    console.log('Making third request');
    return makeOneGetRequest();
}).then( () => {
    console.log('All done!');
});
```

Promises Enforce Ordering Through “Then”

```
1. console.log('Making requests');
2. axios.get('https://rest-example.covey.town/')
   .then((response) =>{
       console.log('Heard back from server');
       console.log(response.data);
   });
3. axios.get('https://www.google.com/')
   .then((response) =>{
       console.log('Heard back from Google');
   });
4. axios.get('https://www.facebook.com/')
   .then((response) =>{
       console.log('Heard back from Facebook');
   });
5. console.log('Requests sent!');
```

- **axios.get** returns a promise.
- **p.then** mutates that promise so that the then block is run immediately after the original promise returns.
- The resulting promise isn't completed until the then block finishes.
- You can chain **.then**'s, to get things that look like `p.then().then().then()`

The Self-Ticking Clock

- To make the clock self-ticking, add the following line to your clock:

```
constructor () {  
    setInterval(() => {this.tick()},50)  
}
```

Async/Await Programming Activity

- Your task is to write a new `async` function, `importGrades`, which takes in input of the type `ImportTranscript[]`.
- `importGrades` should create a student record for each `ImportTranscript`, and then post the grades for each of those students.
- After posting the grades, it should fetch the transcripts for each student and return an array of transcripts.

Download the activity (includes instructions in README.md):

Linked from course webpage for Module 6

Review

- You should now be prepared to:
 - Explain the difference between JS run-to-completion semantics and interrupt-based semantics.
 - Given a simple program using `async/await`, work out the order in which the statements in the program will run.
 - Write simple programs that create and manage promises using `async/await`
 - Write simple programs to mask latency with concurrency by using non-blocking IO and `Promise.all` in TypeScript.