



JENNER

COMPARE DATA



SLEEPER CENTER

RYPTION

52

Problem: Securely compare two data items

Solution: Normalise & hash data, compare hashes

LOREM IPSUM...



LOREM IPSUM...

=> sha256(**LOREM IPSUM ...**) == sha256(**LOREM IPSUM ...**)






Collisions [**A** **!=** **B** but **sha256(A)** **==** **sha256(B)**] are mathematically possible, but practically not relevant



Problem: Securely compare two data items

Solution: Normalise & hash data, compare hashes

COMPARE DATA

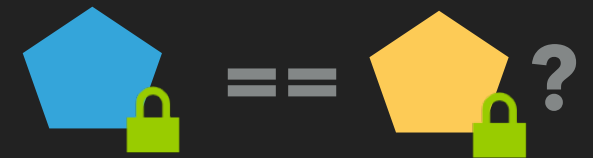

Problem: Securely compare two data items

Solution: Normalise & hash data, compare hashes

1 - Normalize

E.g. **J. EDGAR HOOVER** \Rightarrow **HOOVER, JOHN EDGAR** \Rightarrow^* **H160, J500 E326**


2 - Hash

Use *hash(salt + data)* to prevent precomputing attacks. Use multiple iterations of hashing.

- ▶ *public salt* \Rightarrow treat hash as *pseudonymised*
- ▶ *secret salt* \Rightarrow treat hash as *anonymised*

* *Soundex - but choose whatever normalisation works for you*

COMPARE DATA

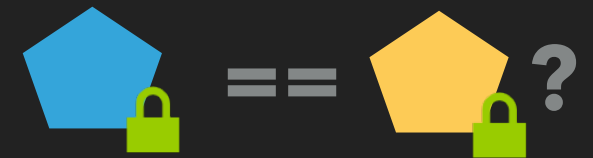

Problem: Securely compare two data items

Solution: Normalise & hash data, compare hashes

LOREM IPSUM ... == LOREM IPSUM ...

=>★

sha256(LOREM IPSUM ...) == sha256(LOREM IPSUM ...)

4C53E9C9... == 4C53E9C9...

<=>

★ Collisions [$A \neq B$ but $\text{sha256}(A) == \text{sha256}(B)$] are mathematically possible, but practically not relevant