


① 捕获: `glyph.draw(recordingPen)`

② 记录: `recordingPen.value` (12 条指令)


③ 重放: `recordingPen.replay(pen)`

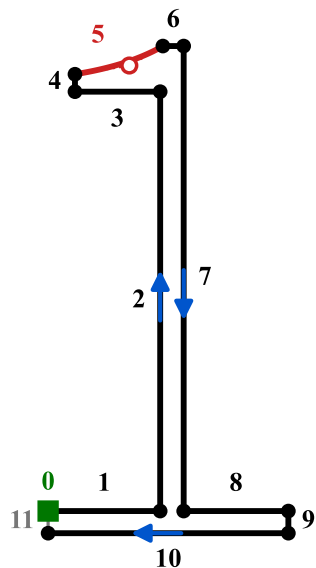

`glyph.draw(recordingPen)`

```
0 ('moveTo', ((95, 33),))
1 ('lineTo', ((262, 33),))
2 ('lineTo', ((262, 658),))
3 ('lineTo', ((135, 658),))
4 ('lineTo', ((135, 684),))
5 ('qCurveTo', ((216, 697), (266, 726)))
6 ('lineTo', ((297, 726),))
7 ('lineTo', ((297, 33),))
8 ('lineTo', ((453, 33),))
9 ('lineTo', ((453, 0),))
10 ('lineTo', ((95, 0),))
11 ('closePath', ())
```

`recordingPen.replay(pen)`

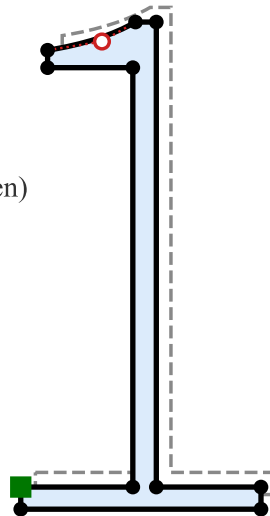

12 条指令逐一重放, 路径与原始轮廓完全一致

红色行: 一条 `qCurveTo` 记录携带 2 个连续控制点

■ `moveTo` 起点

— `lineTo` 直线段

— `qCurveTo` 二次曲线段

○ 离曲线控制点 (`qCurveTo` 的中间点)

-- `closePath` 闭合边

➡ 绘制方向

③ 中灰虚线为偏移显示的原始轮廓

路径序号与 `recordingPen.value` 中的指令一一对应