
ara13 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=317; Error (D) n=169

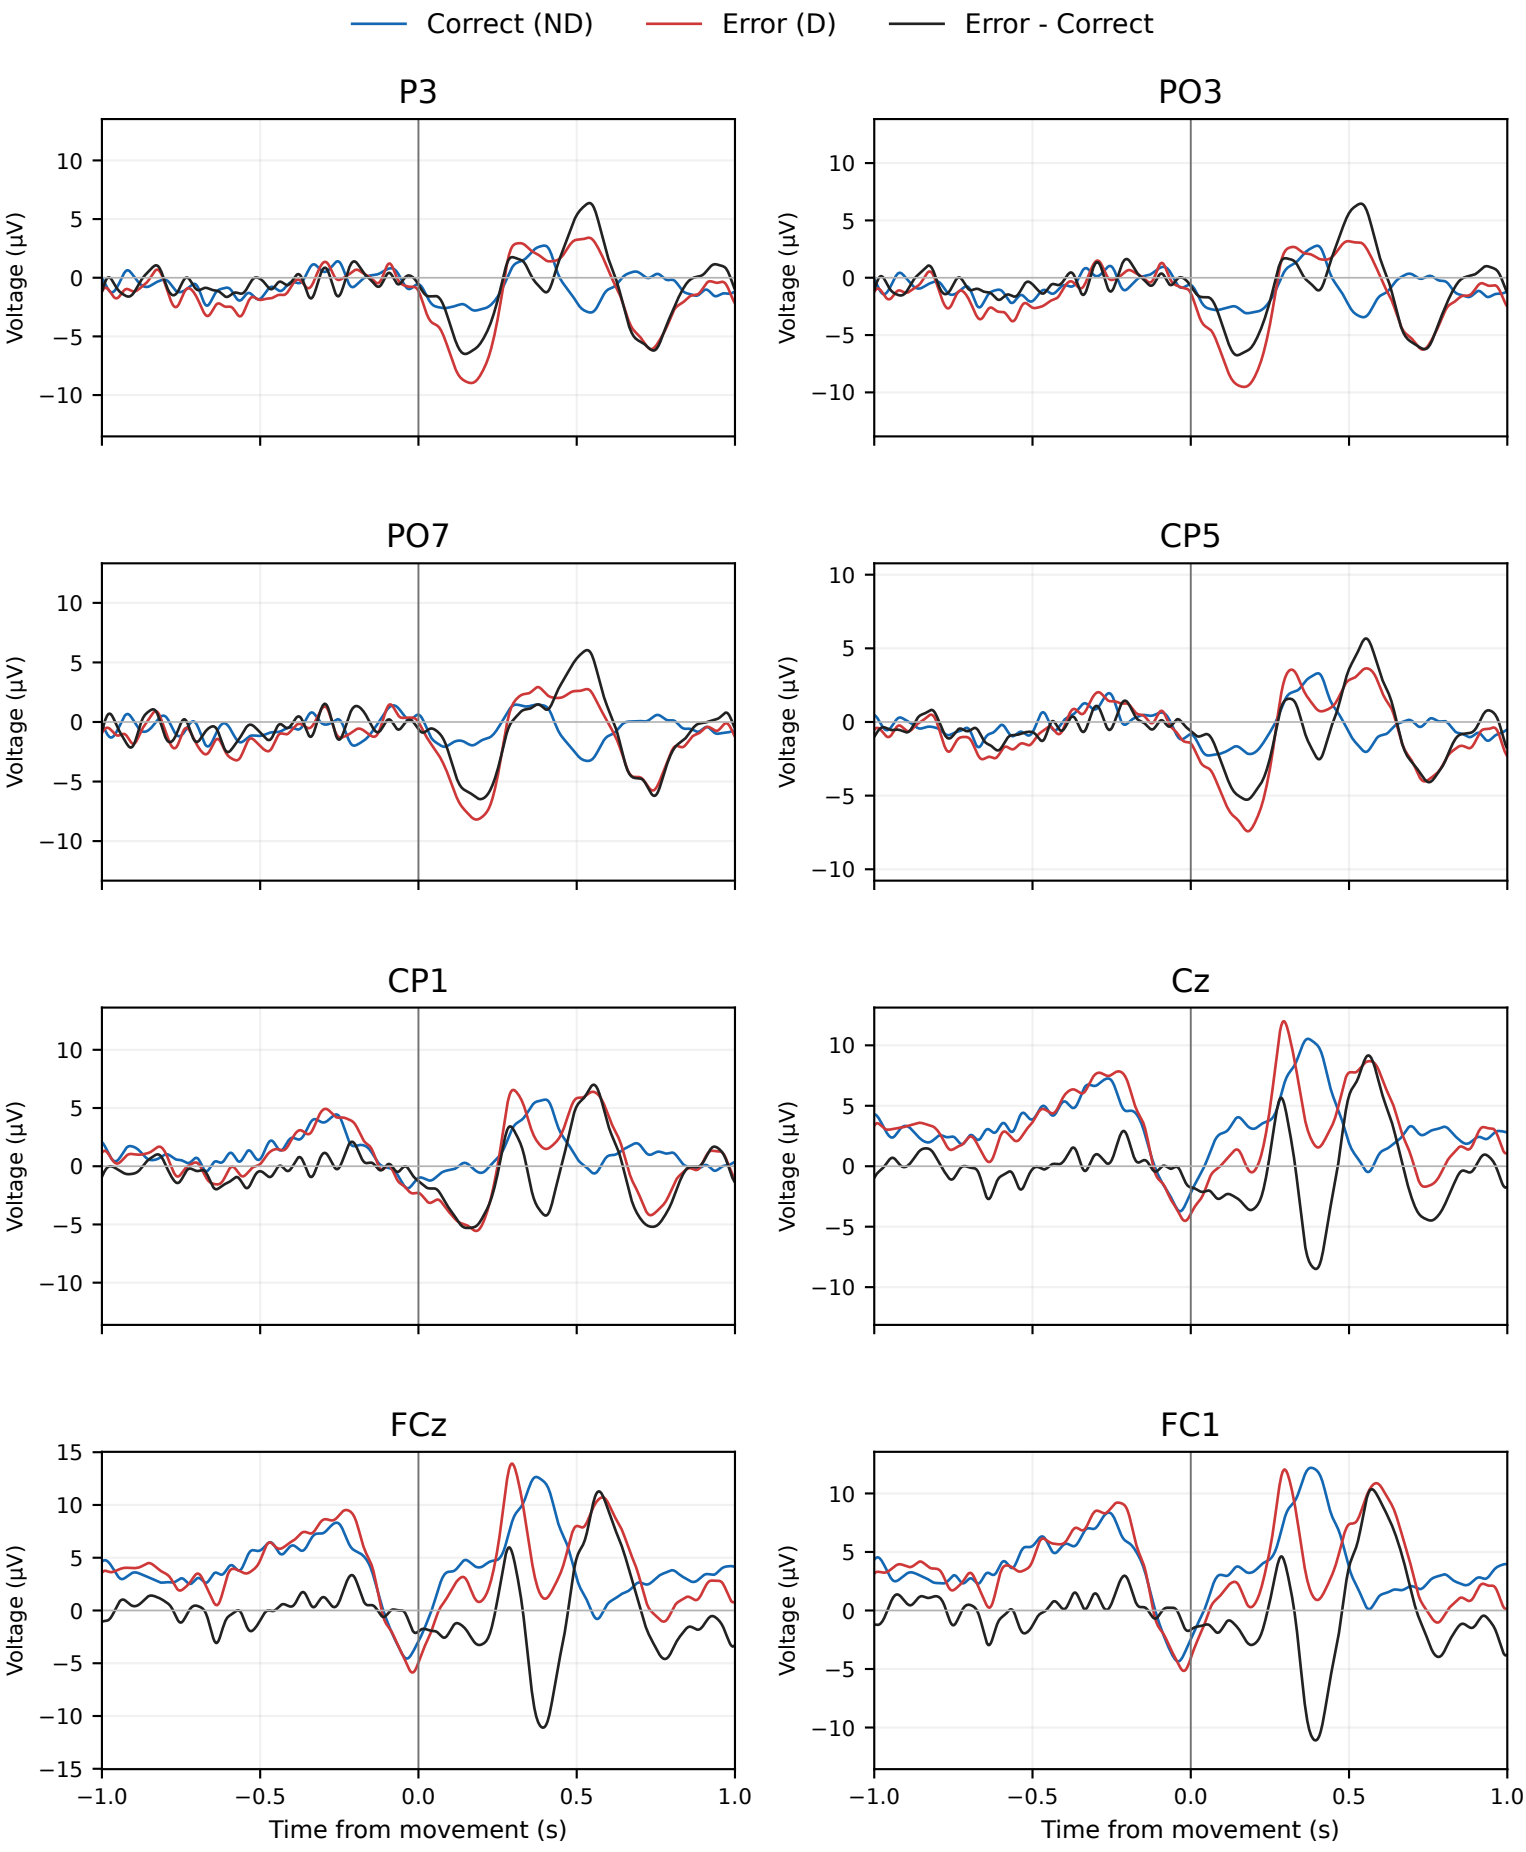

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

ara13 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=317; Error (D) n=165

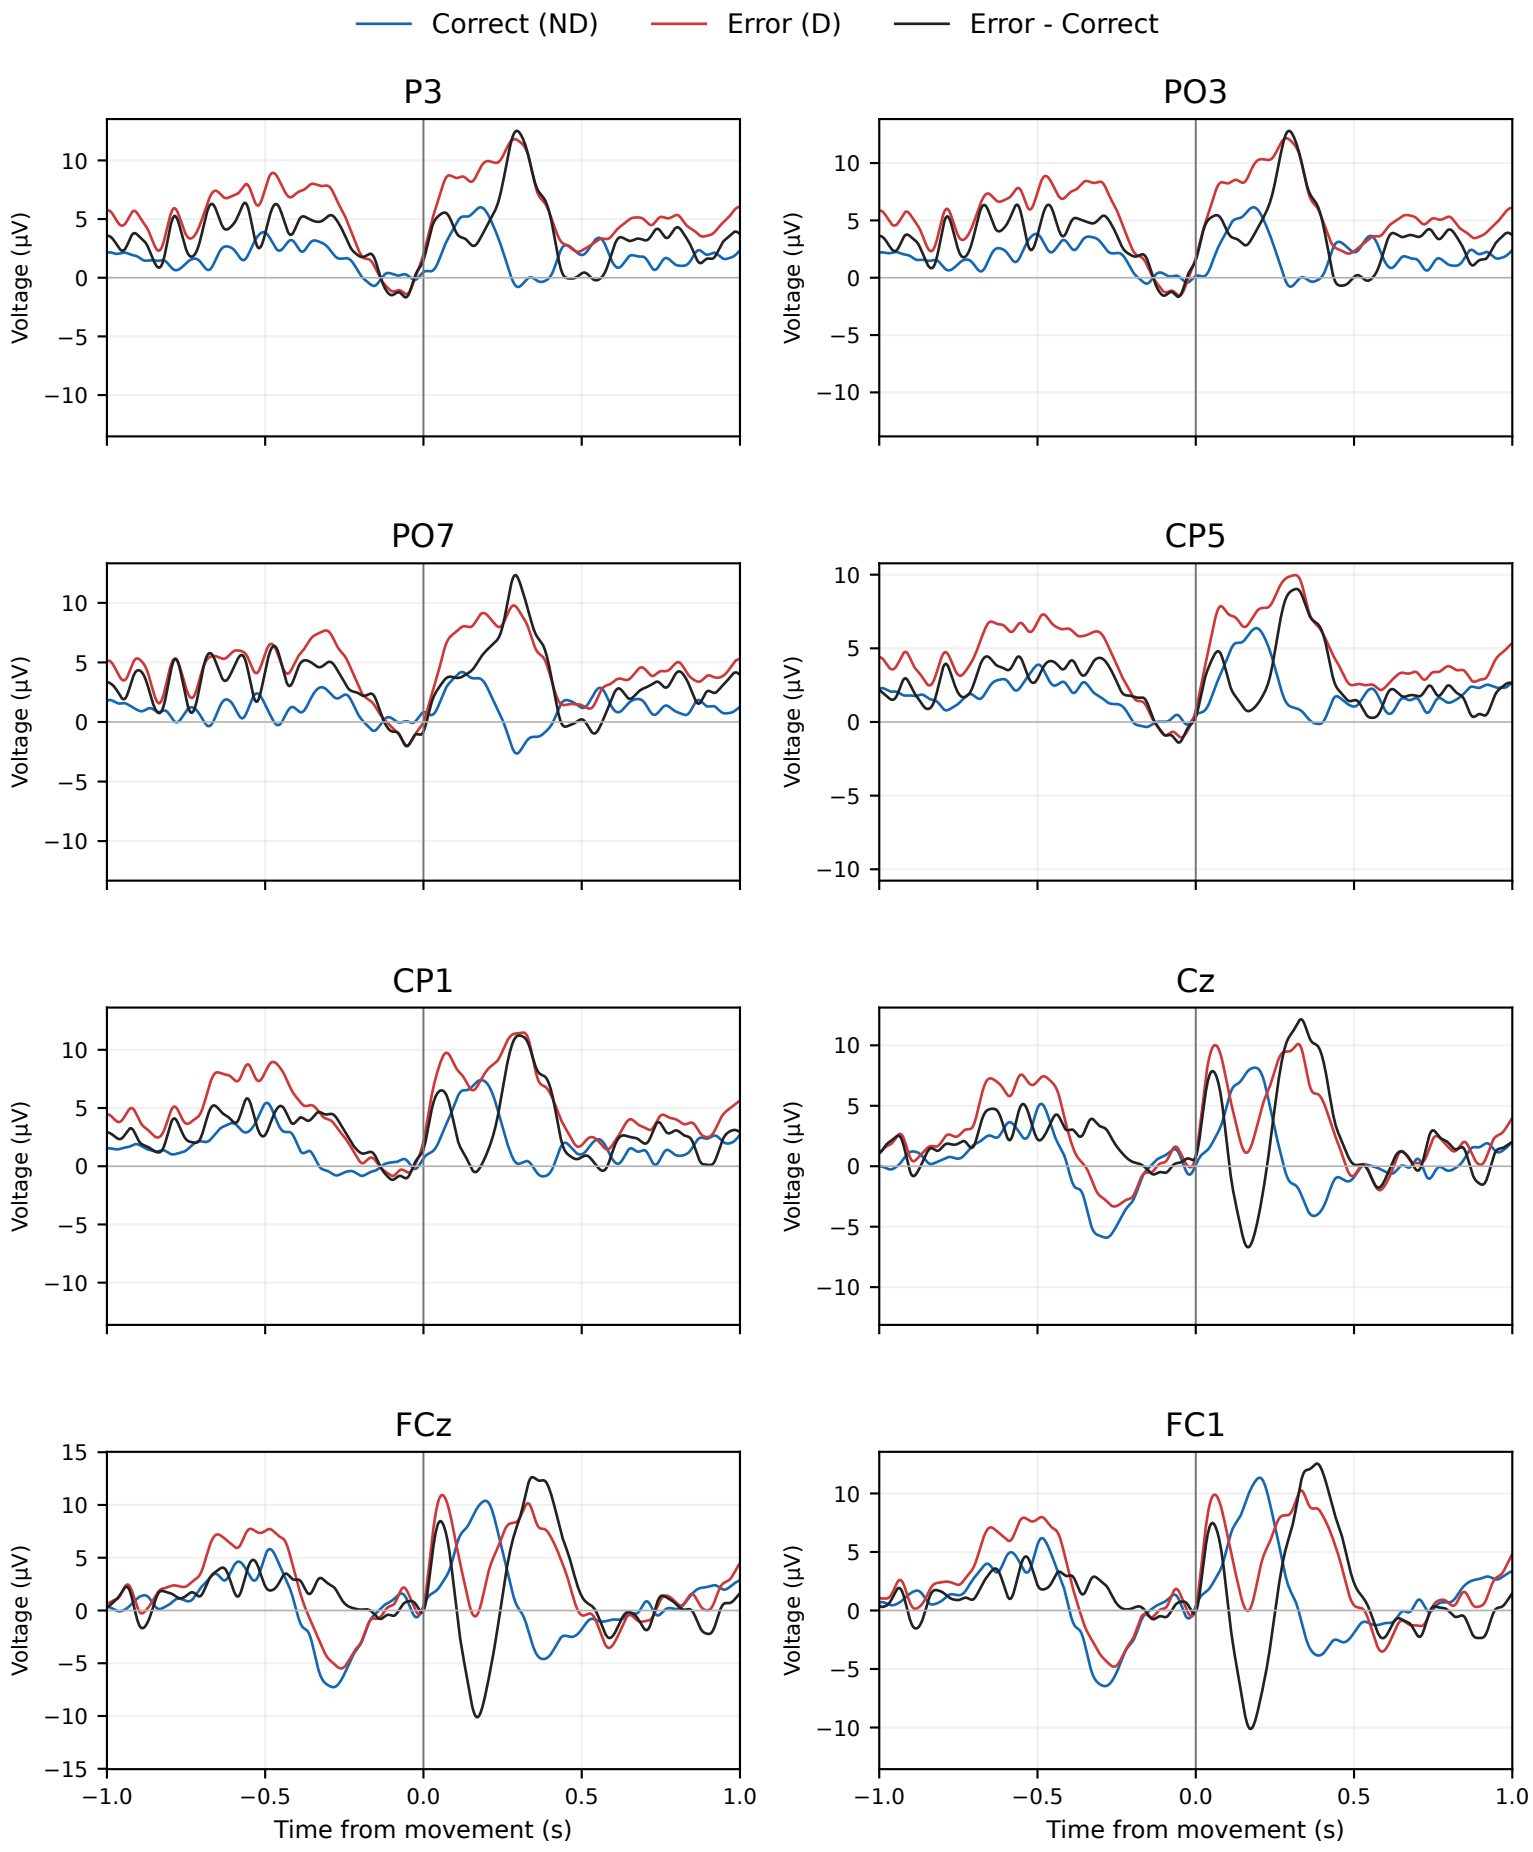

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

ara13 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=232; Error (D) n=125

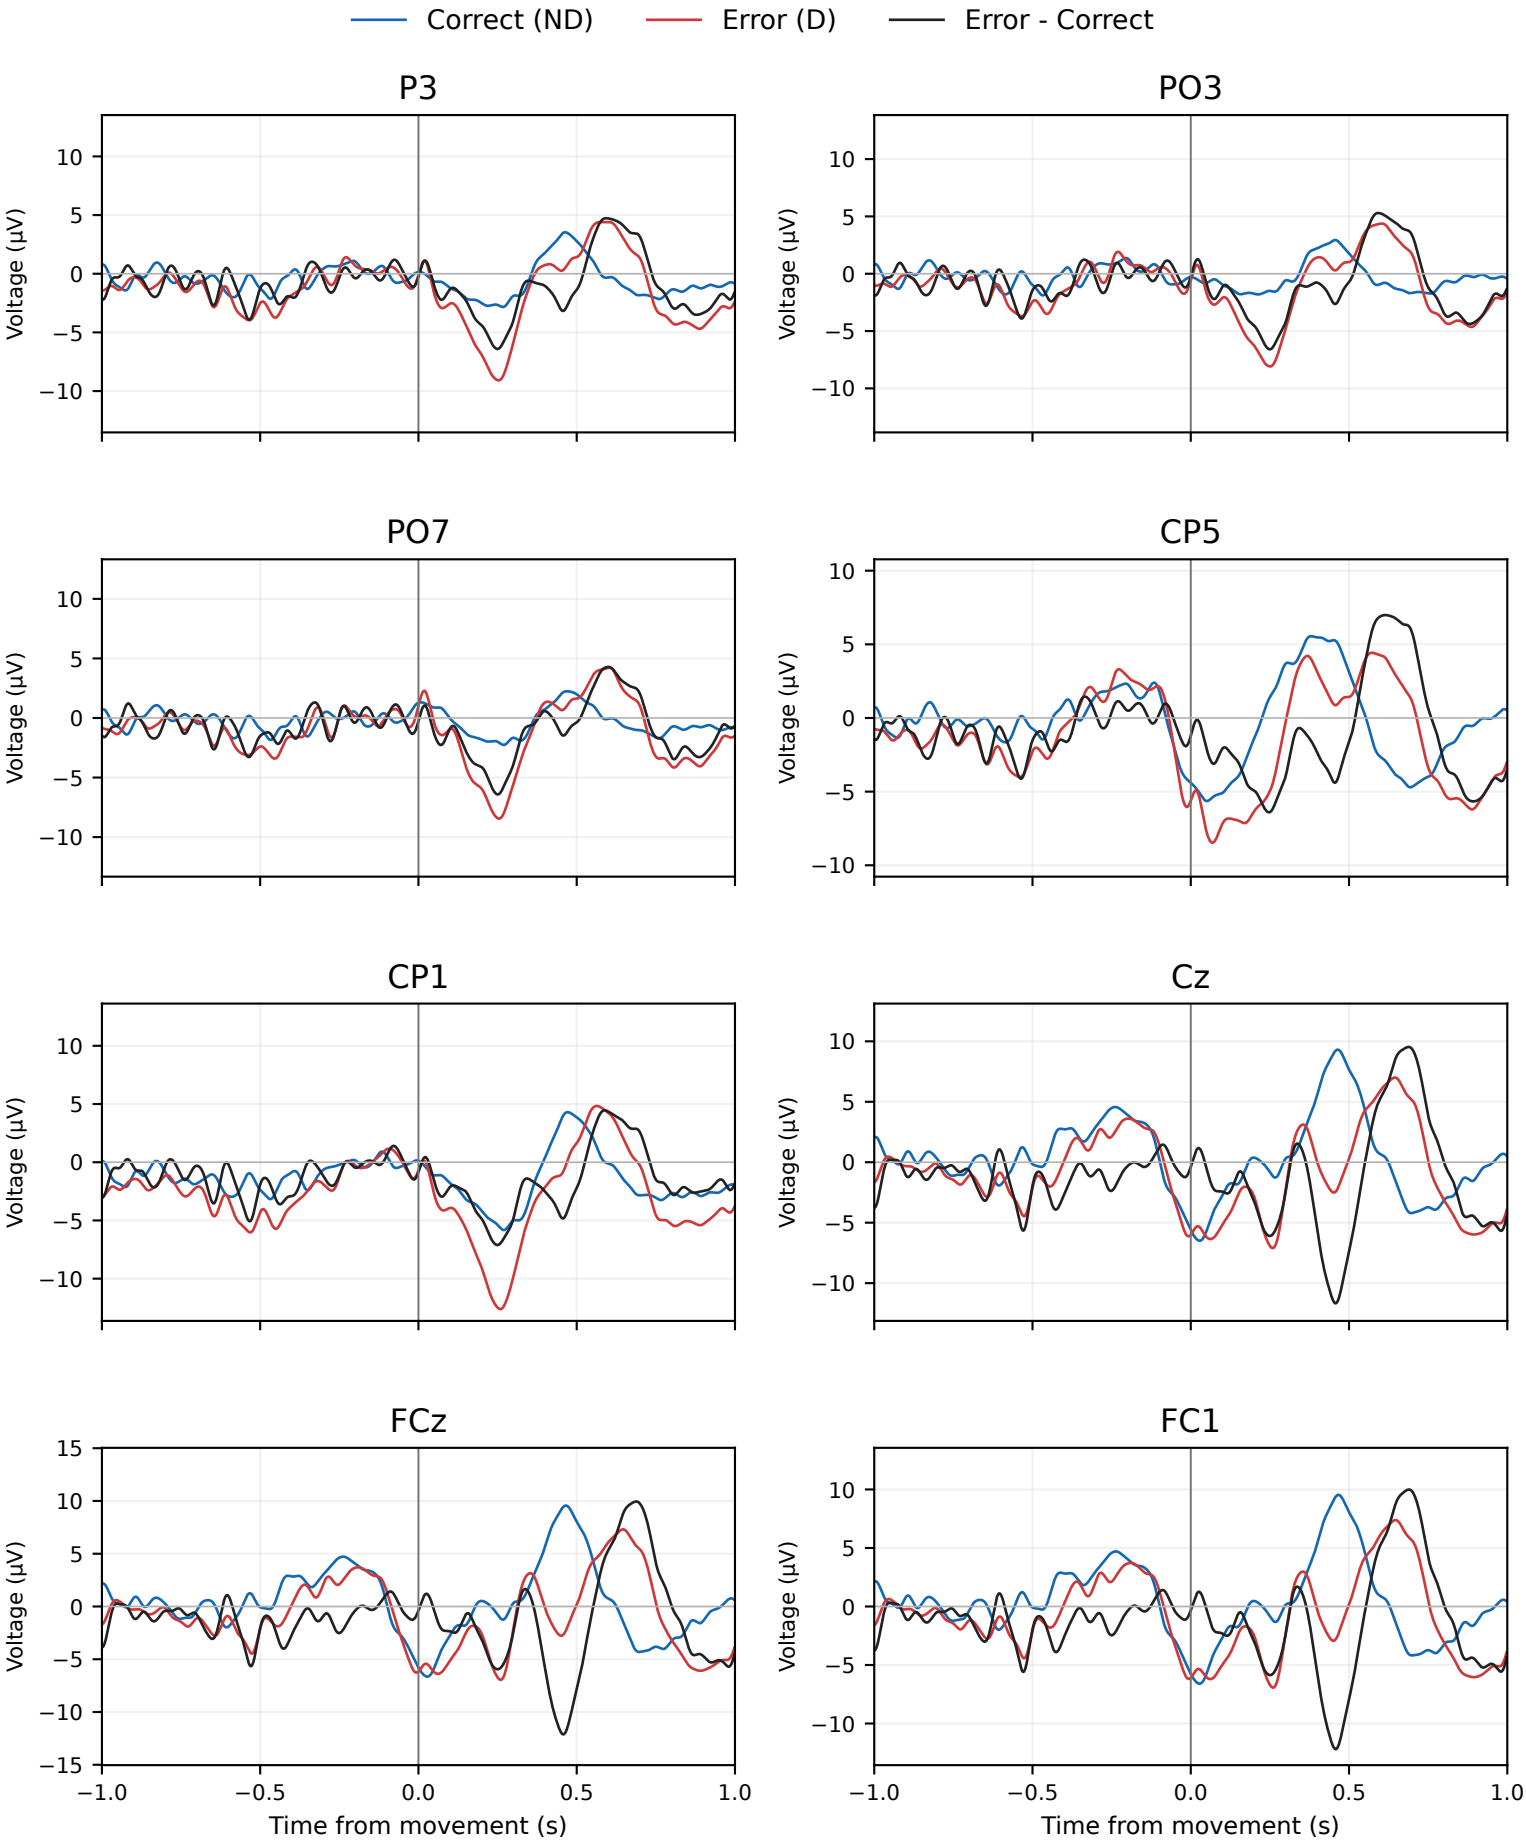

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bal08 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=256; Error (D) n=130

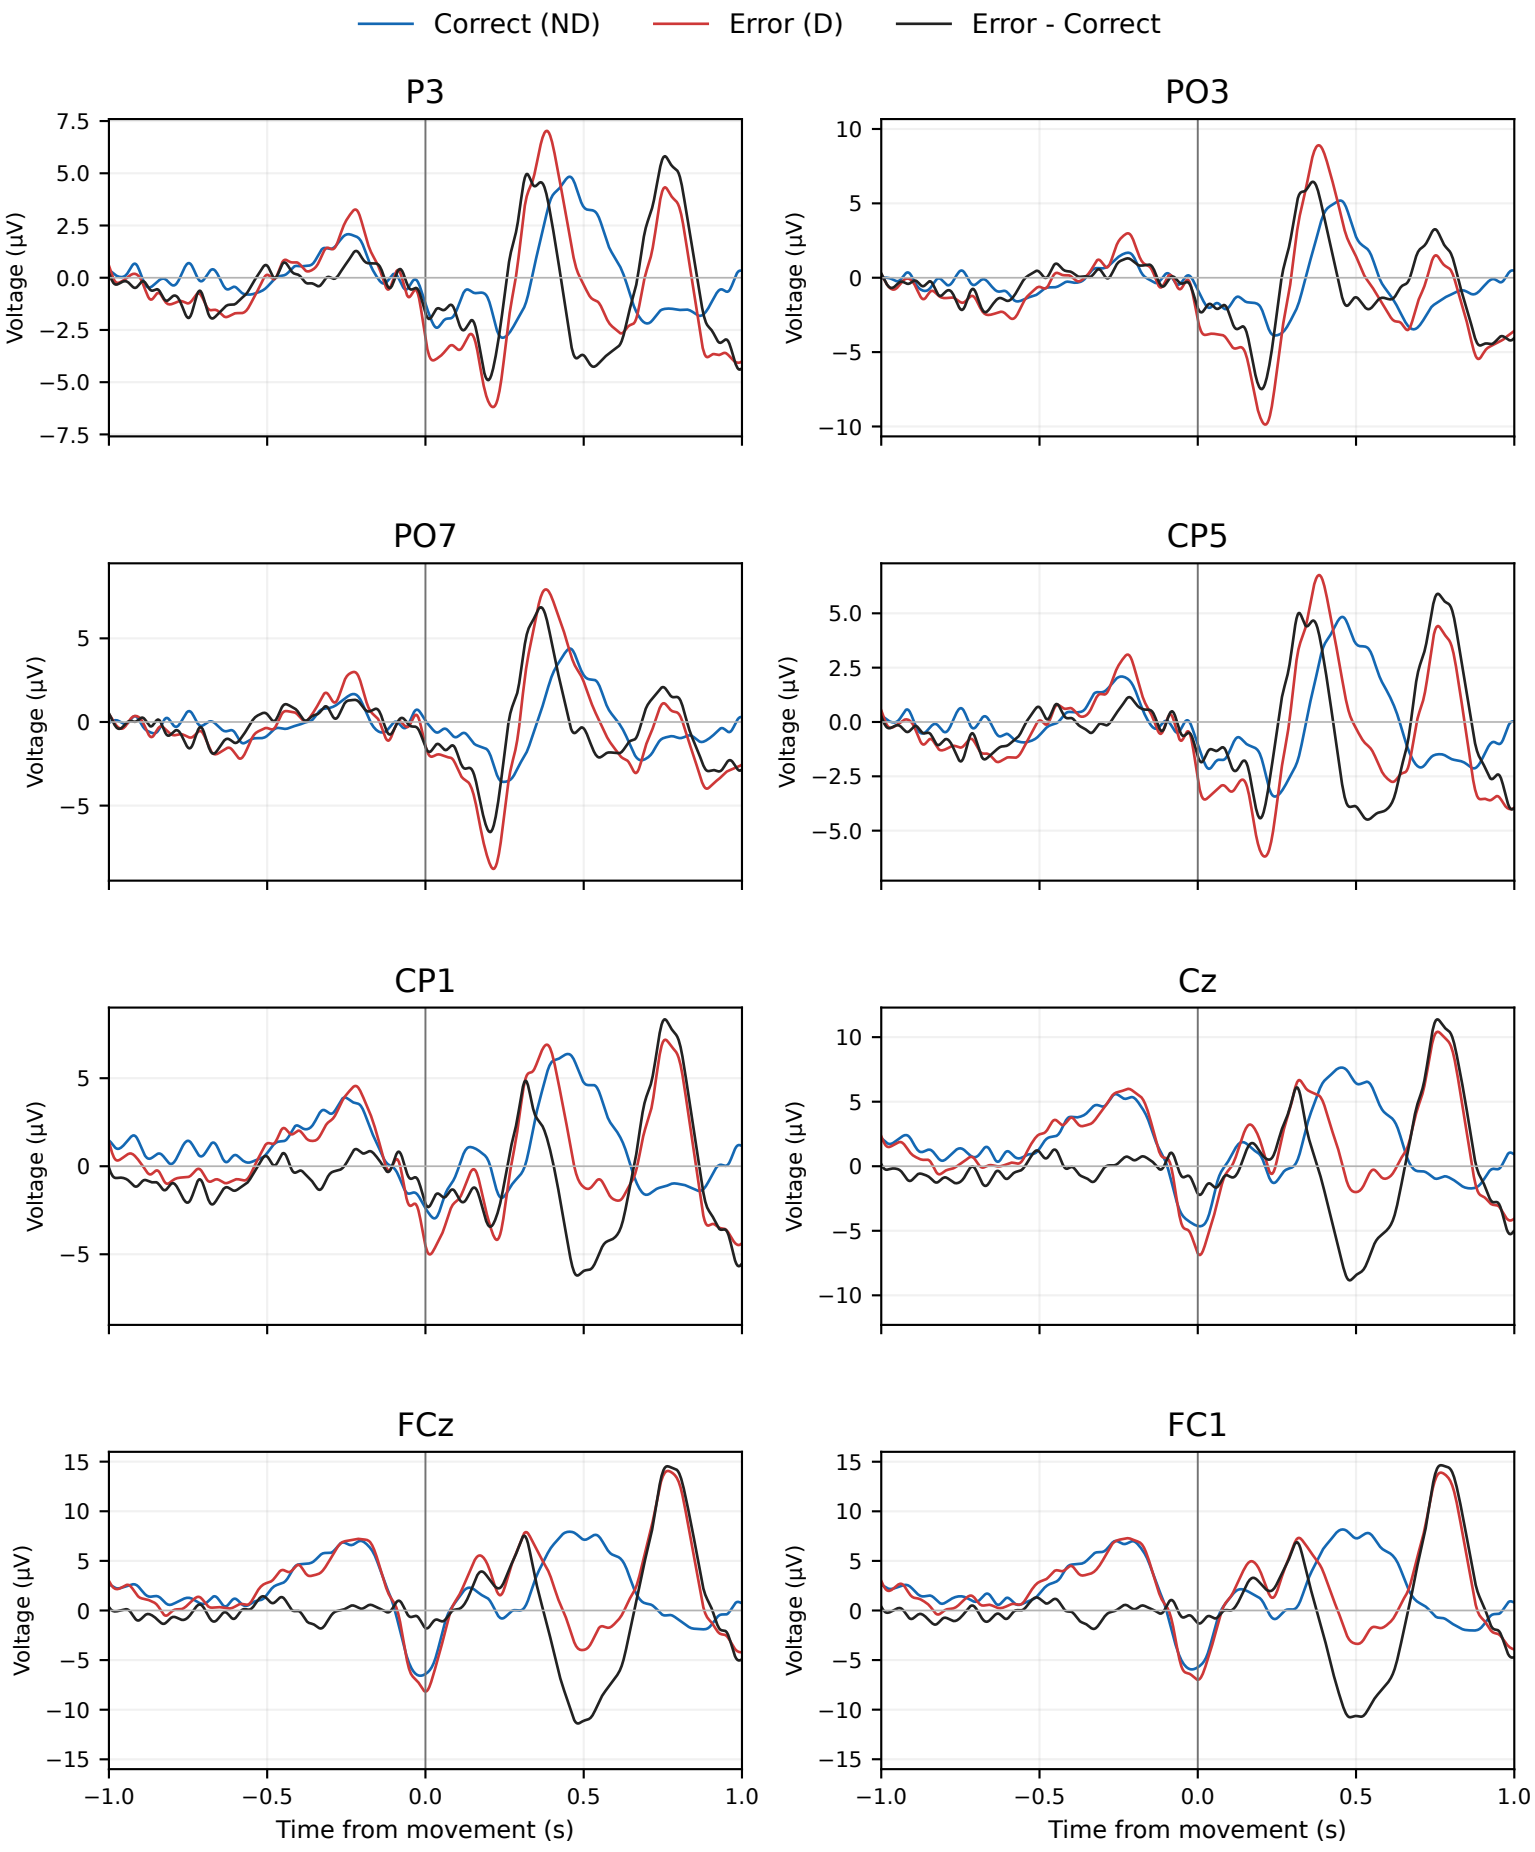

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bal08 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=290; Error (D) n=147

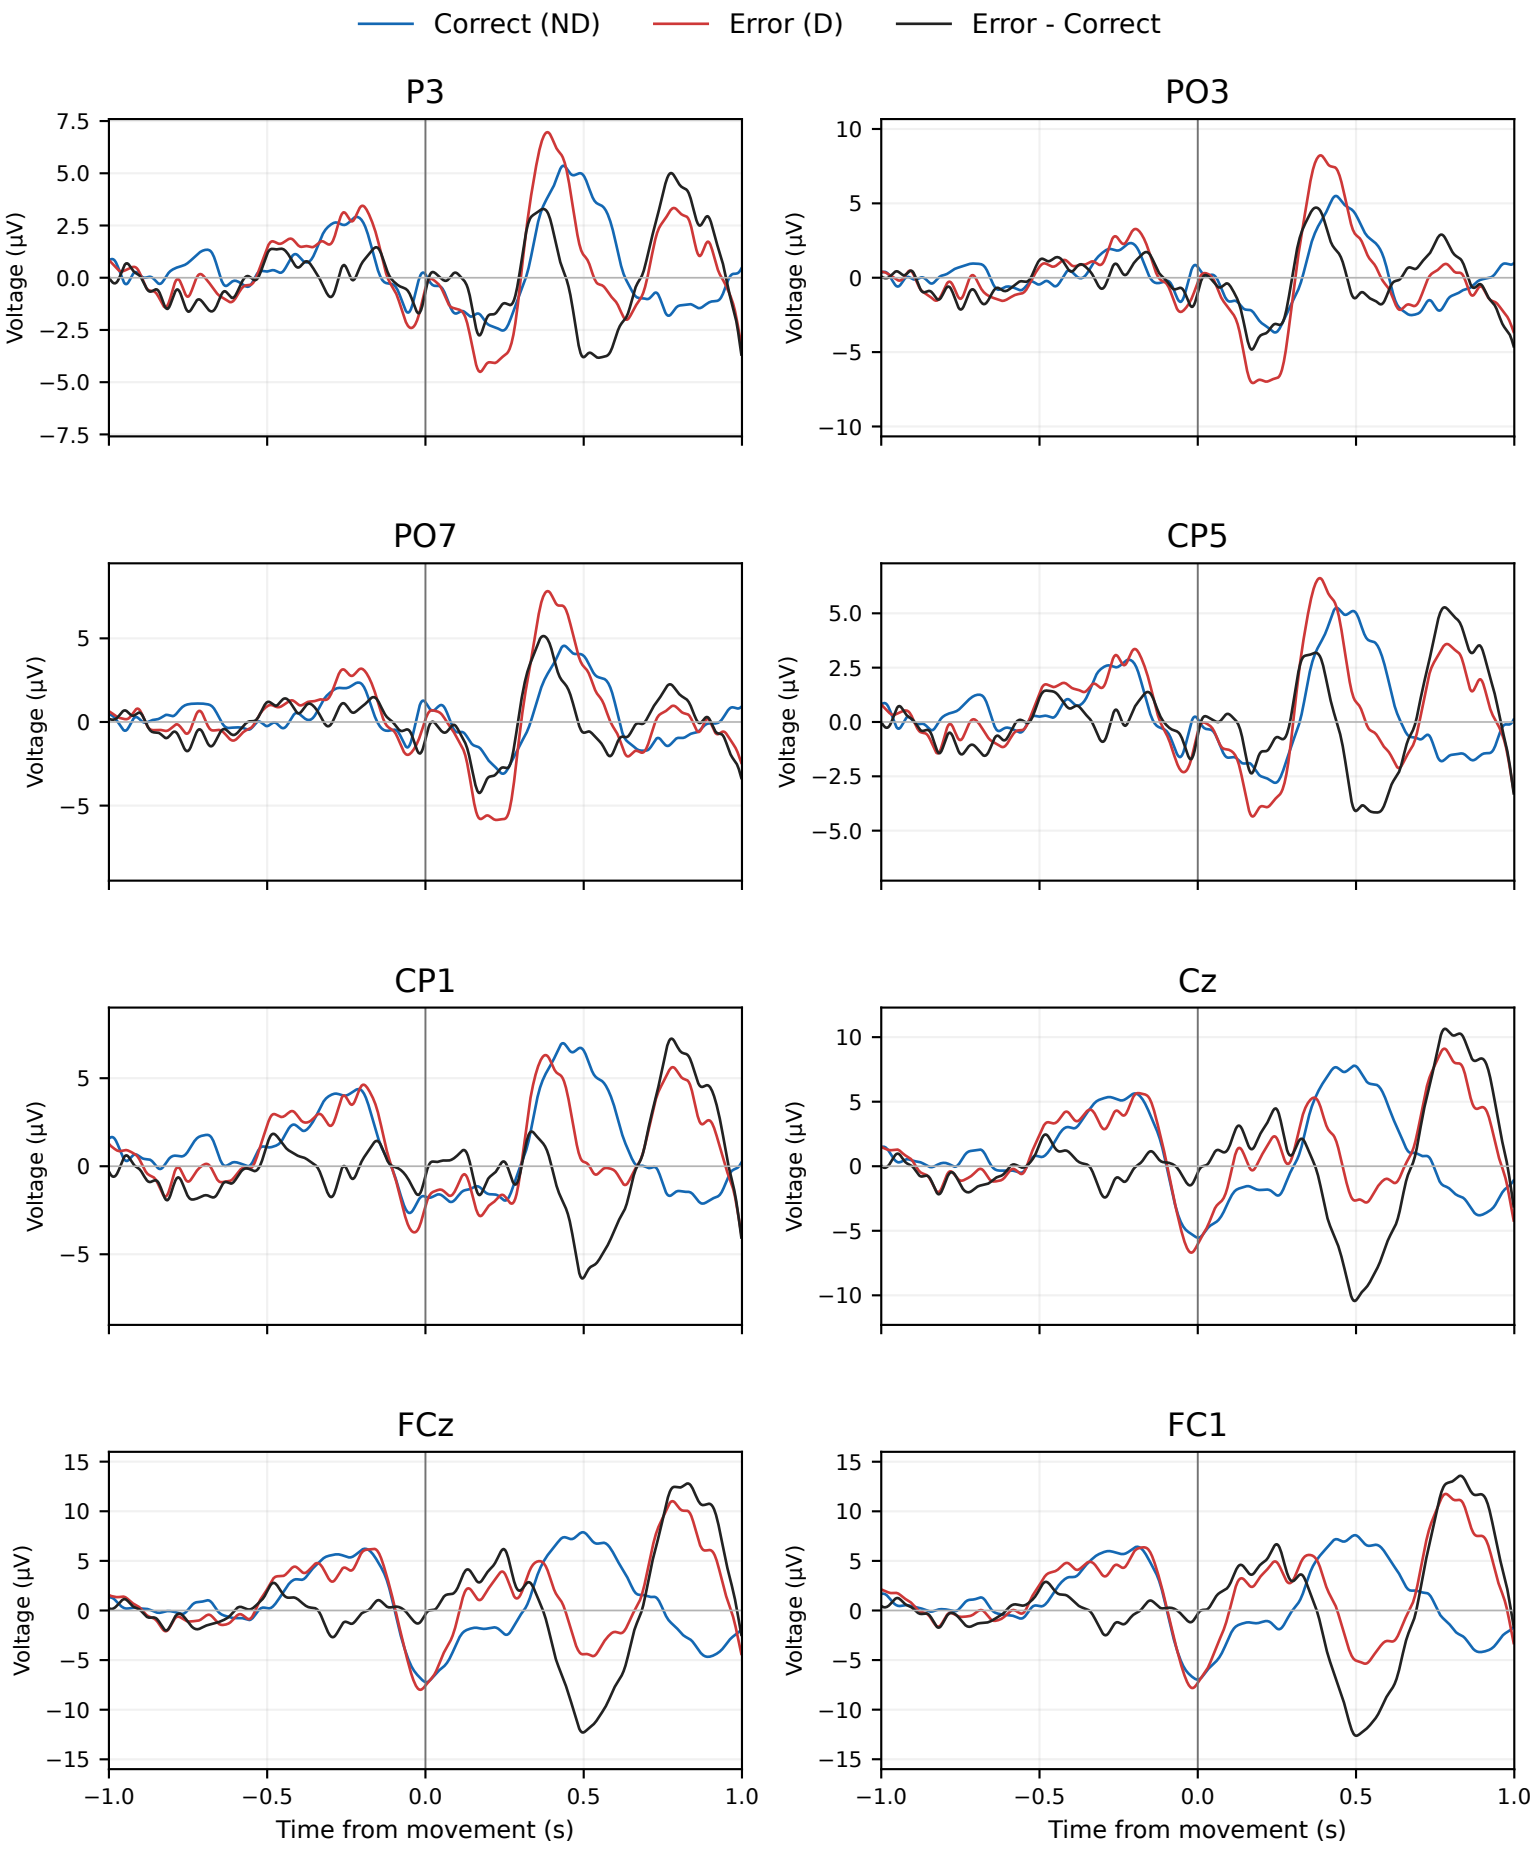

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bal08 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=288; Error (D) n=150

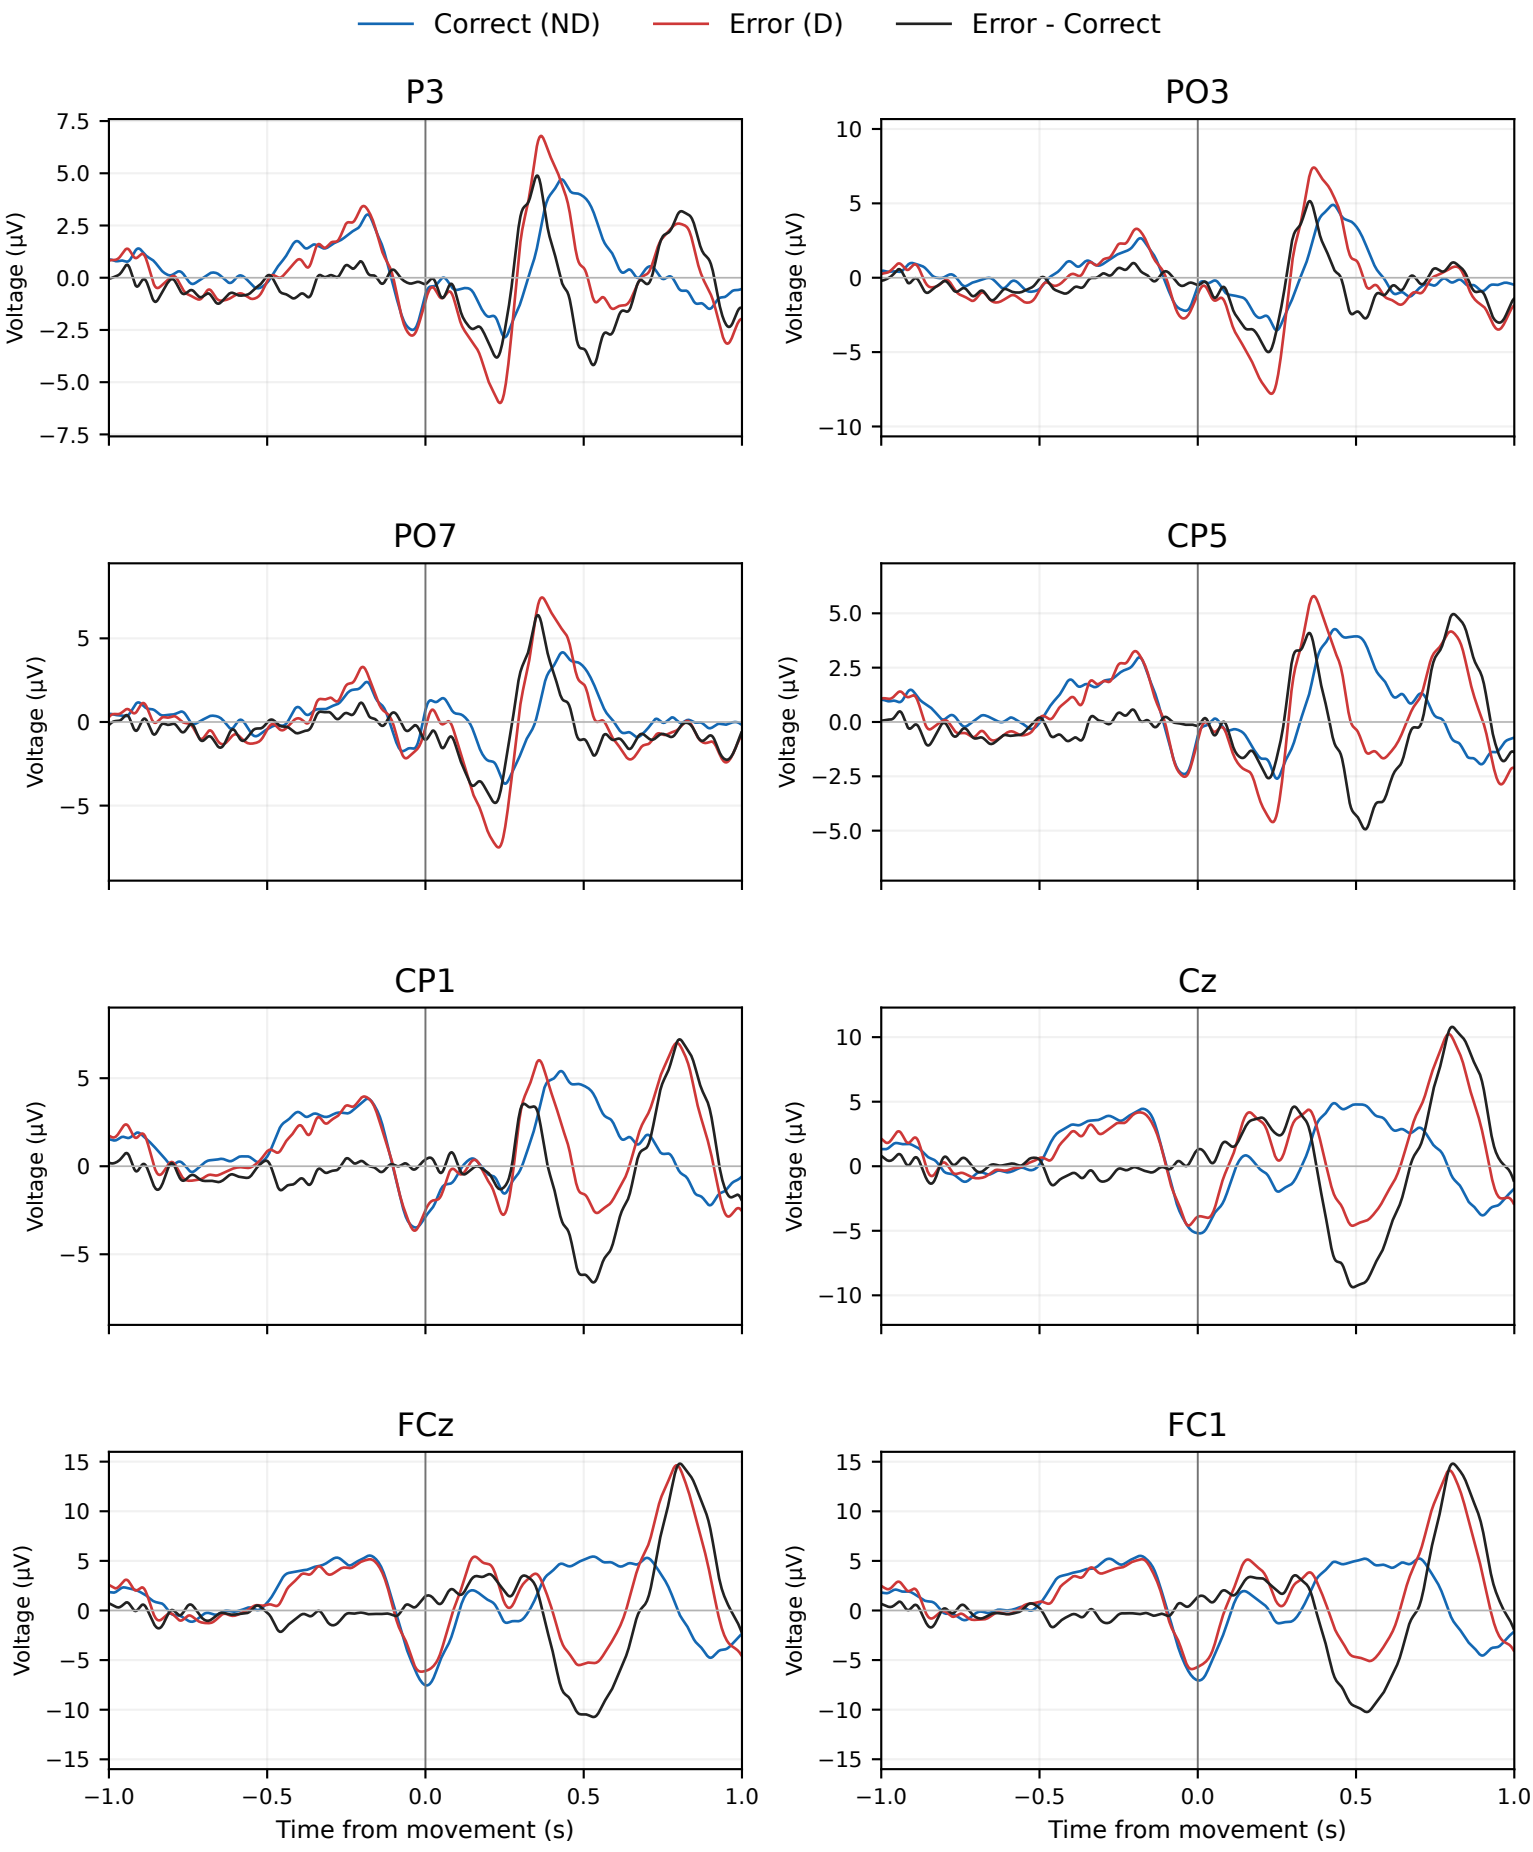

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bpe06 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=240; Error (D) n=125

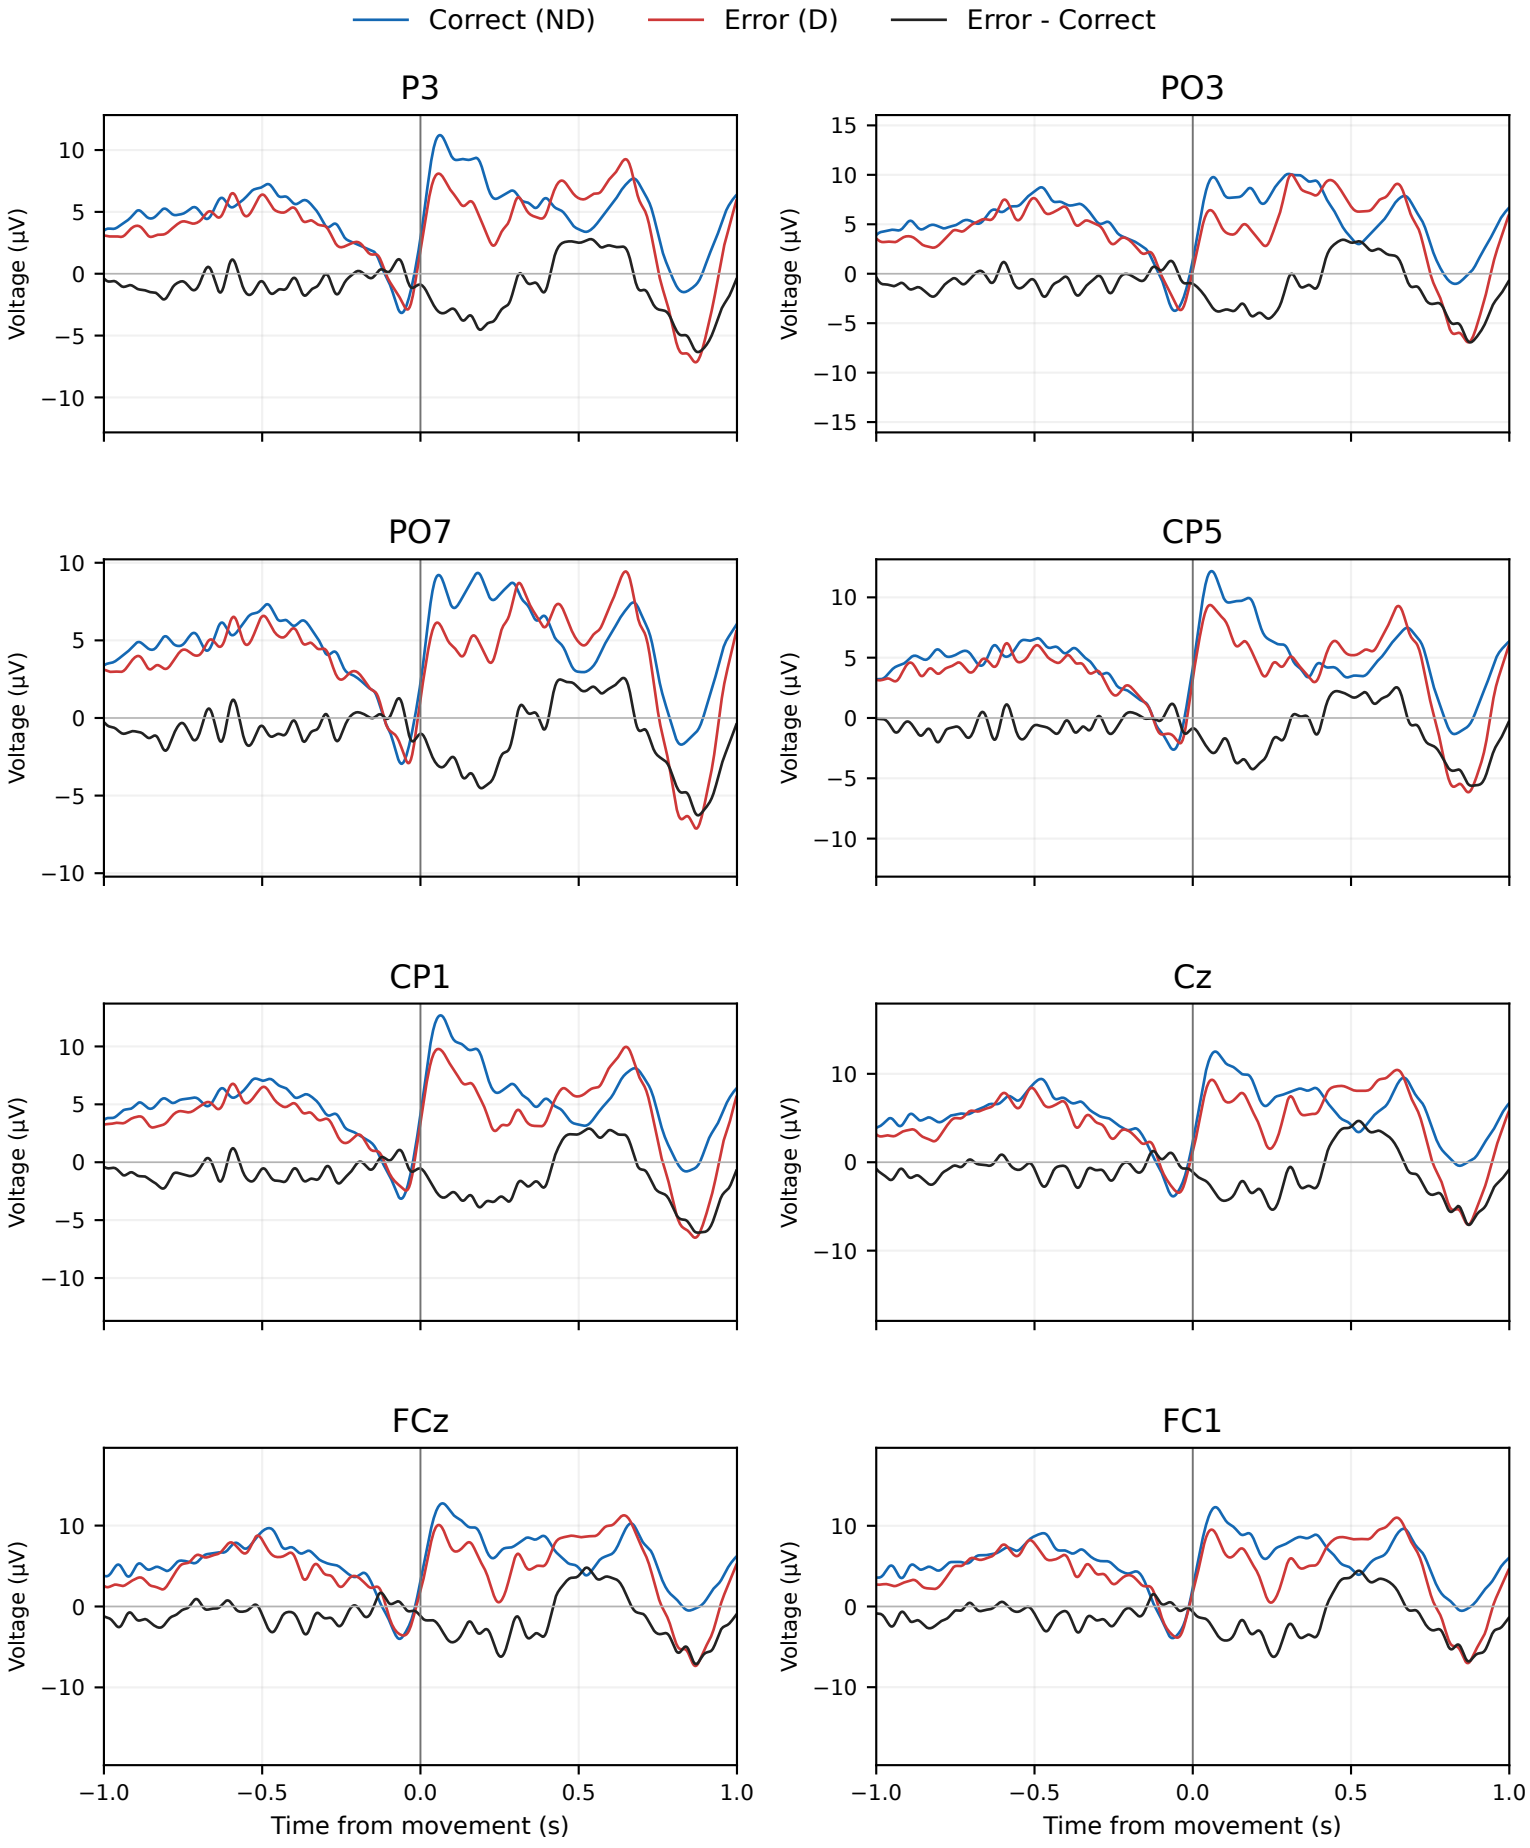

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bpe06 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=317; Error (D) n=166

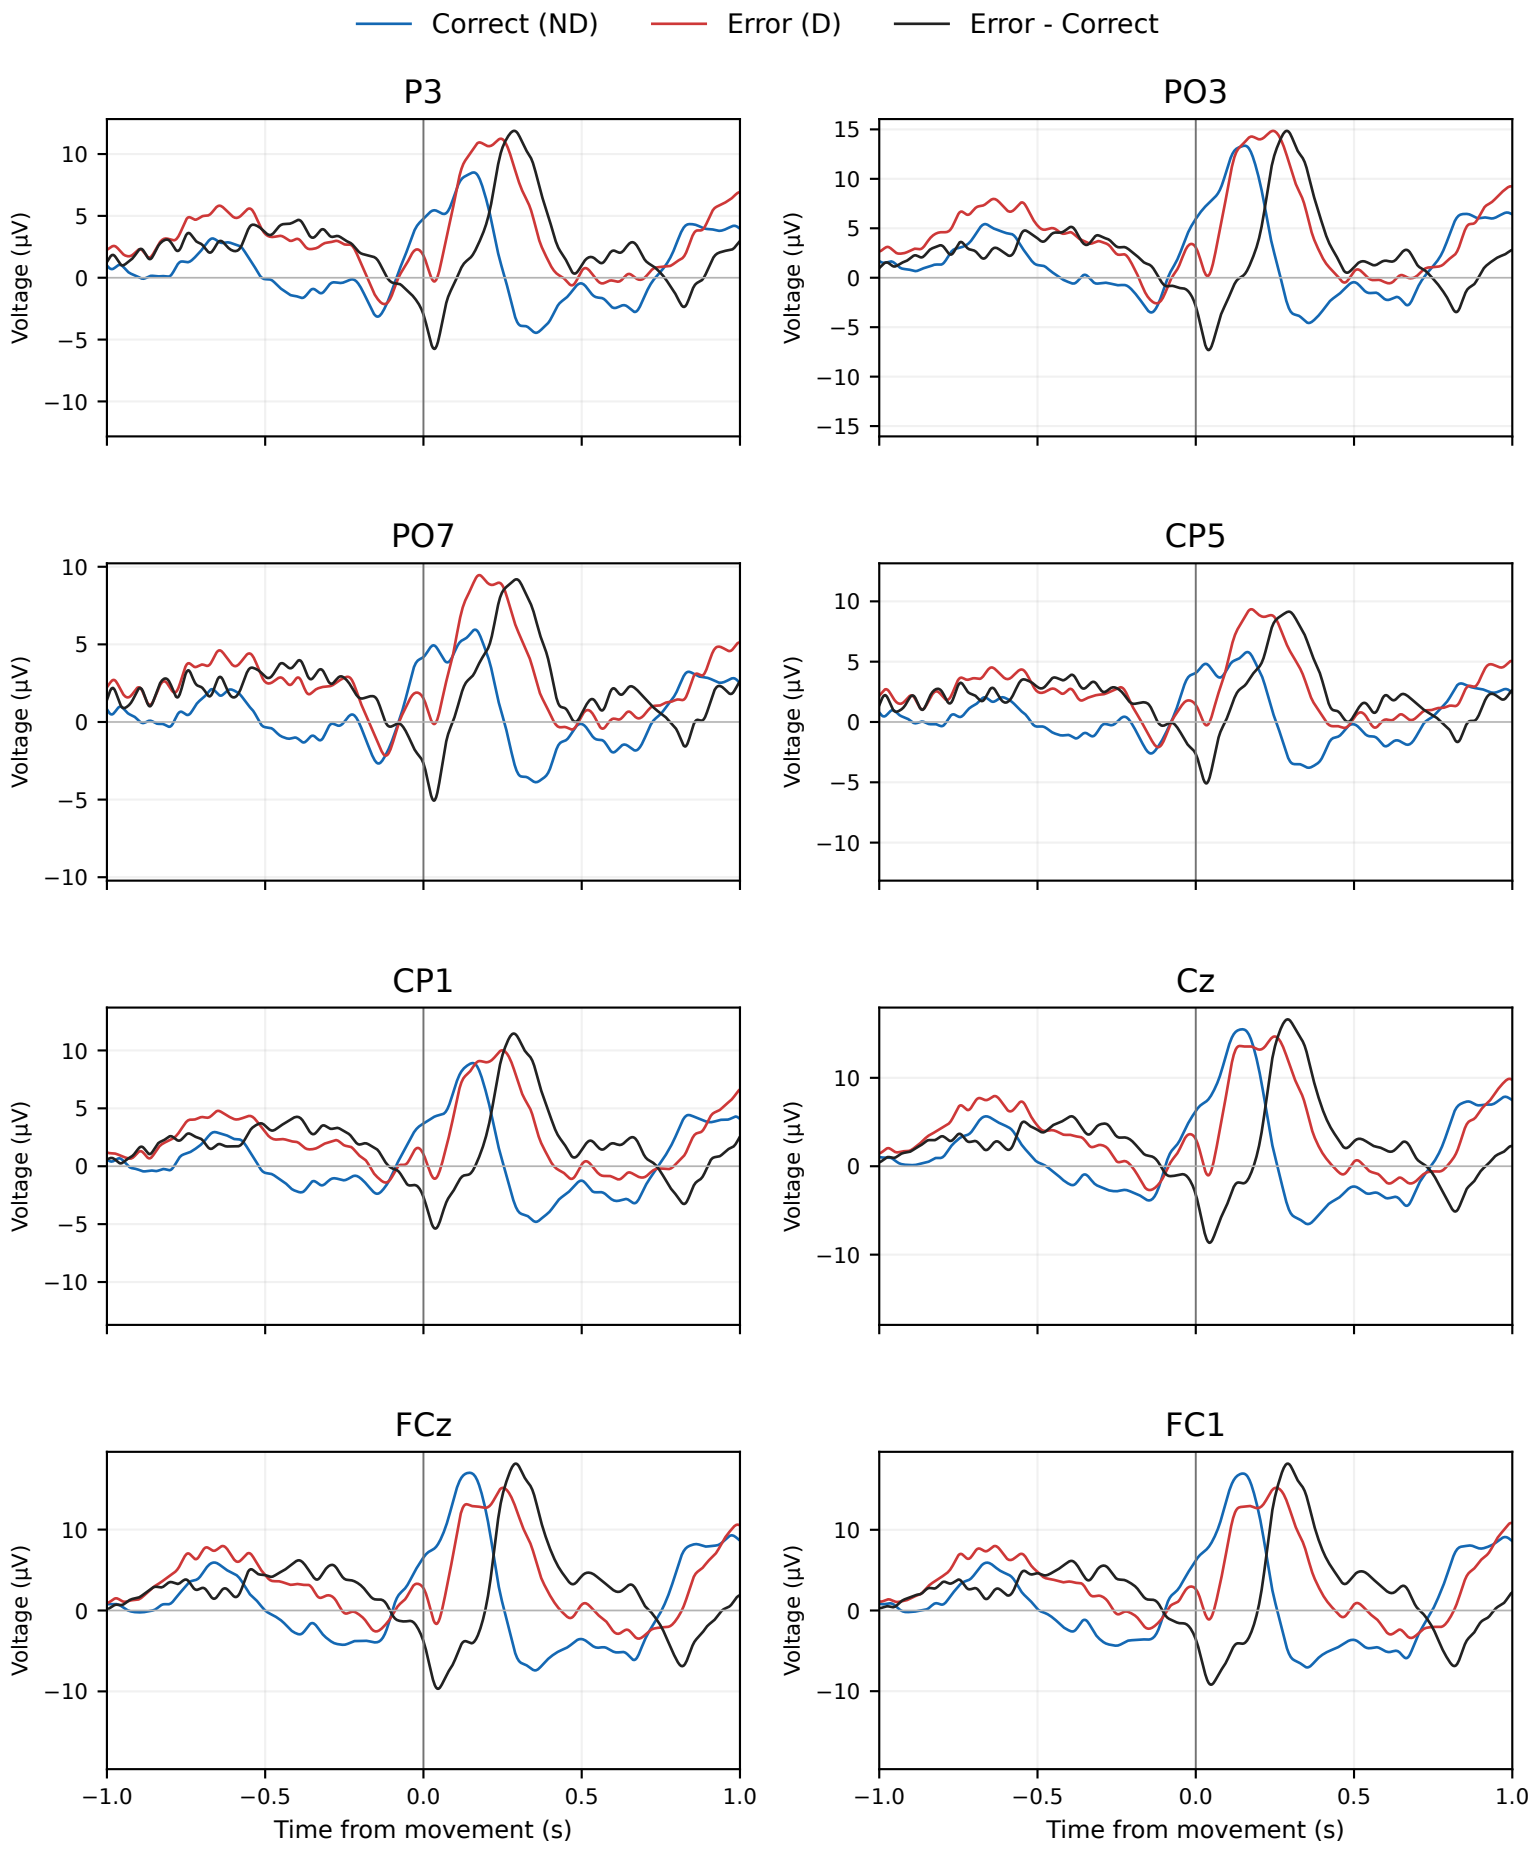

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bpe06 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=192; Error (D) n=100

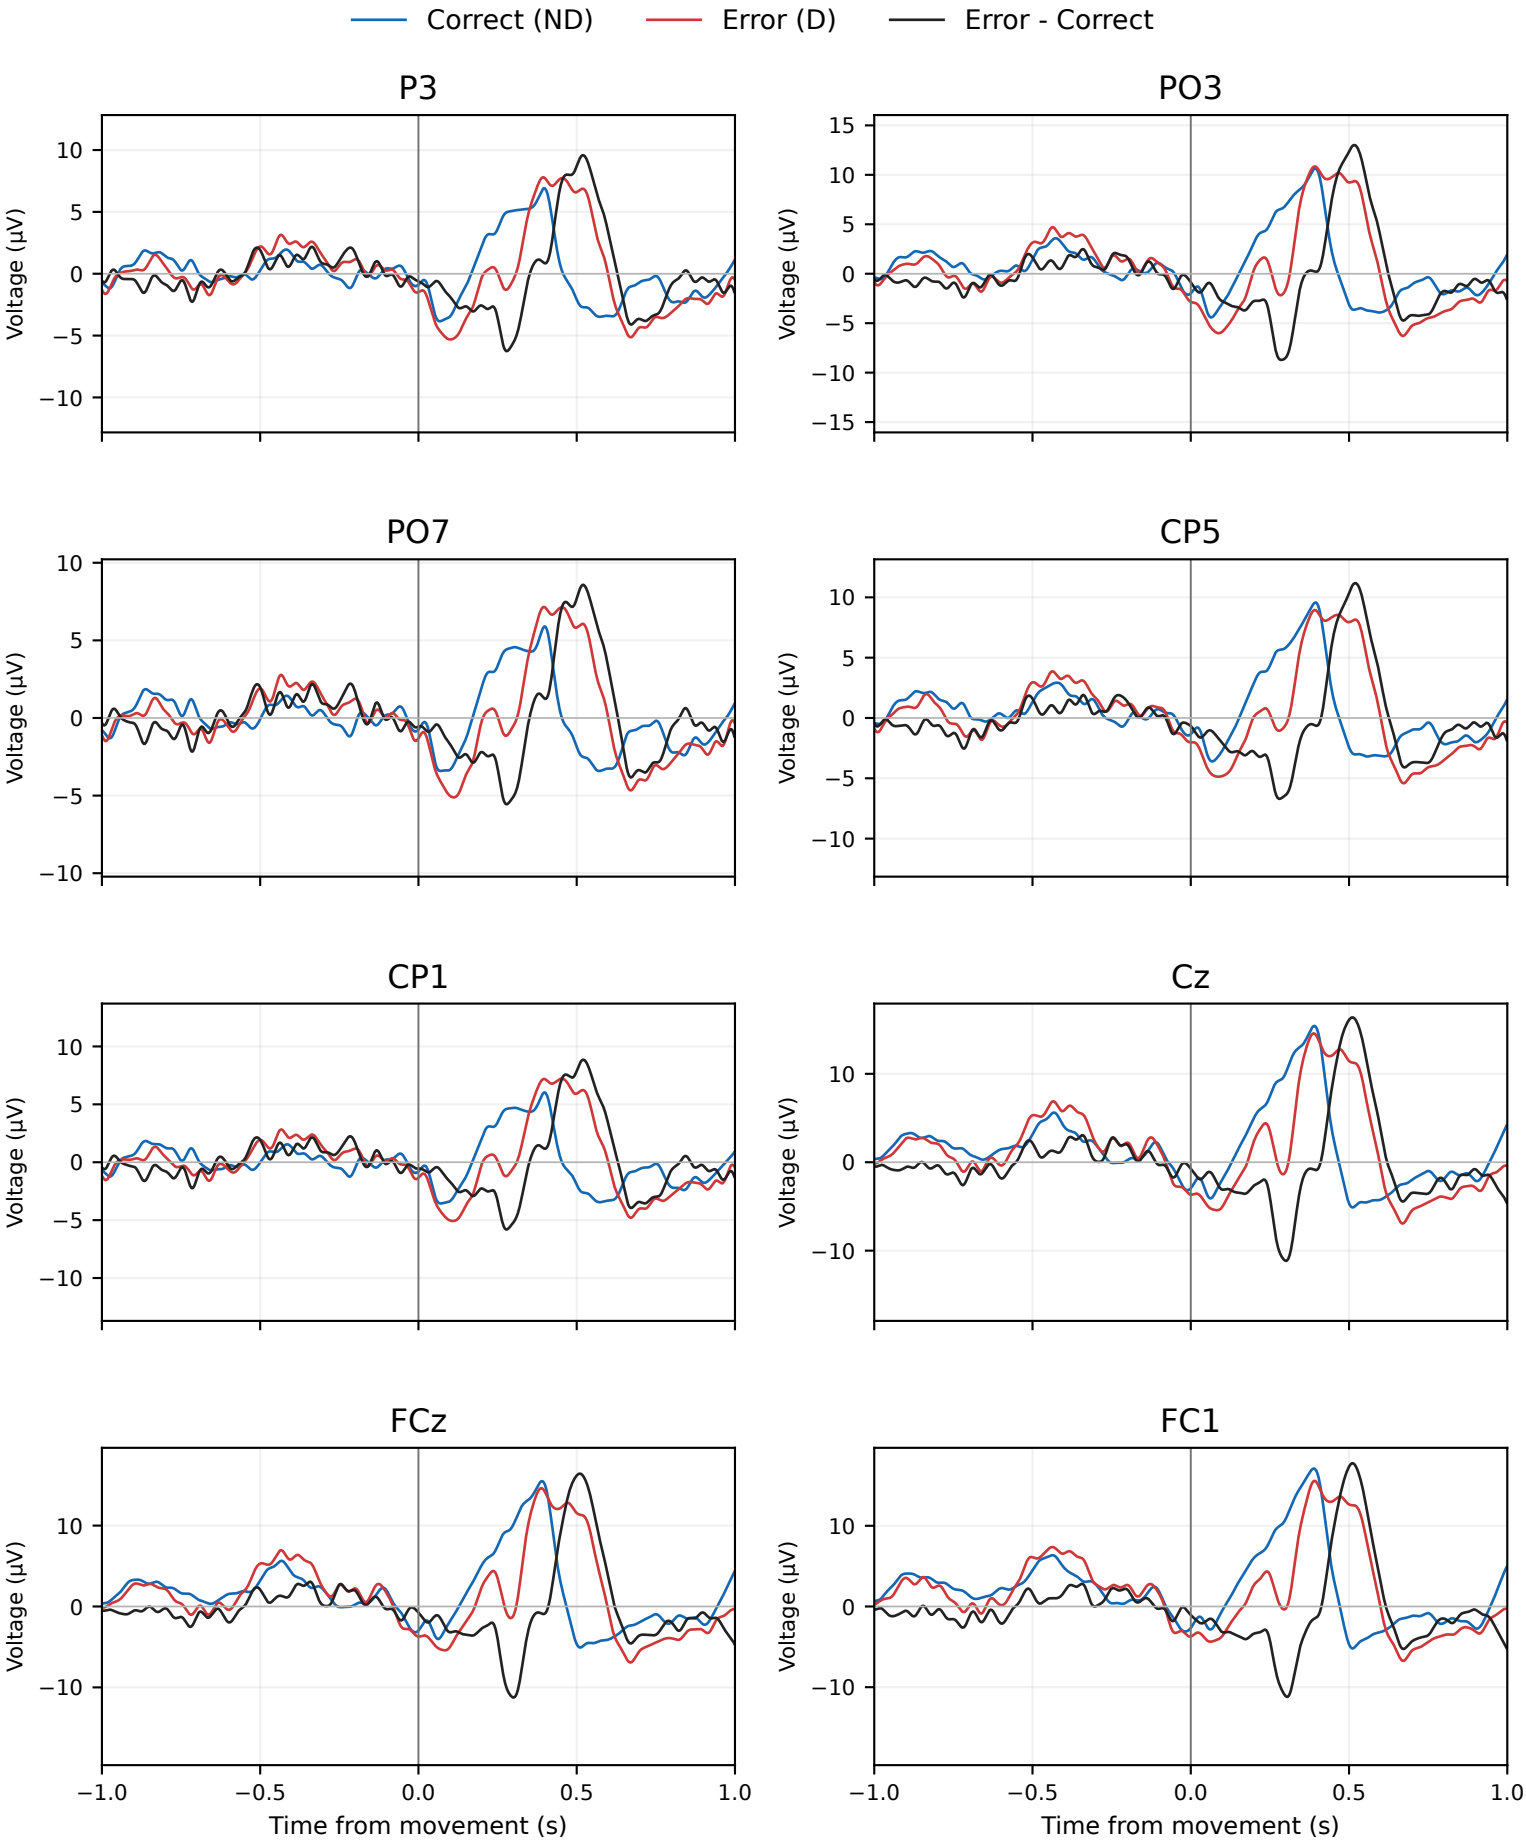

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bro19 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=162; Error (D) n=81

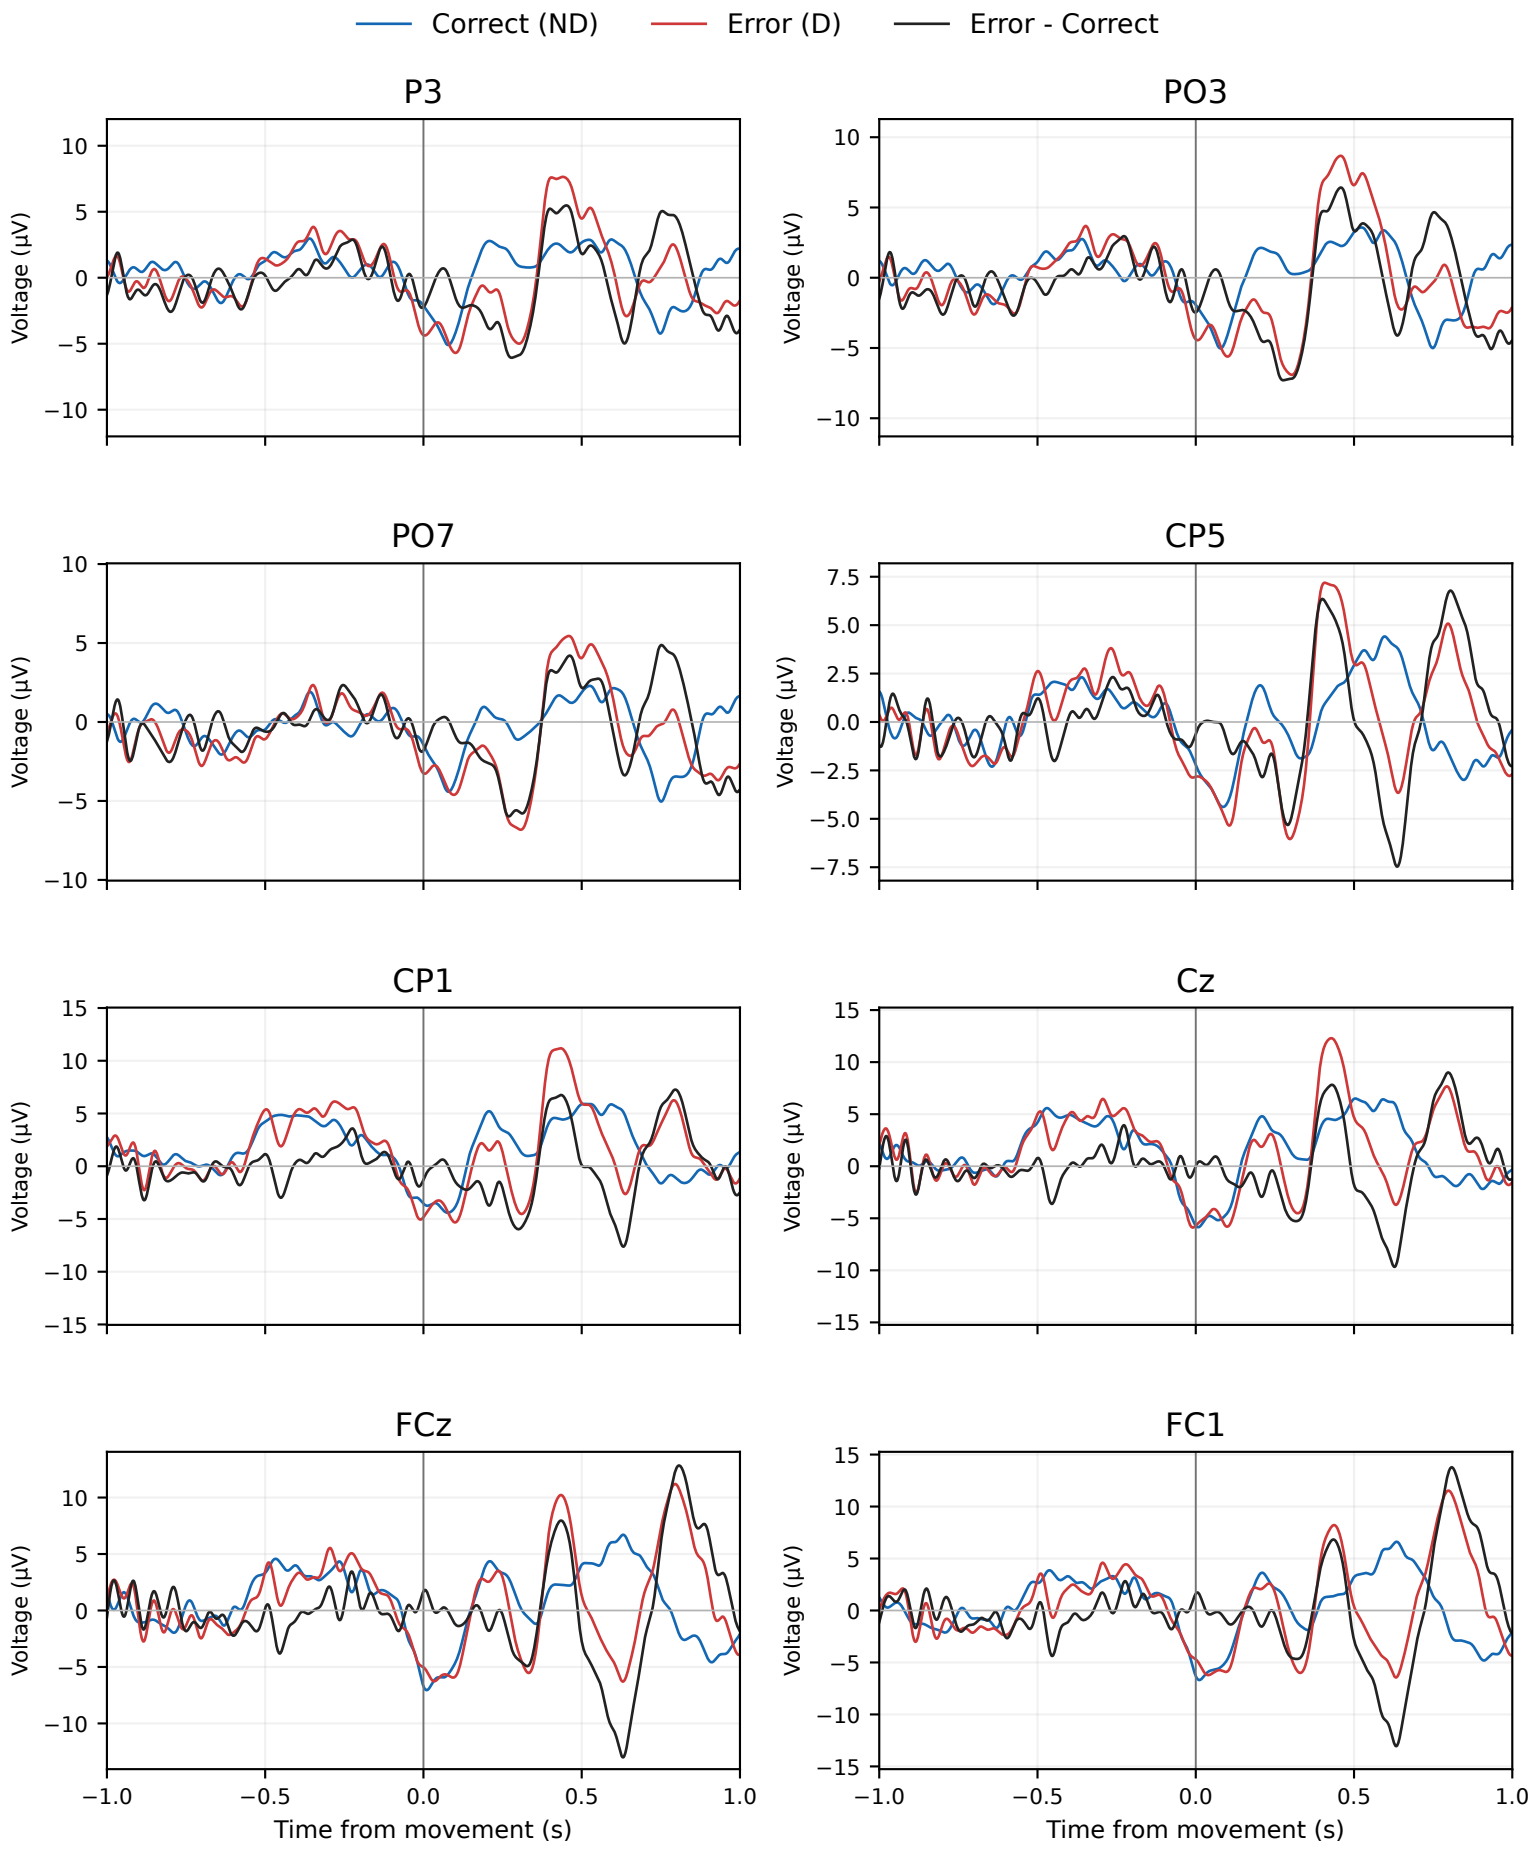

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bro19 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=49; Error (D) n=30

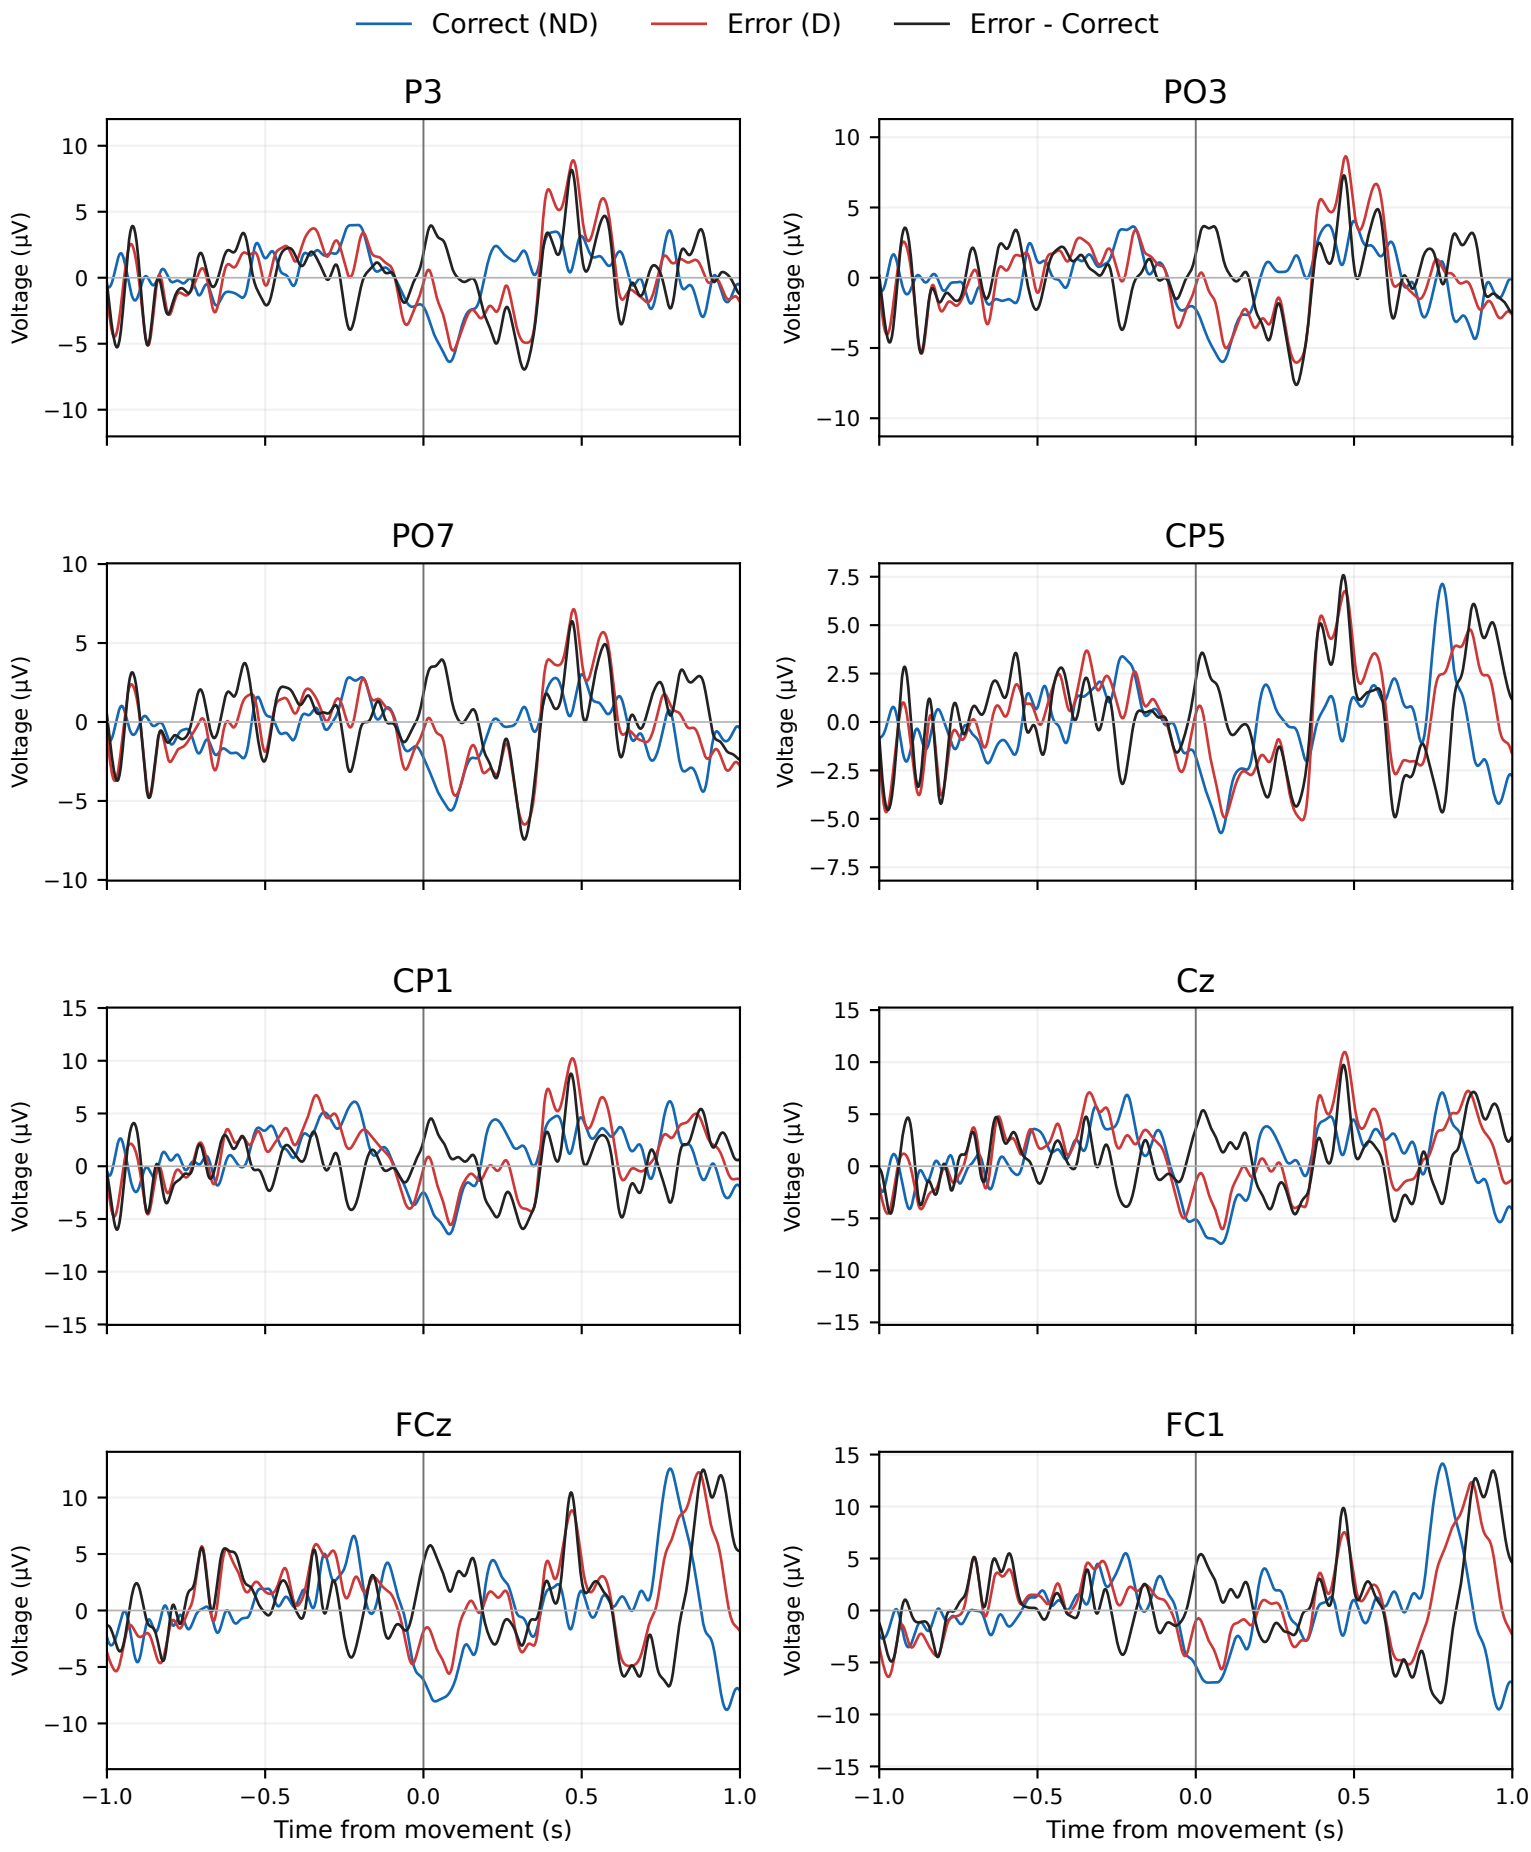

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

bro19 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=325; Error (D) n=169

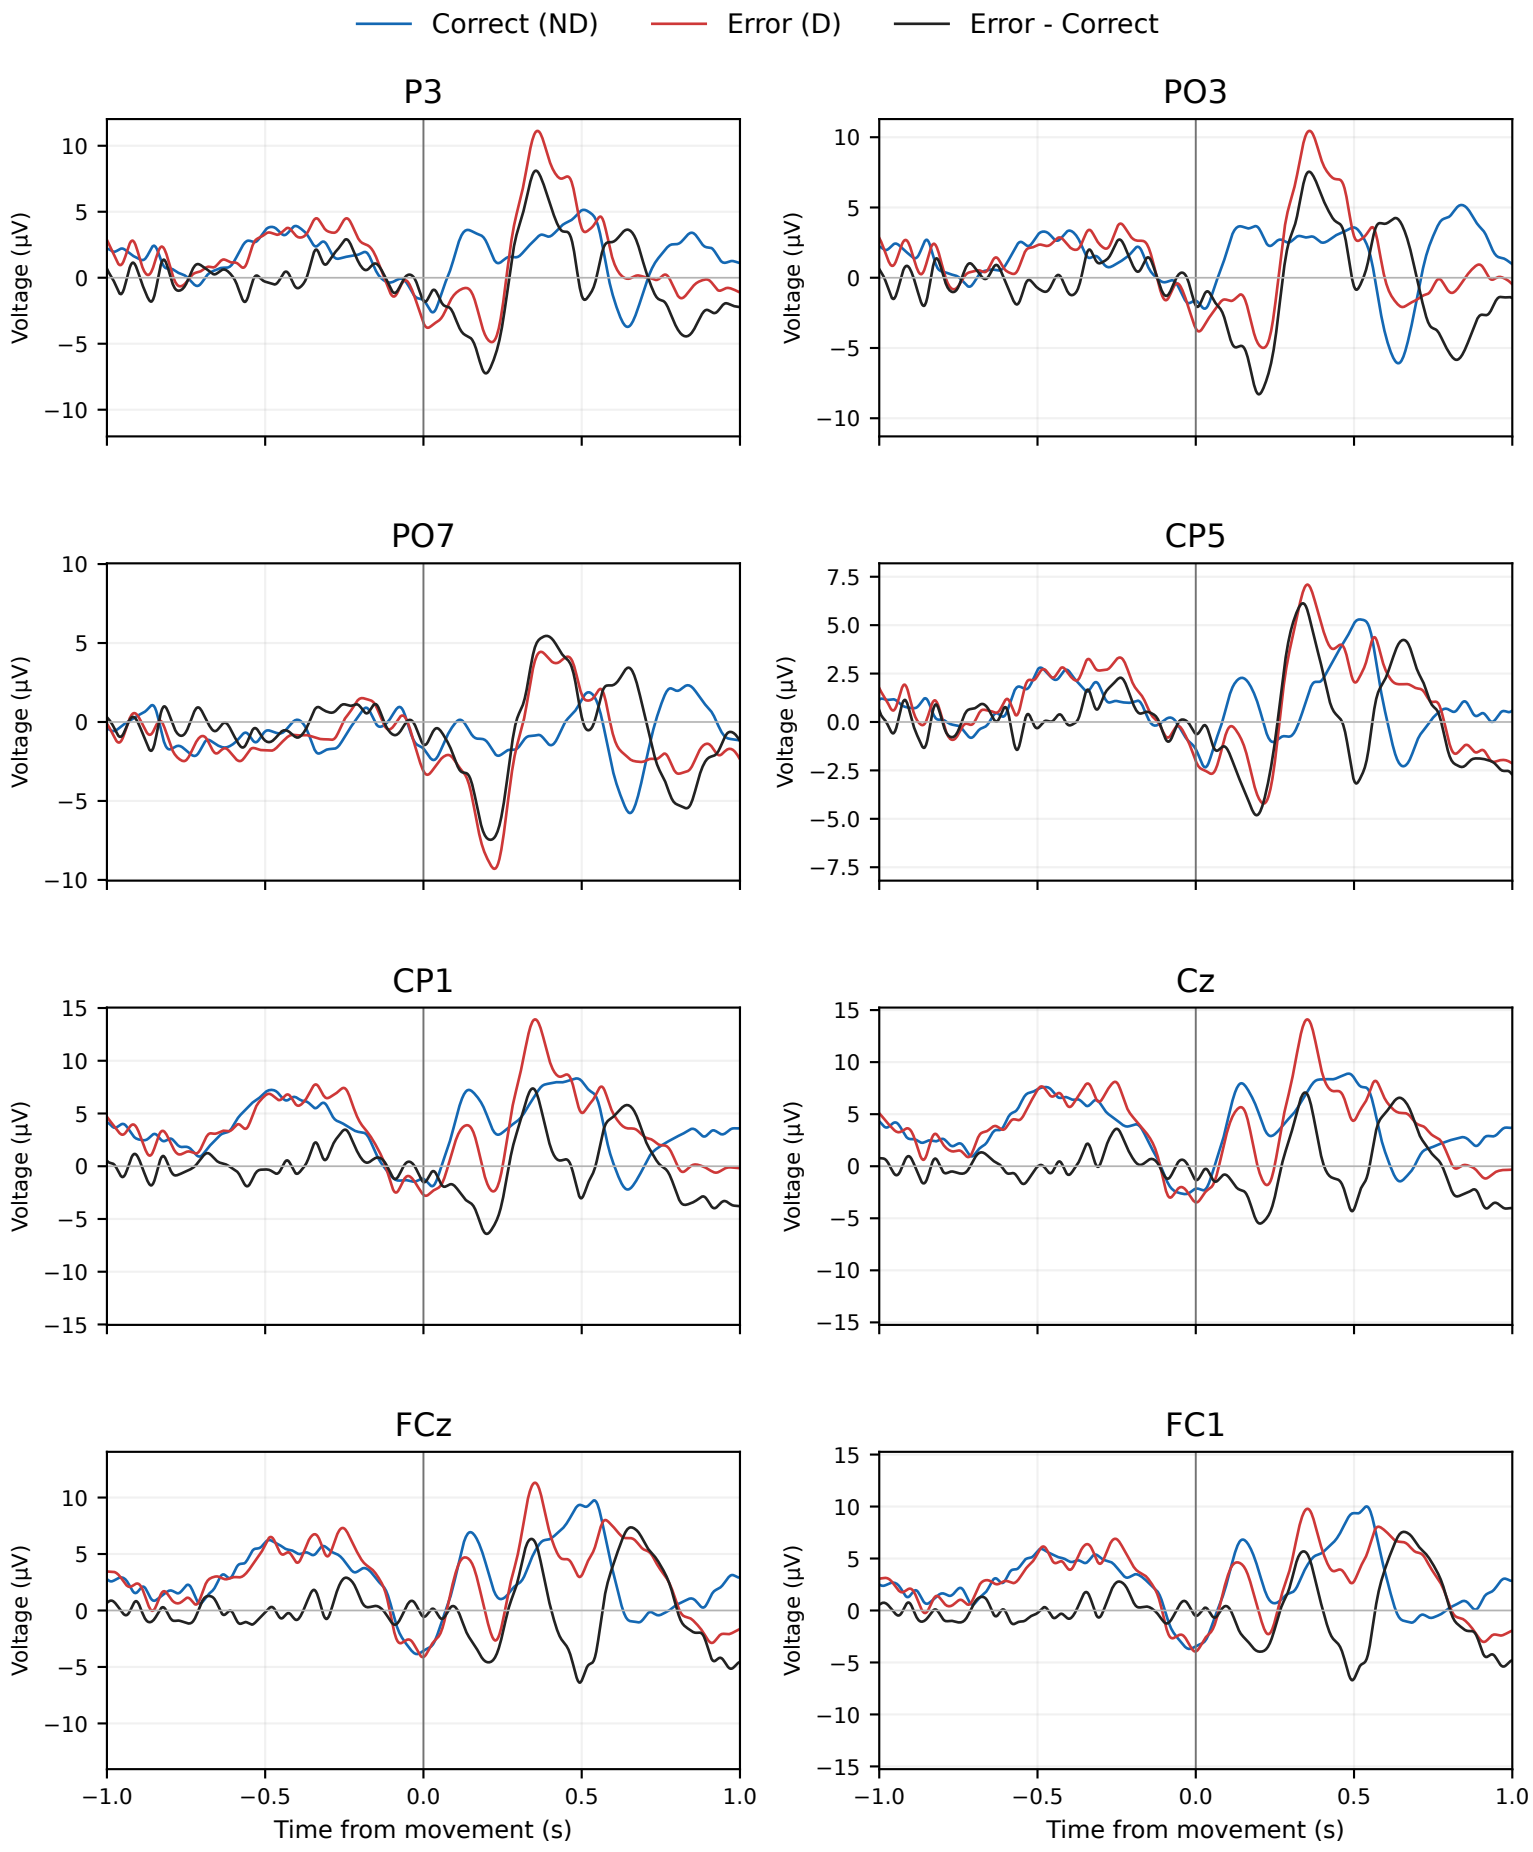

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

cna07 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=187; Error (D) n=100

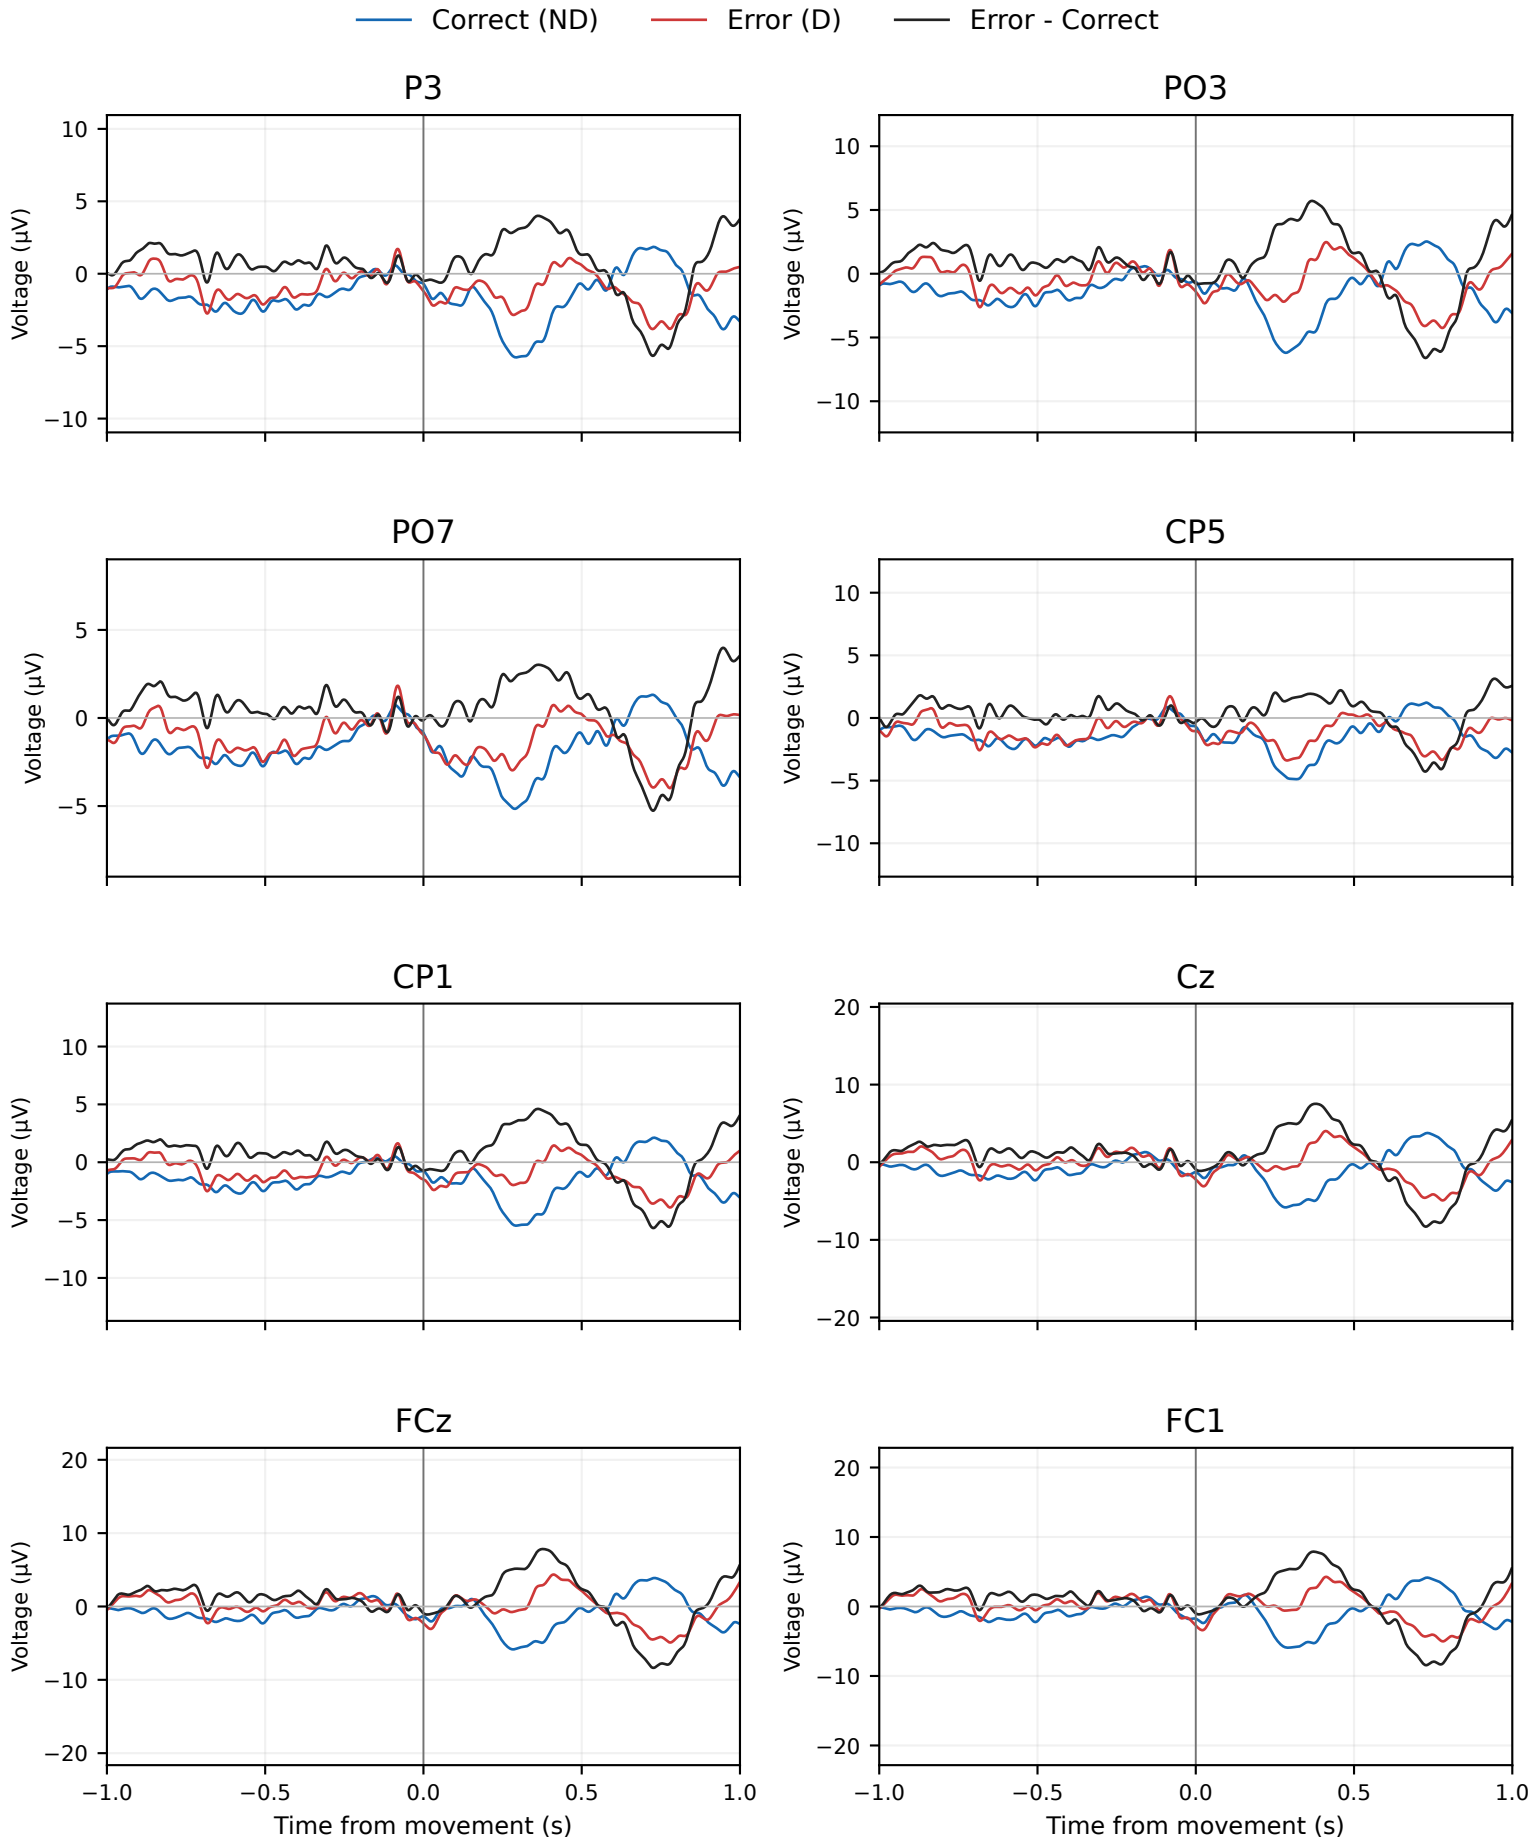

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

cna07 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=171; Error (D) n=92

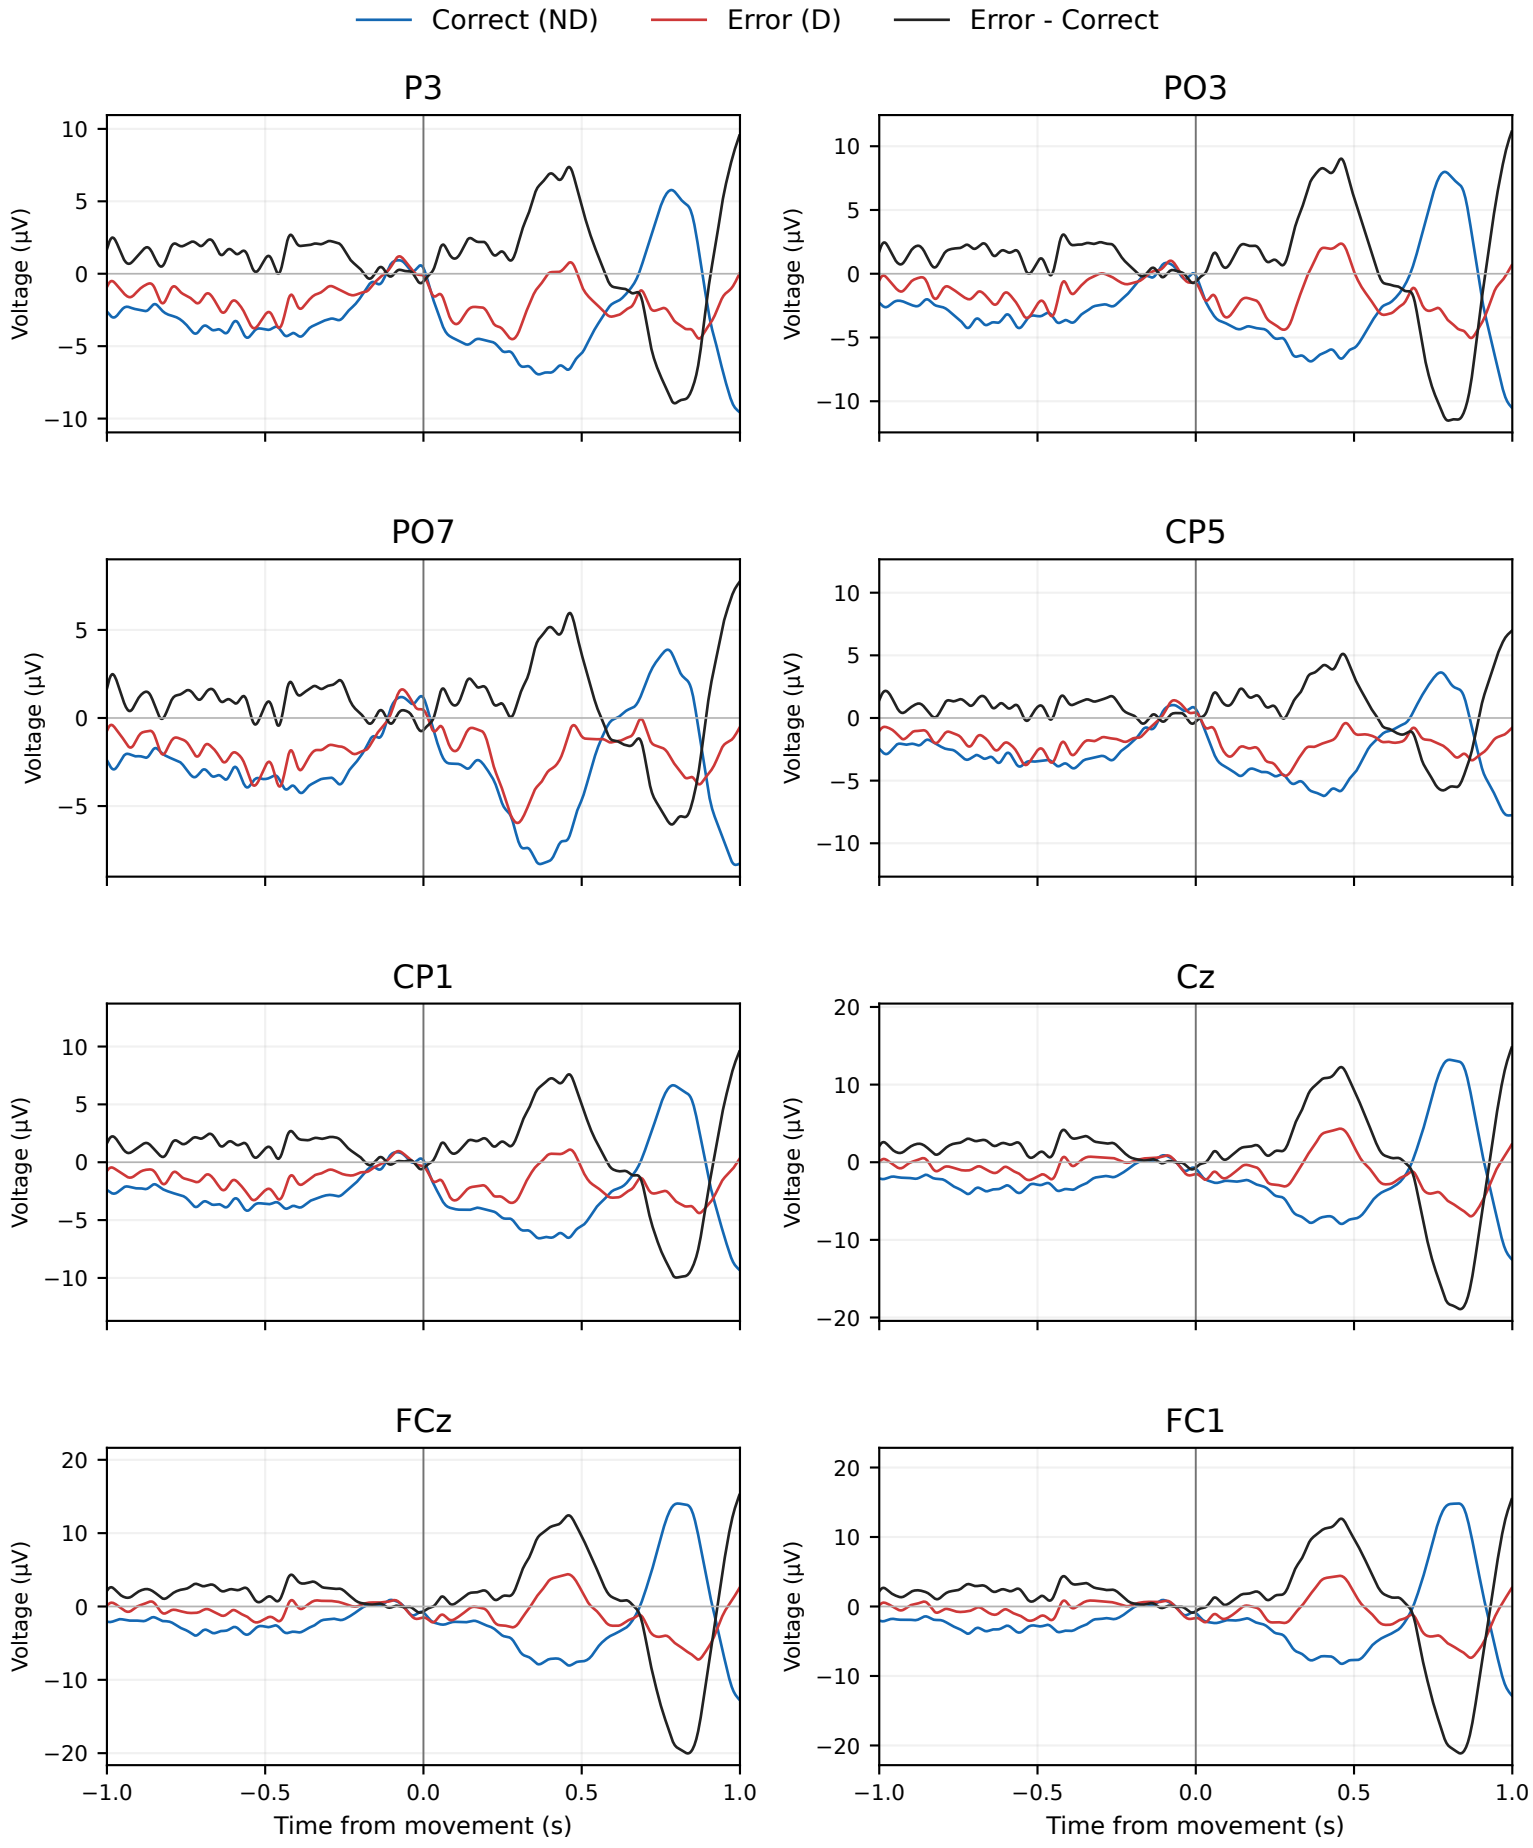

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

cna07 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=292; Error (D) n=152

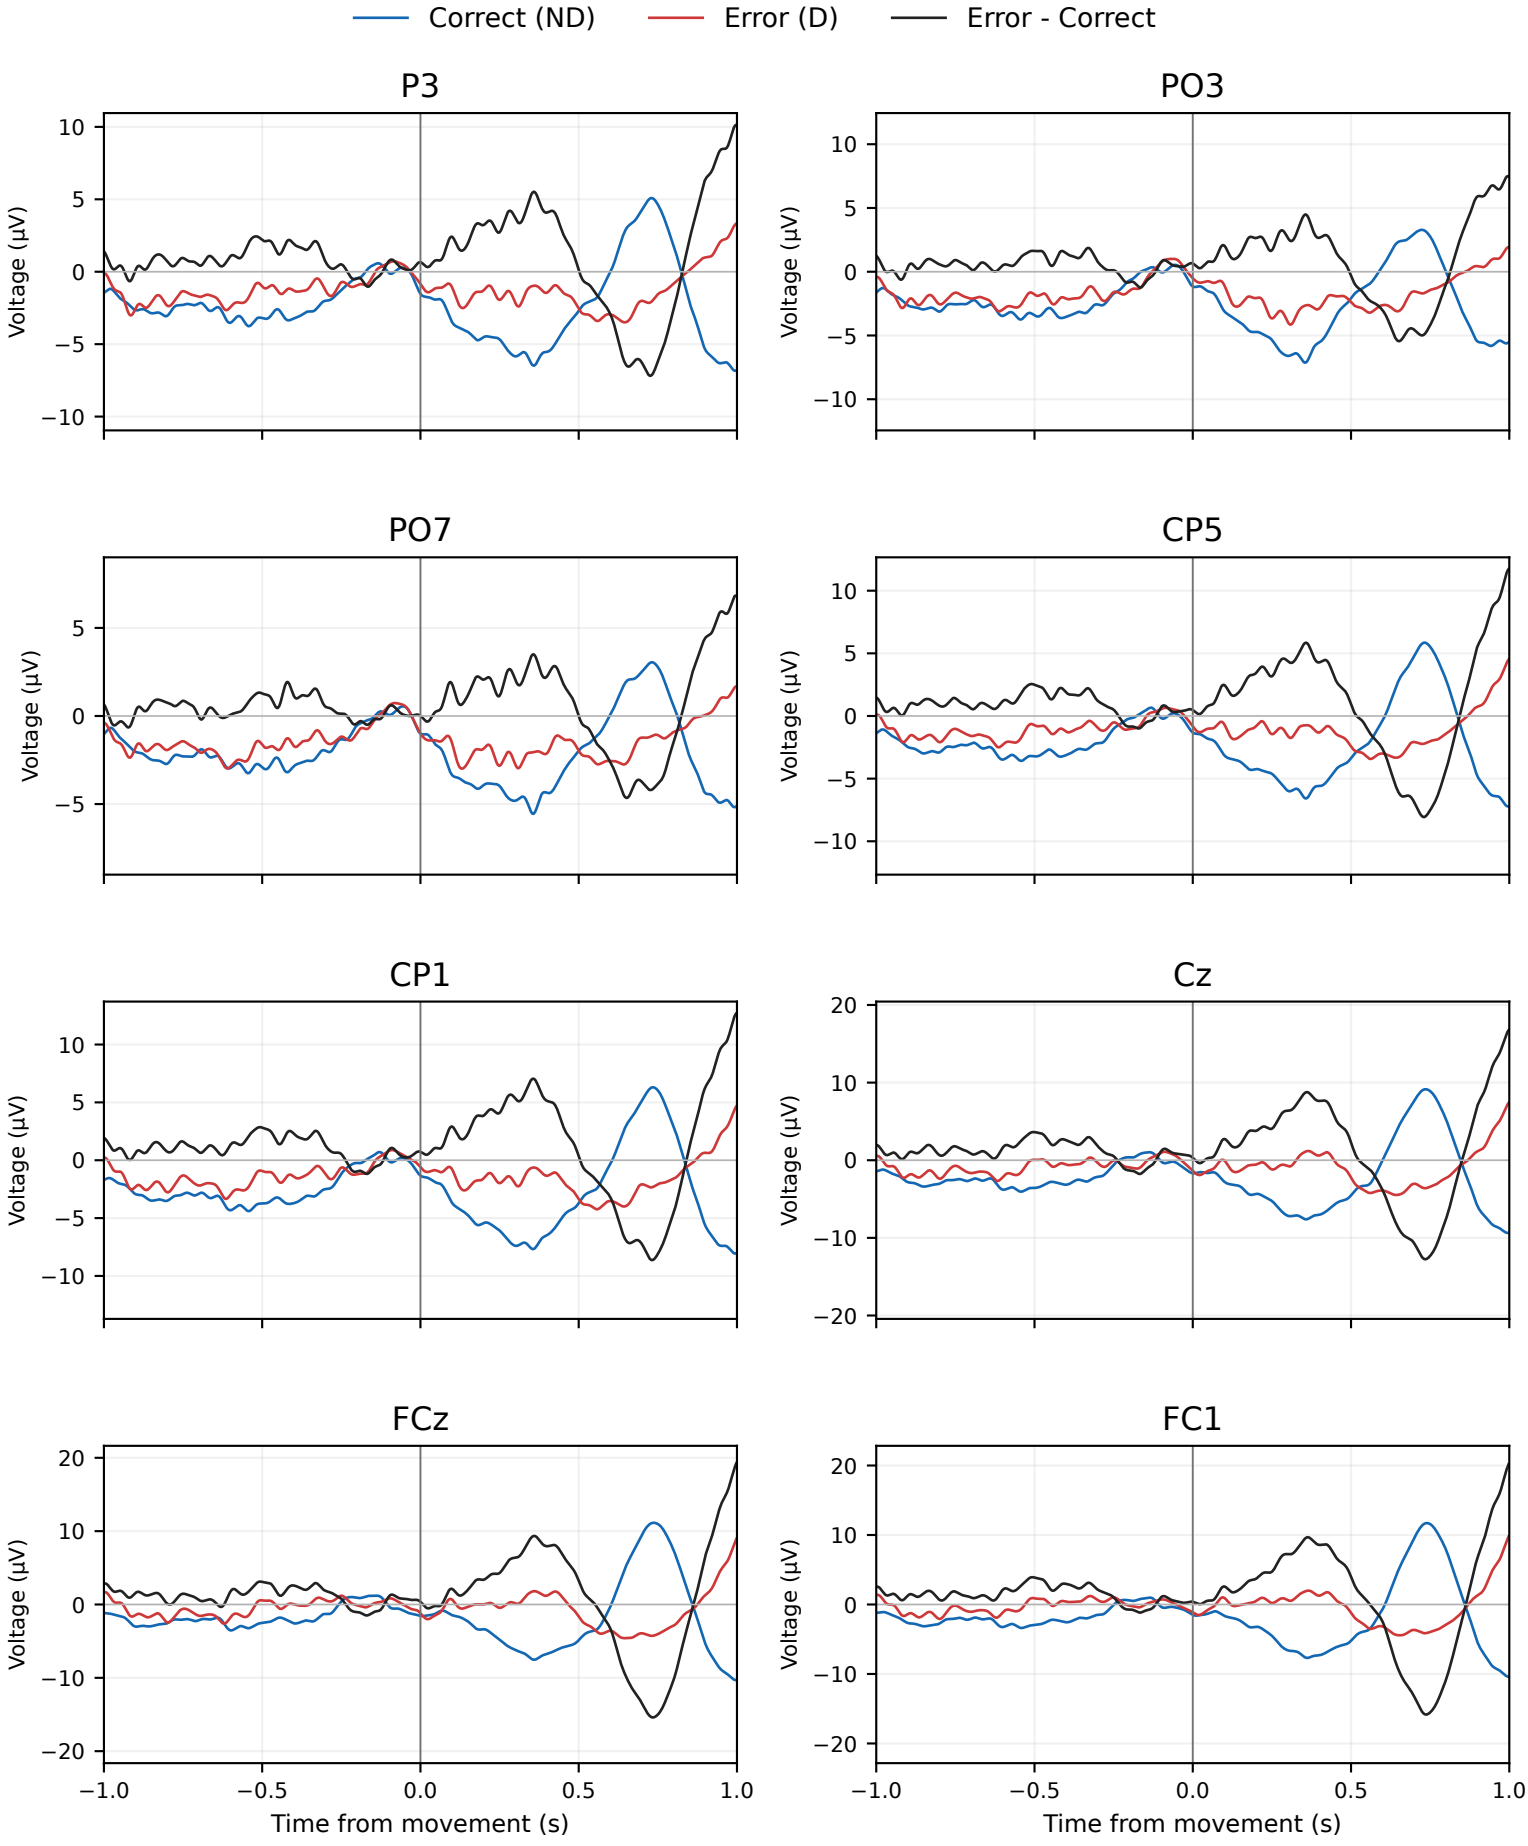

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

cve01 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=335; Error (D) n=157

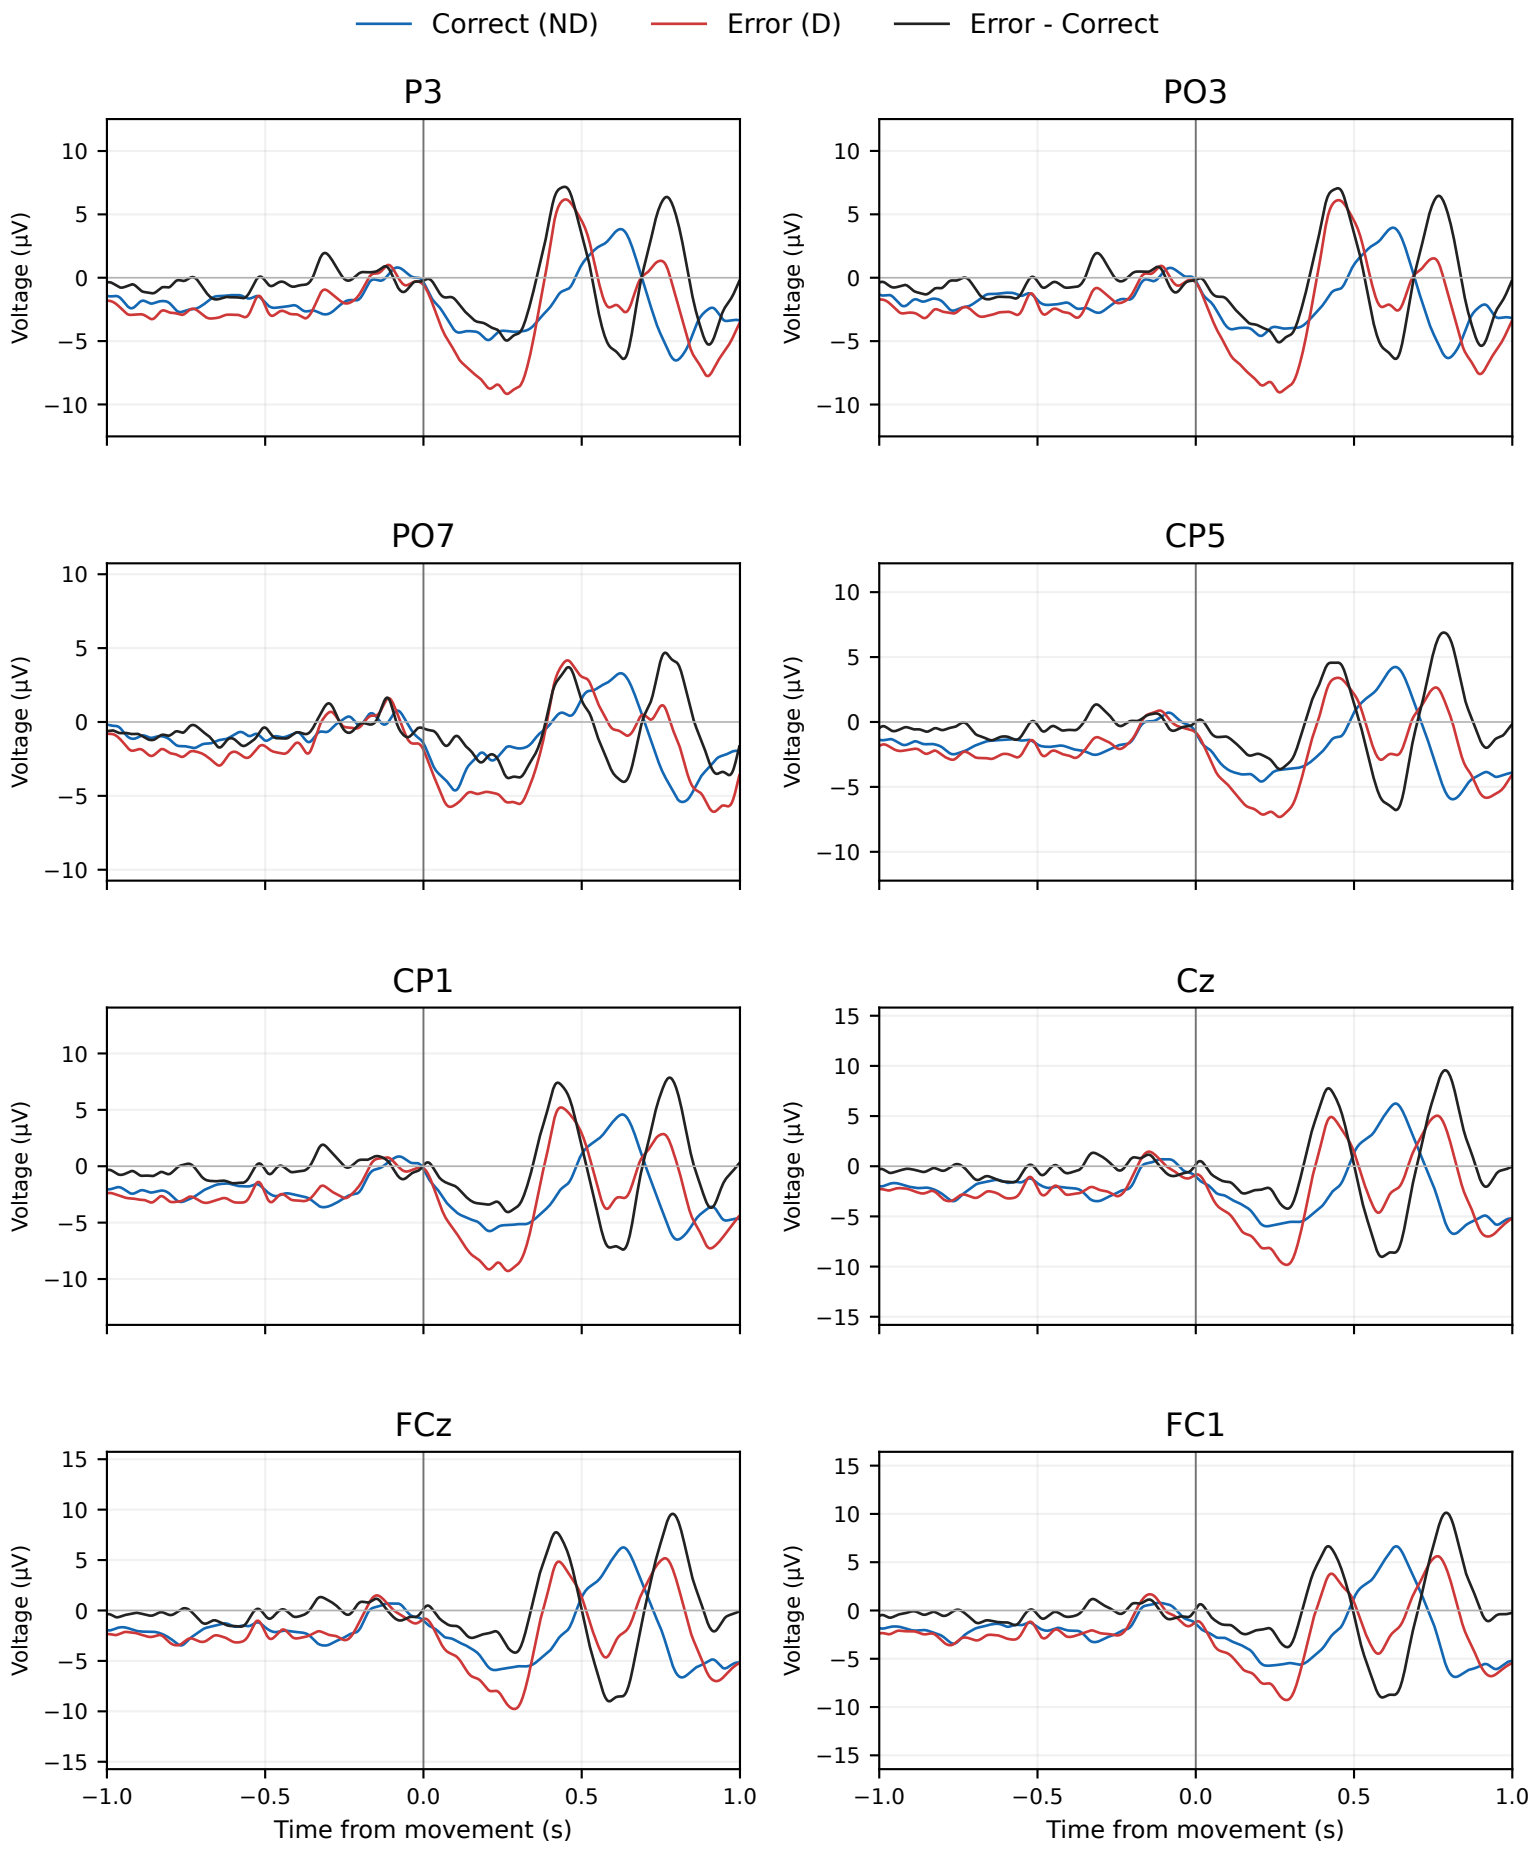

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

cve01 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=323; Error (D) n=169

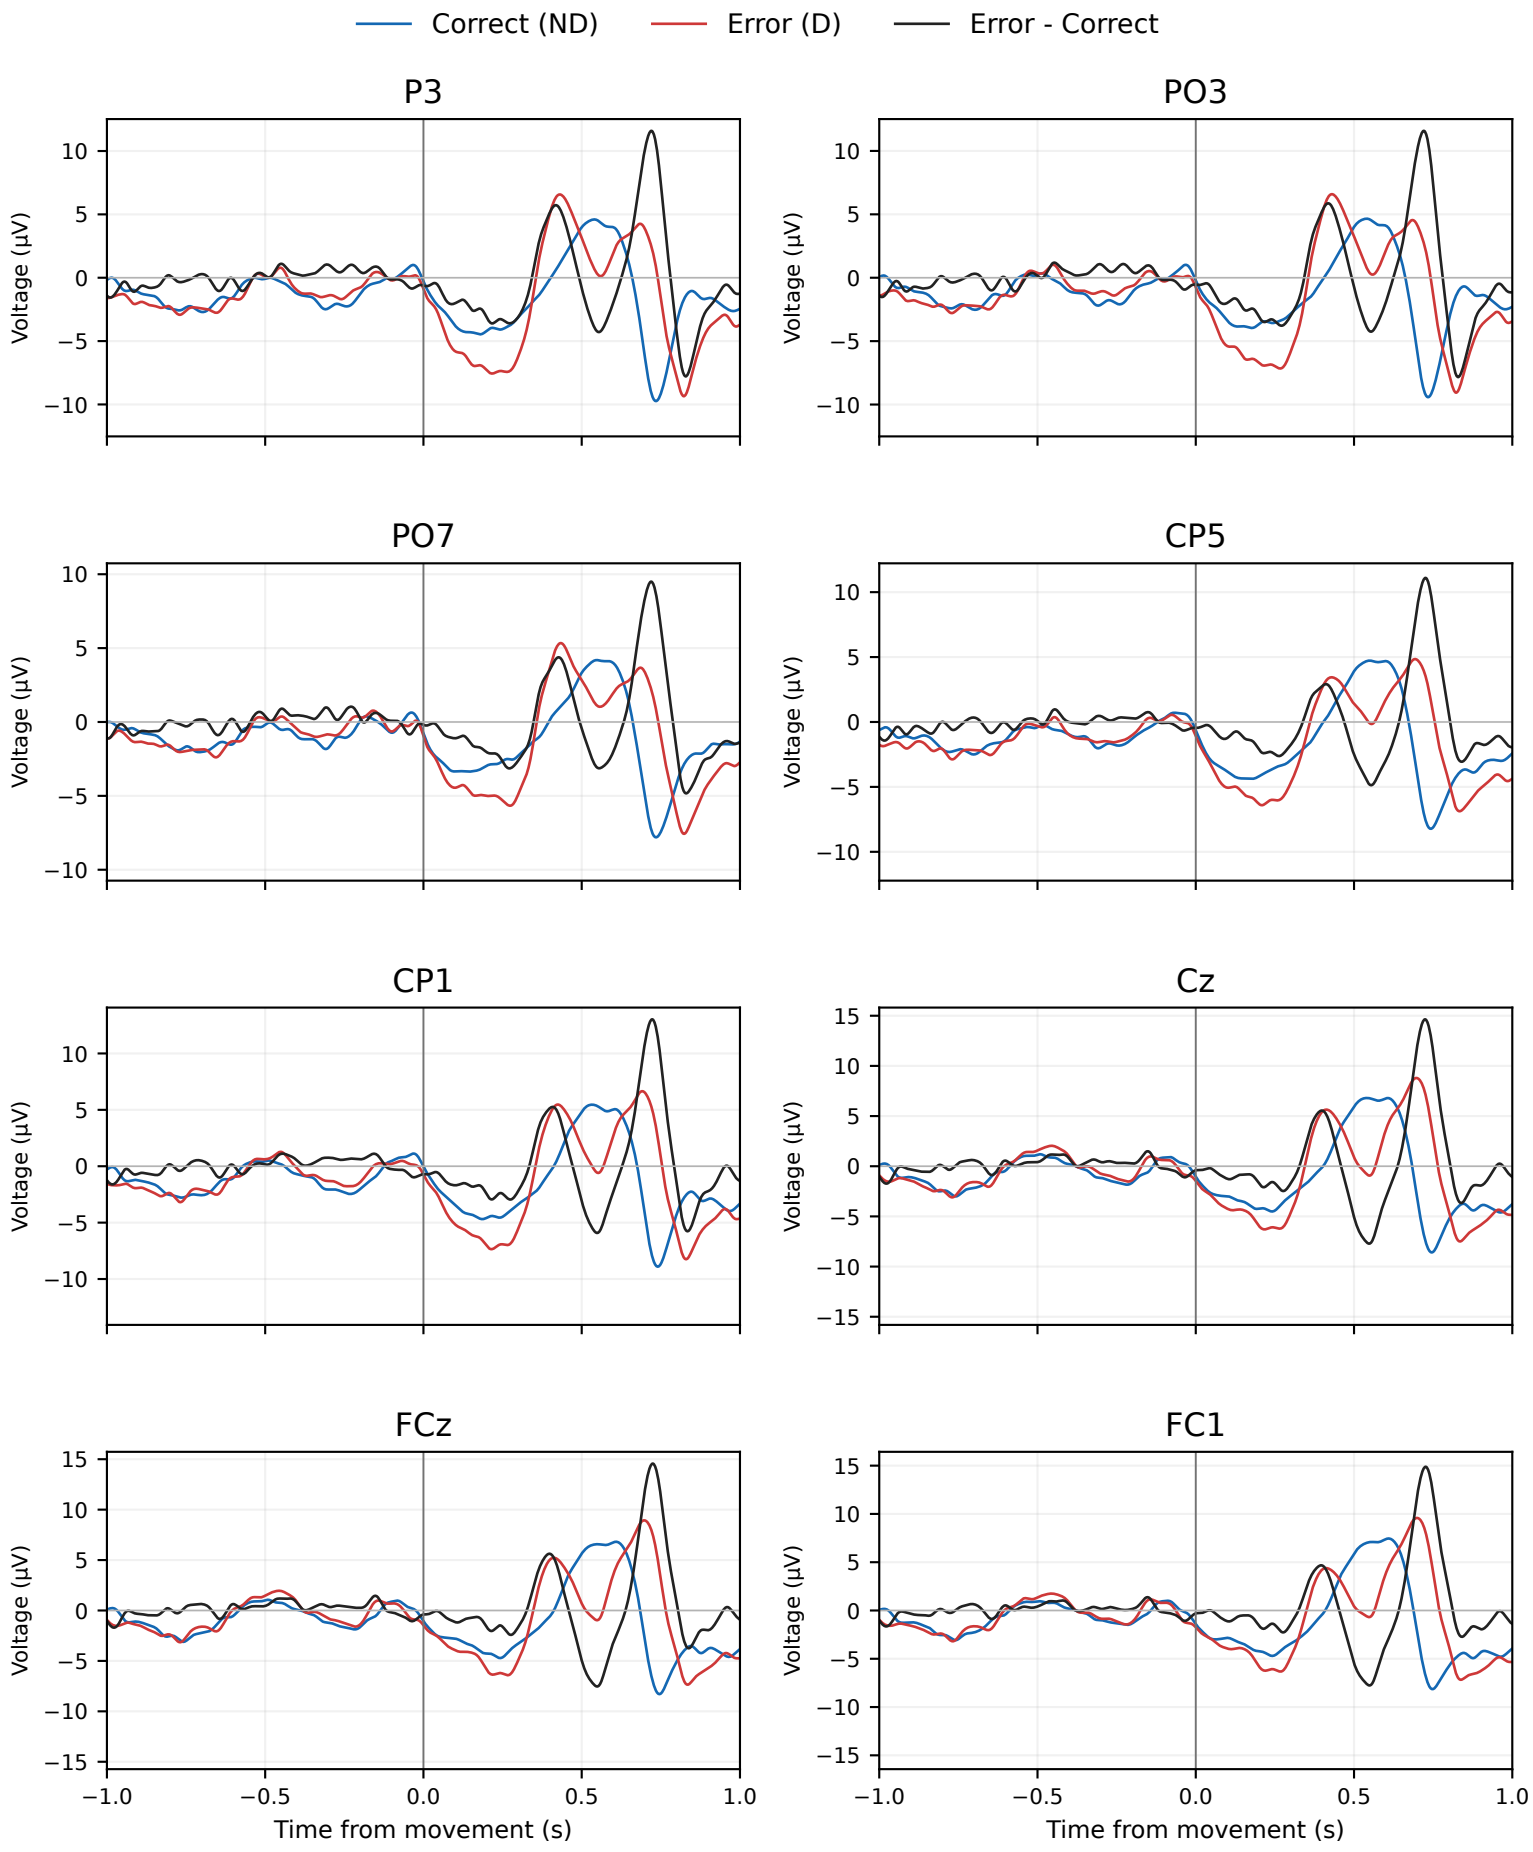

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

cve01 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=276; Error (D) n=145

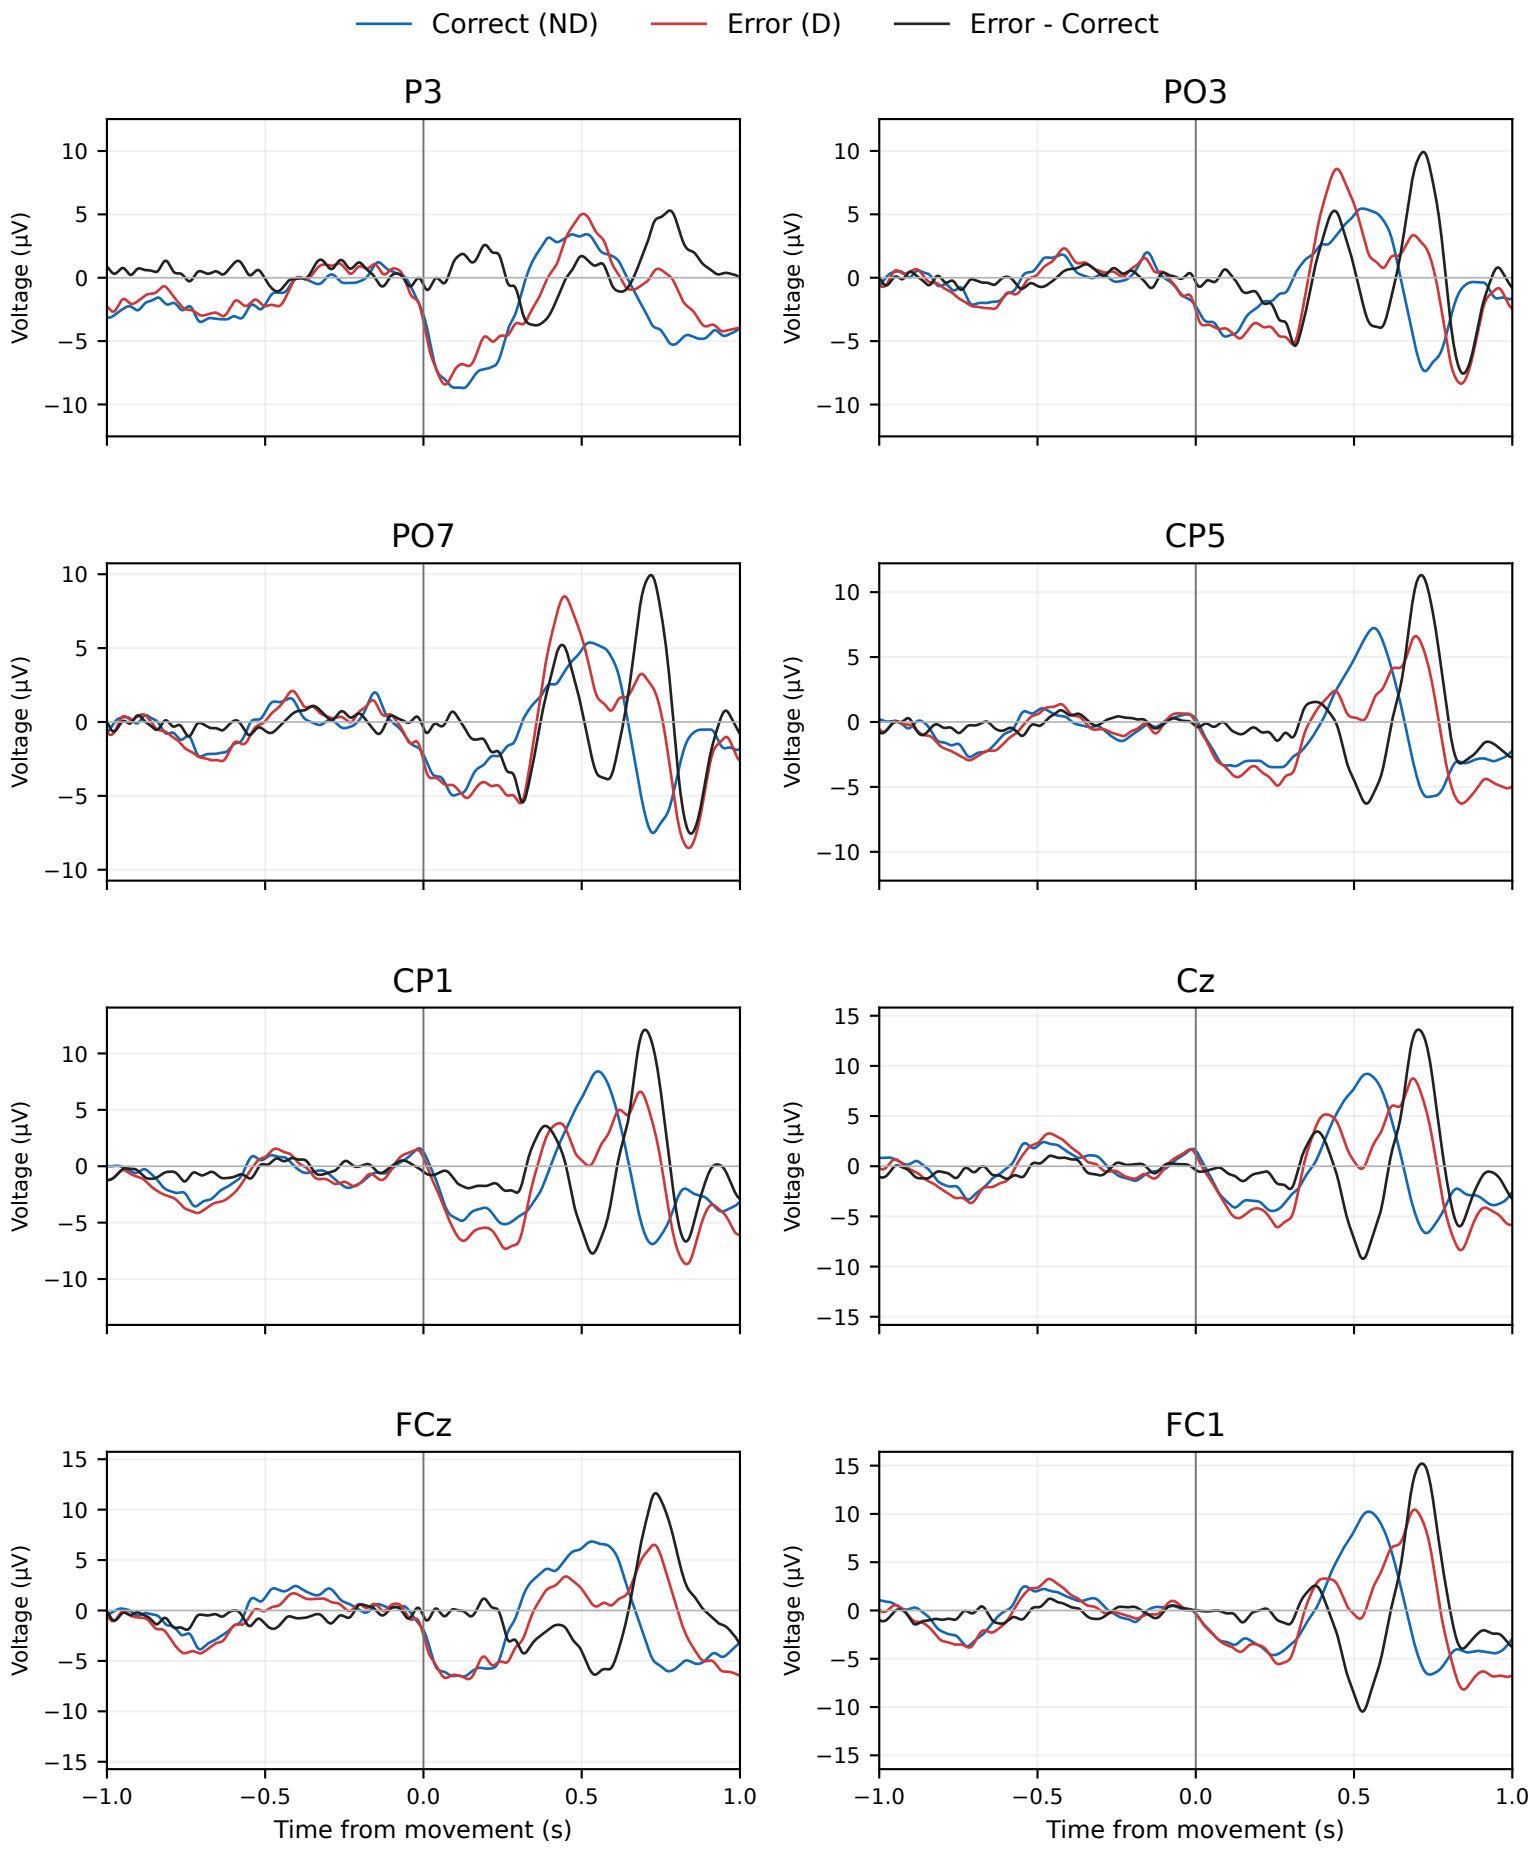

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

den12 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=296; Error (D) n=158

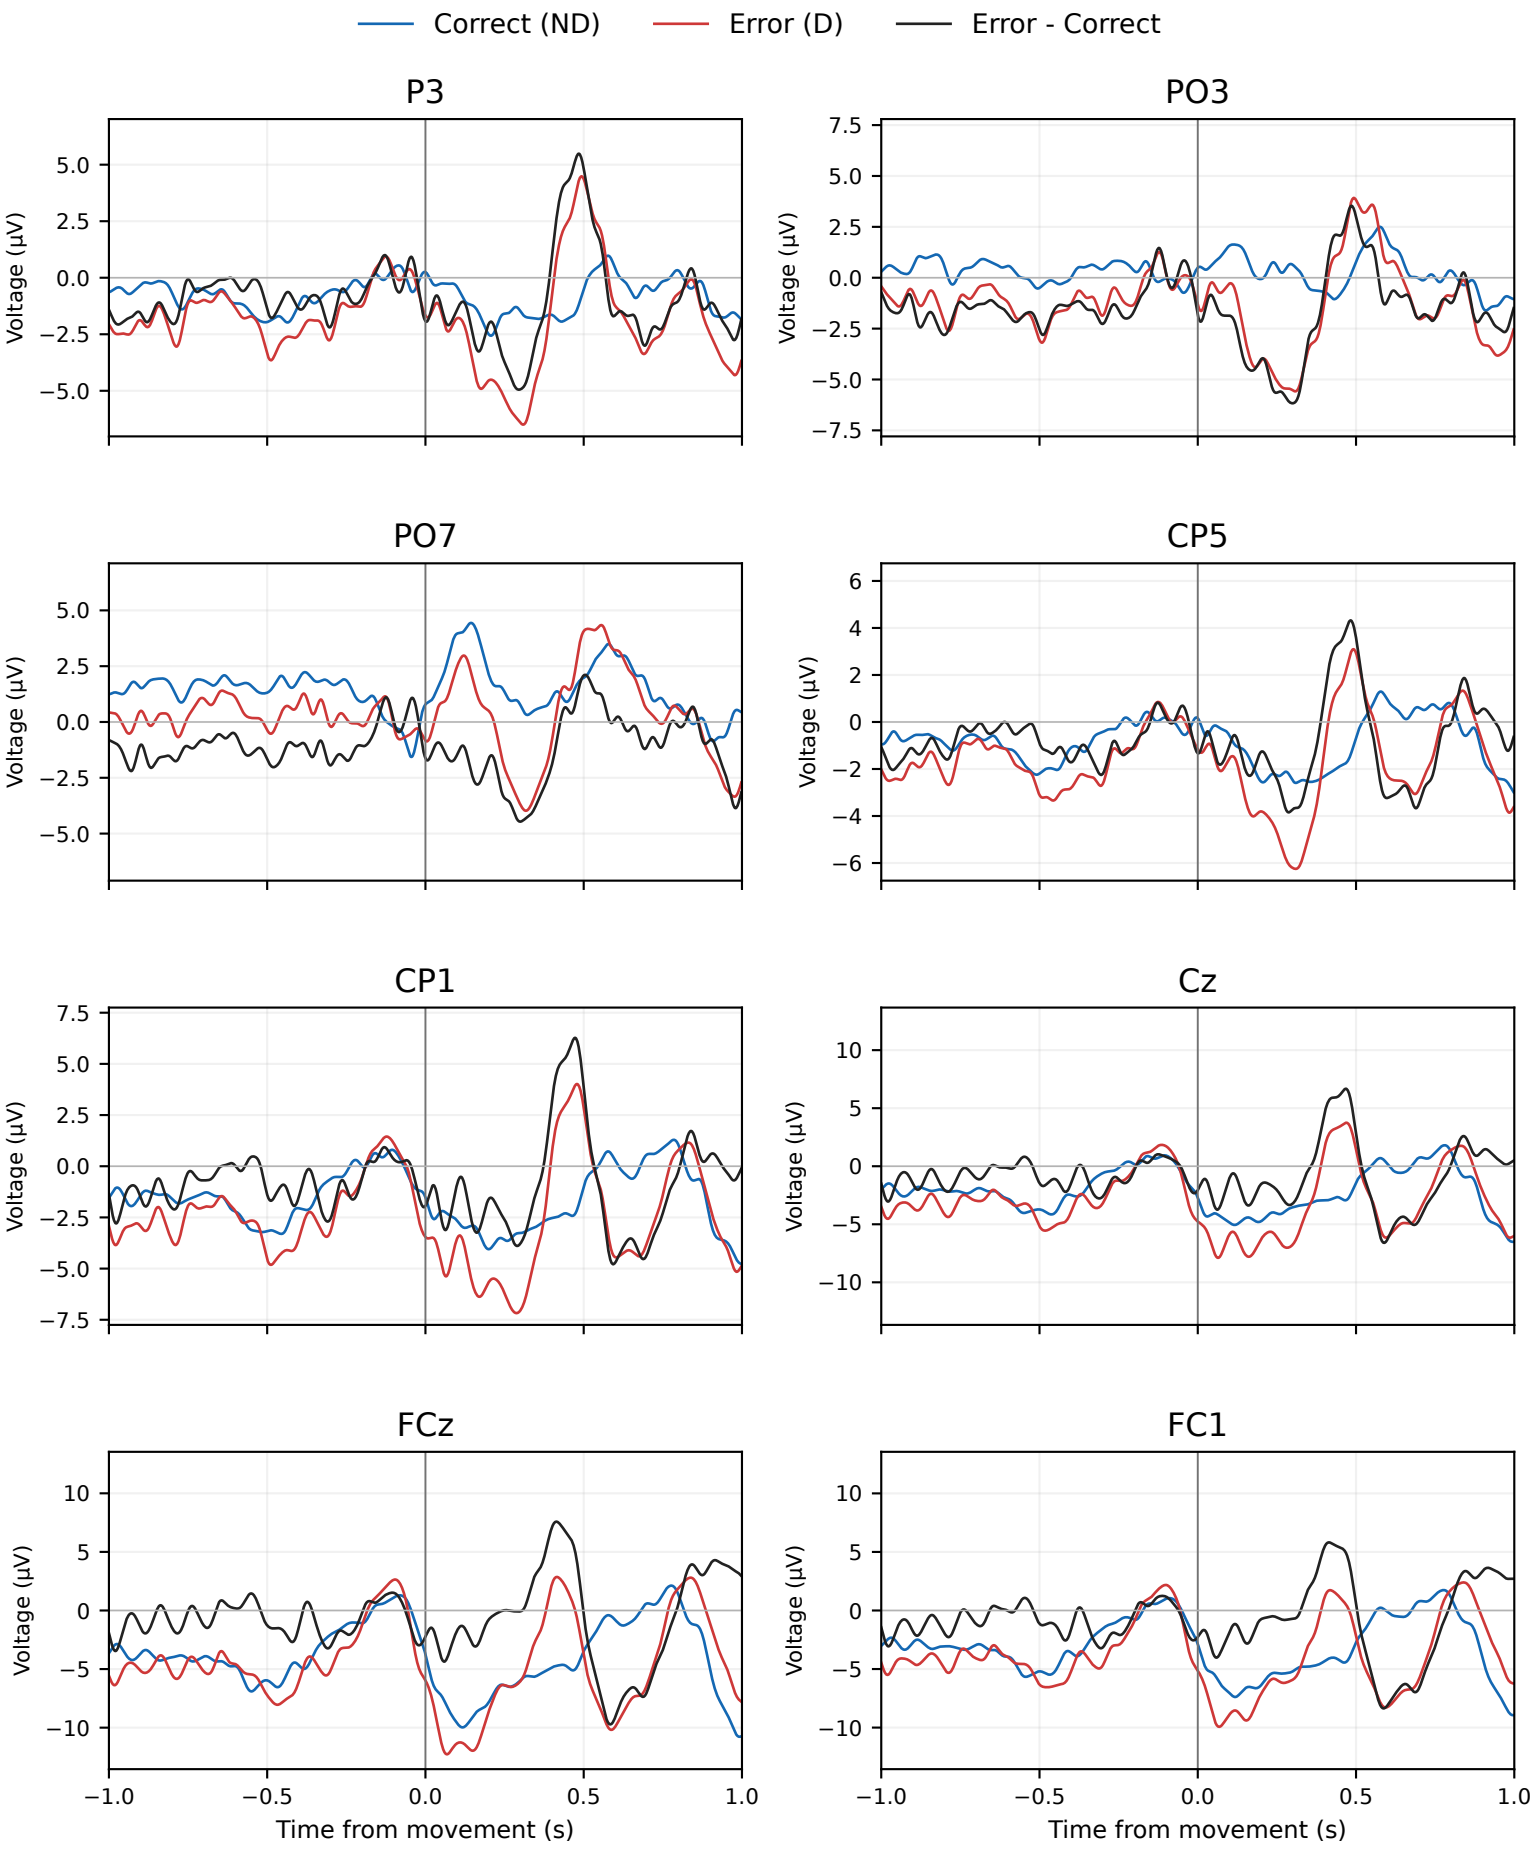

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

den12 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=303; Error (D) n=158

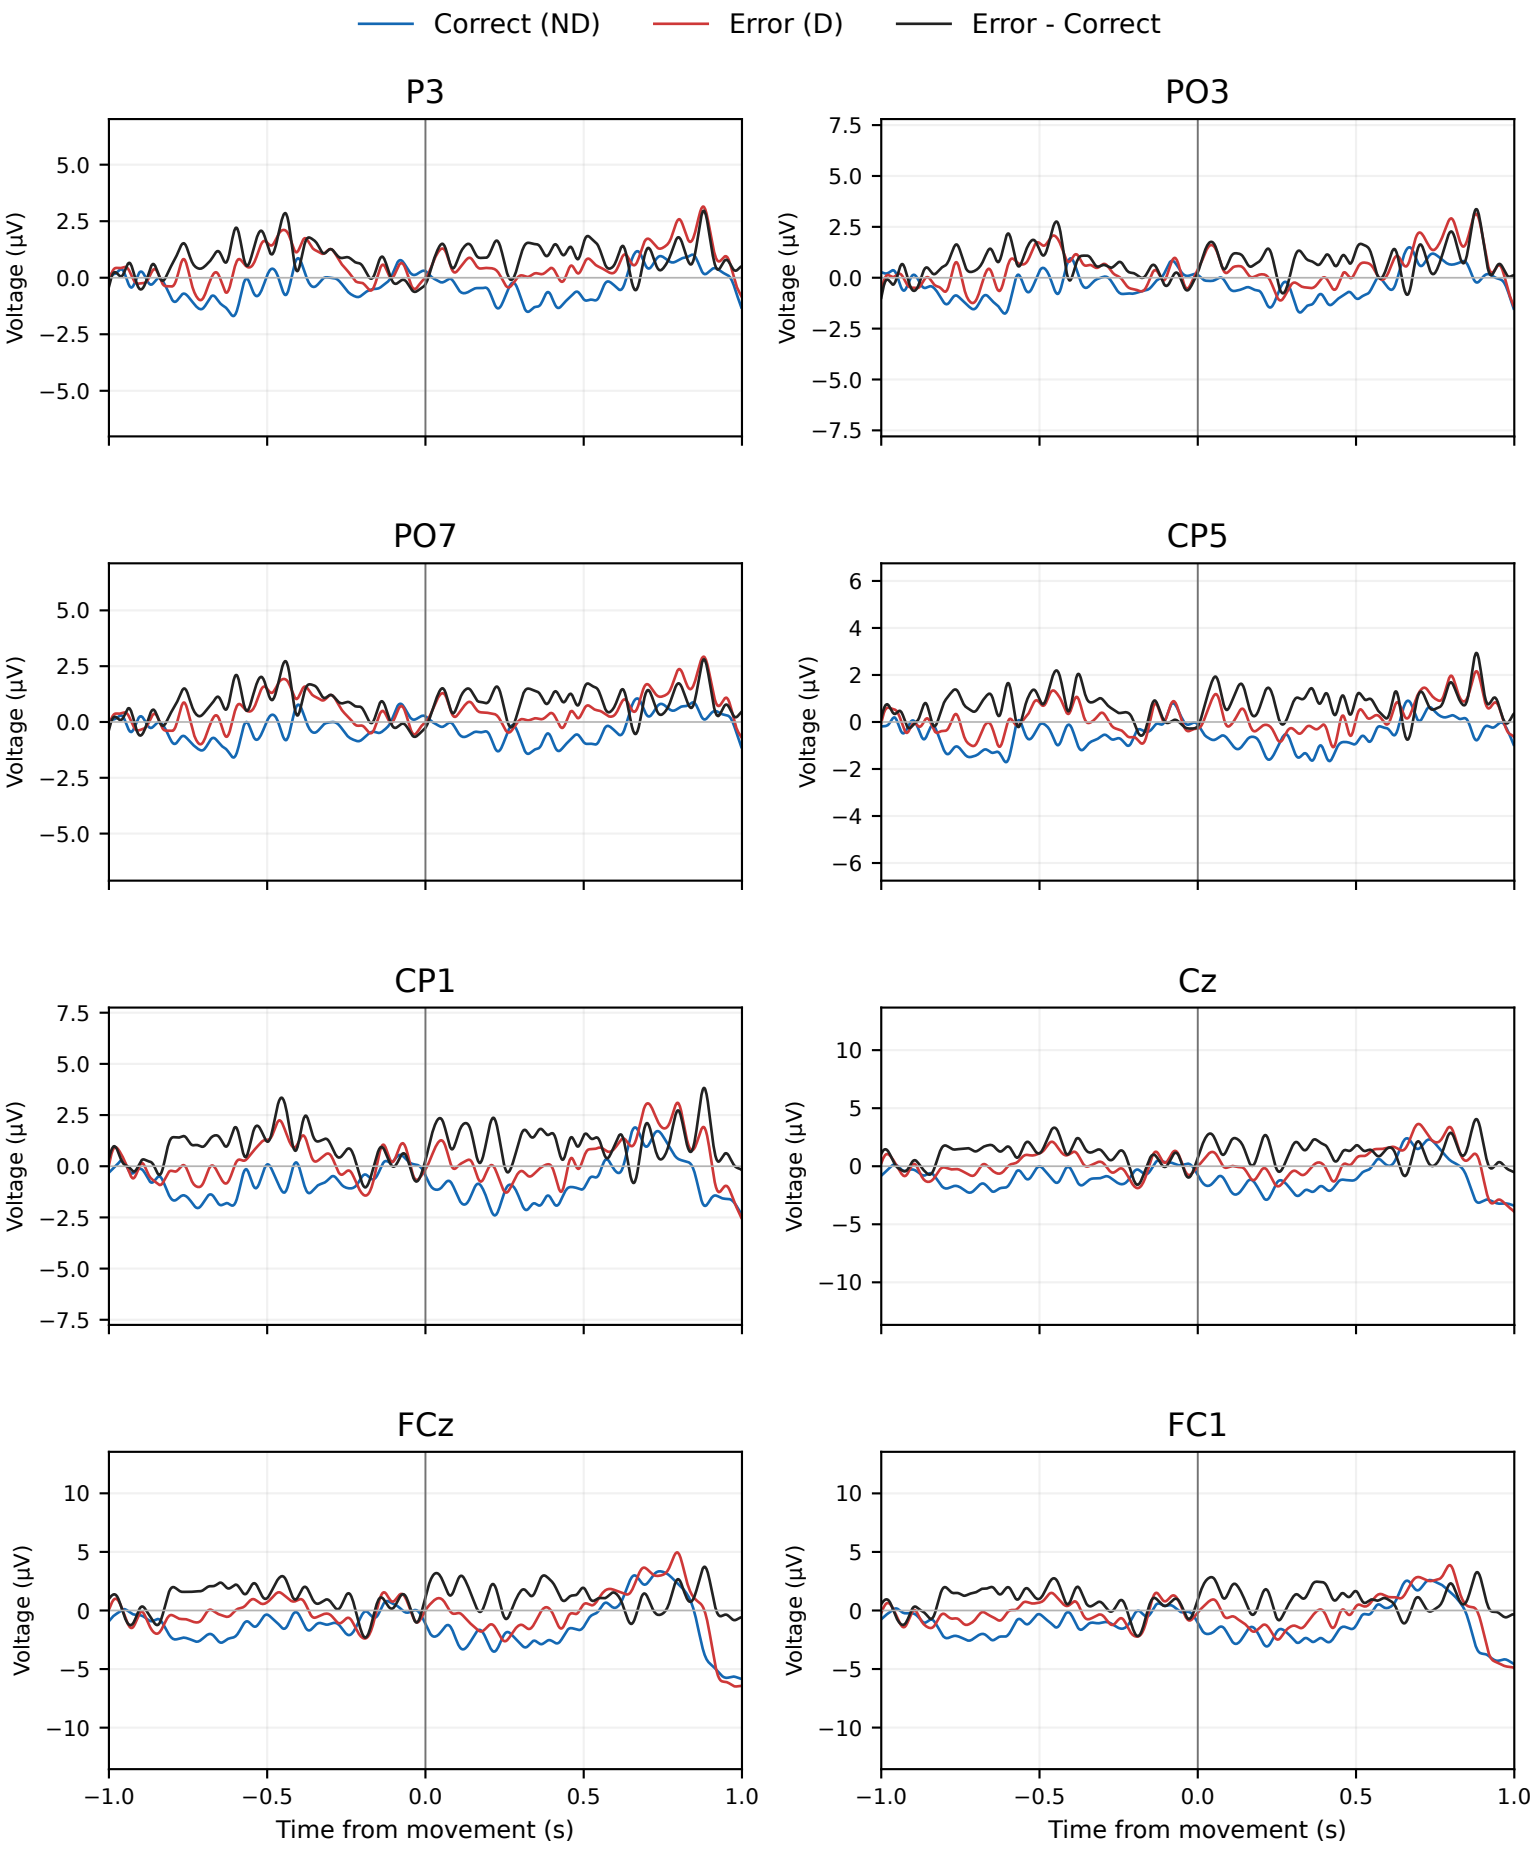

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

den12 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=297; Error (D) n=152

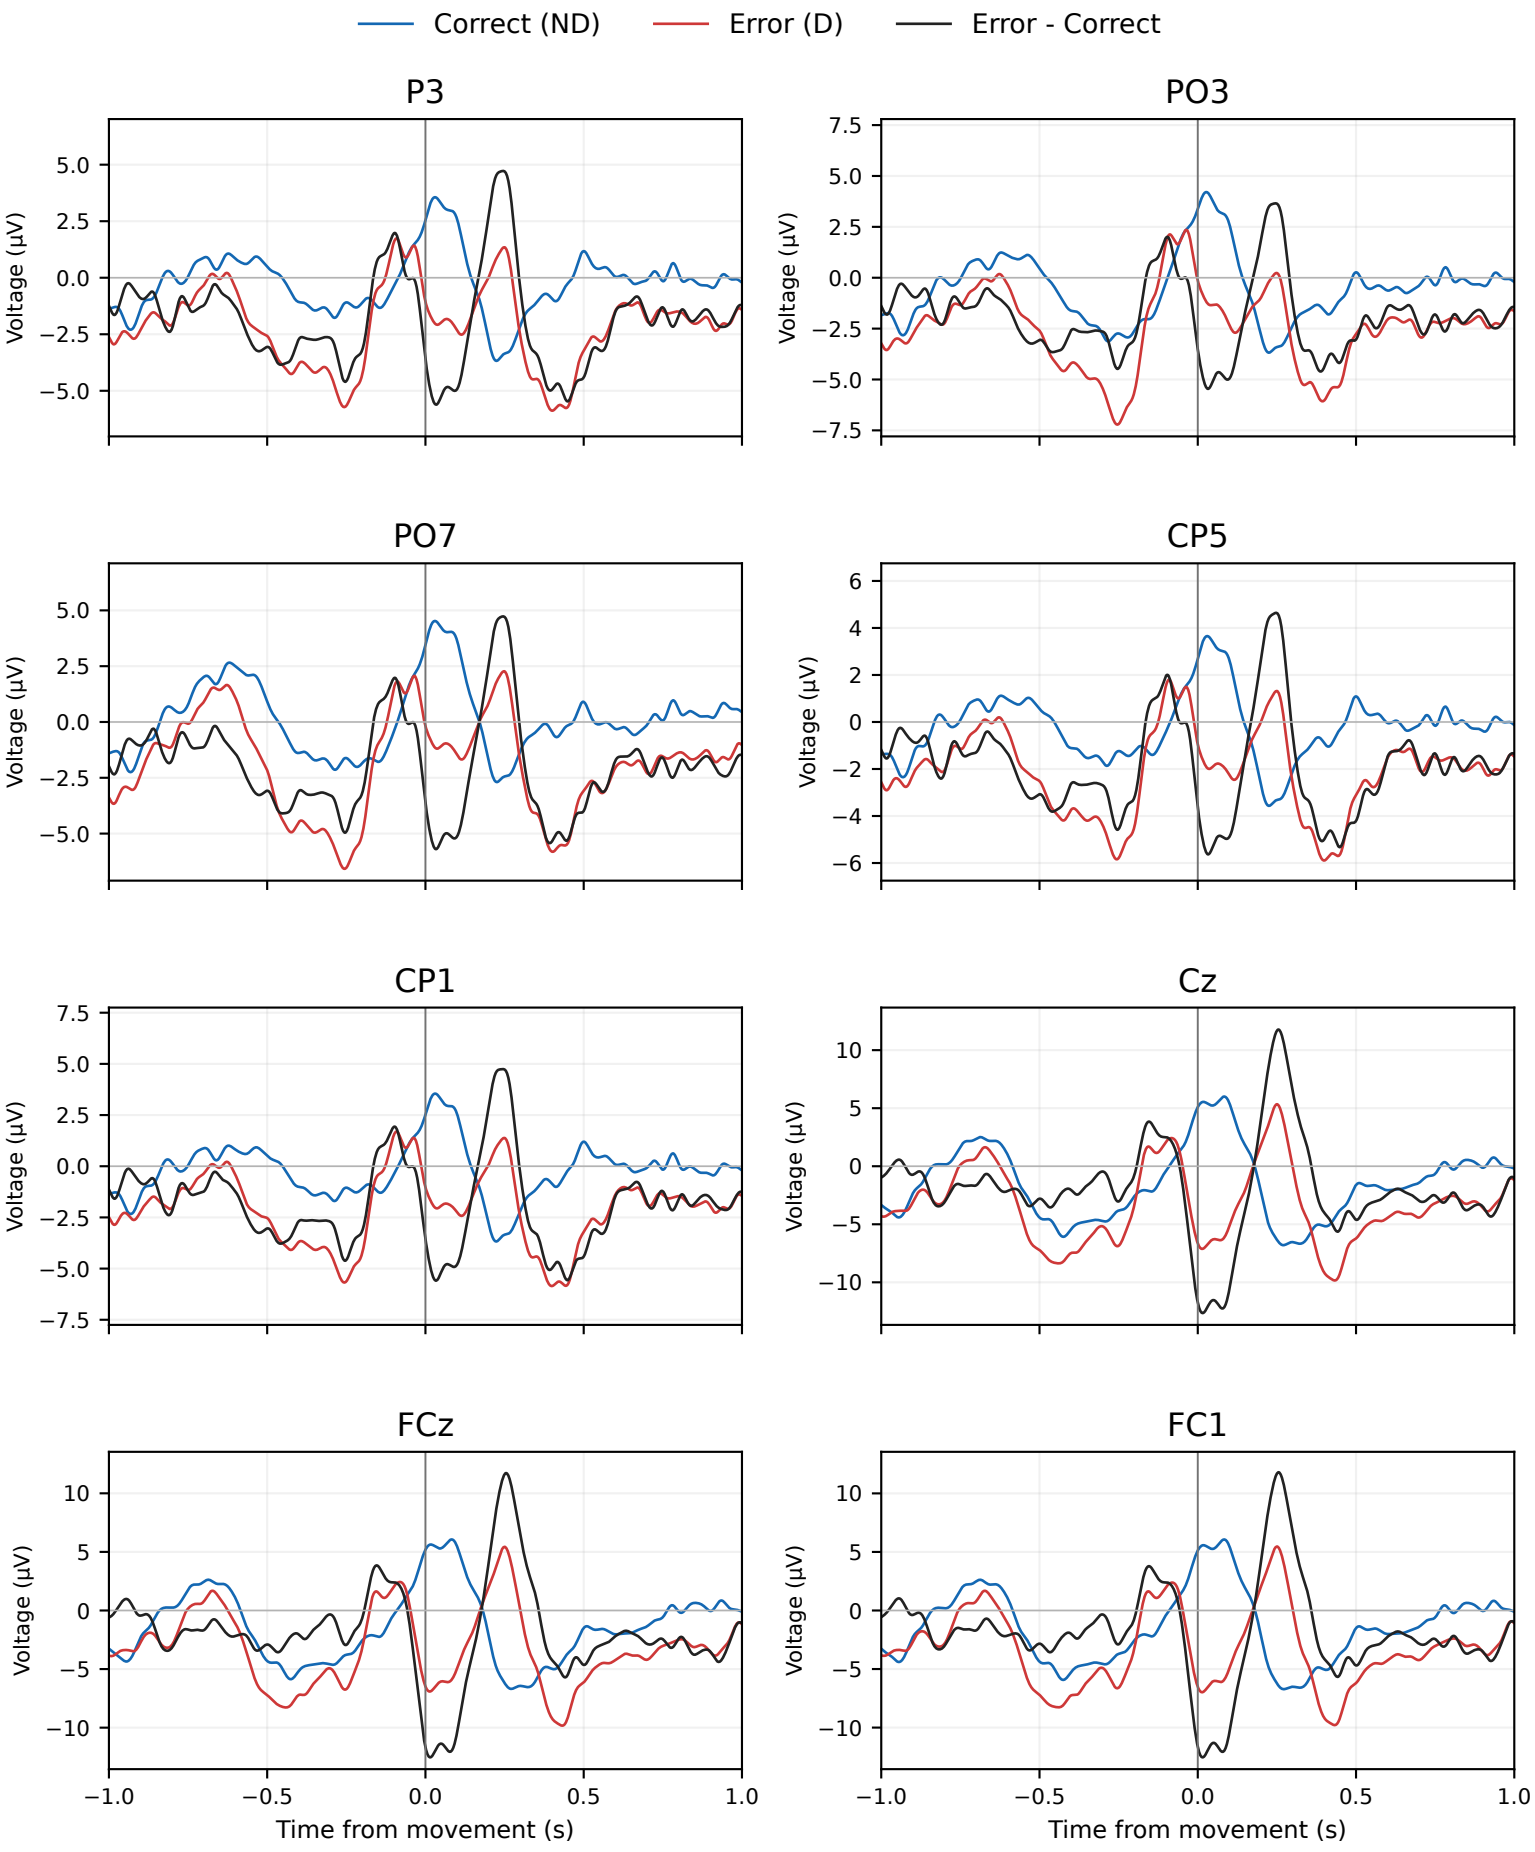

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

eab31 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=327; Error (D) n=163

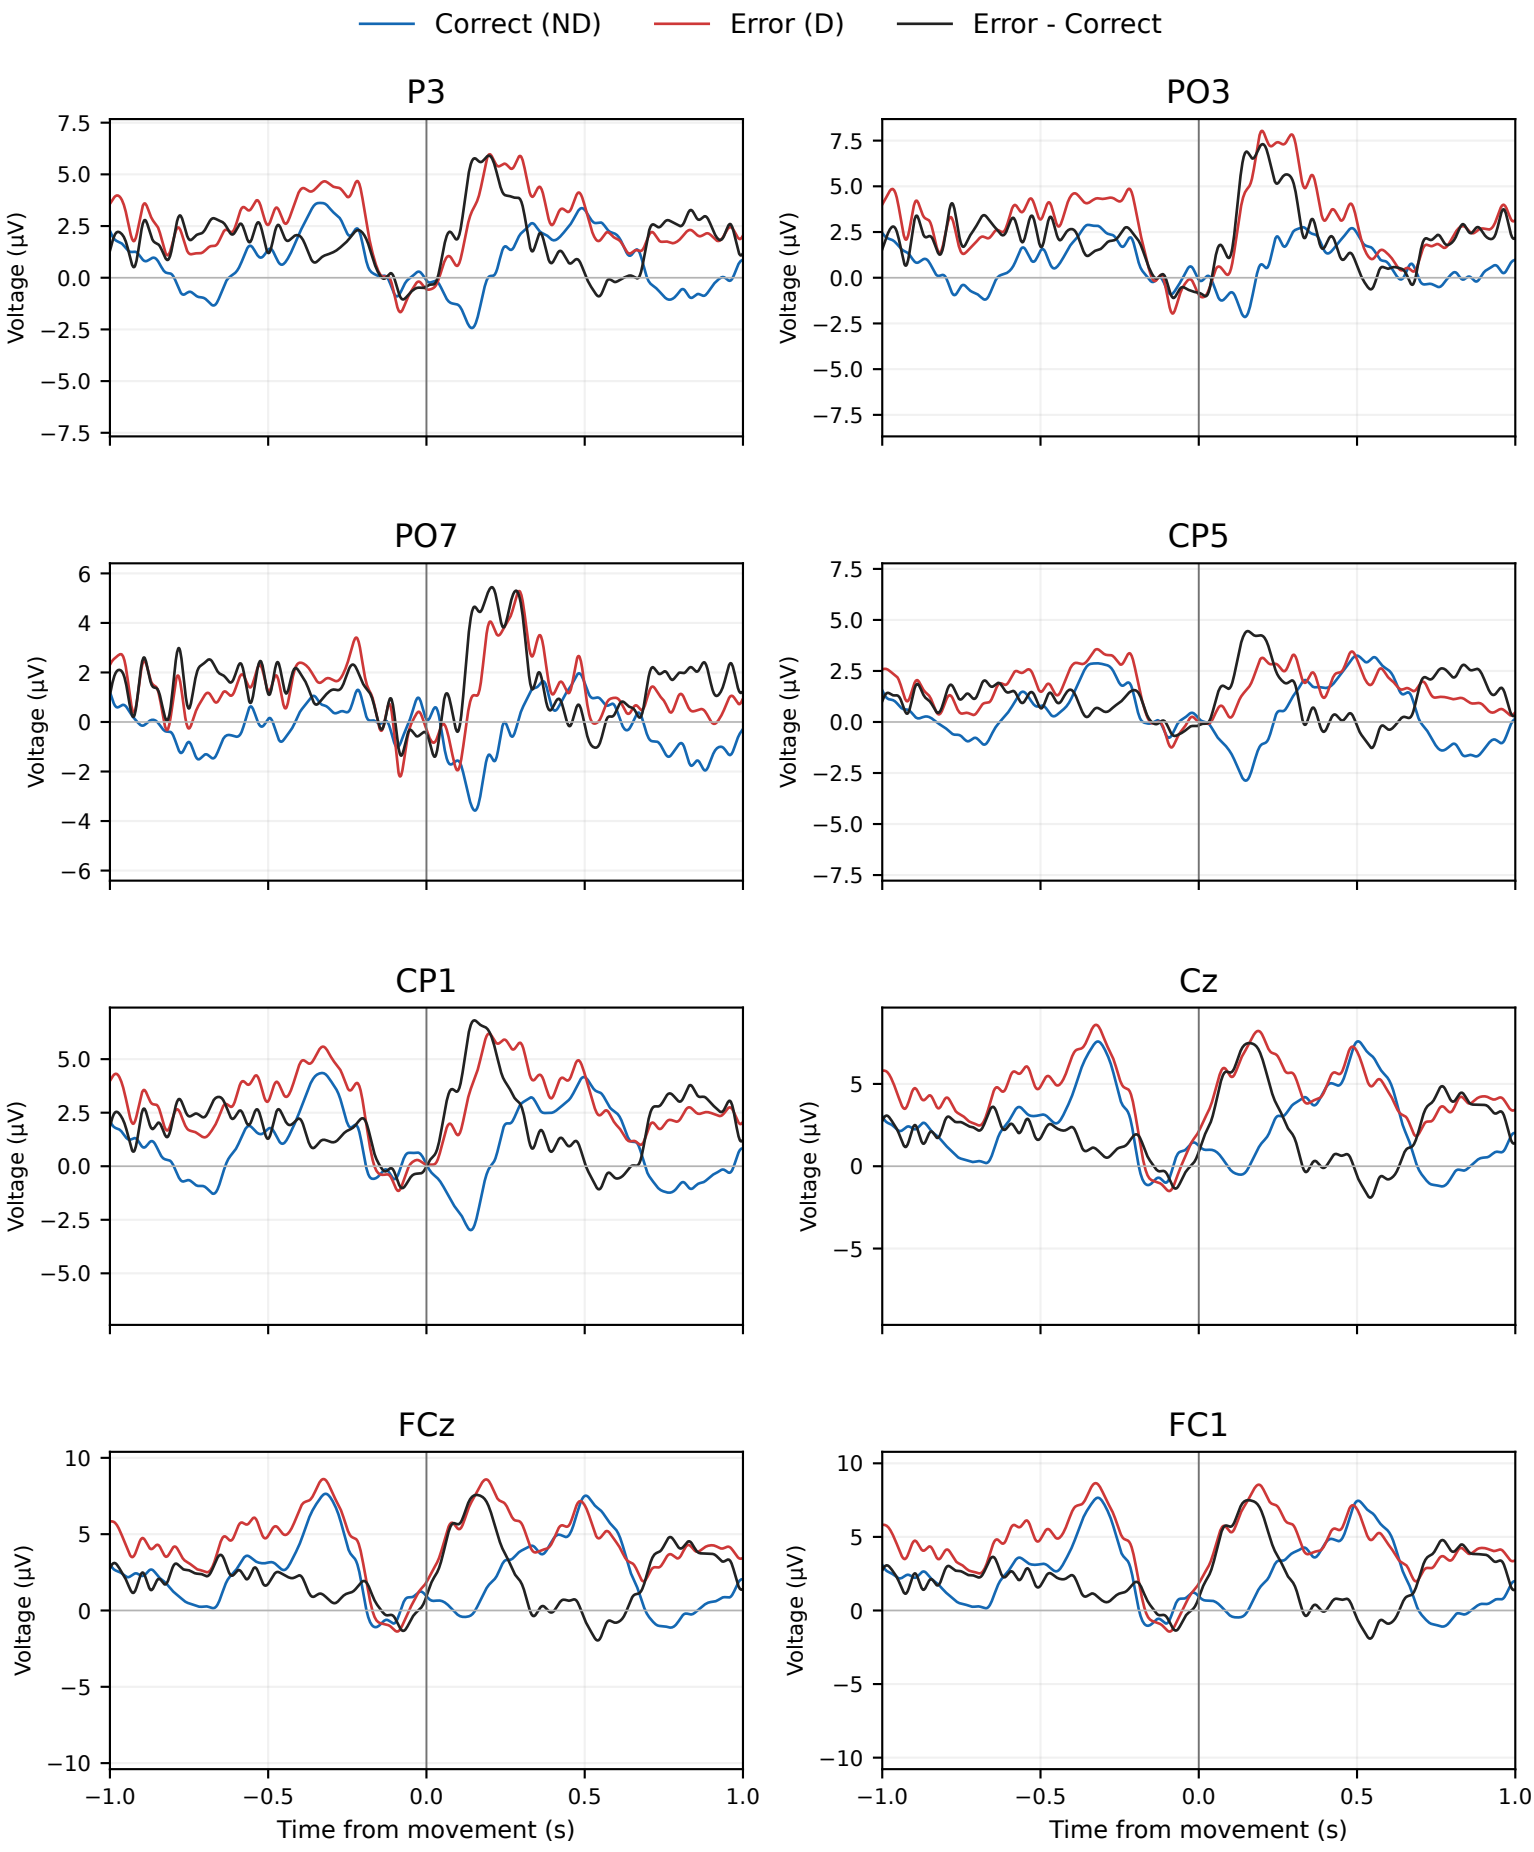

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

eab31 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=323; Error (D) n=168

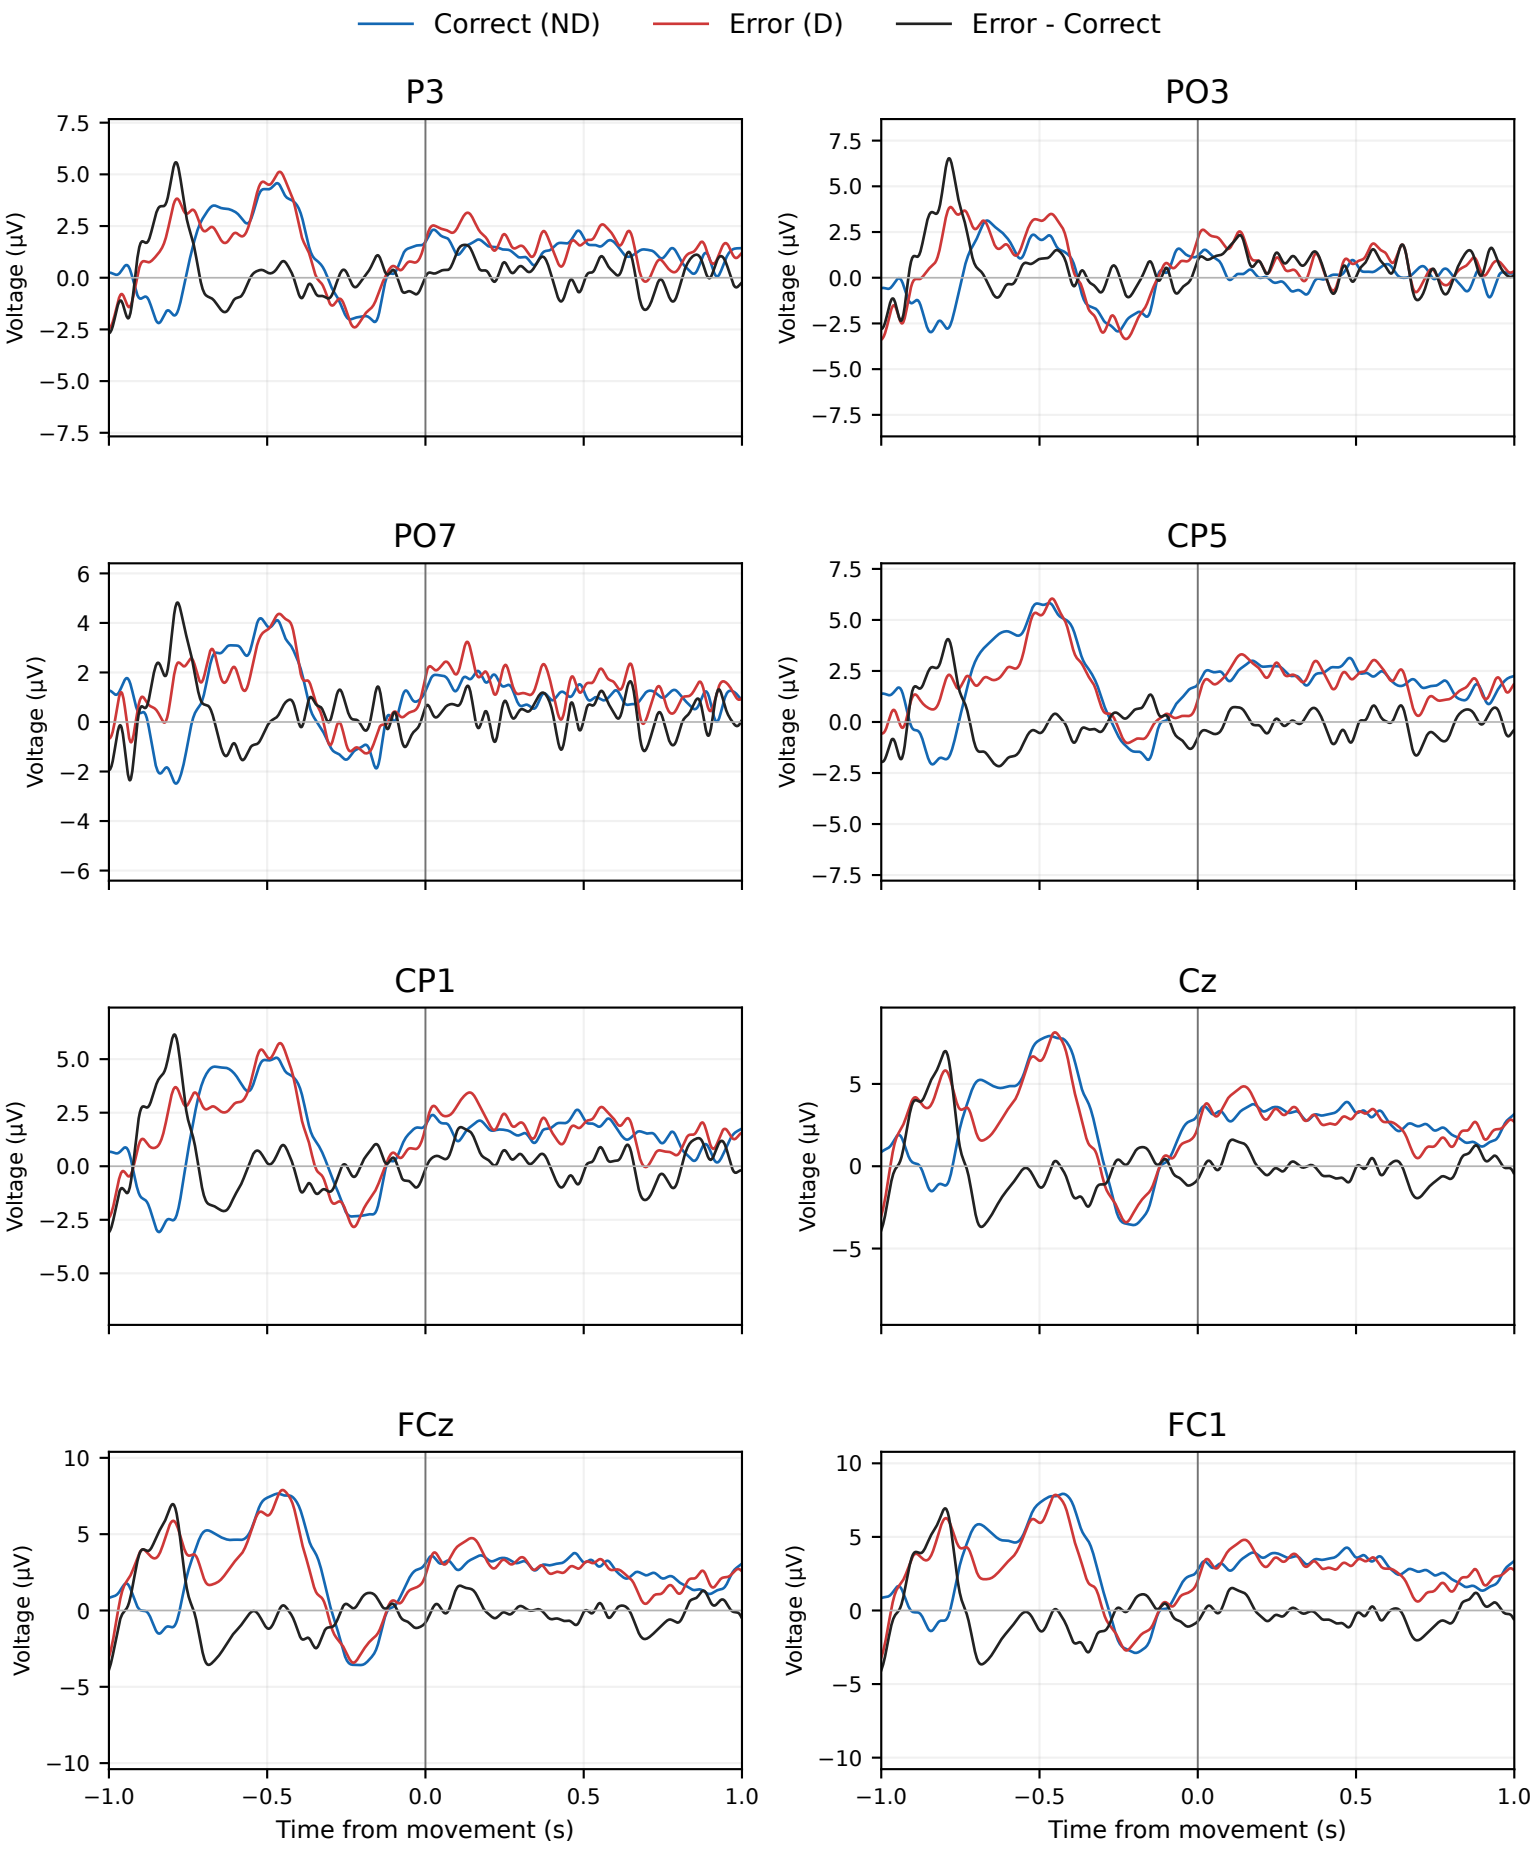

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

eab31 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=292; Error (D) n=150

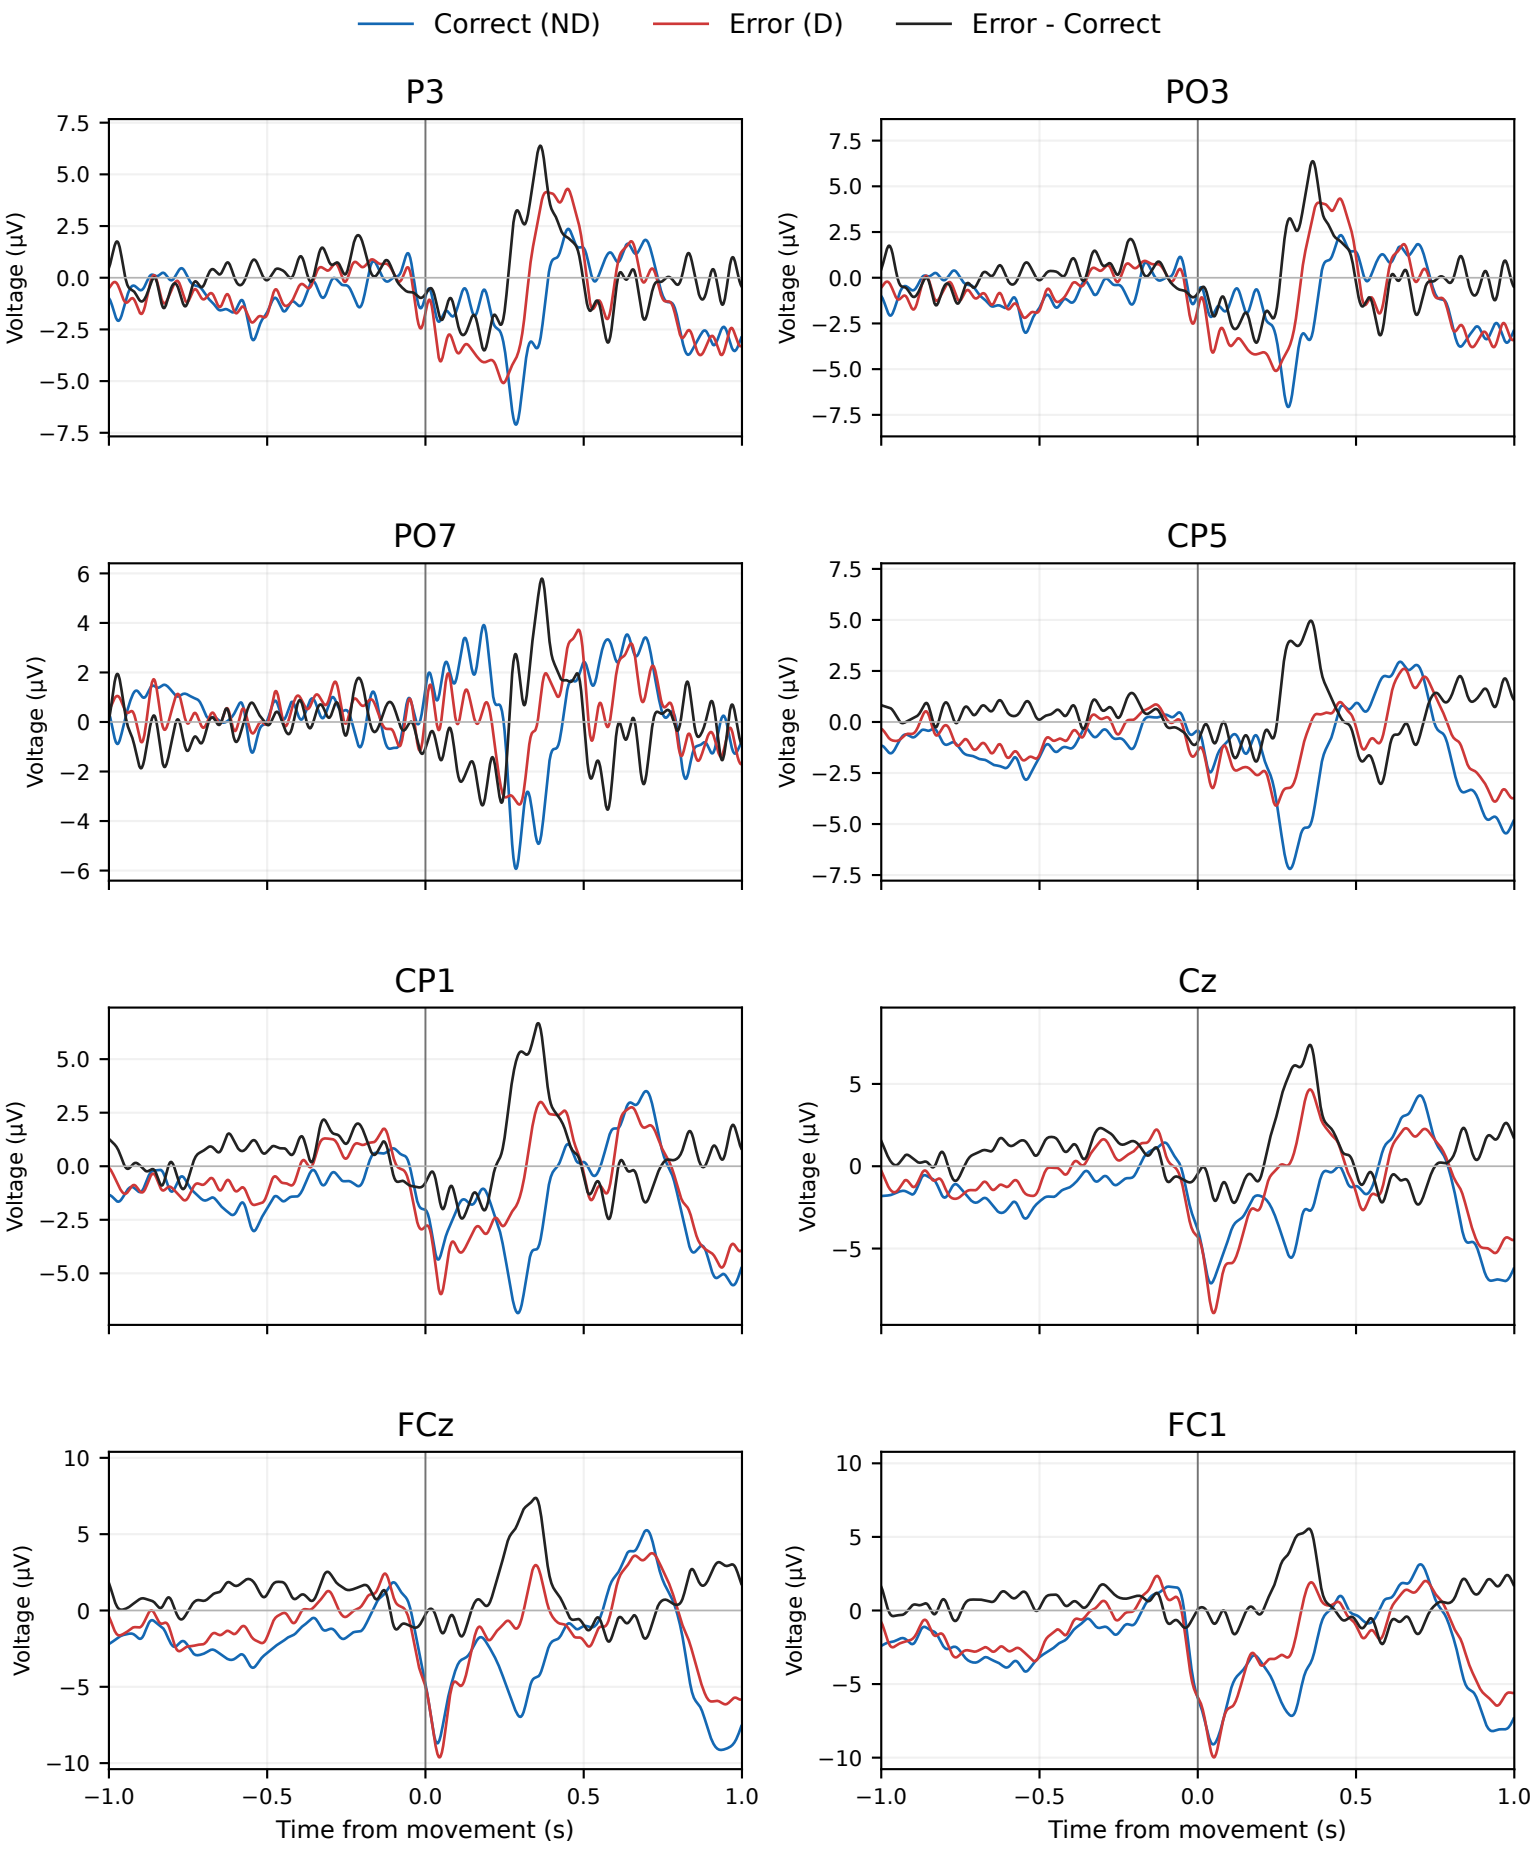

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

emo24 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=188; Error (D) n=95

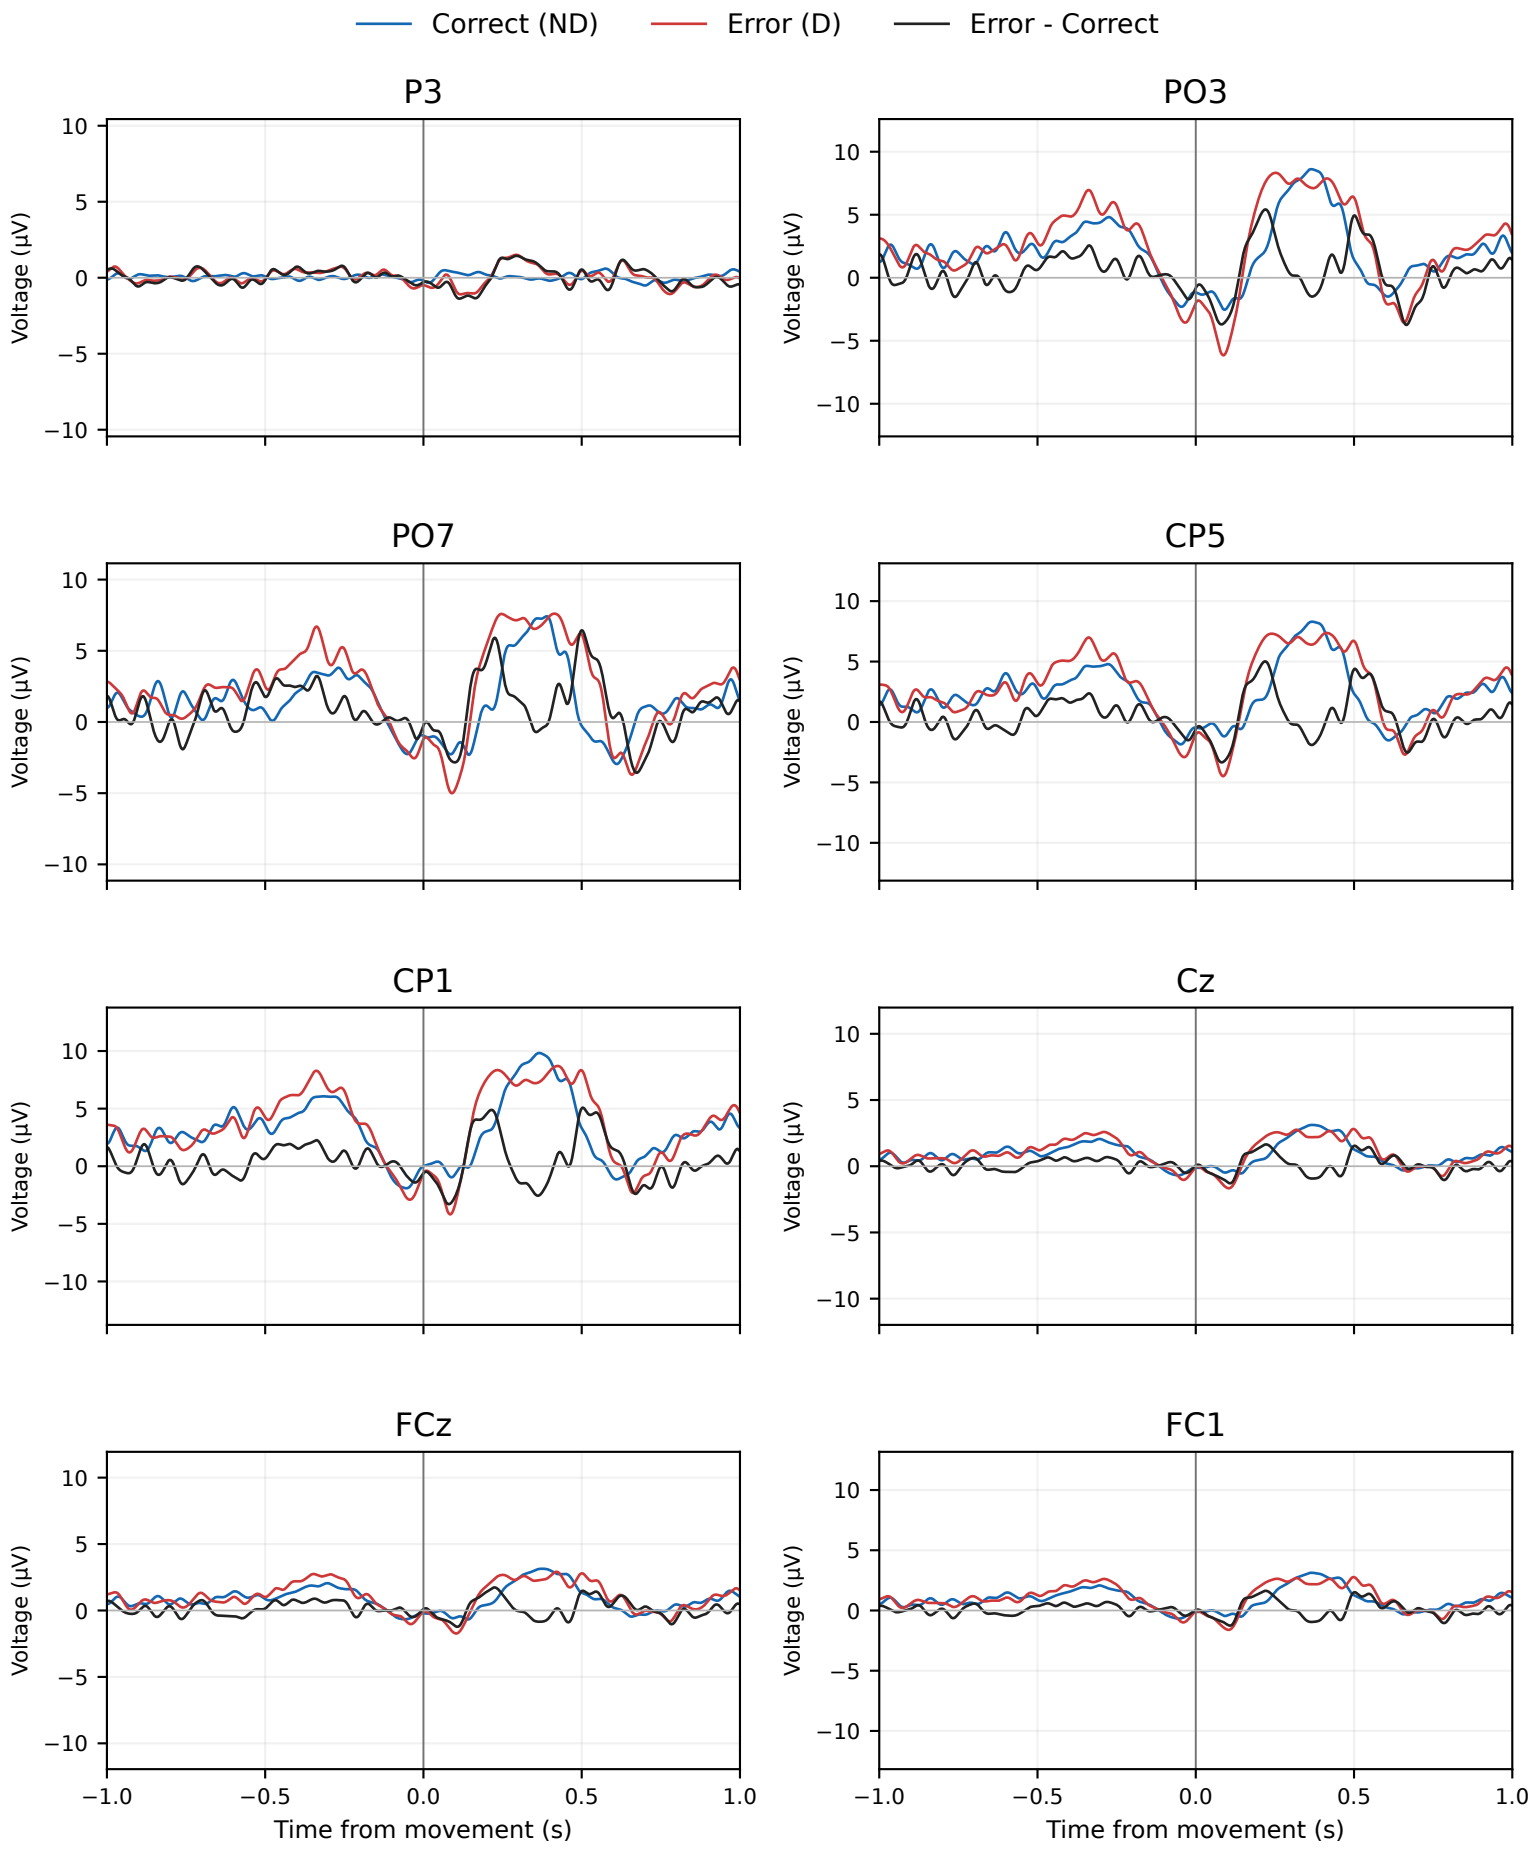

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

emo24 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=280; Error (D) n=147

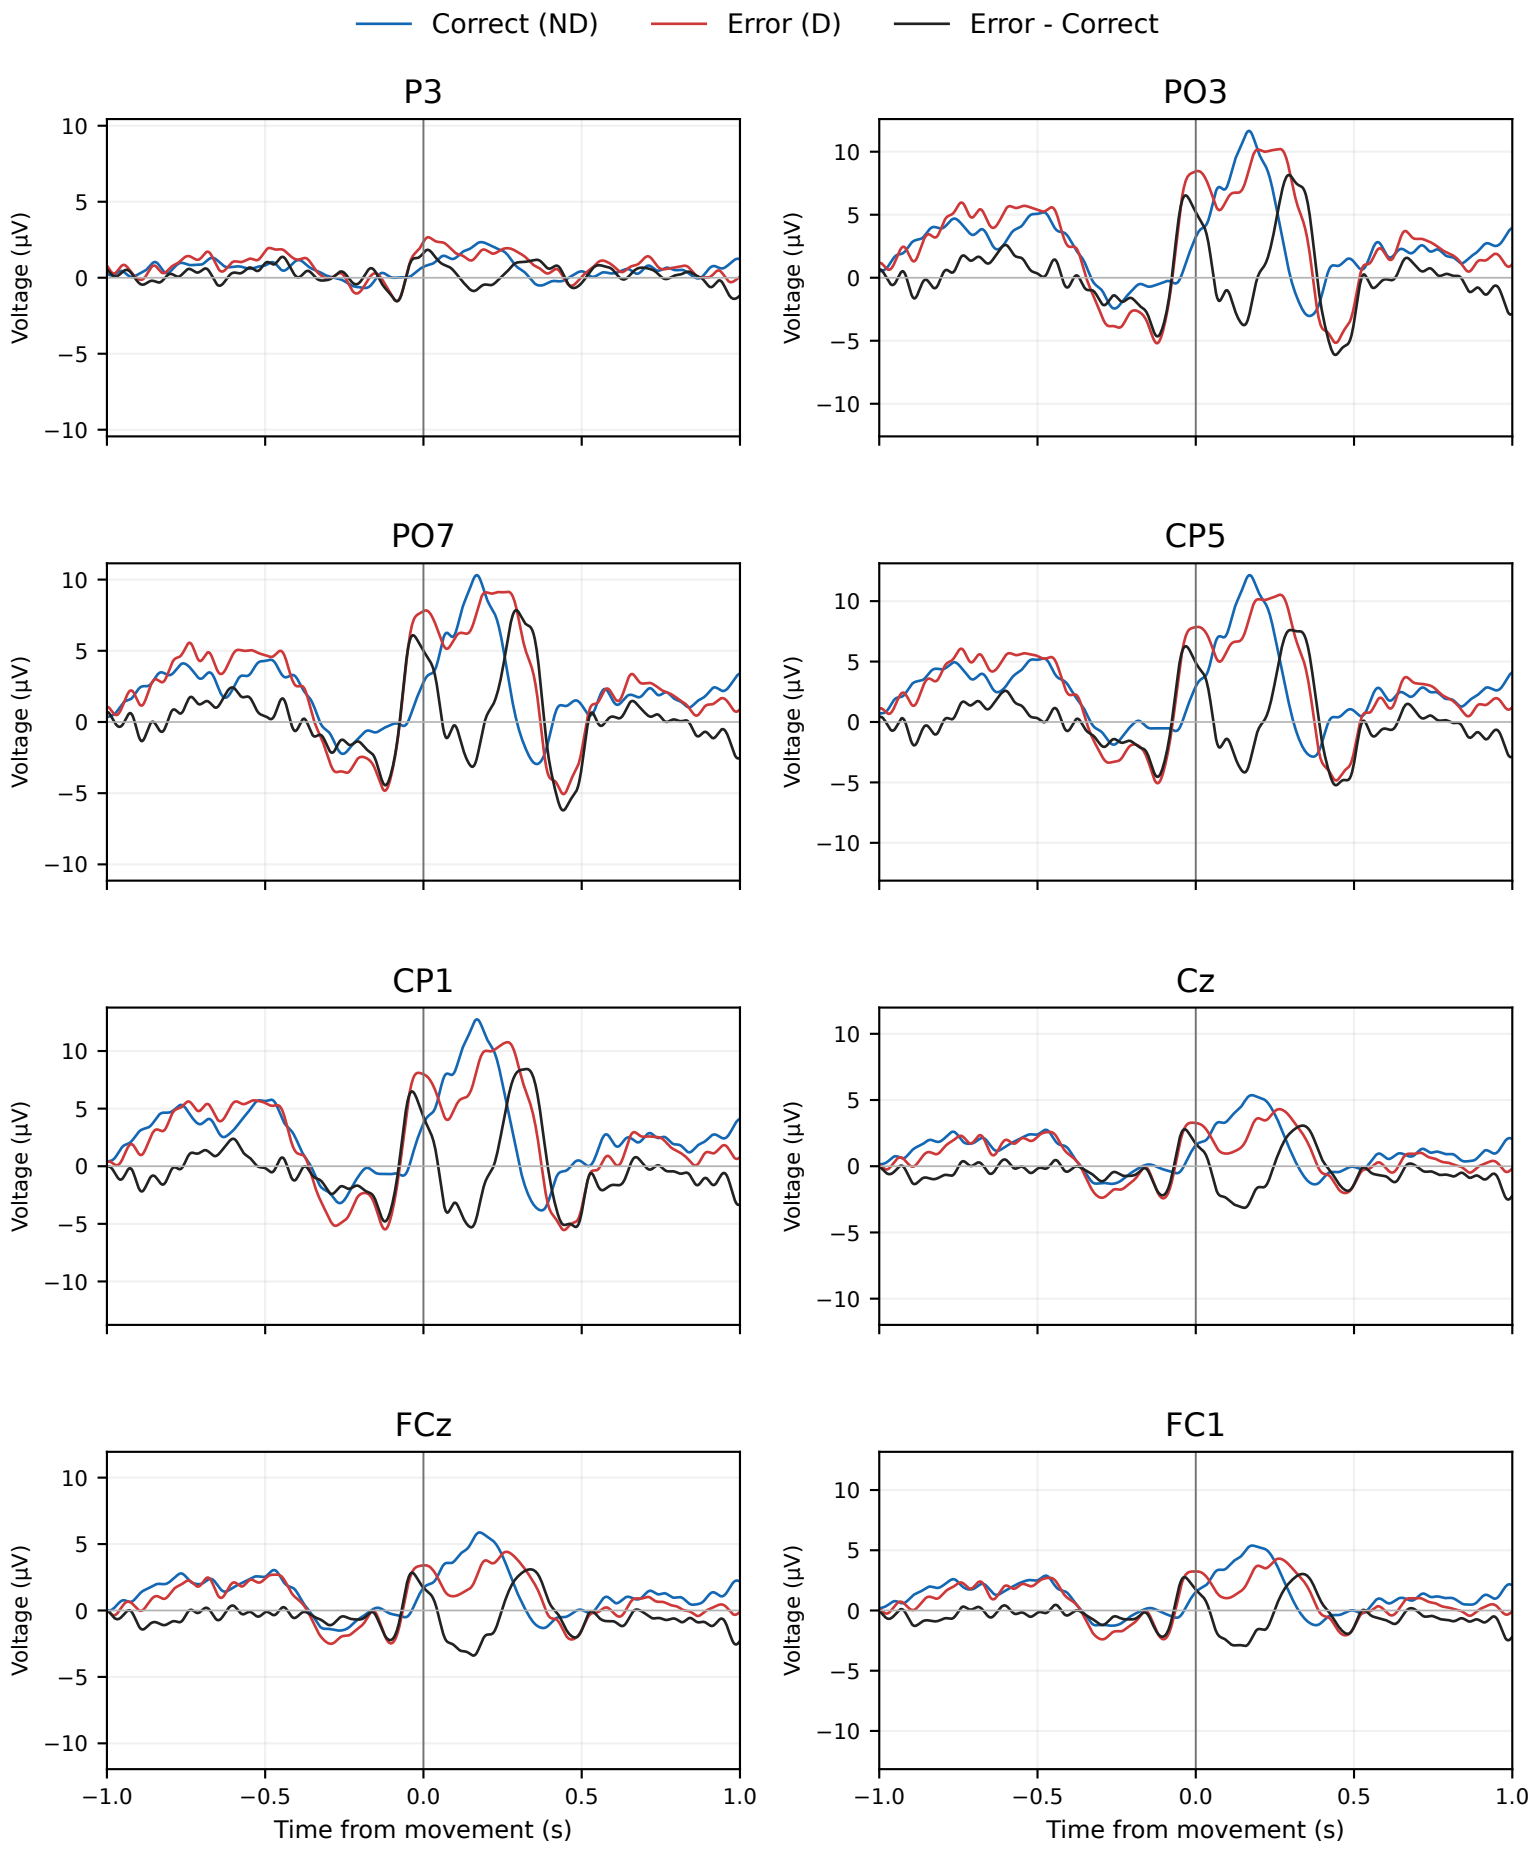

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

emo24 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=109; Error (D) n=65

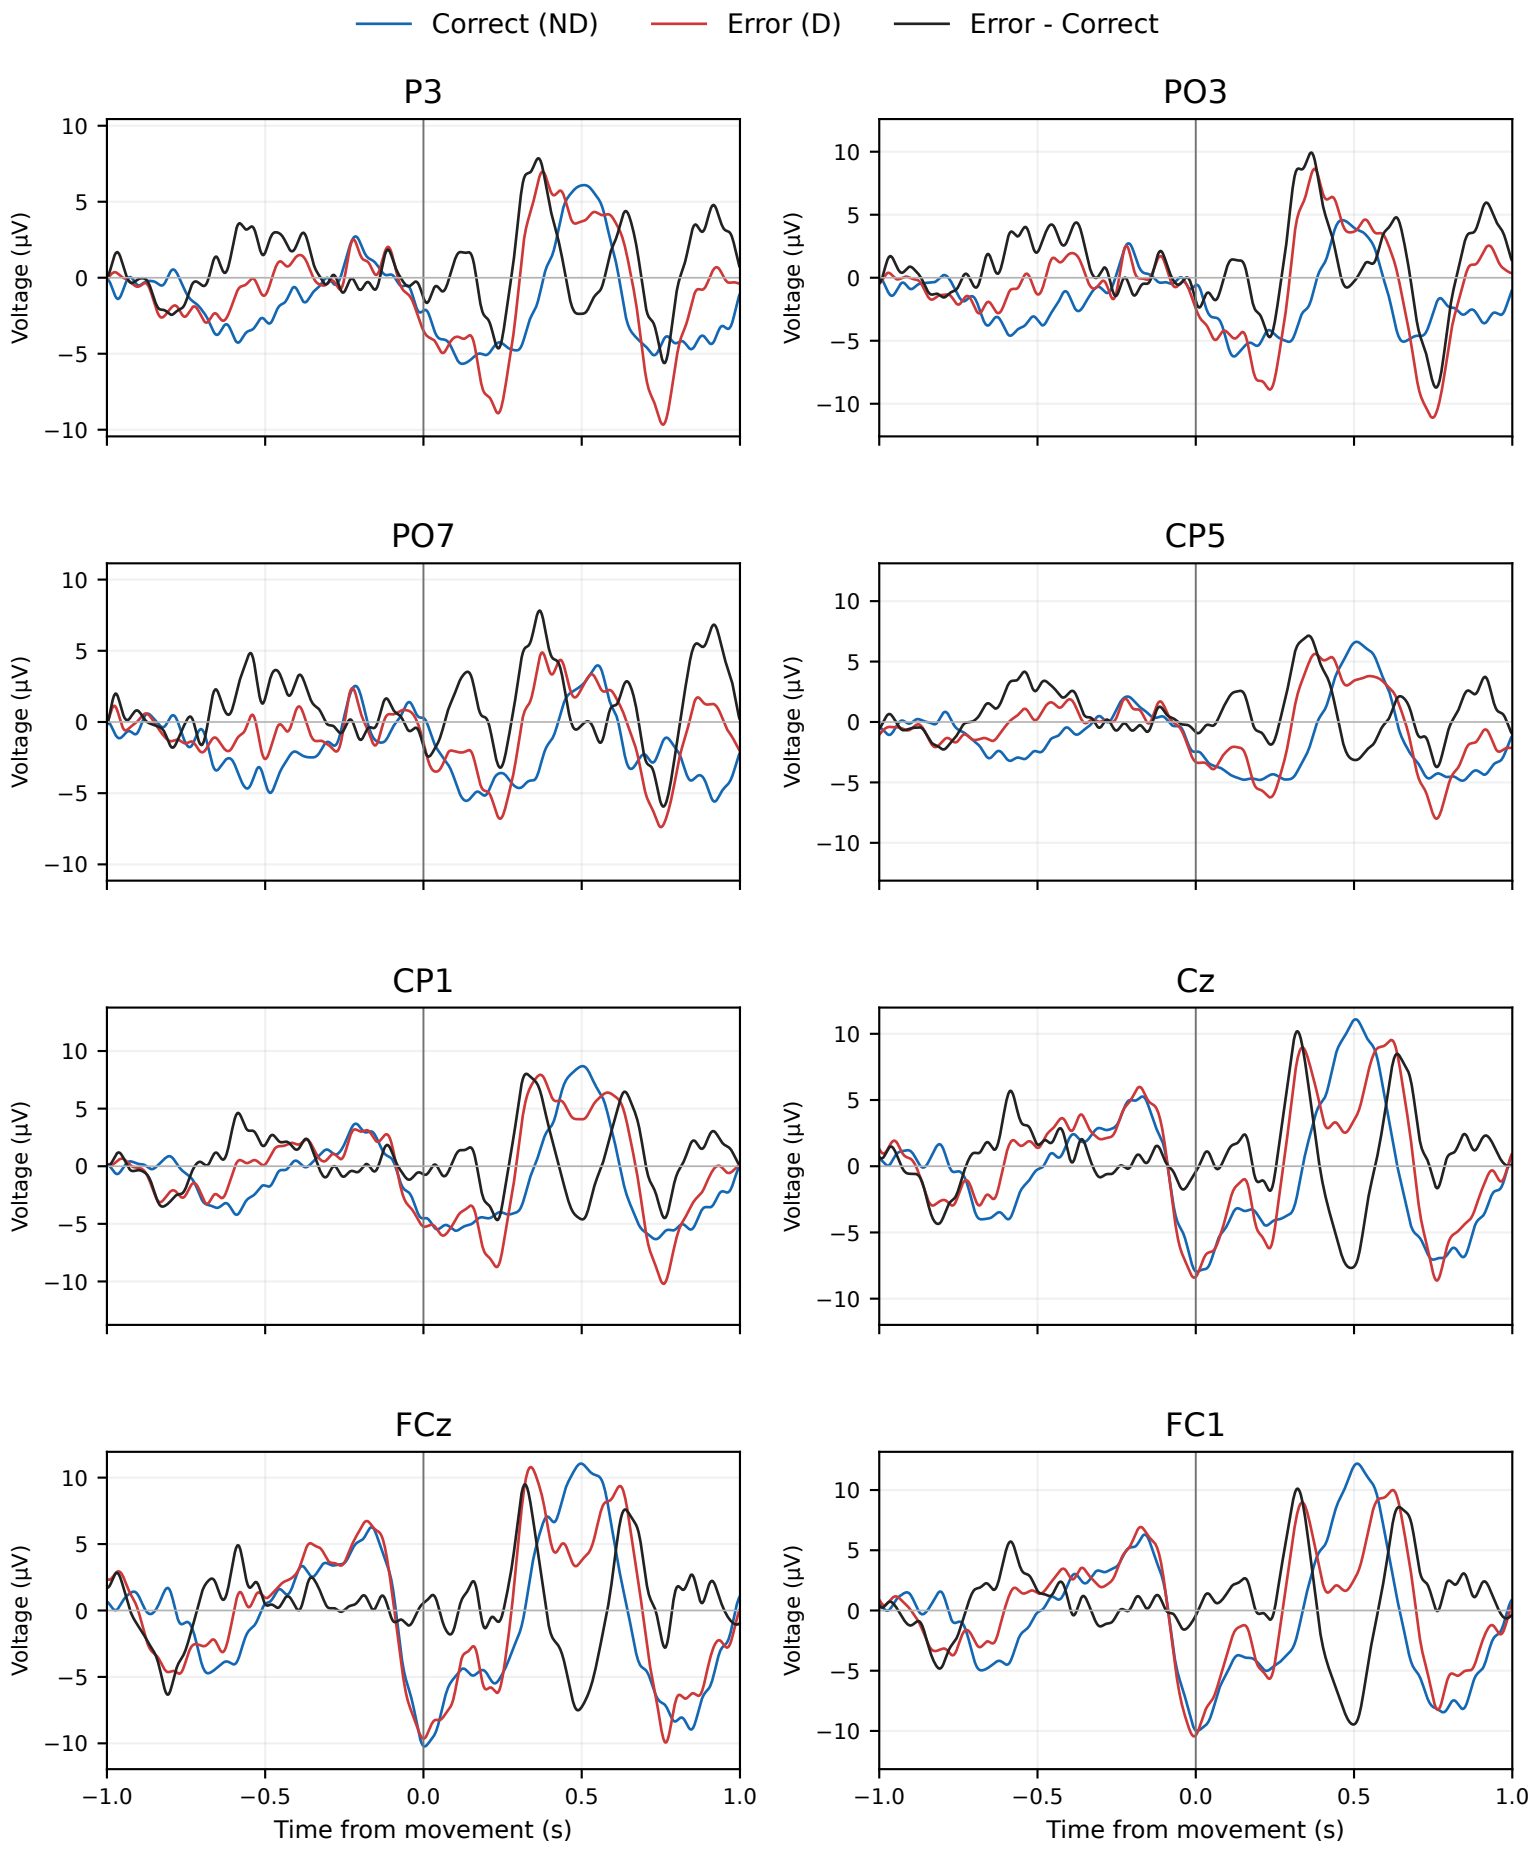

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

fbo09 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=326; Error (D) n=161

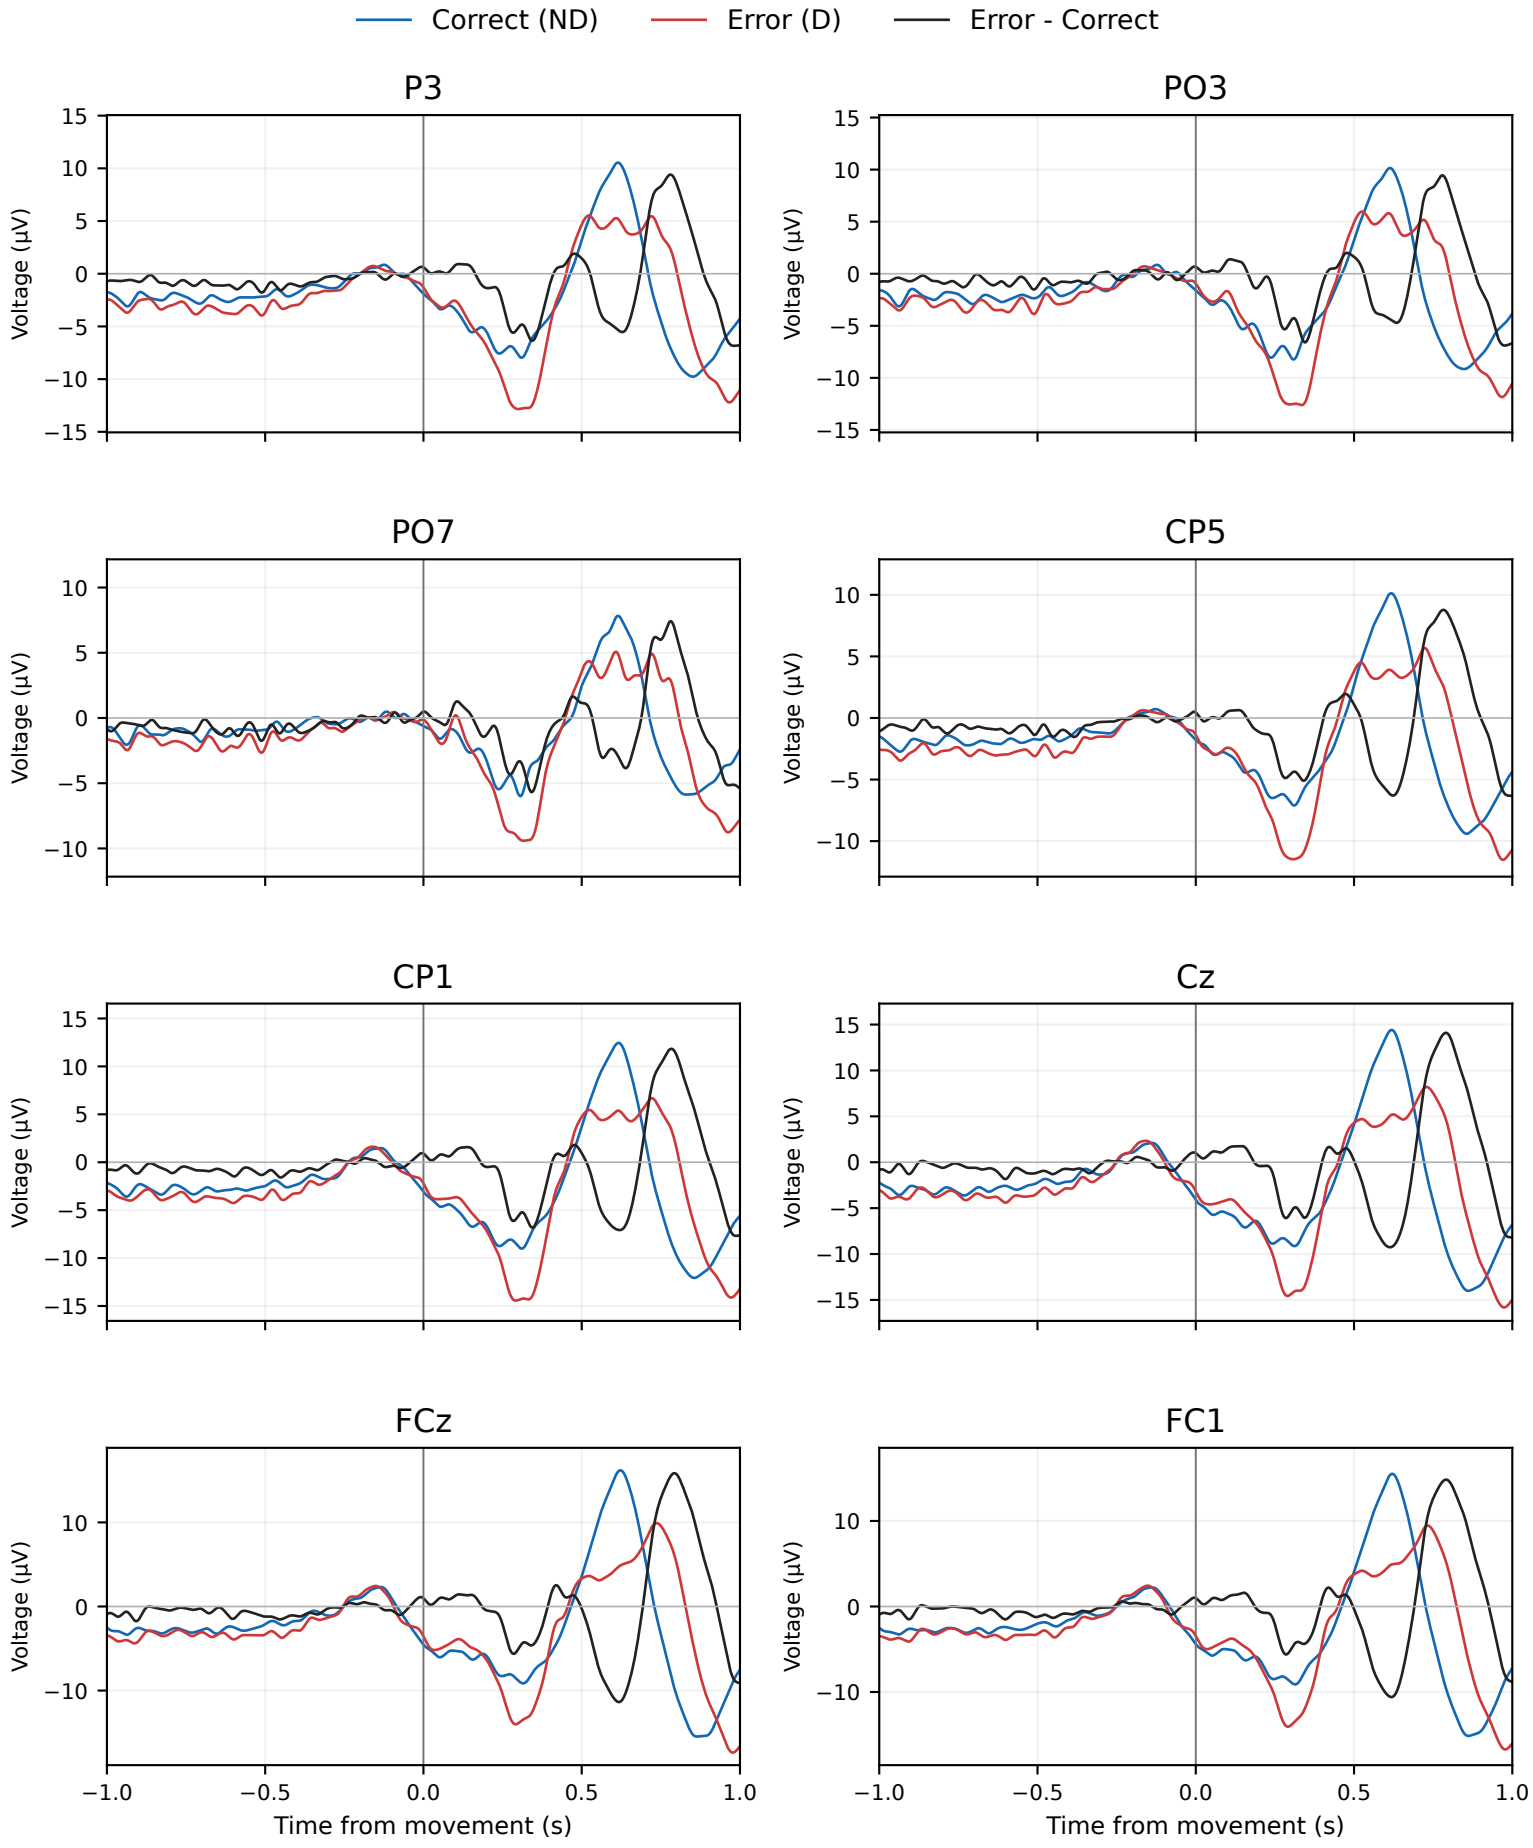

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

fbo09 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=316; Error (D) n=162

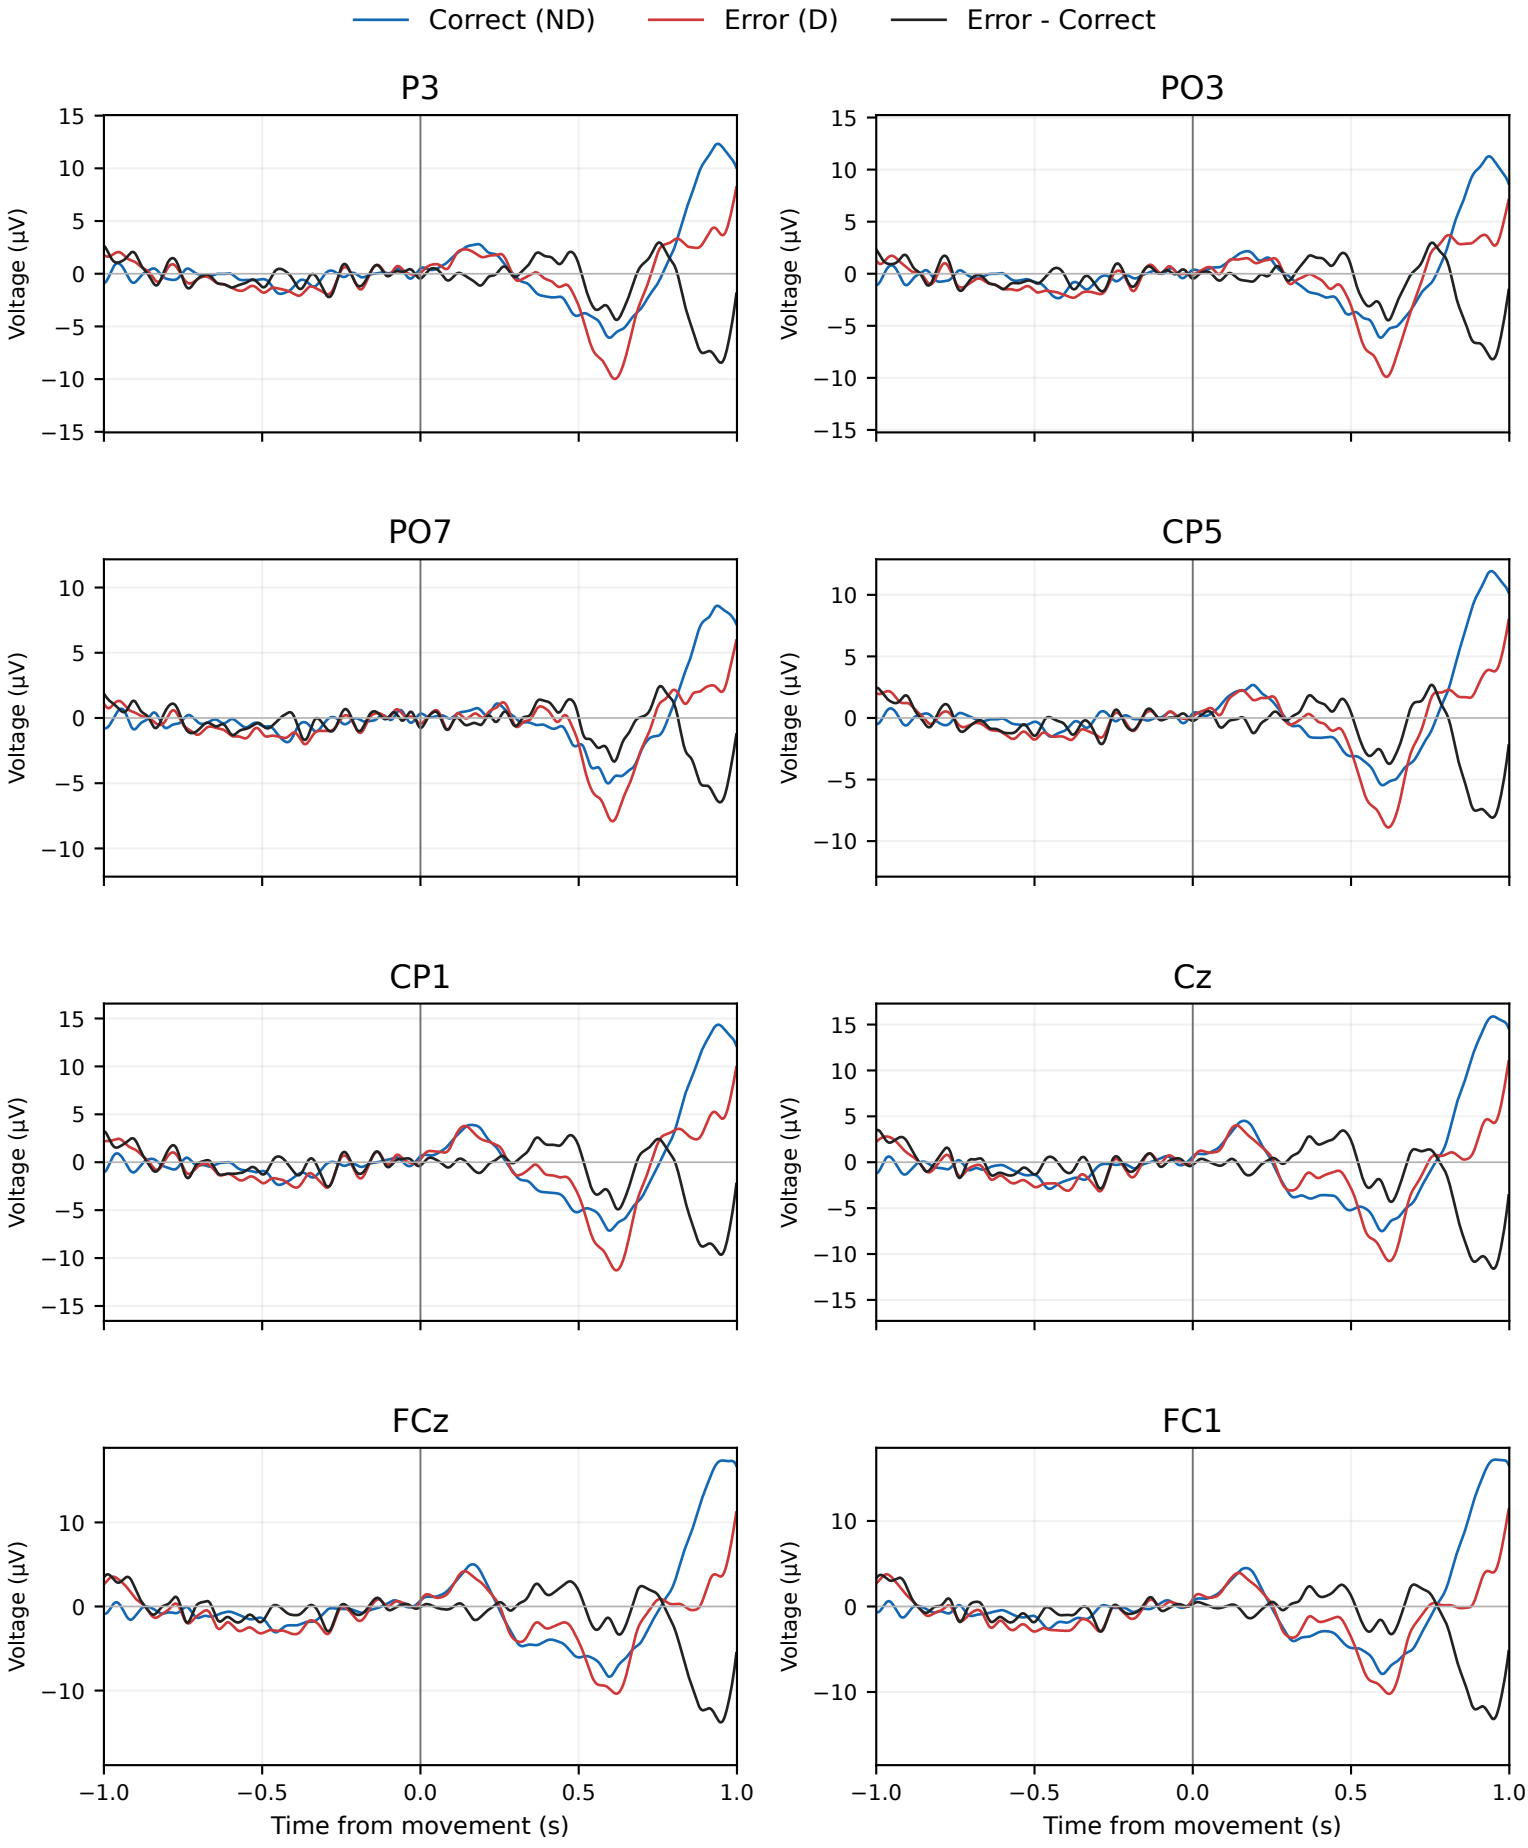

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

fbo09 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=245; Error (D) n=122

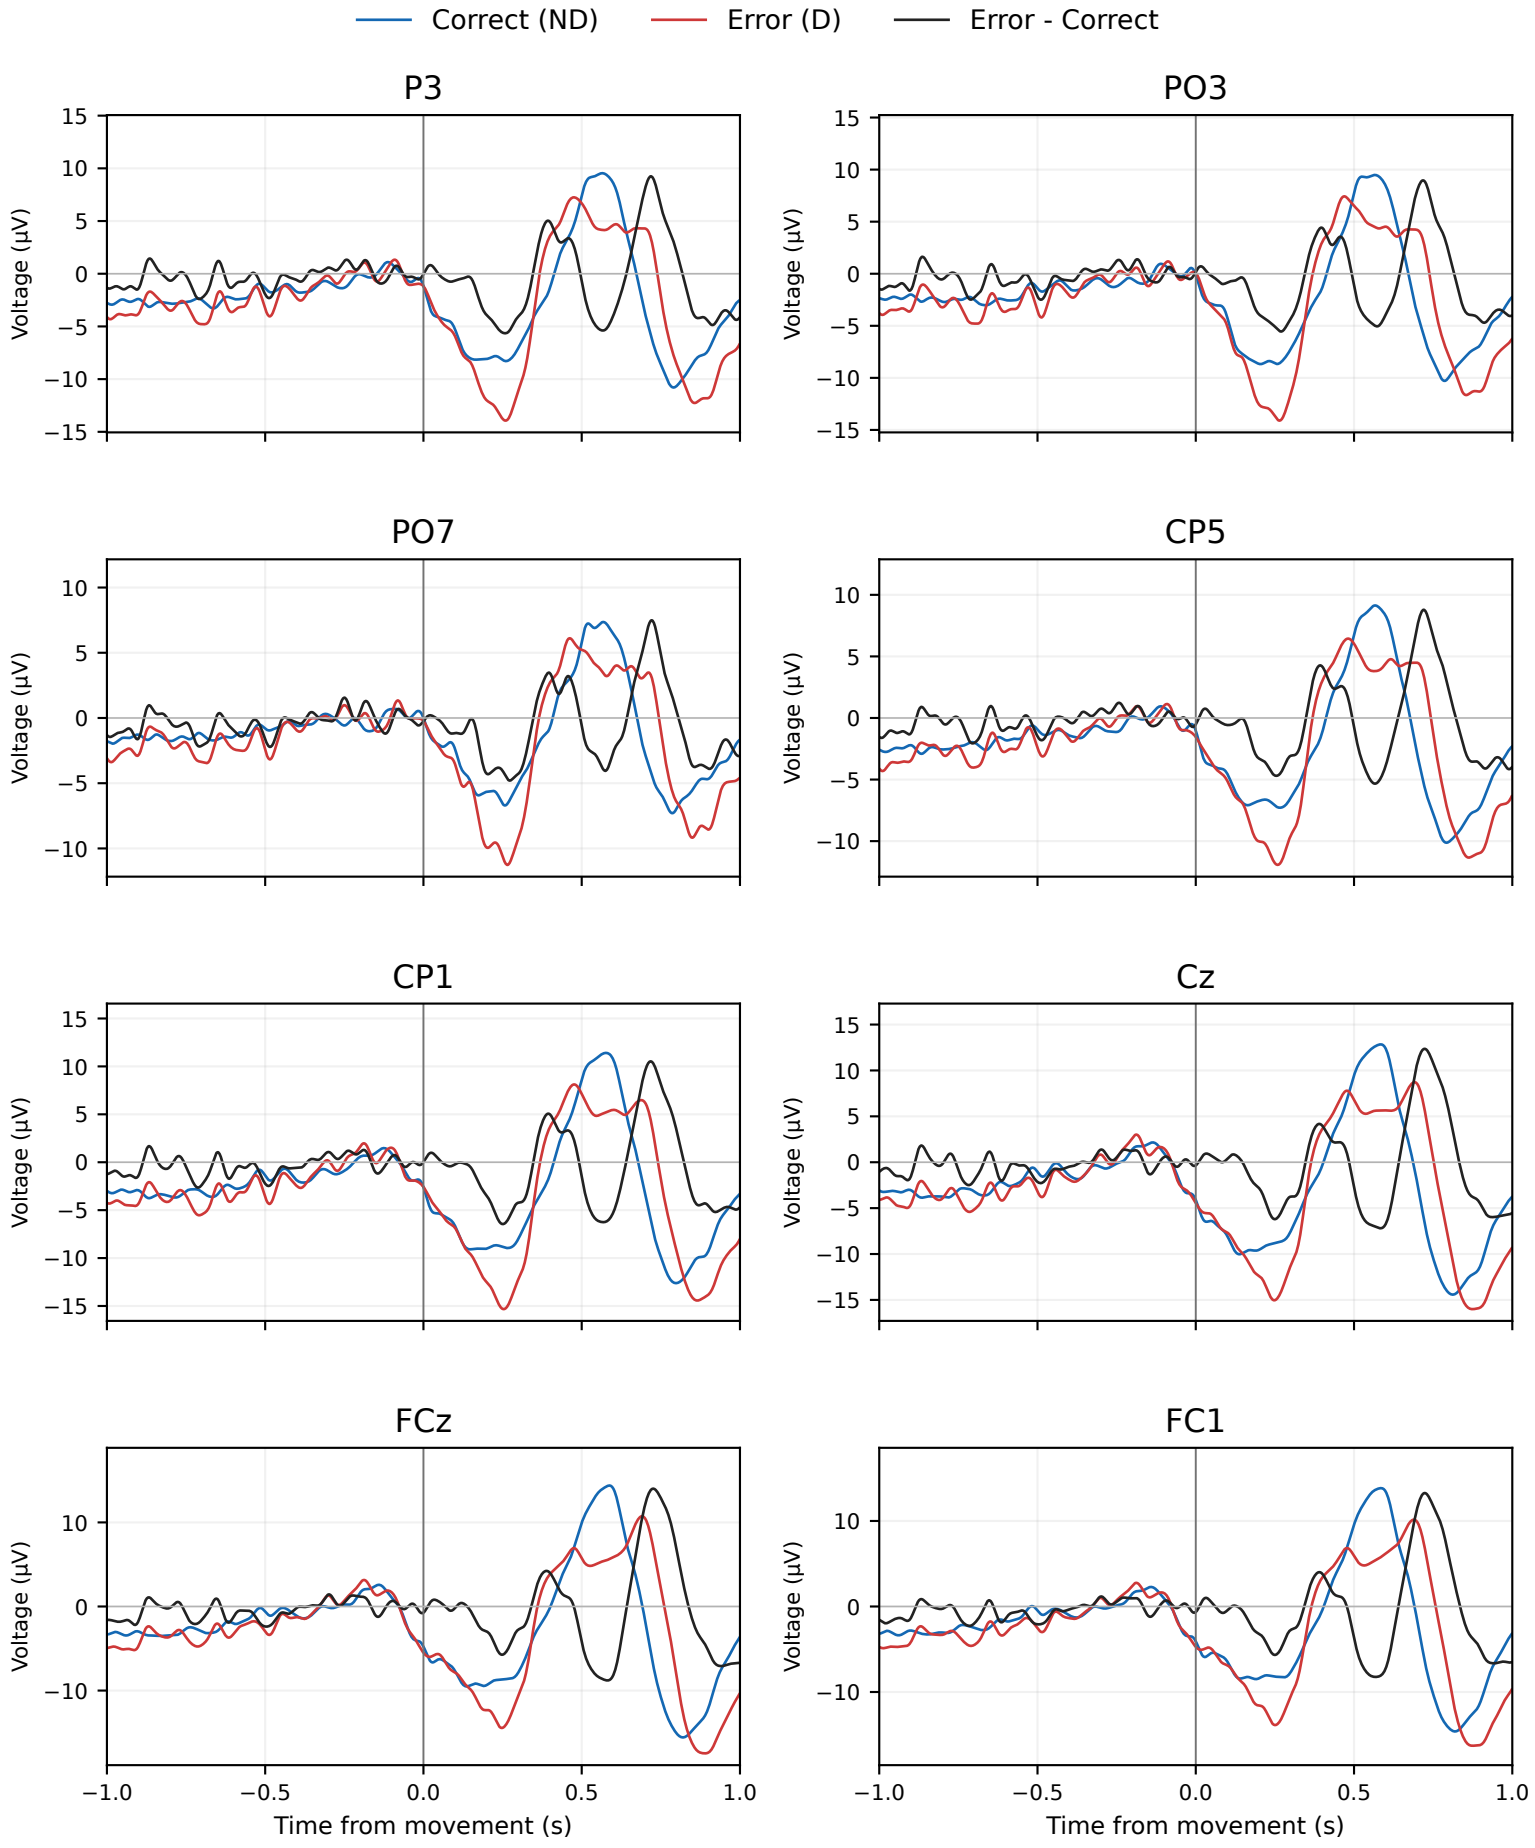

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

gba12 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=316; Error (D) n=160

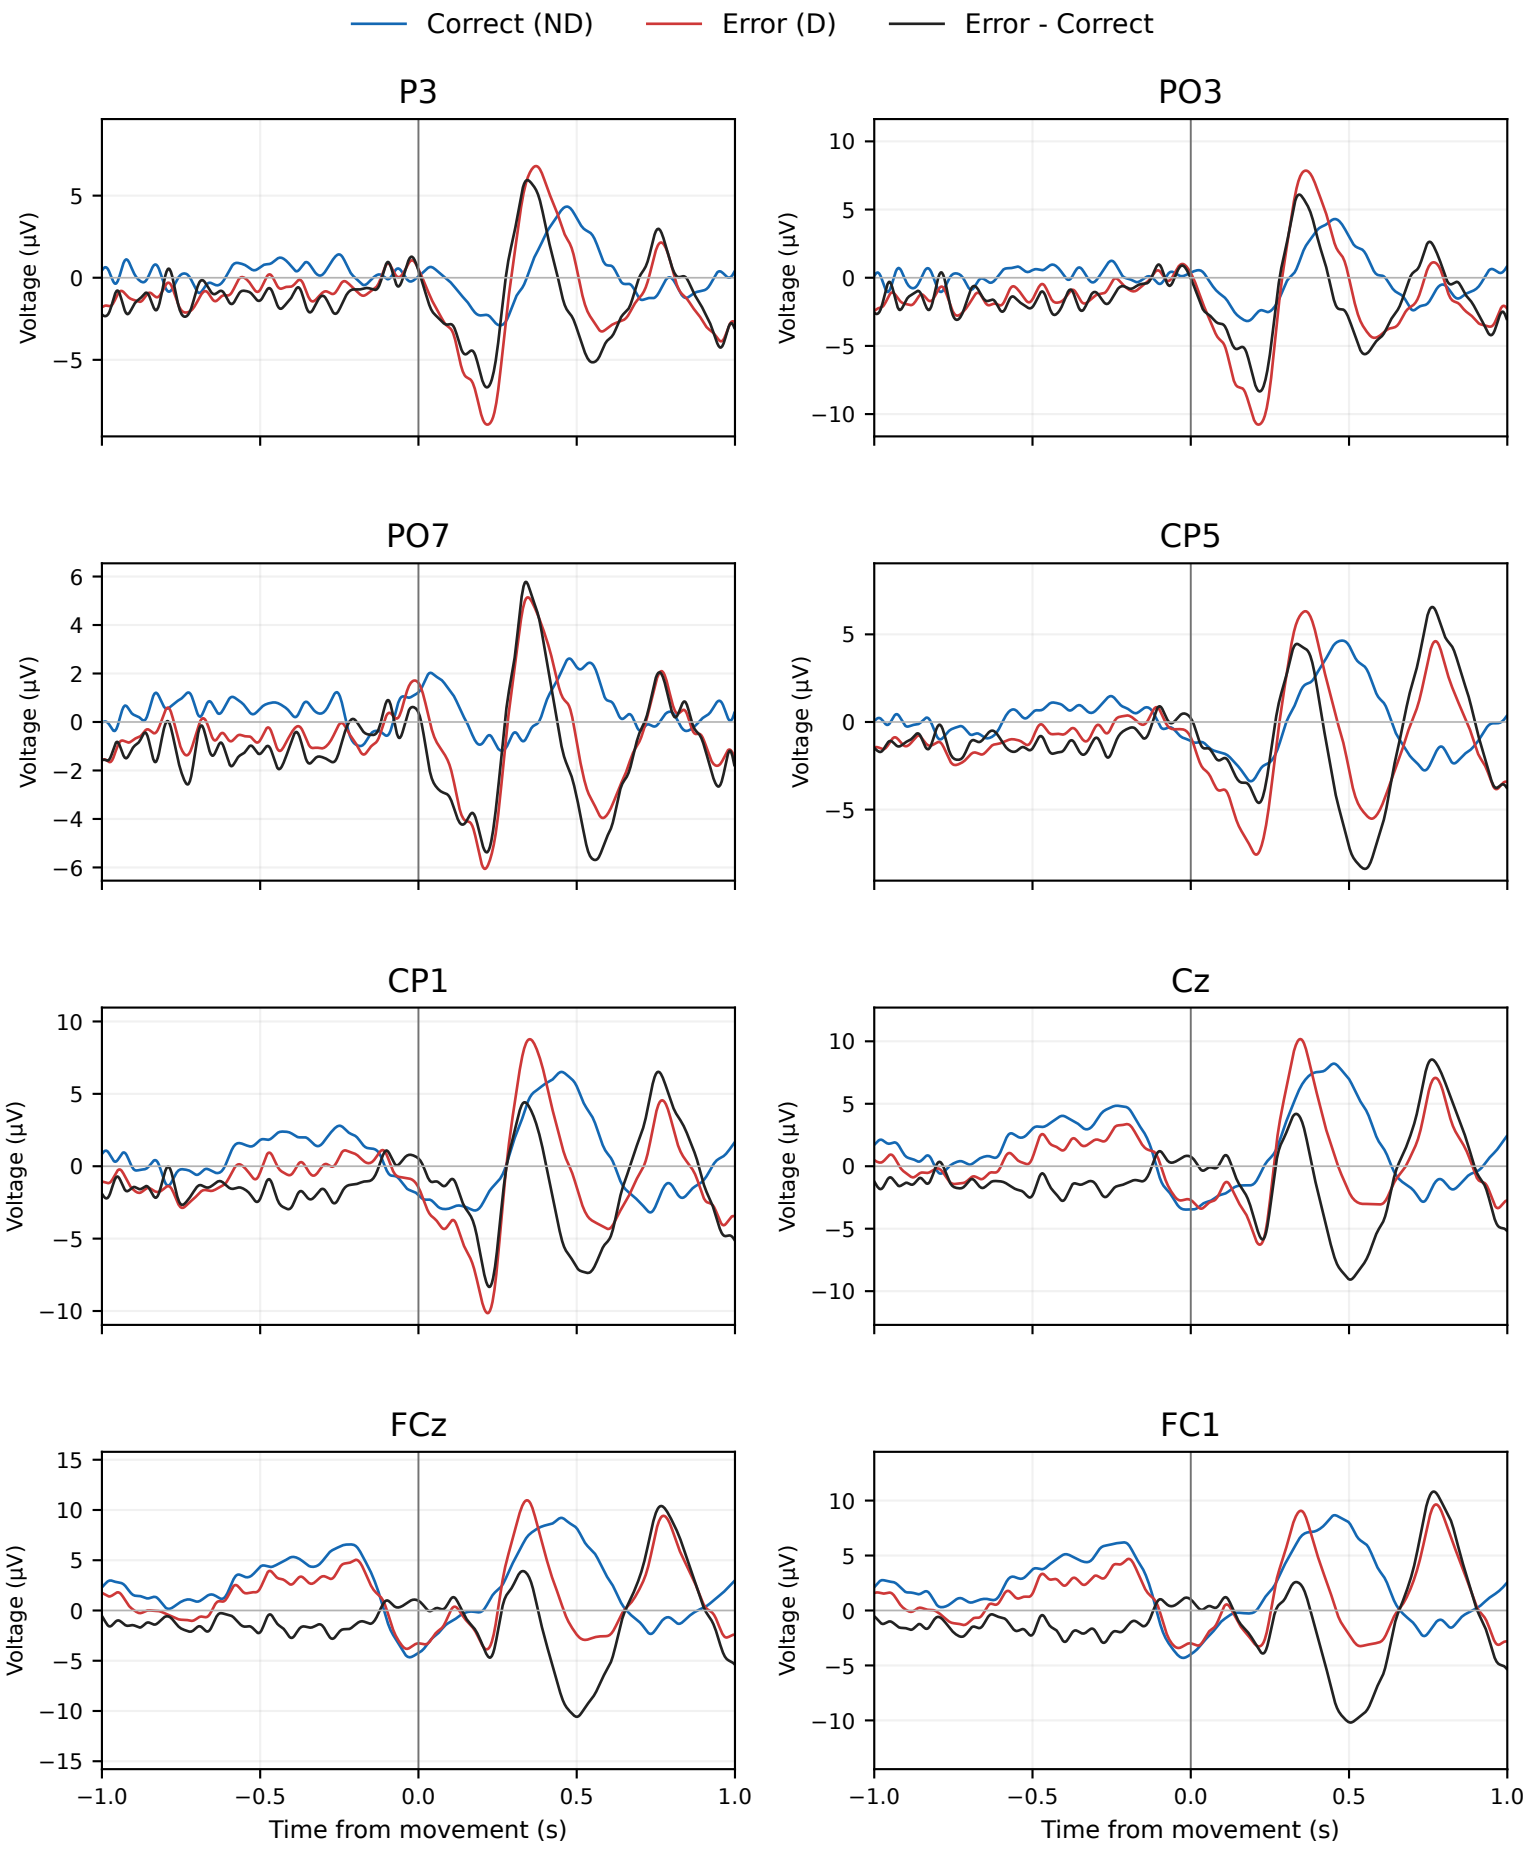

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

gba12 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=322; Error (D) n=169

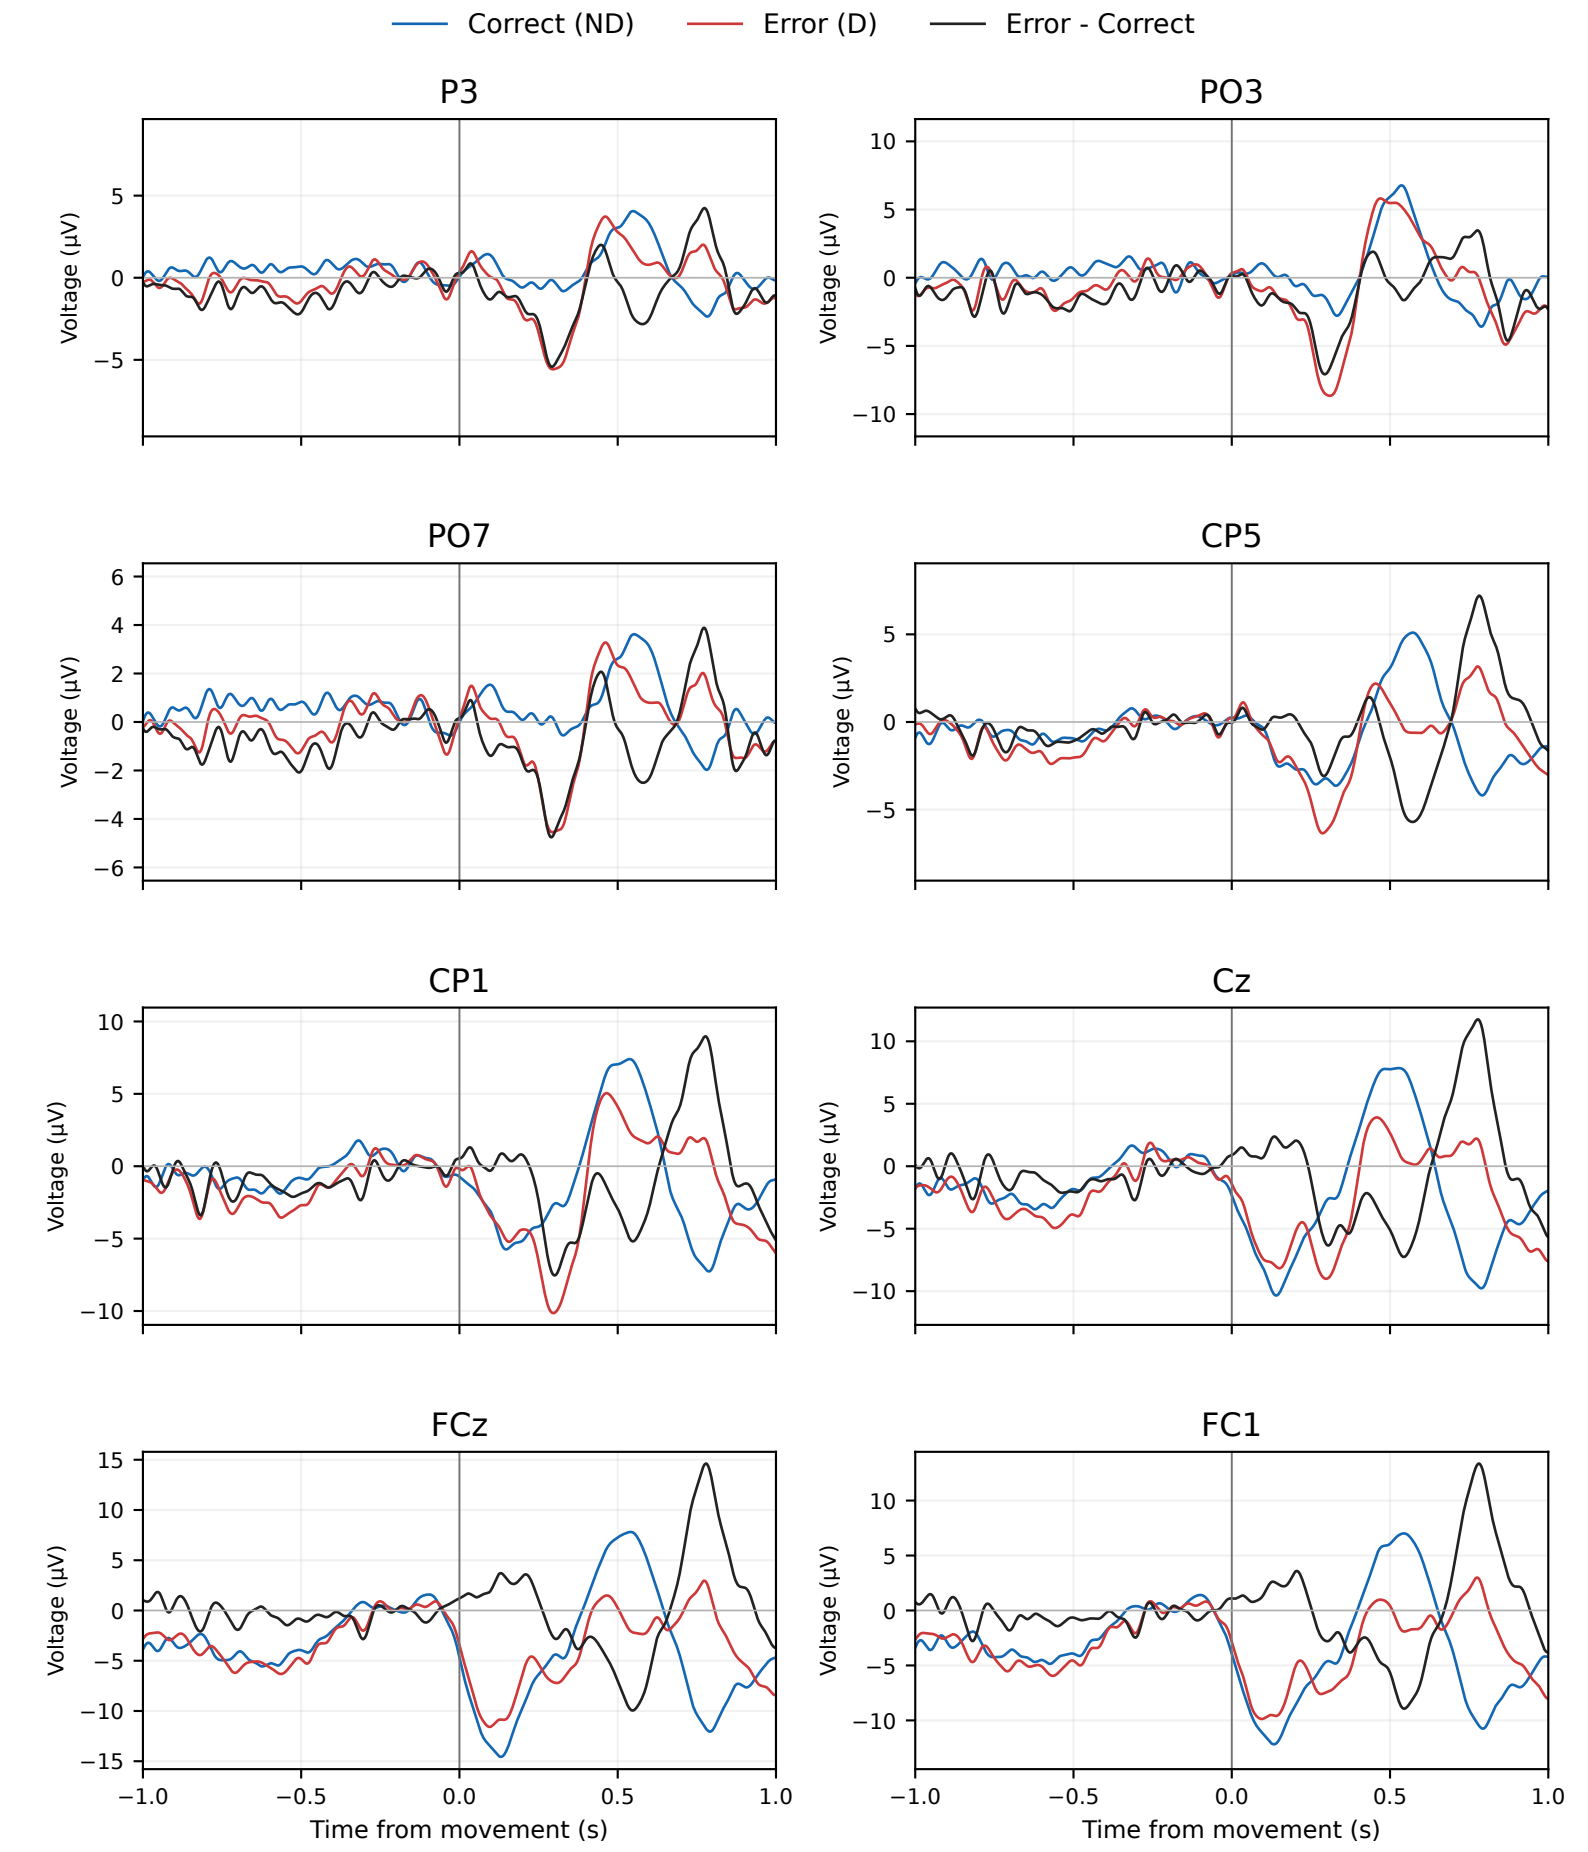

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

gba12 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=299; Error (D) n=148

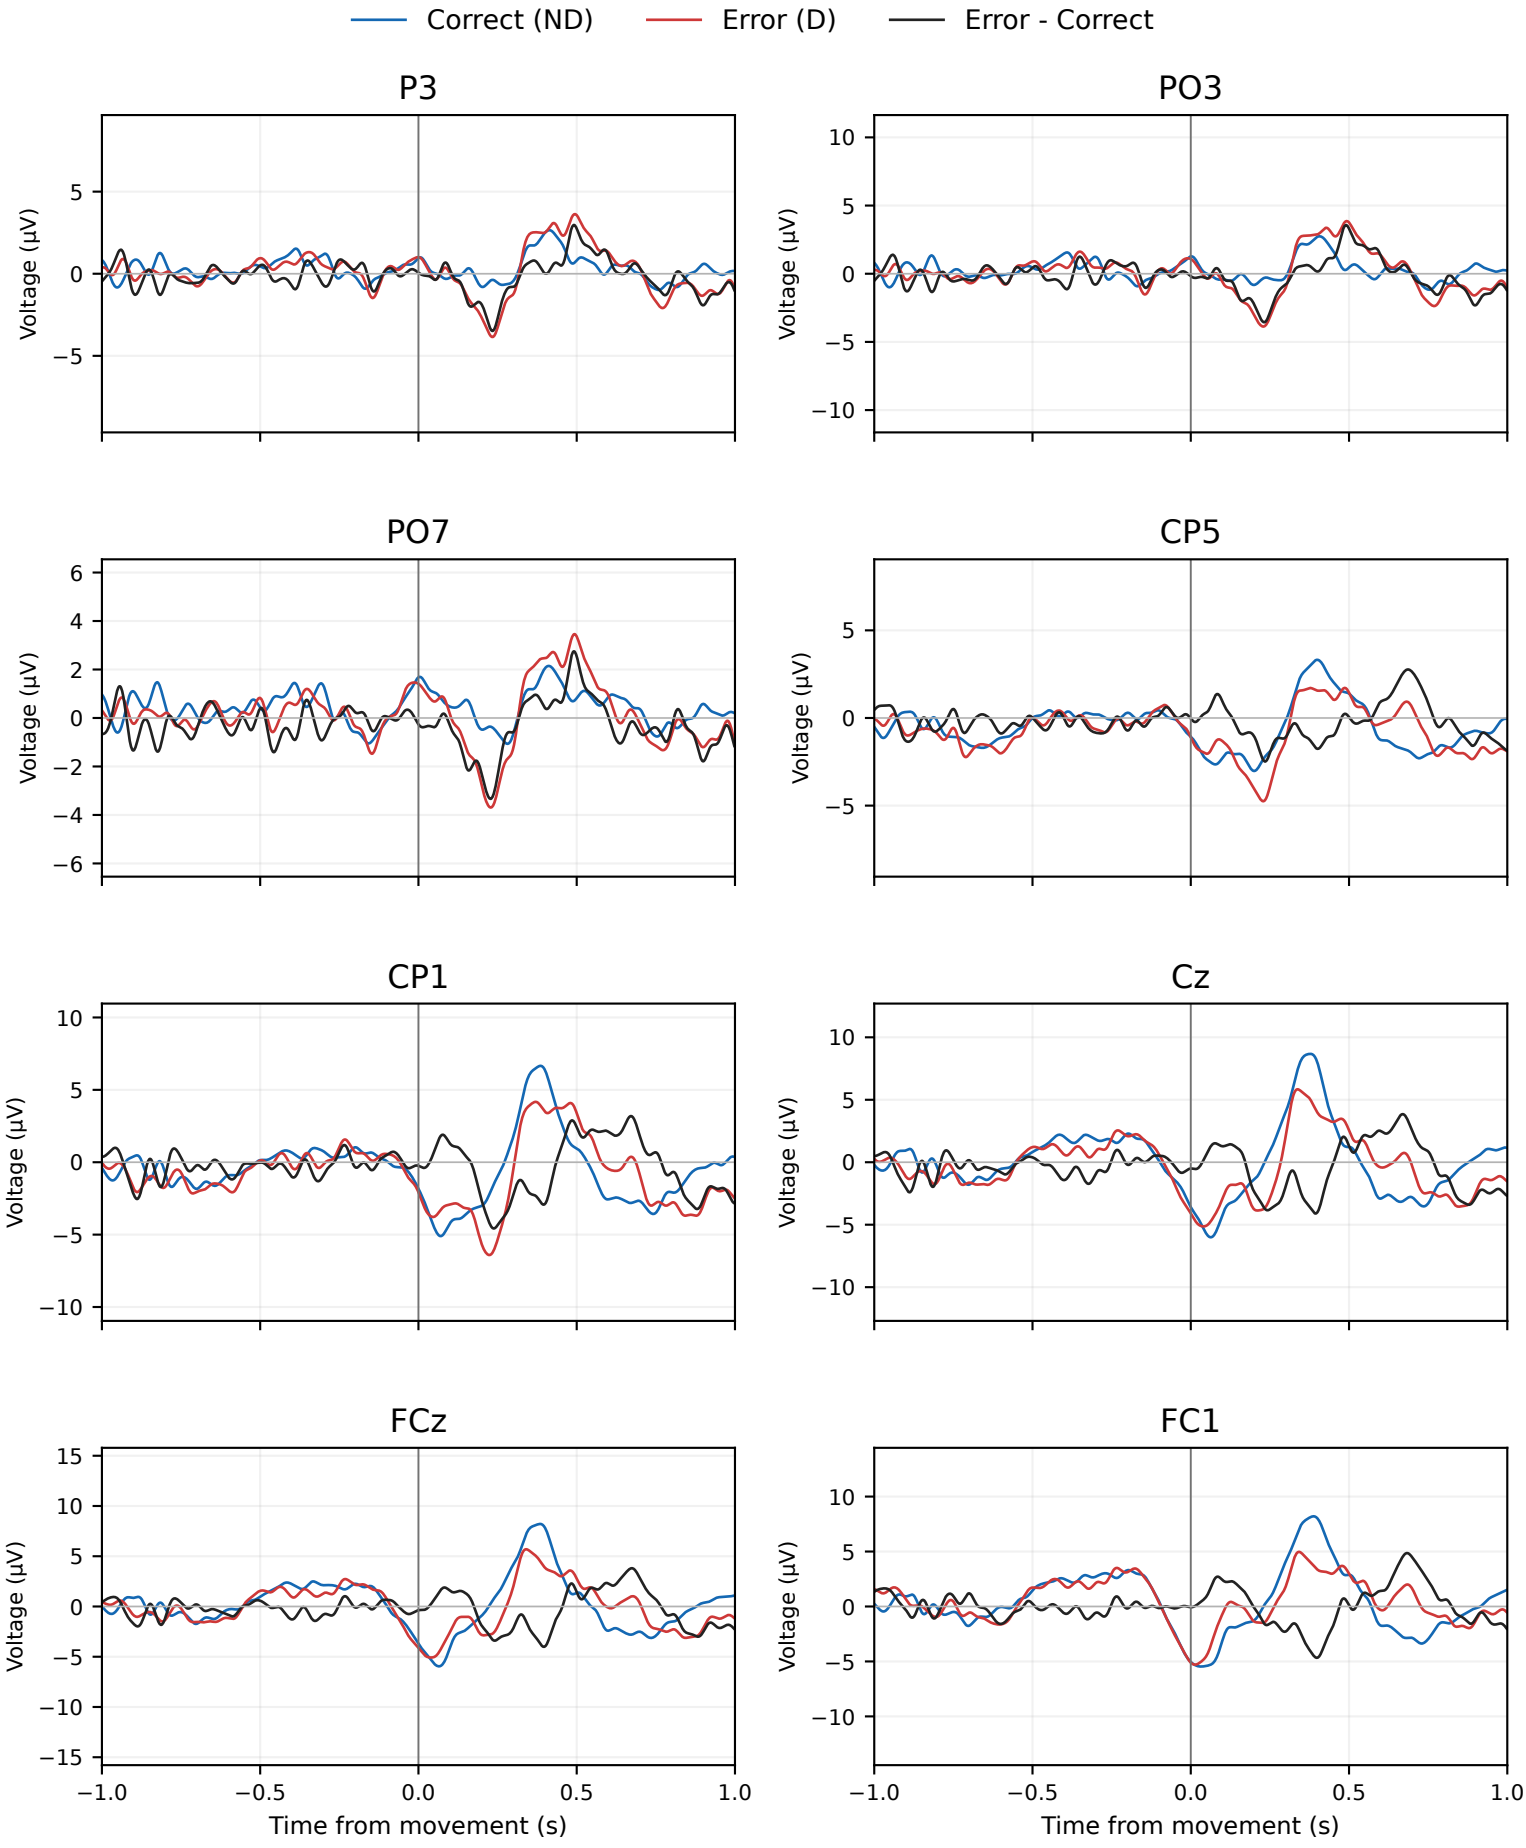

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

gcr27 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=354; Error (D) n=132

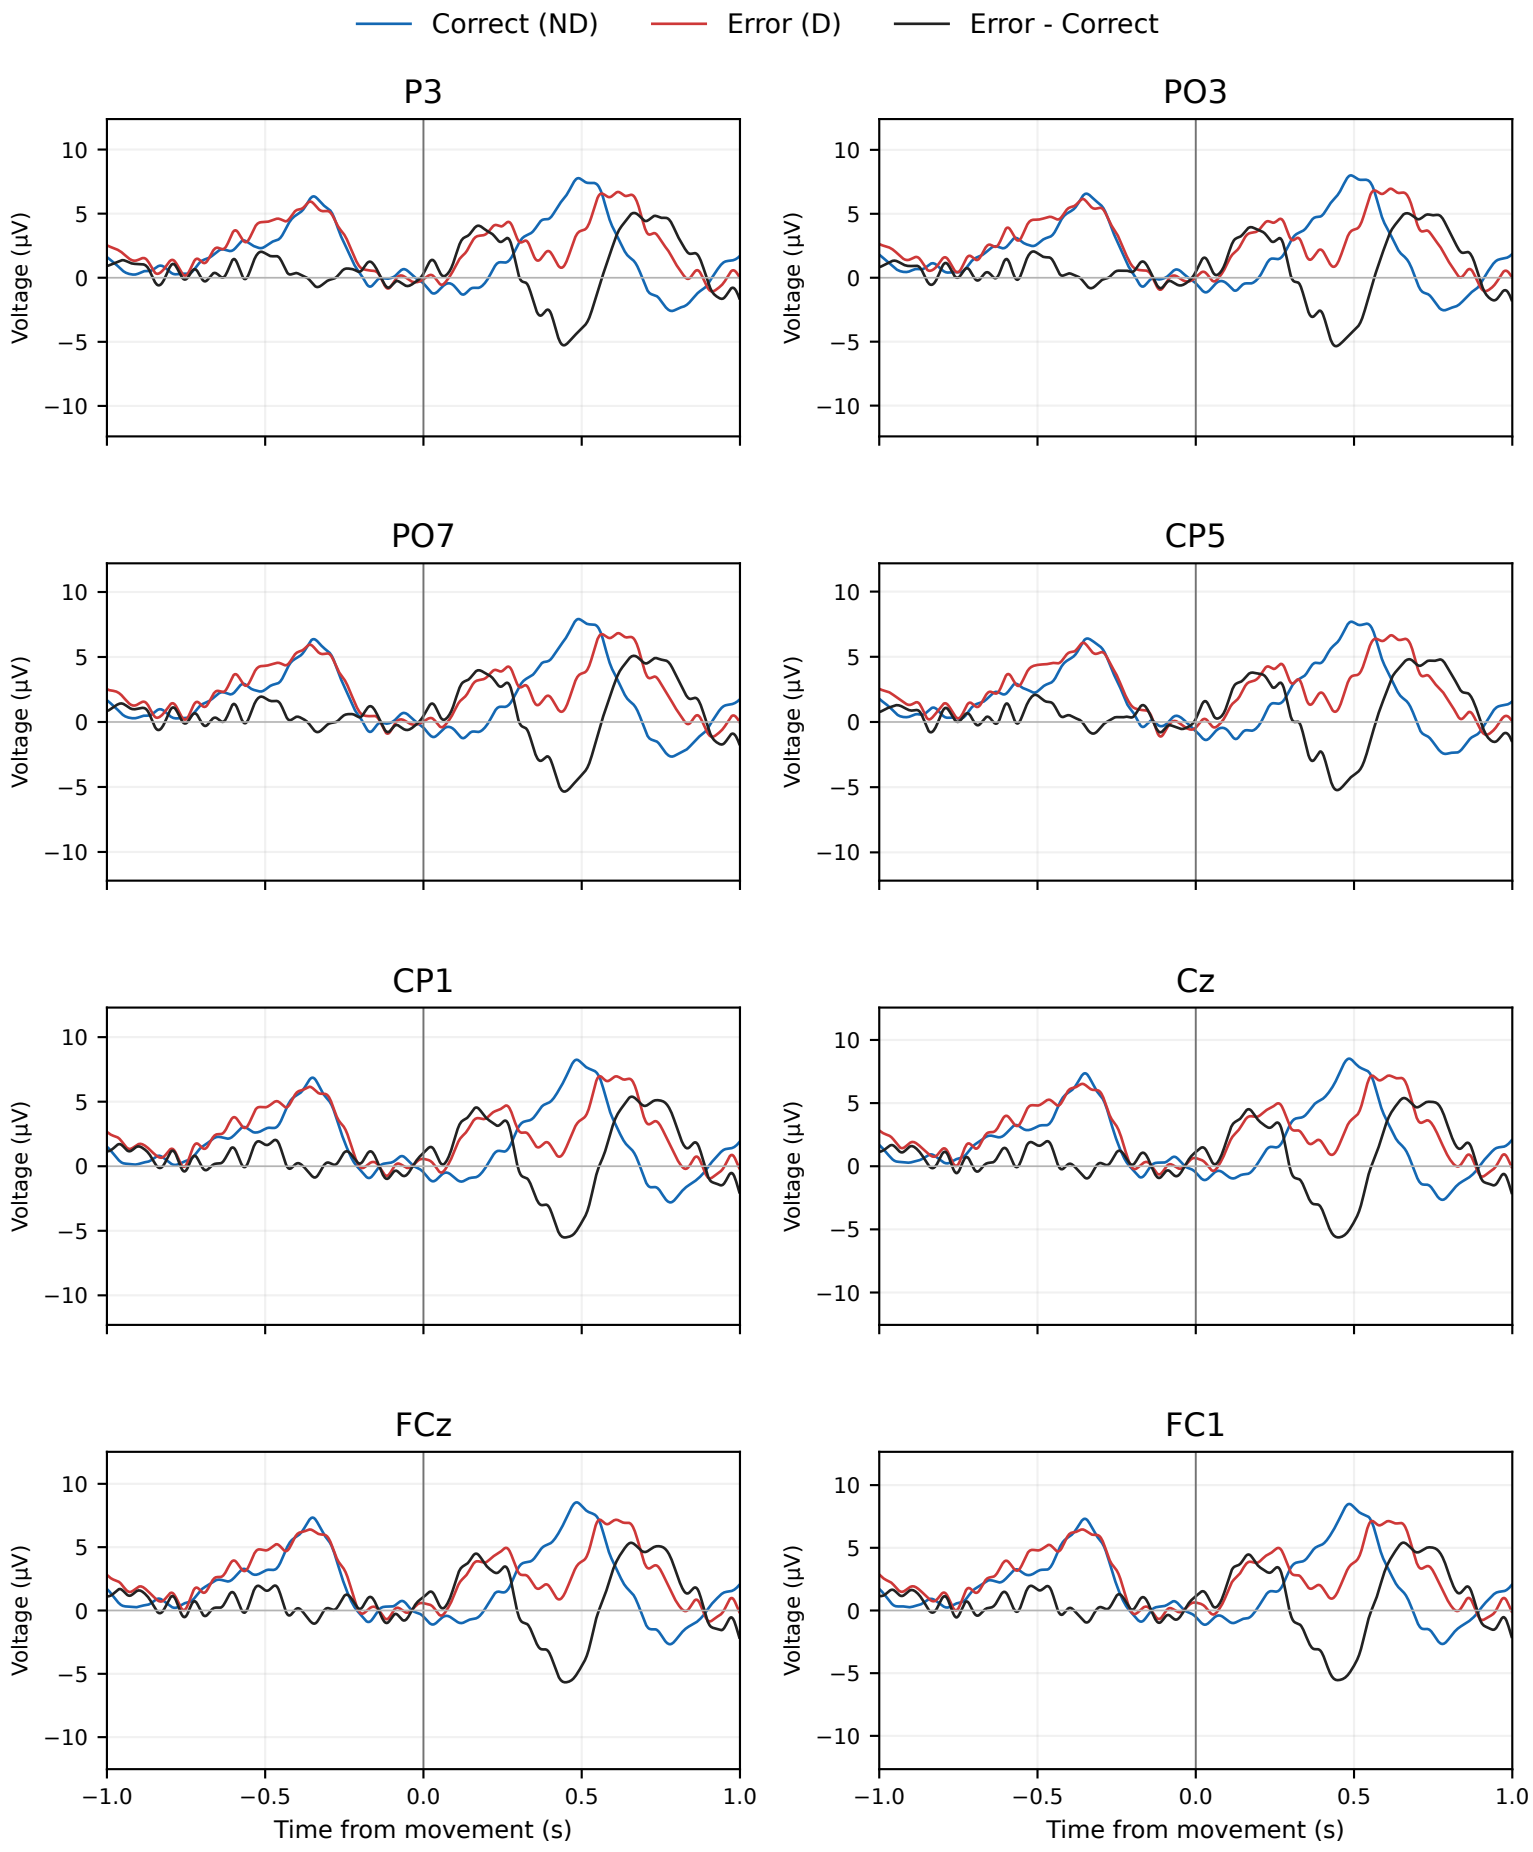

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

gcr27 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=329; Error (D) n=159

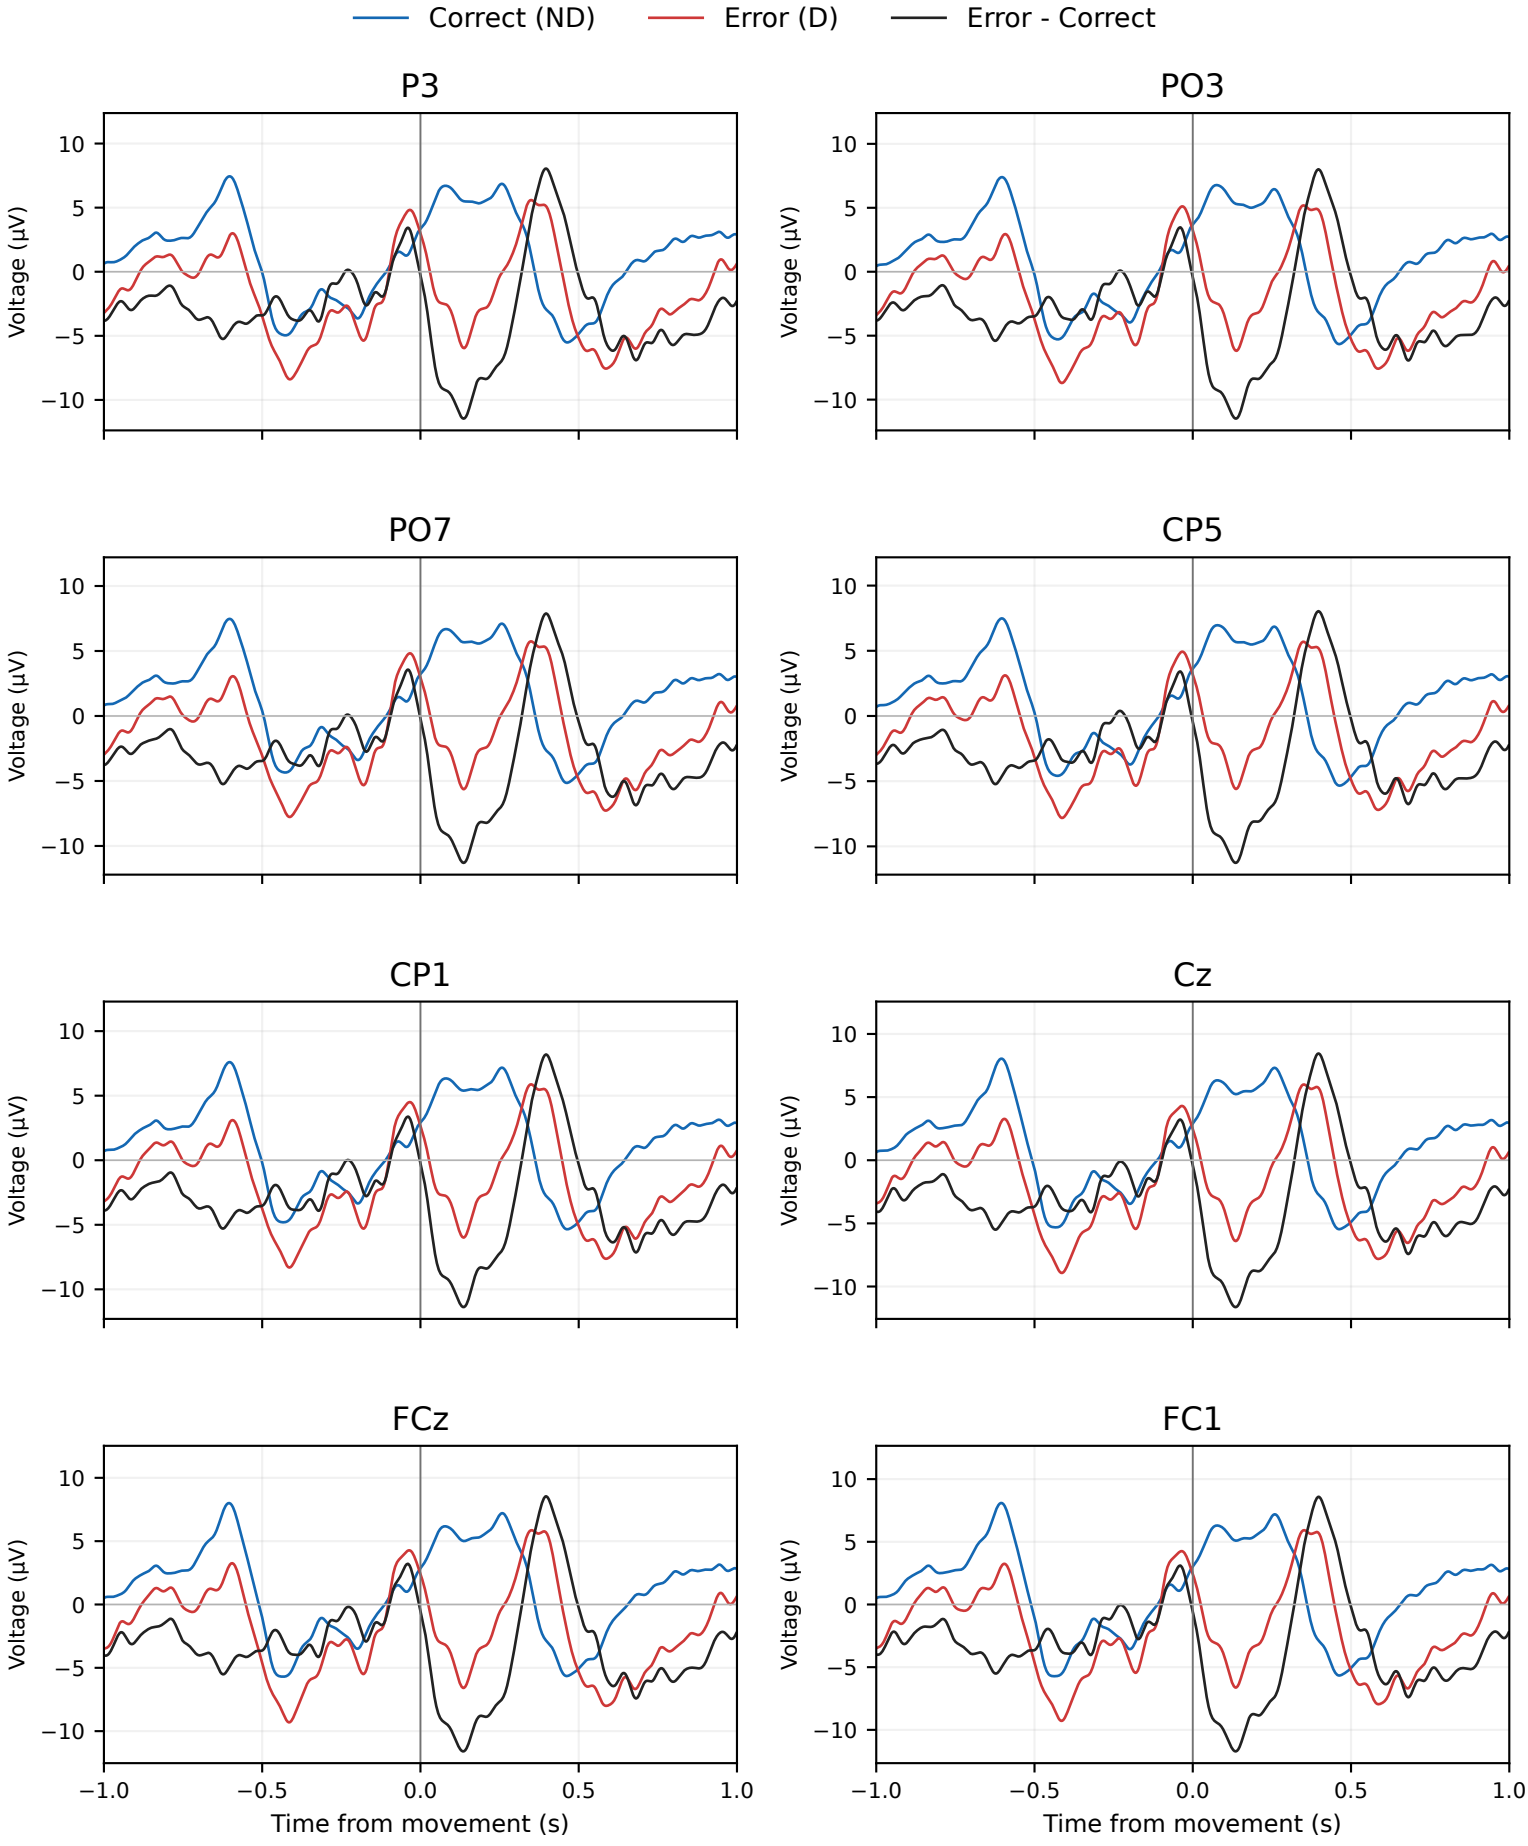

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

gcr27 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=308; Error (D) n=157

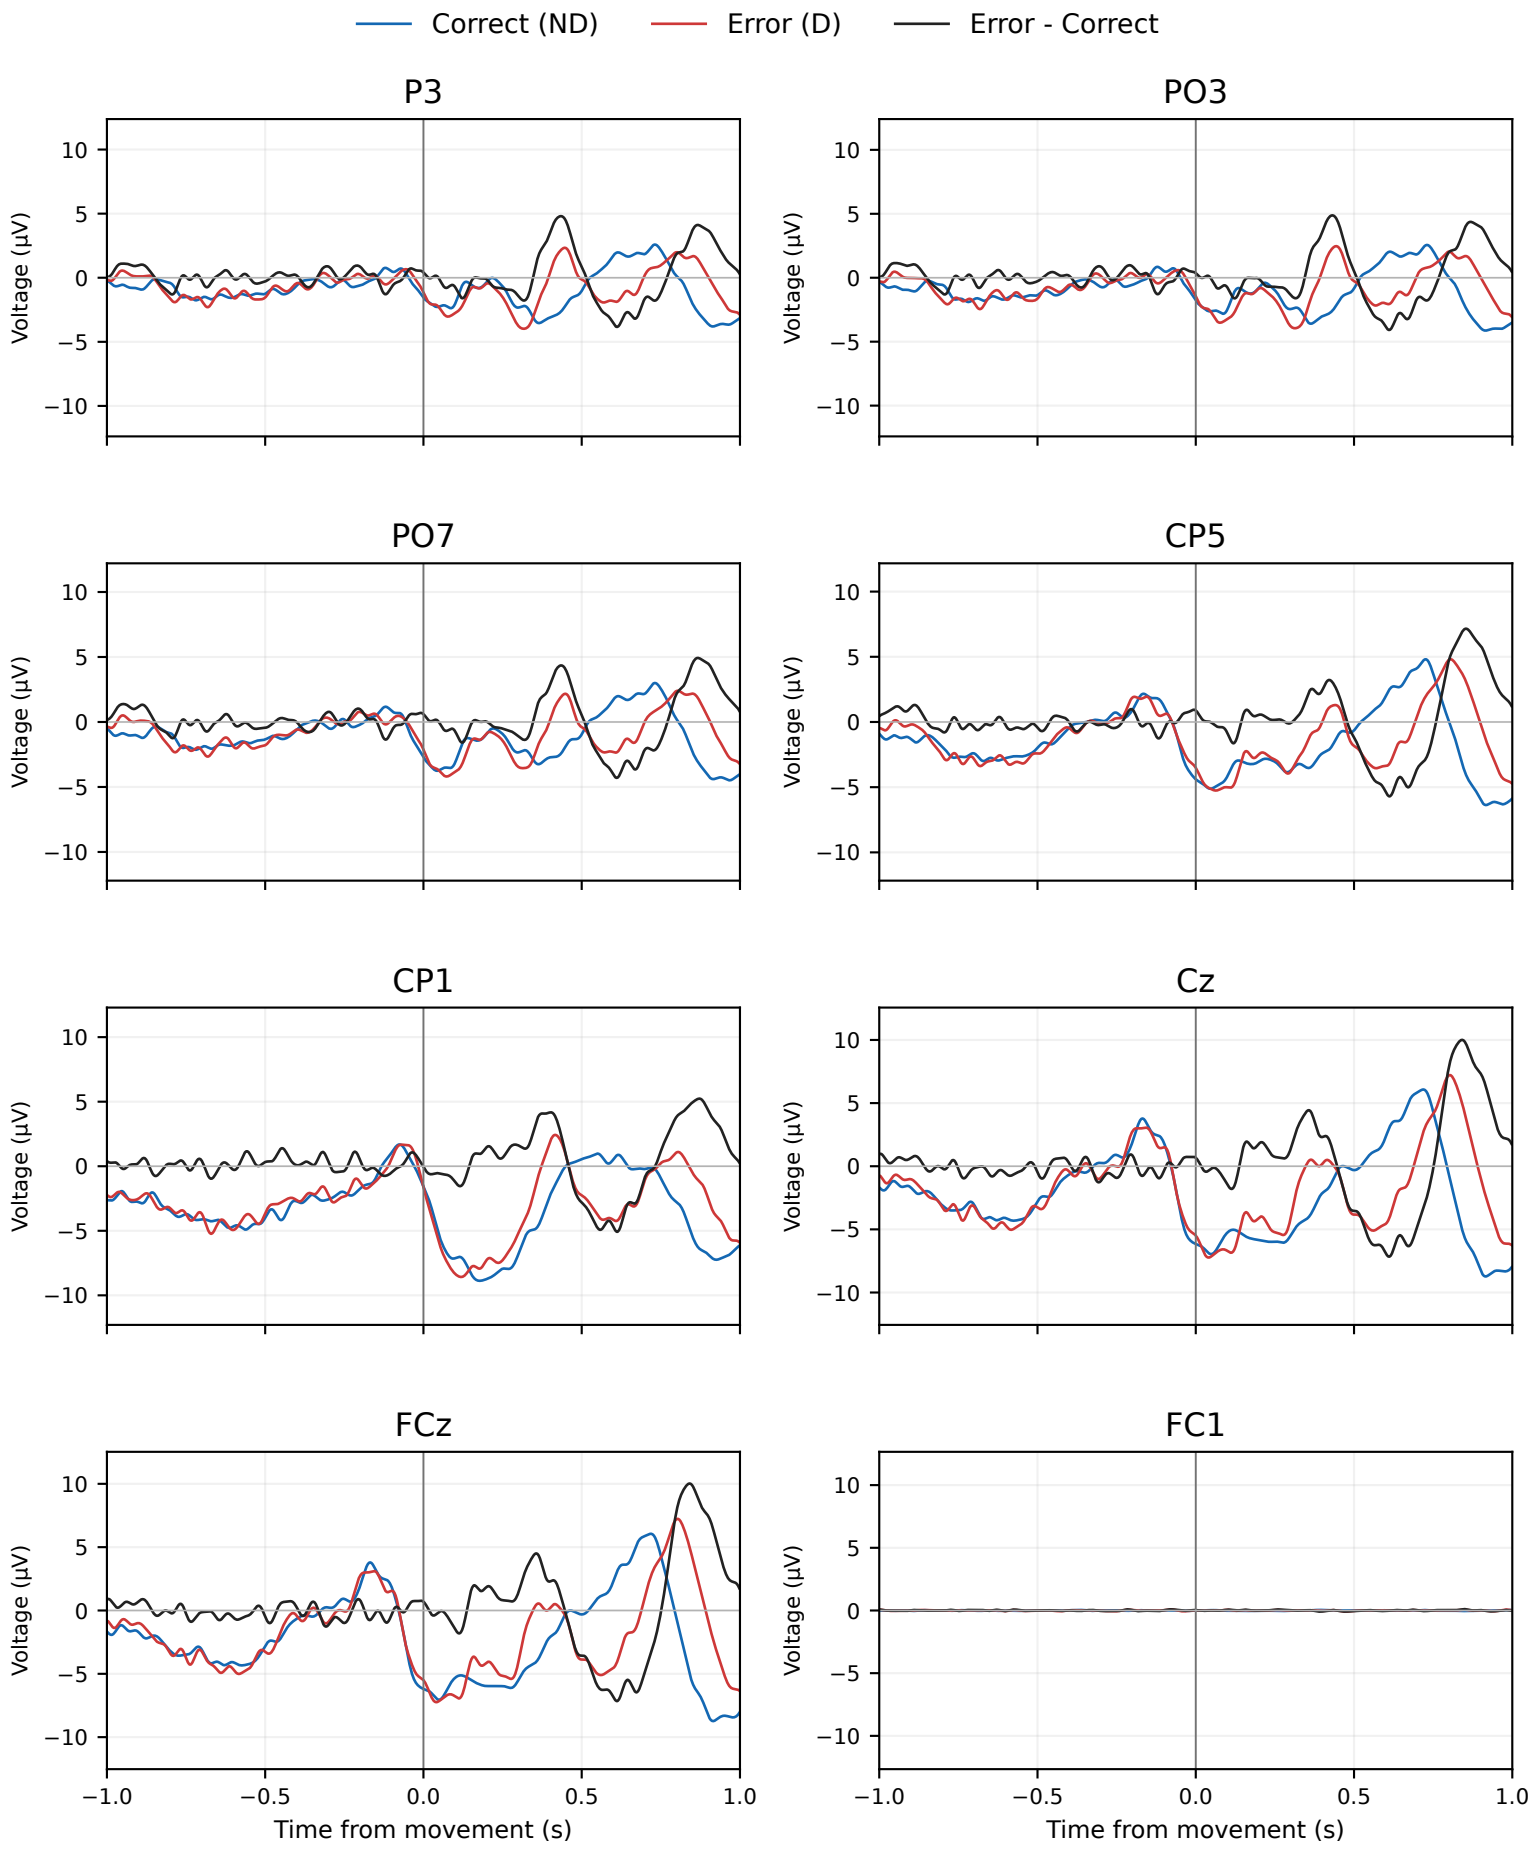

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

lbo12 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=310; Error (D) n=159

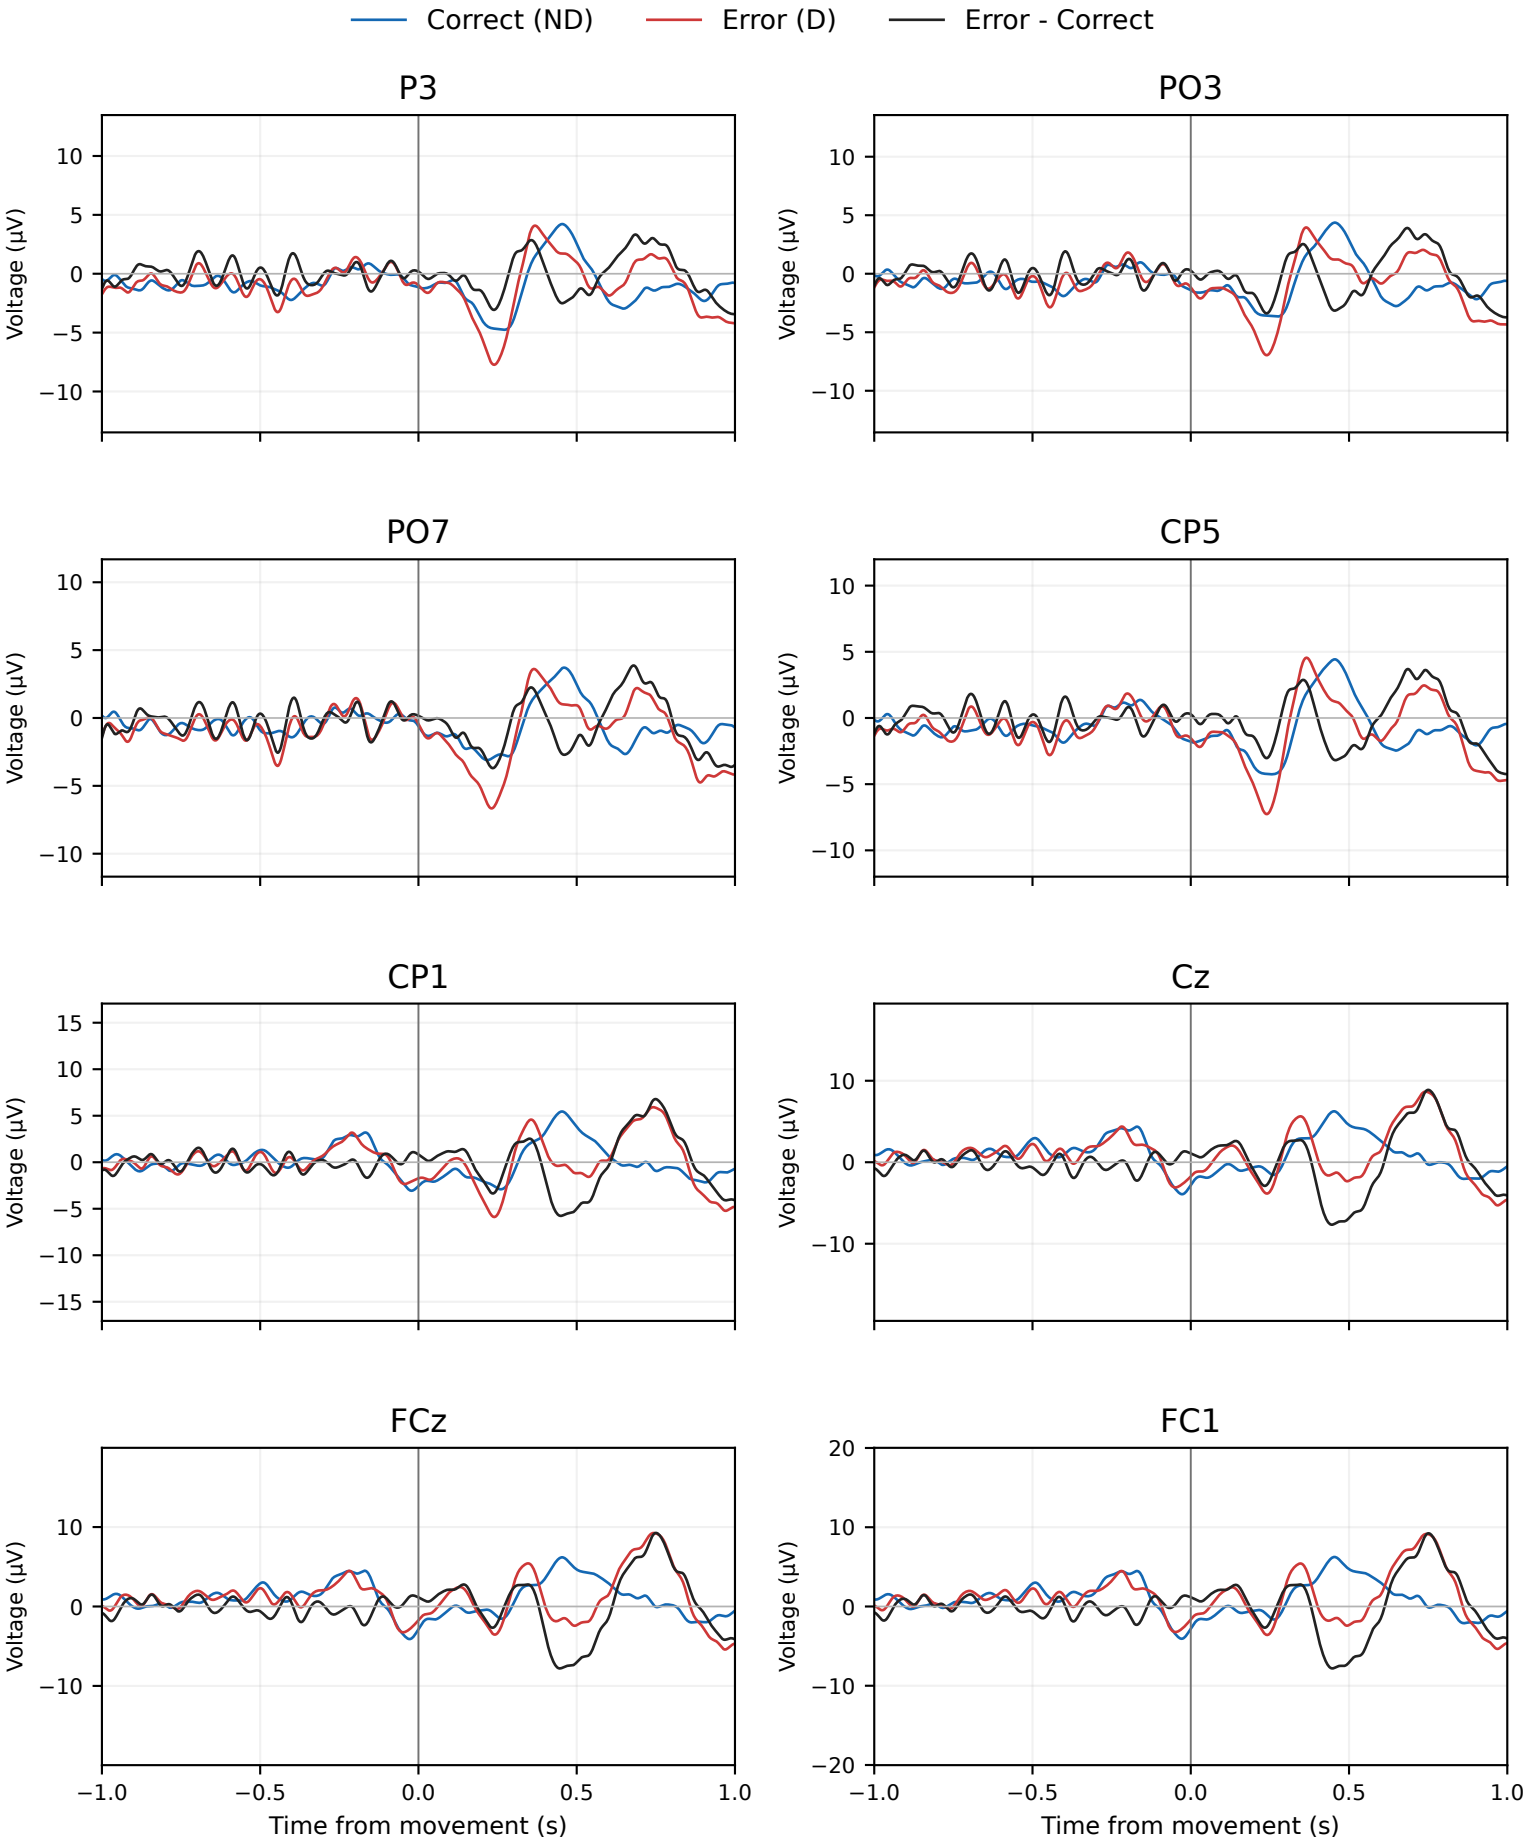

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

lbo12 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=269; Error (D) n=141

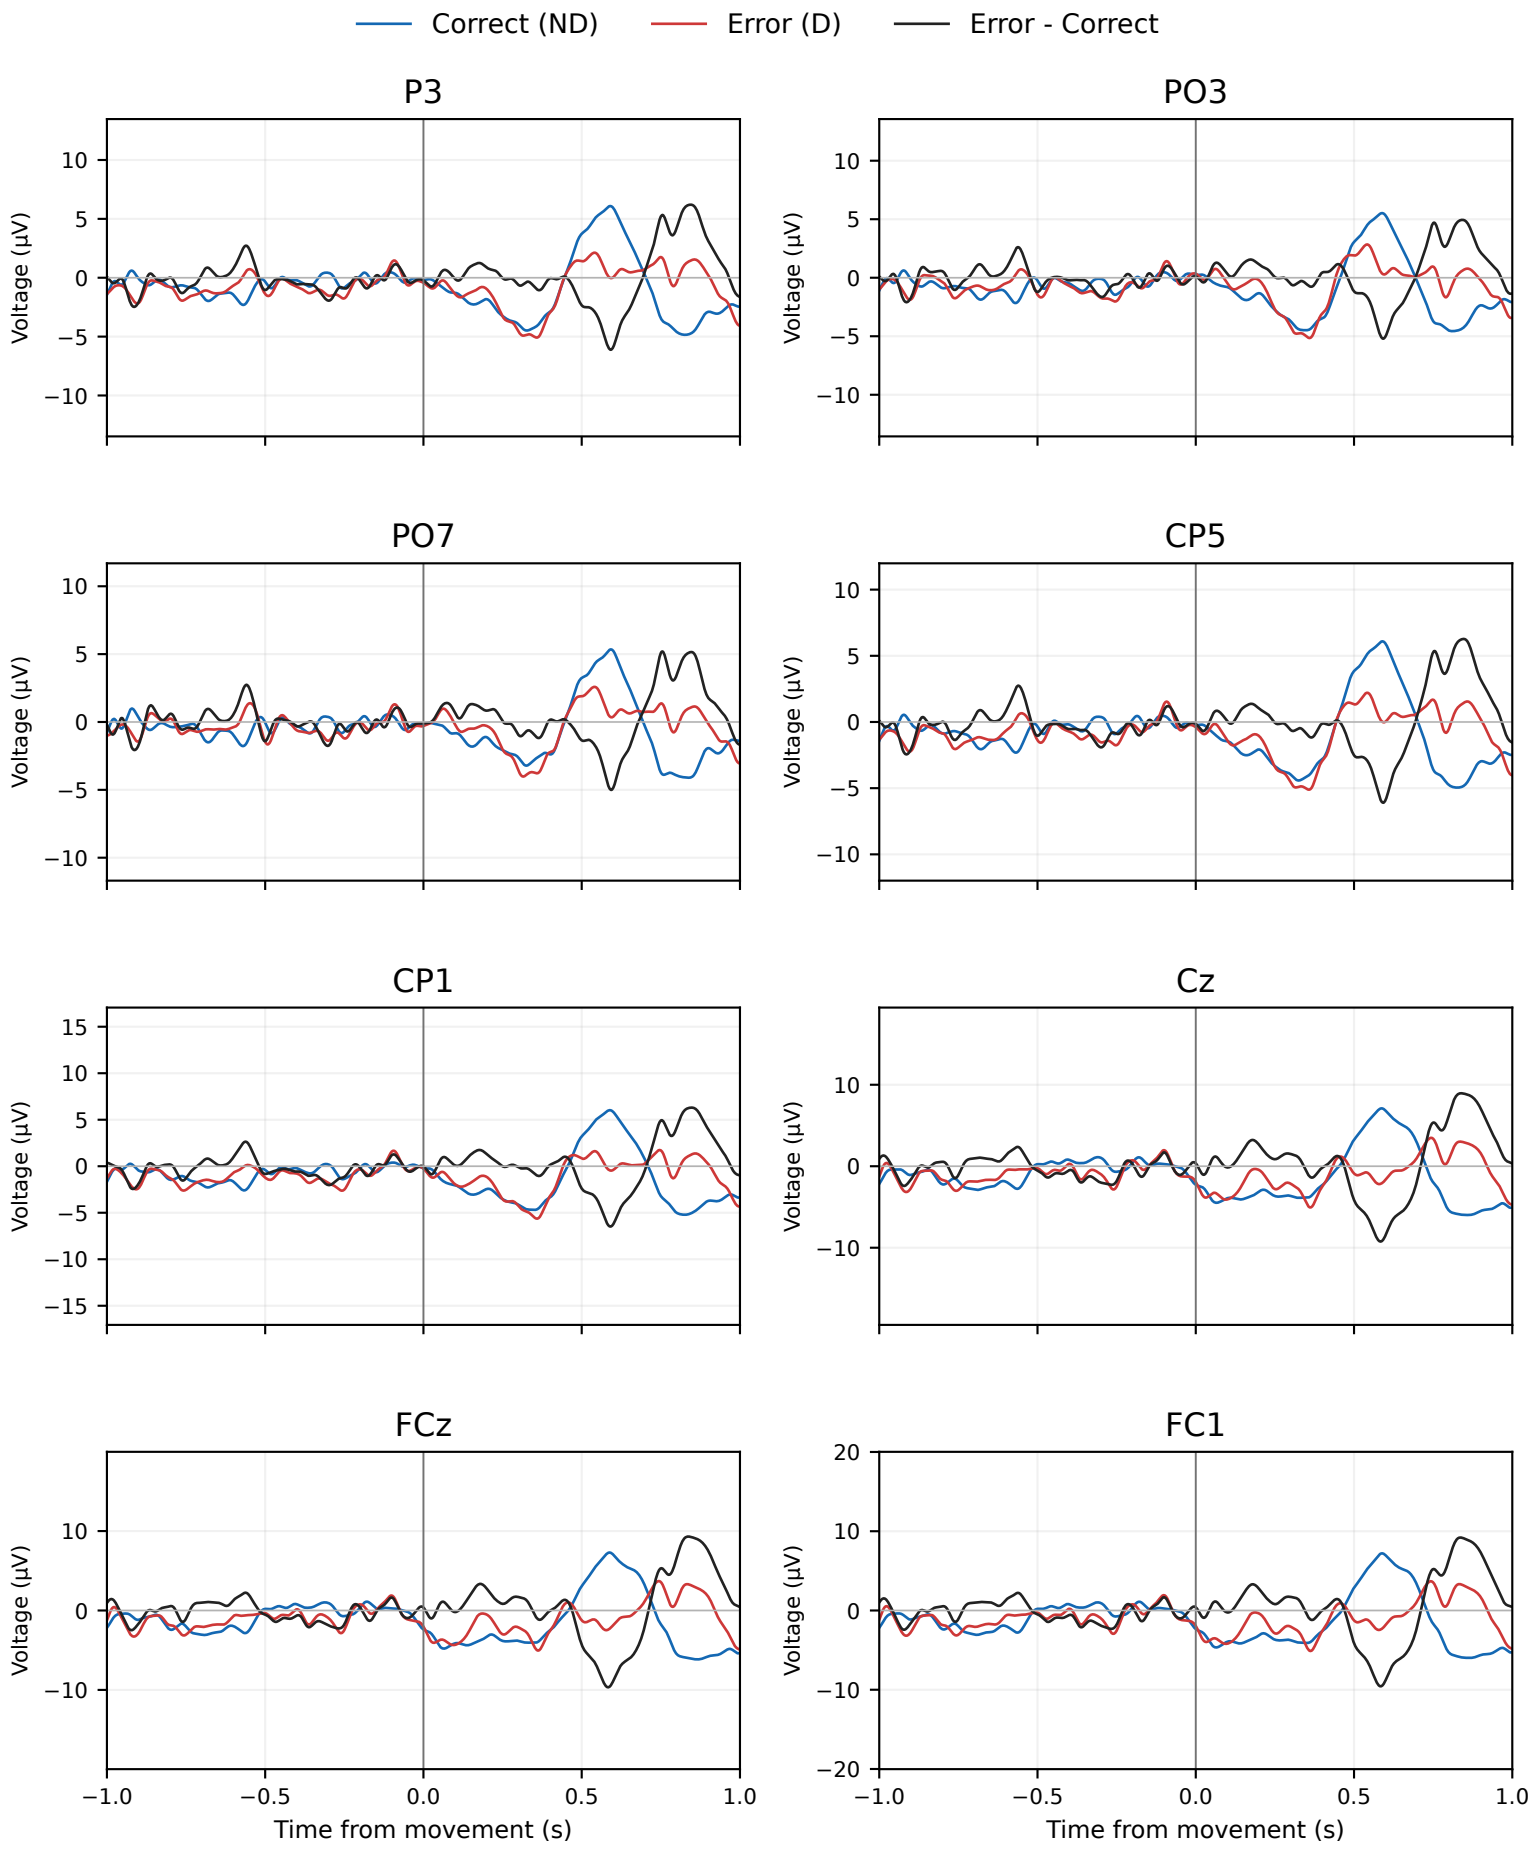

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

lbo12 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=252; Error (D) n=134

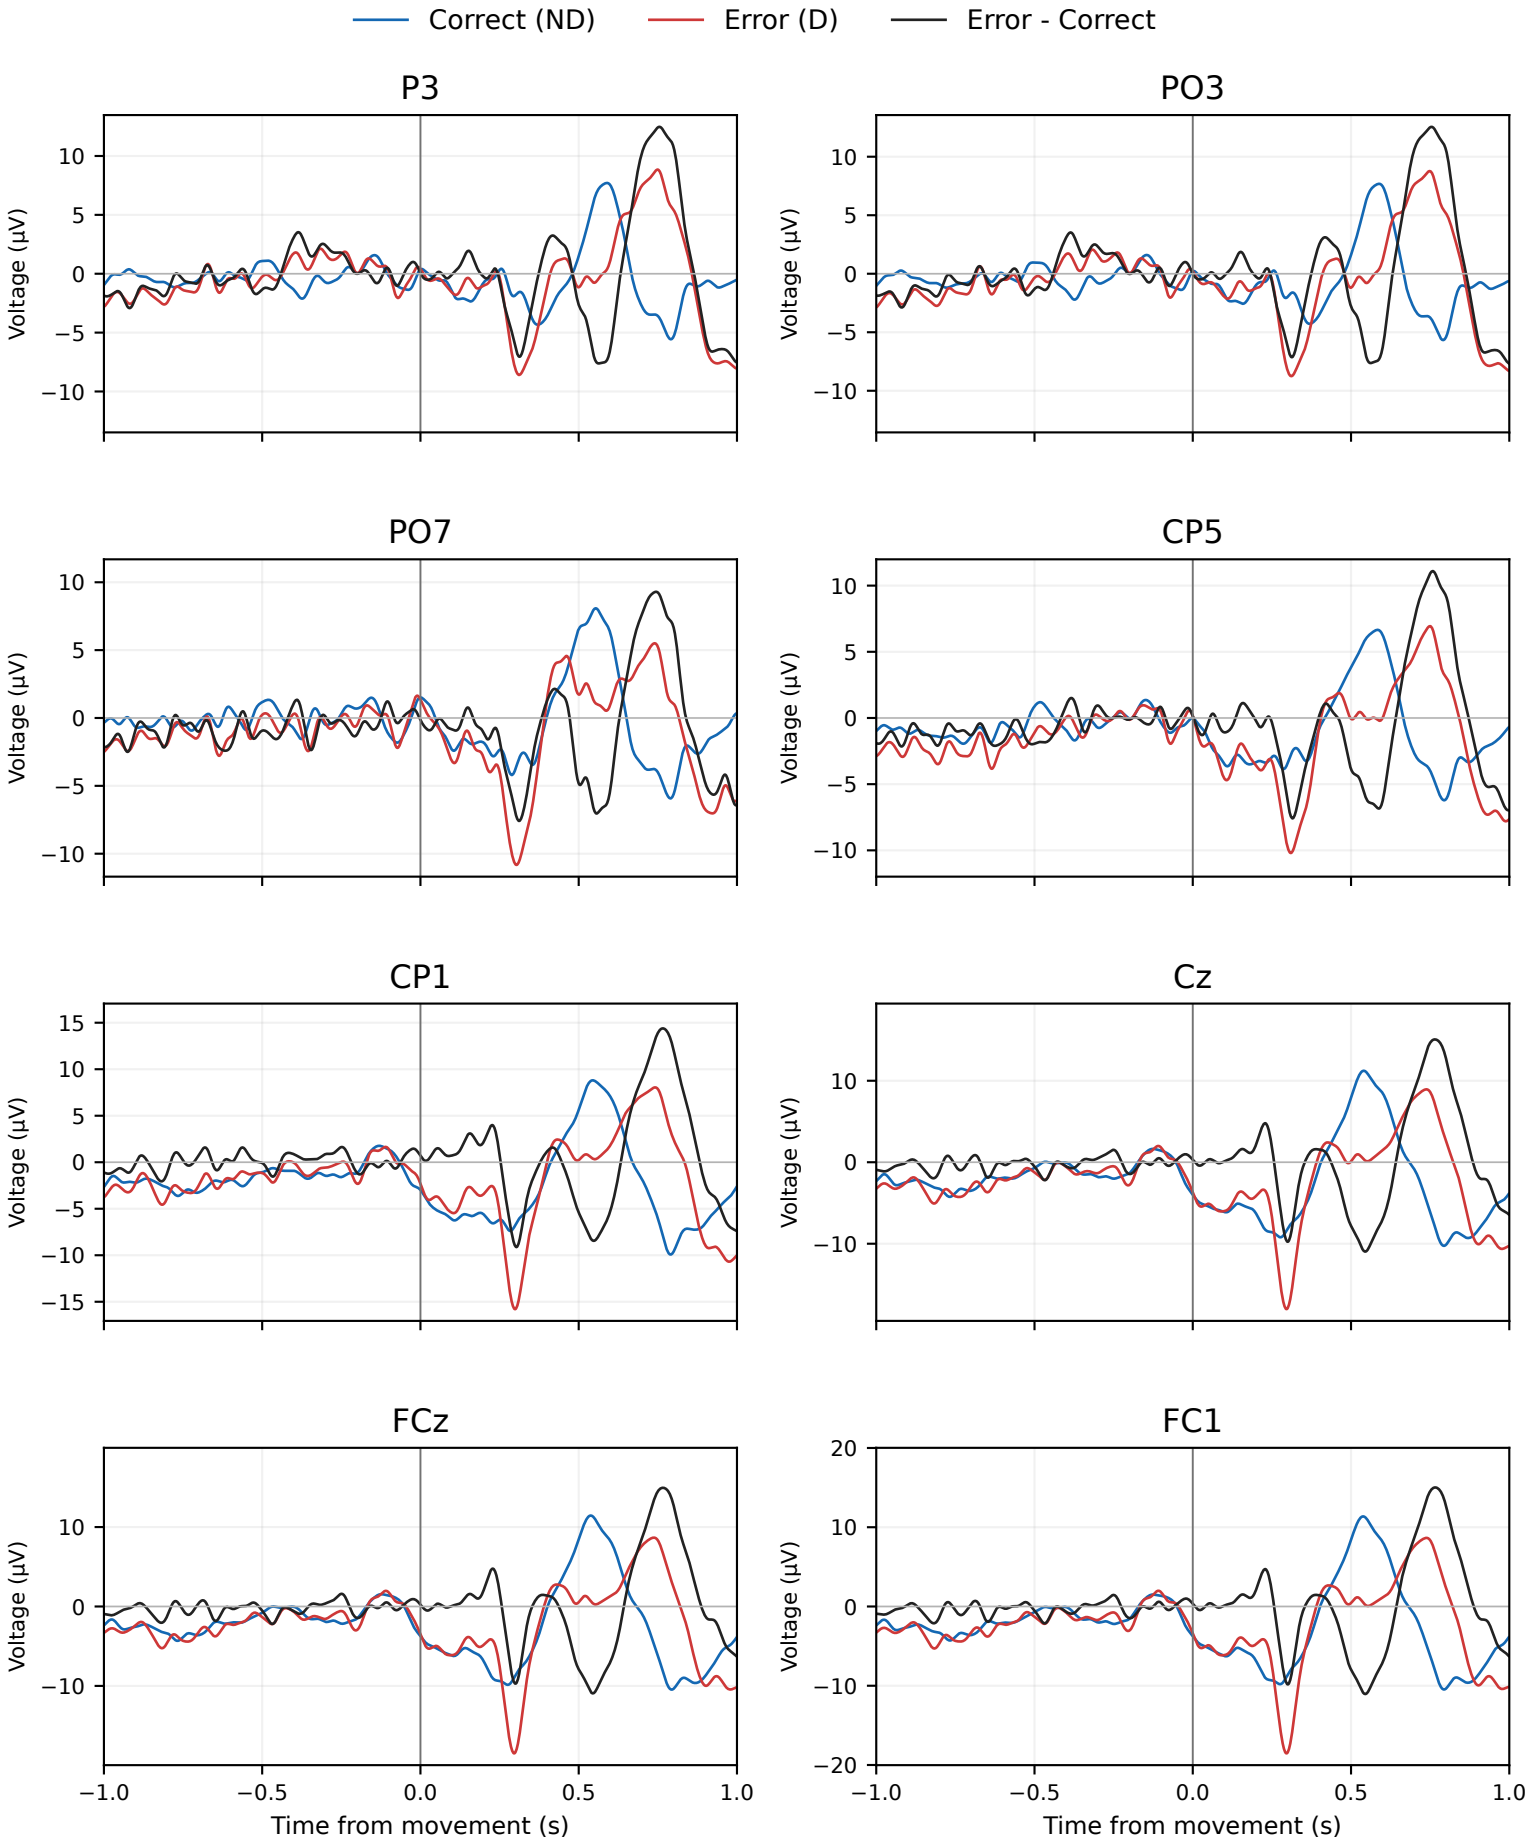

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

ldu23 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=300; Error (D) n=109

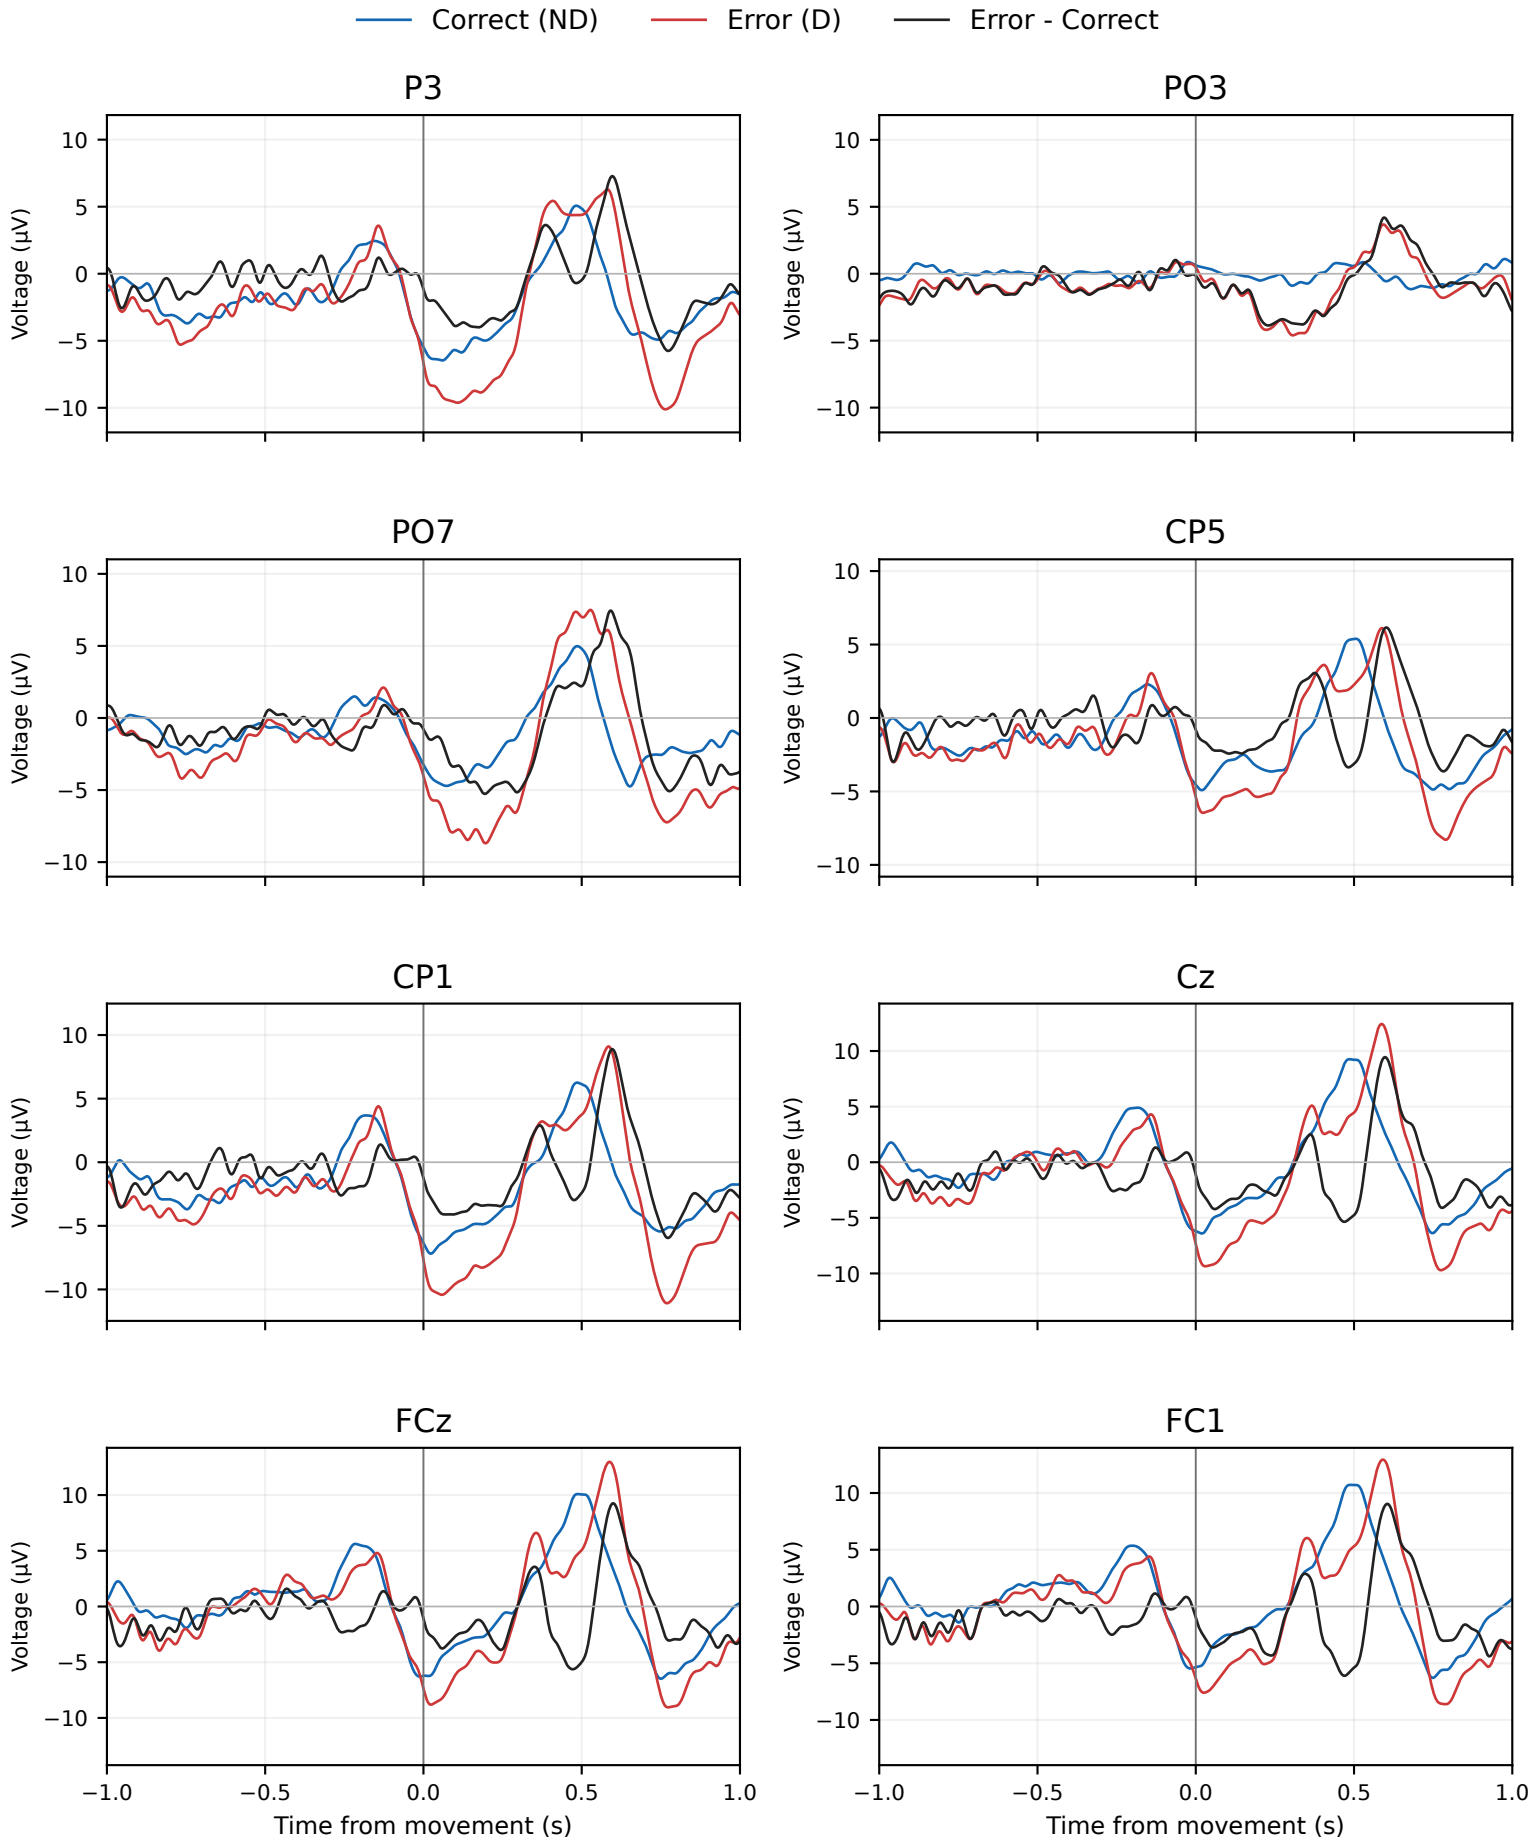

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

ldu23 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=301; Error (D) n=142

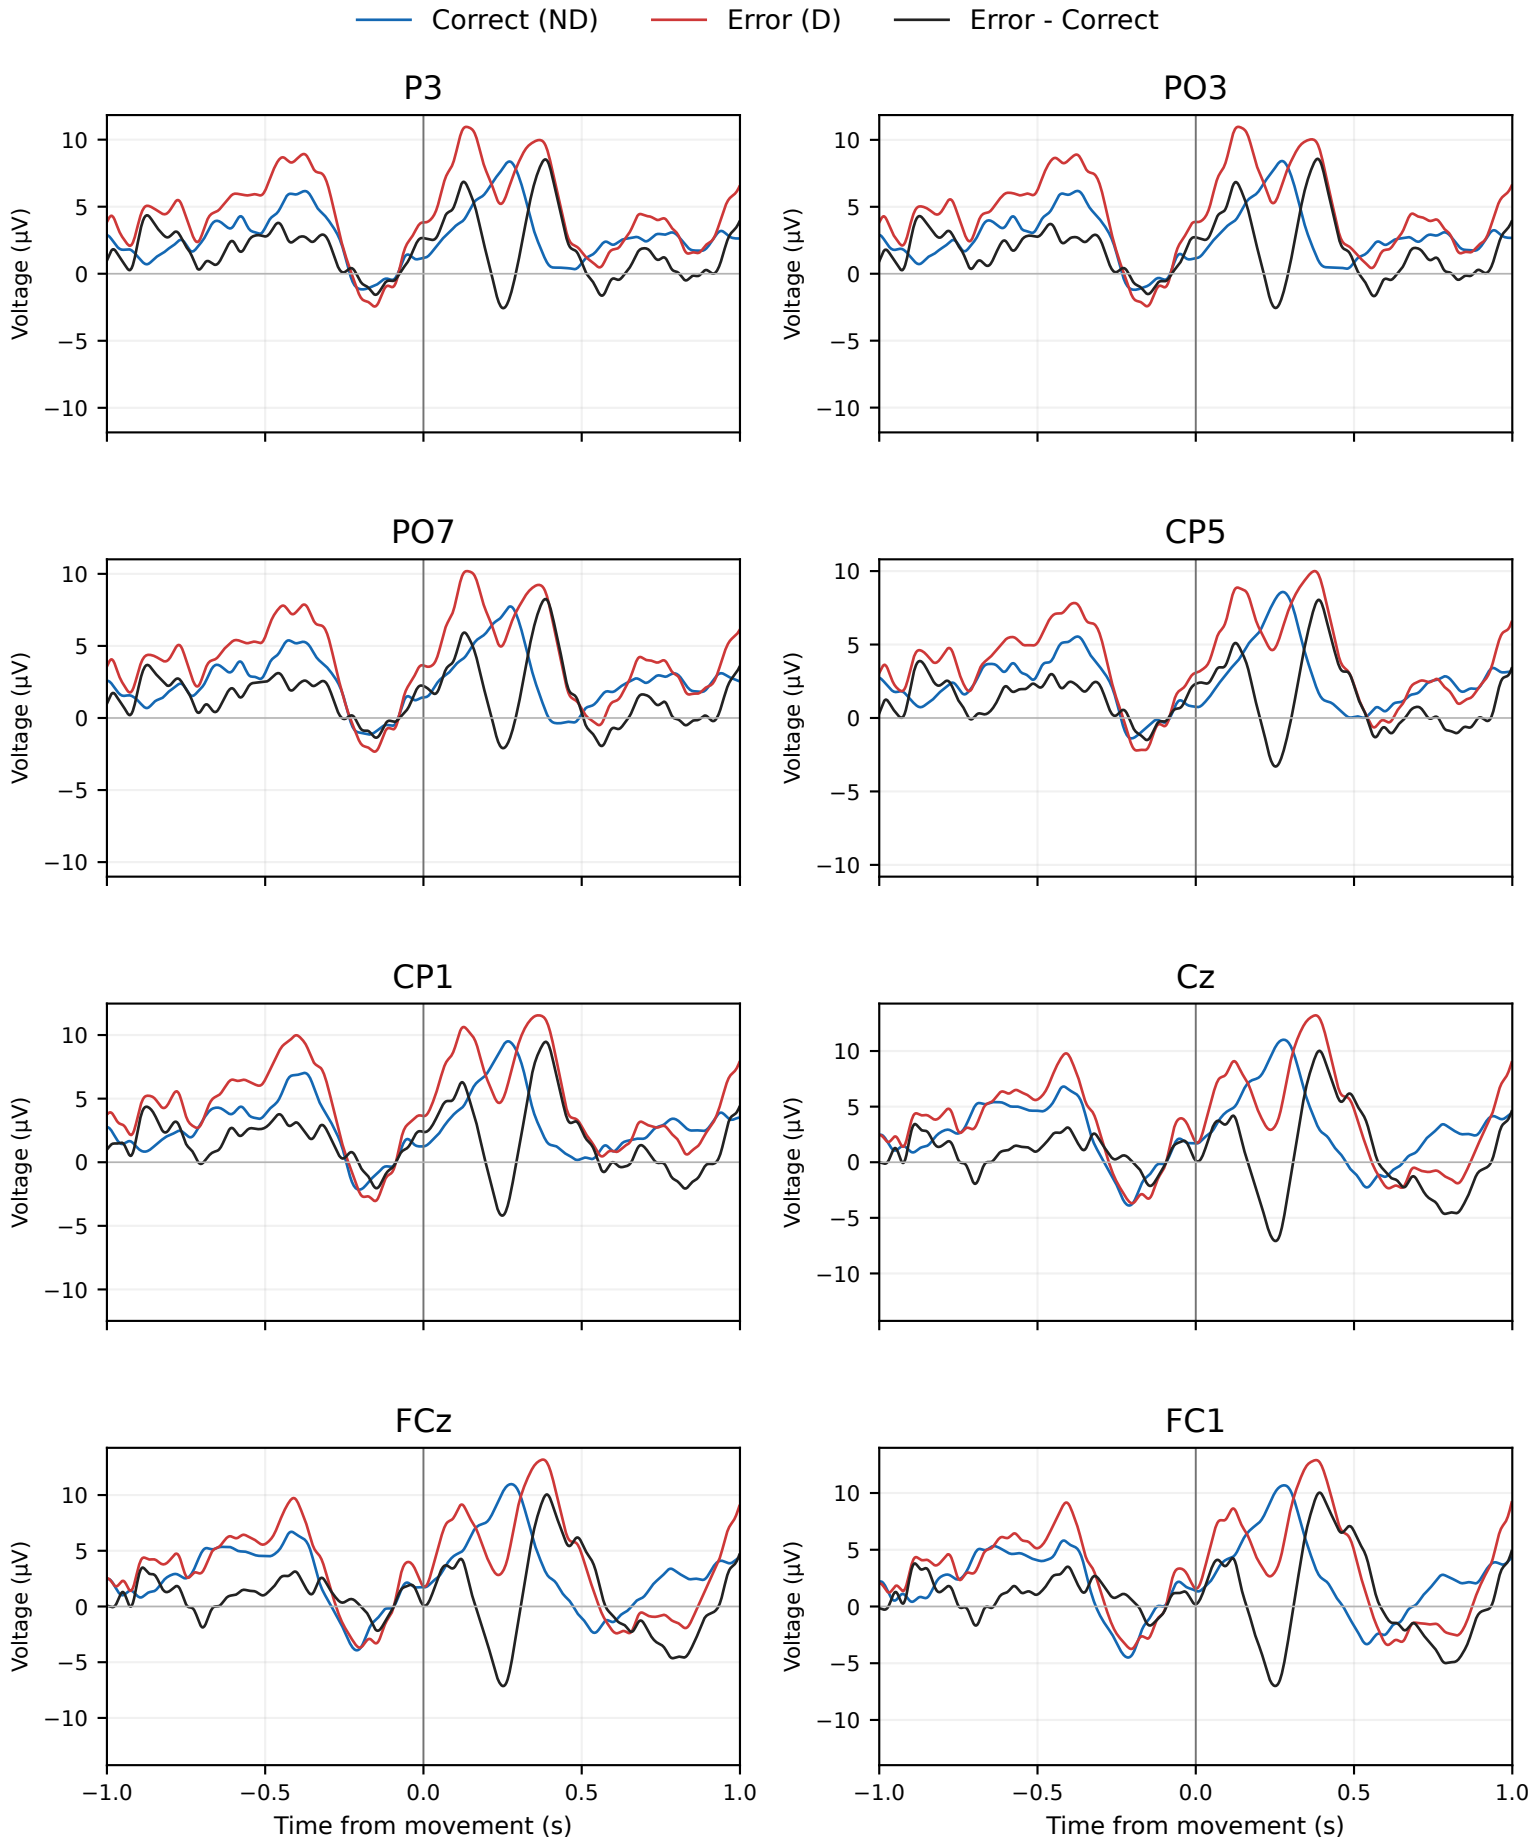

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

ldu23 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=285; Error (D) n=138

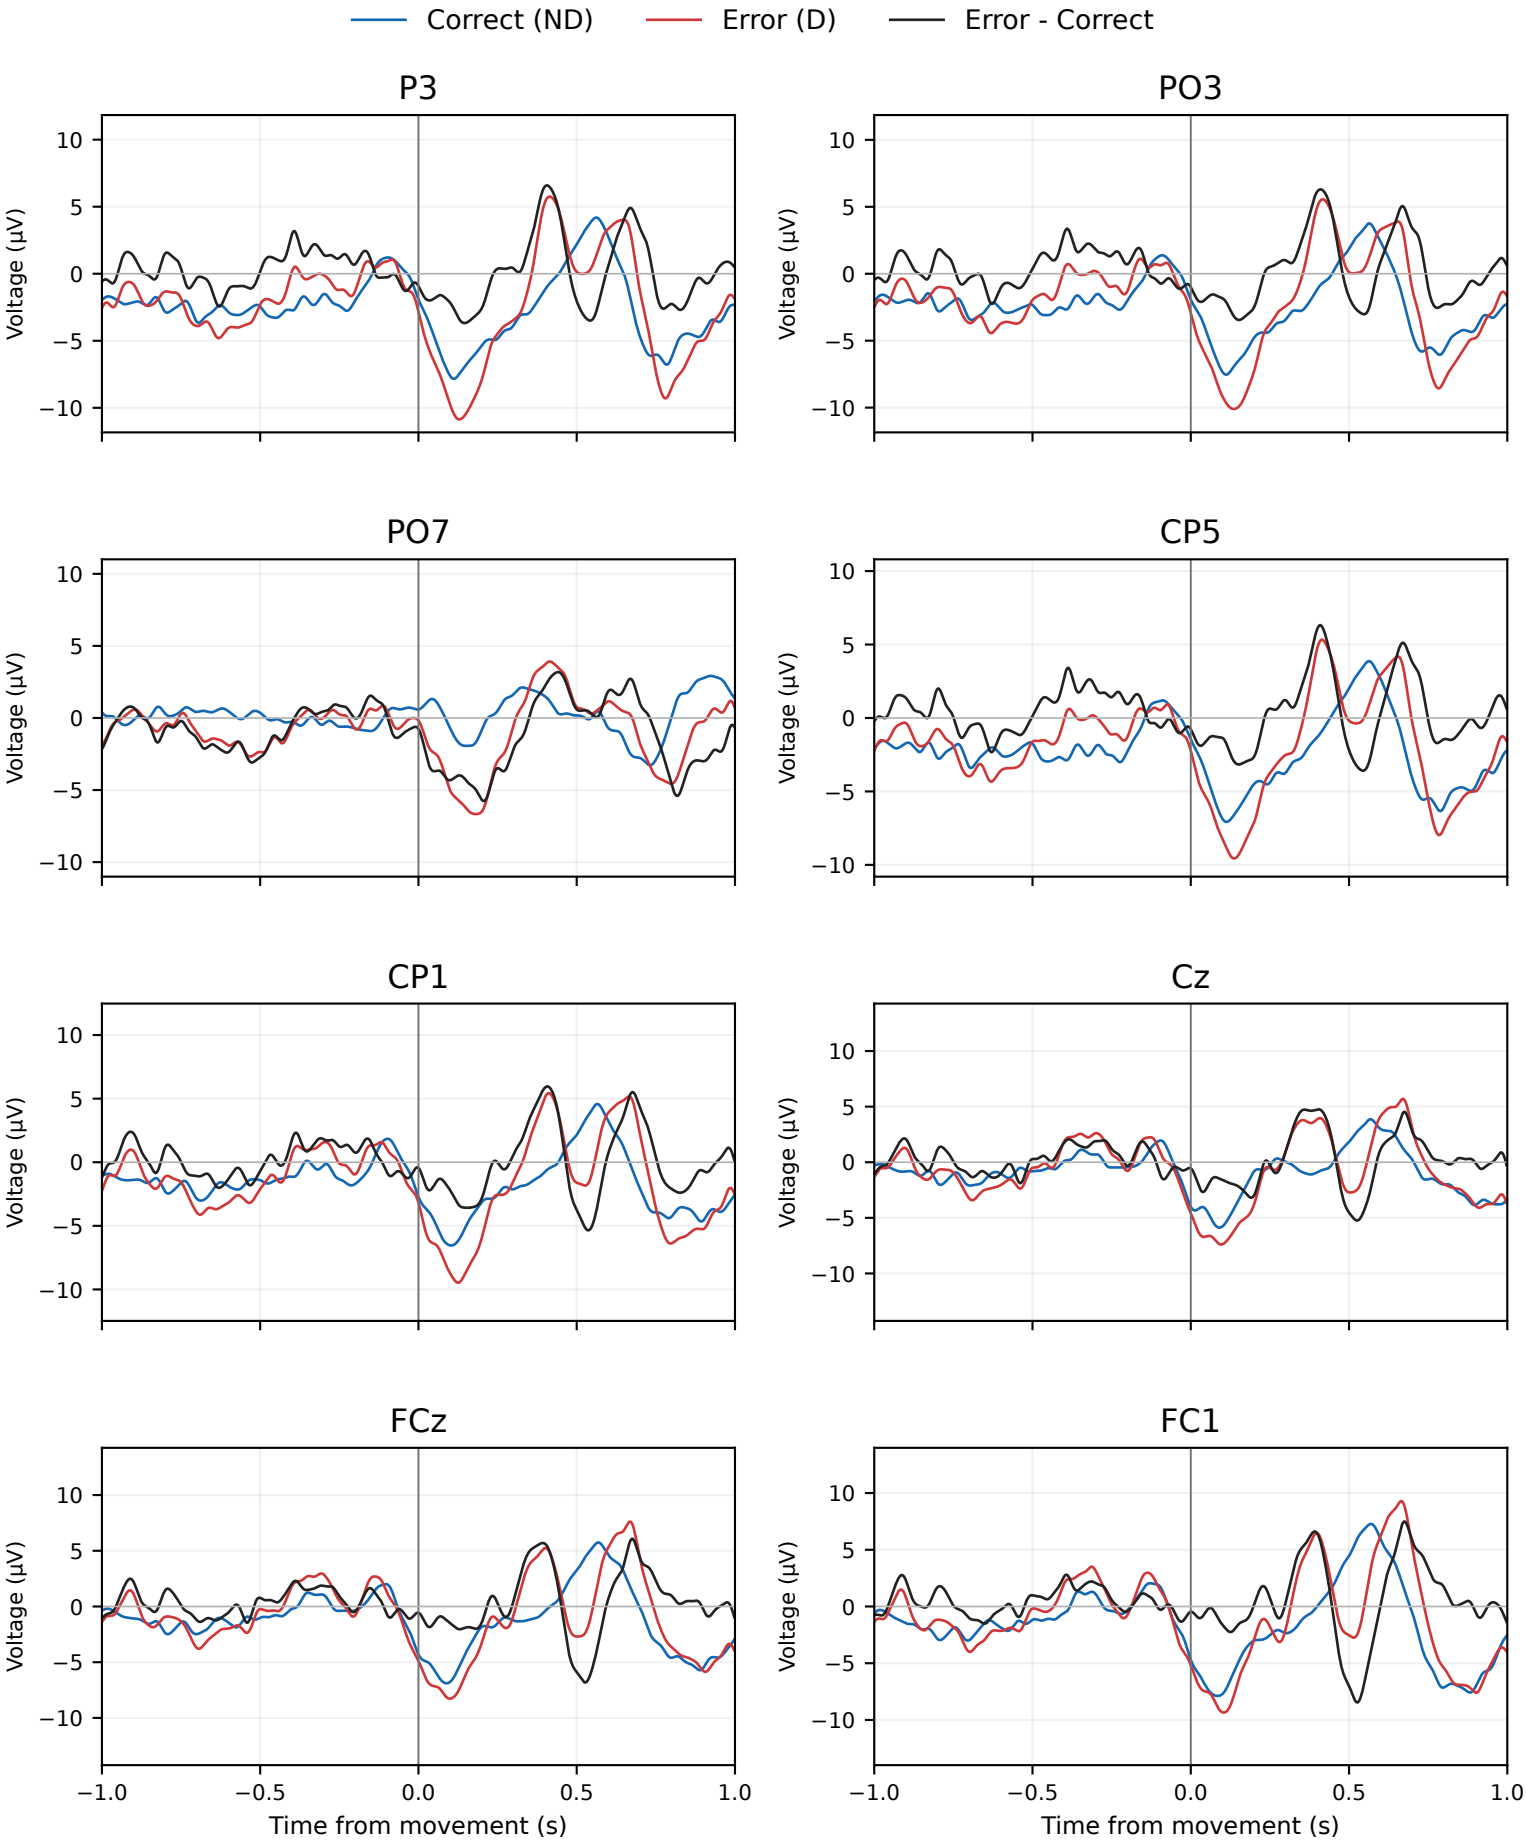

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

meb17 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=140; Error (D) n=66

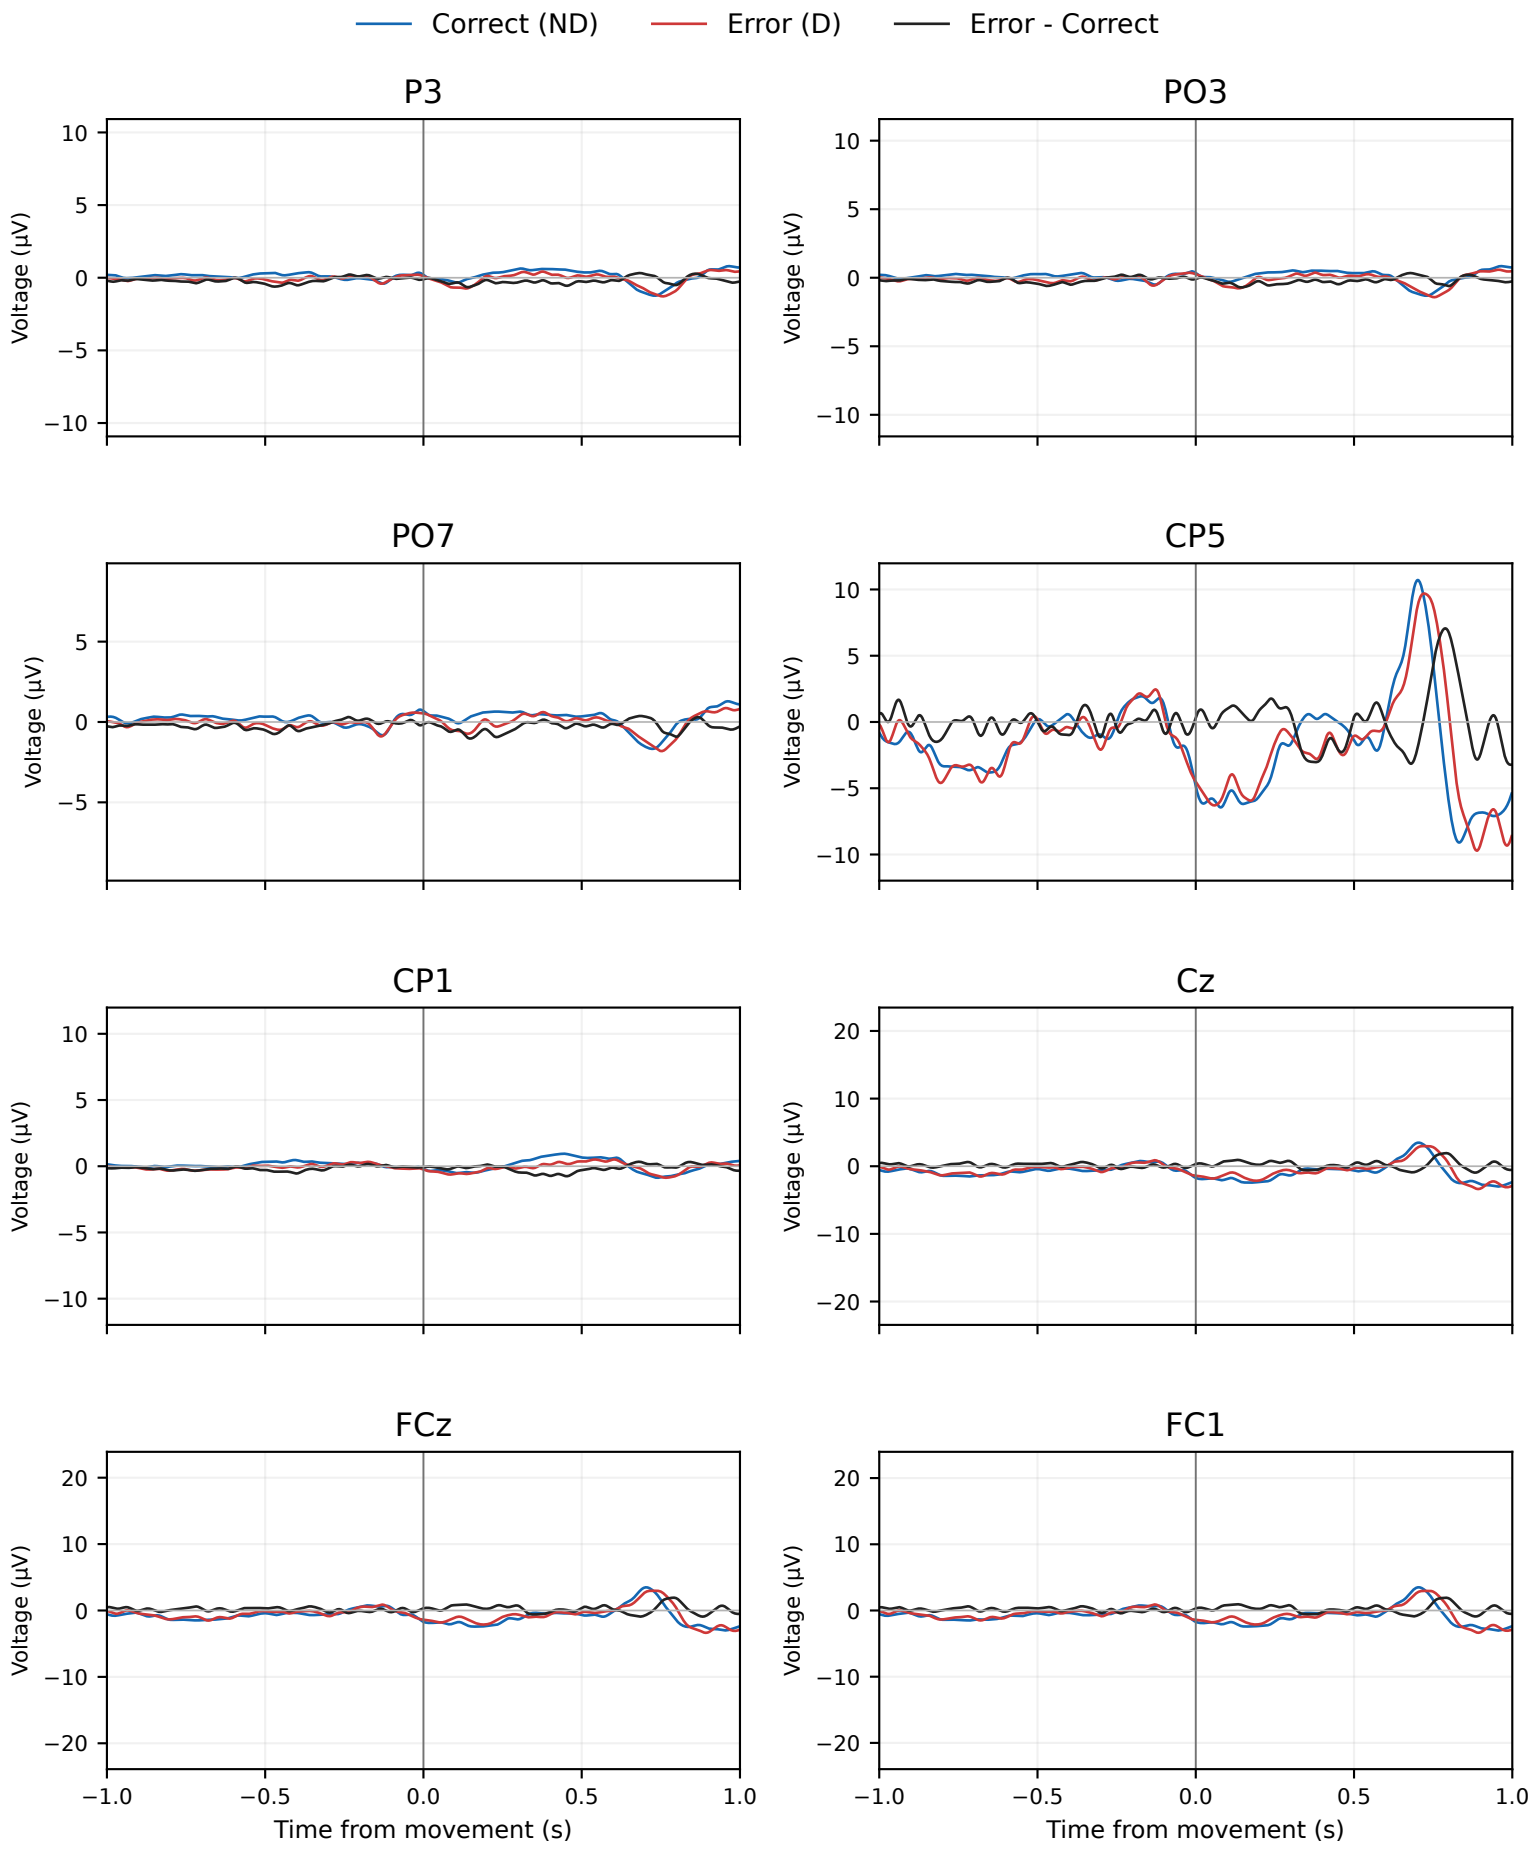

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

meb17 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=302; Error (D) n=159

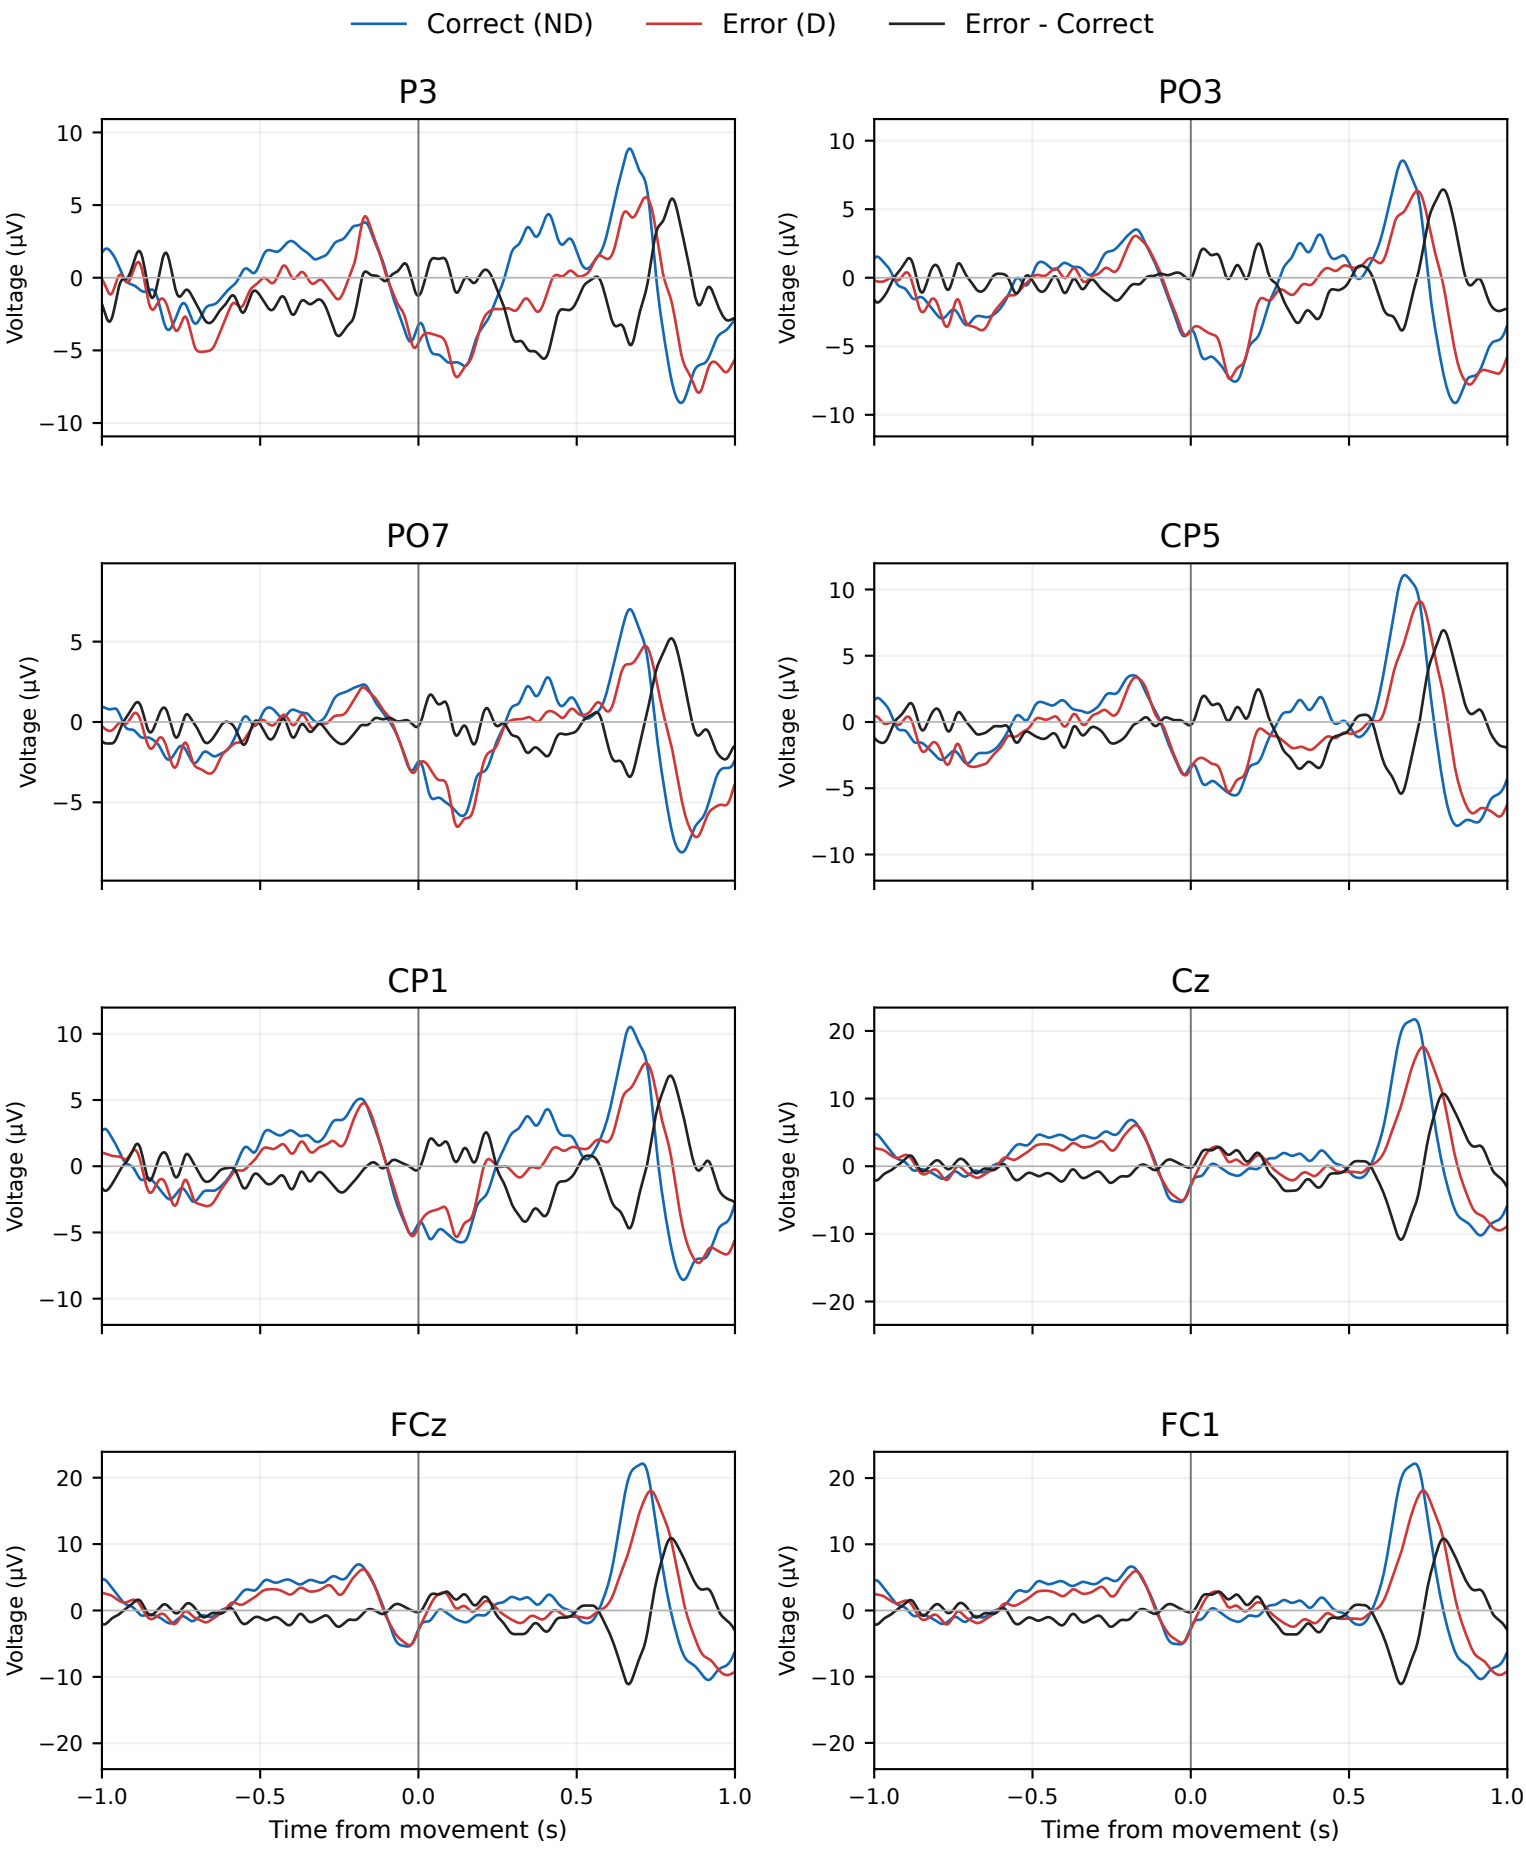

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

meb17 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=229; Error (D) n=114

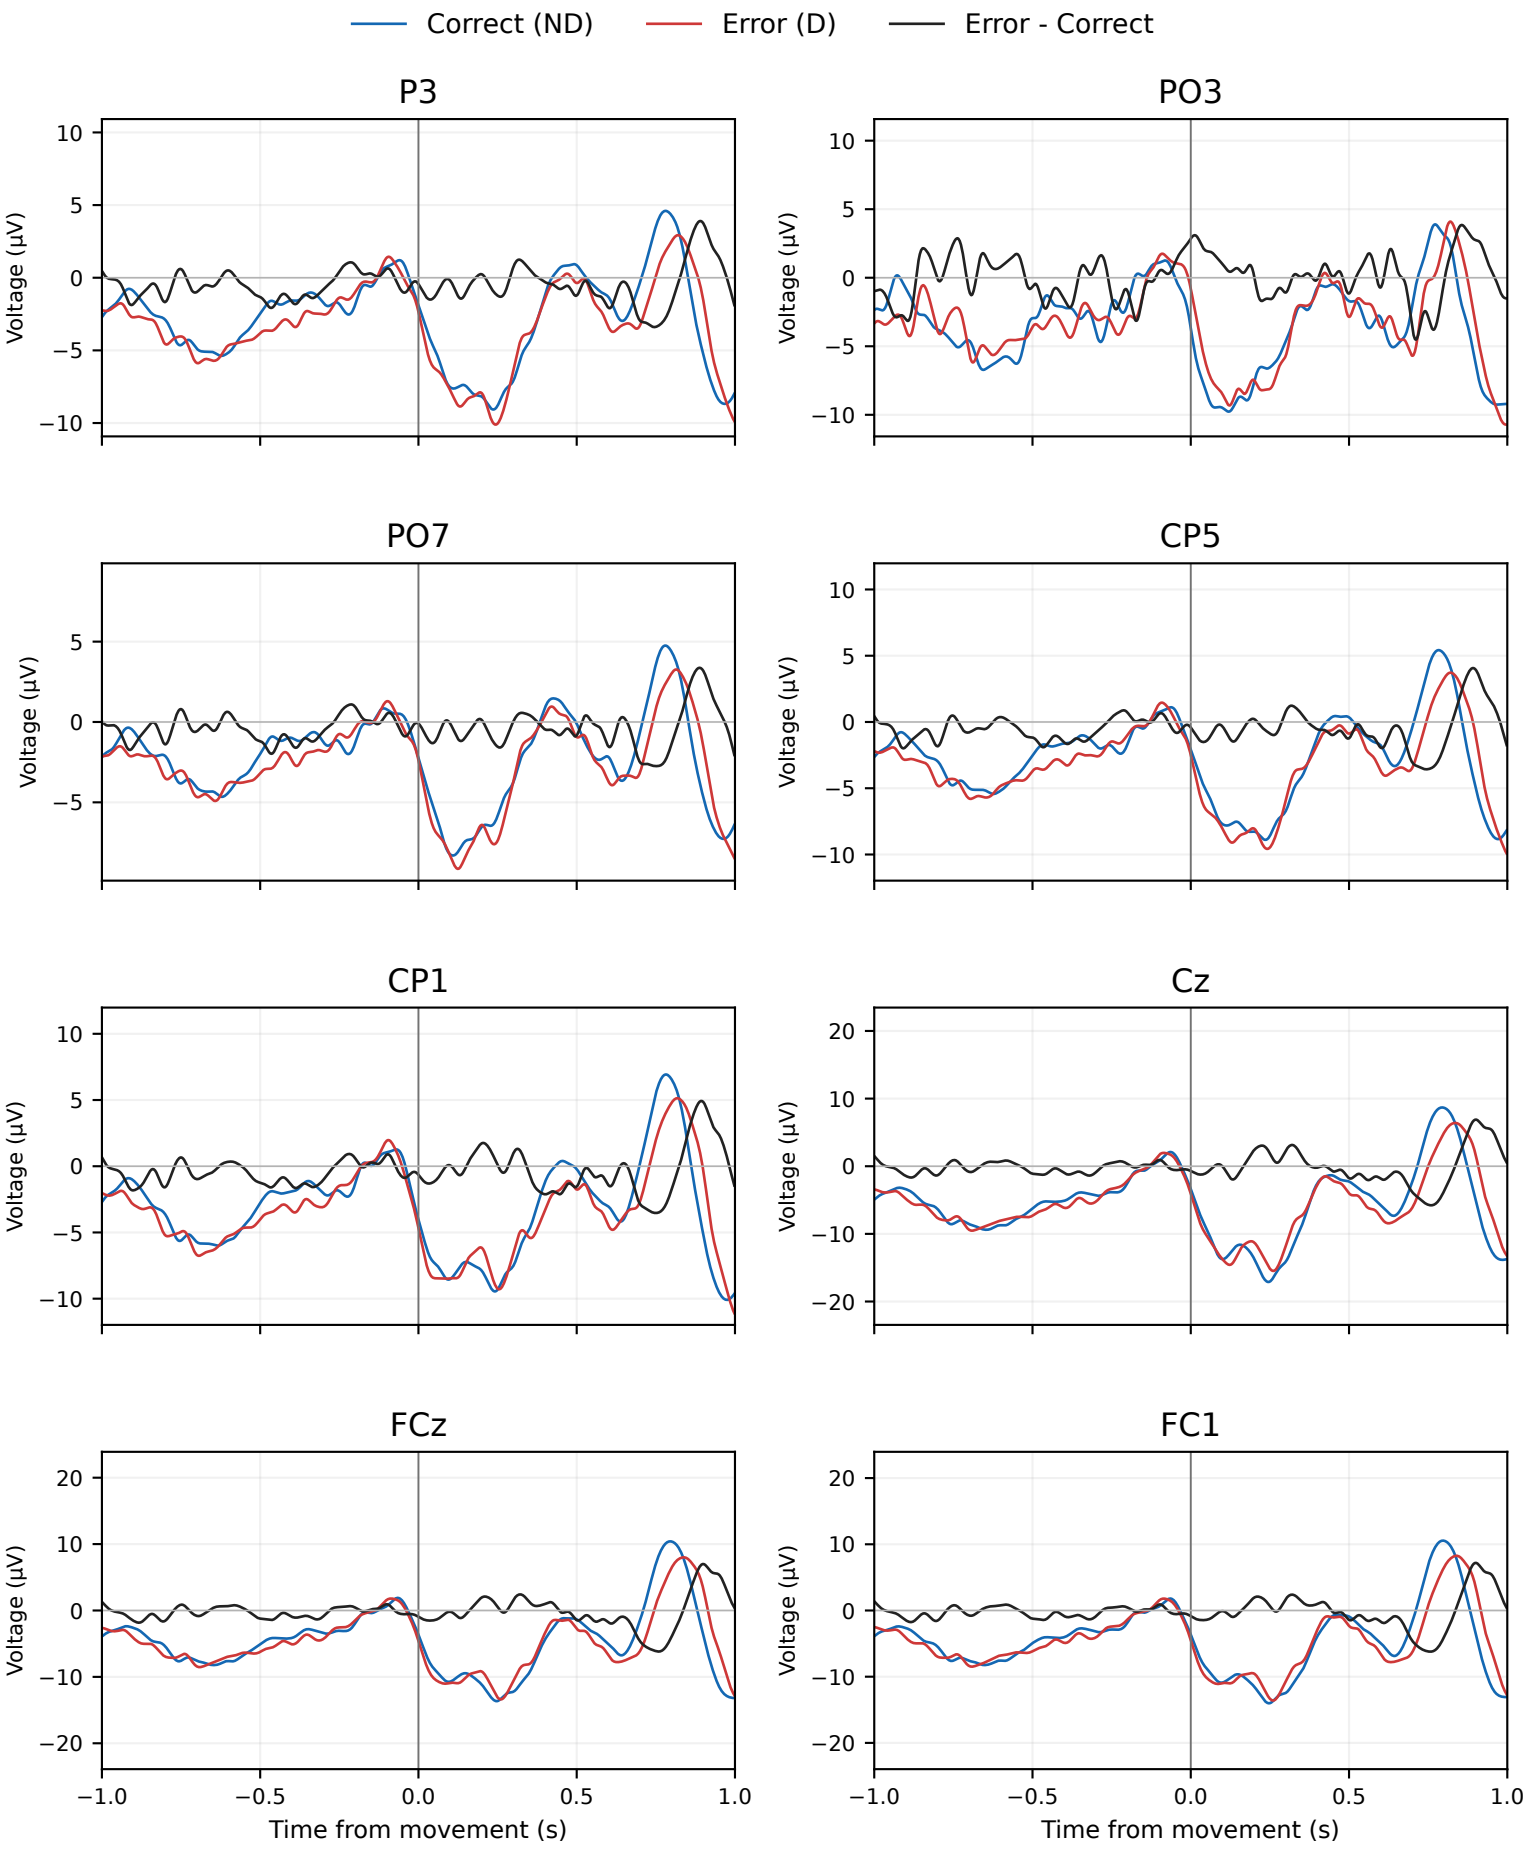

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

mka24 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=317; Error (D) n=166

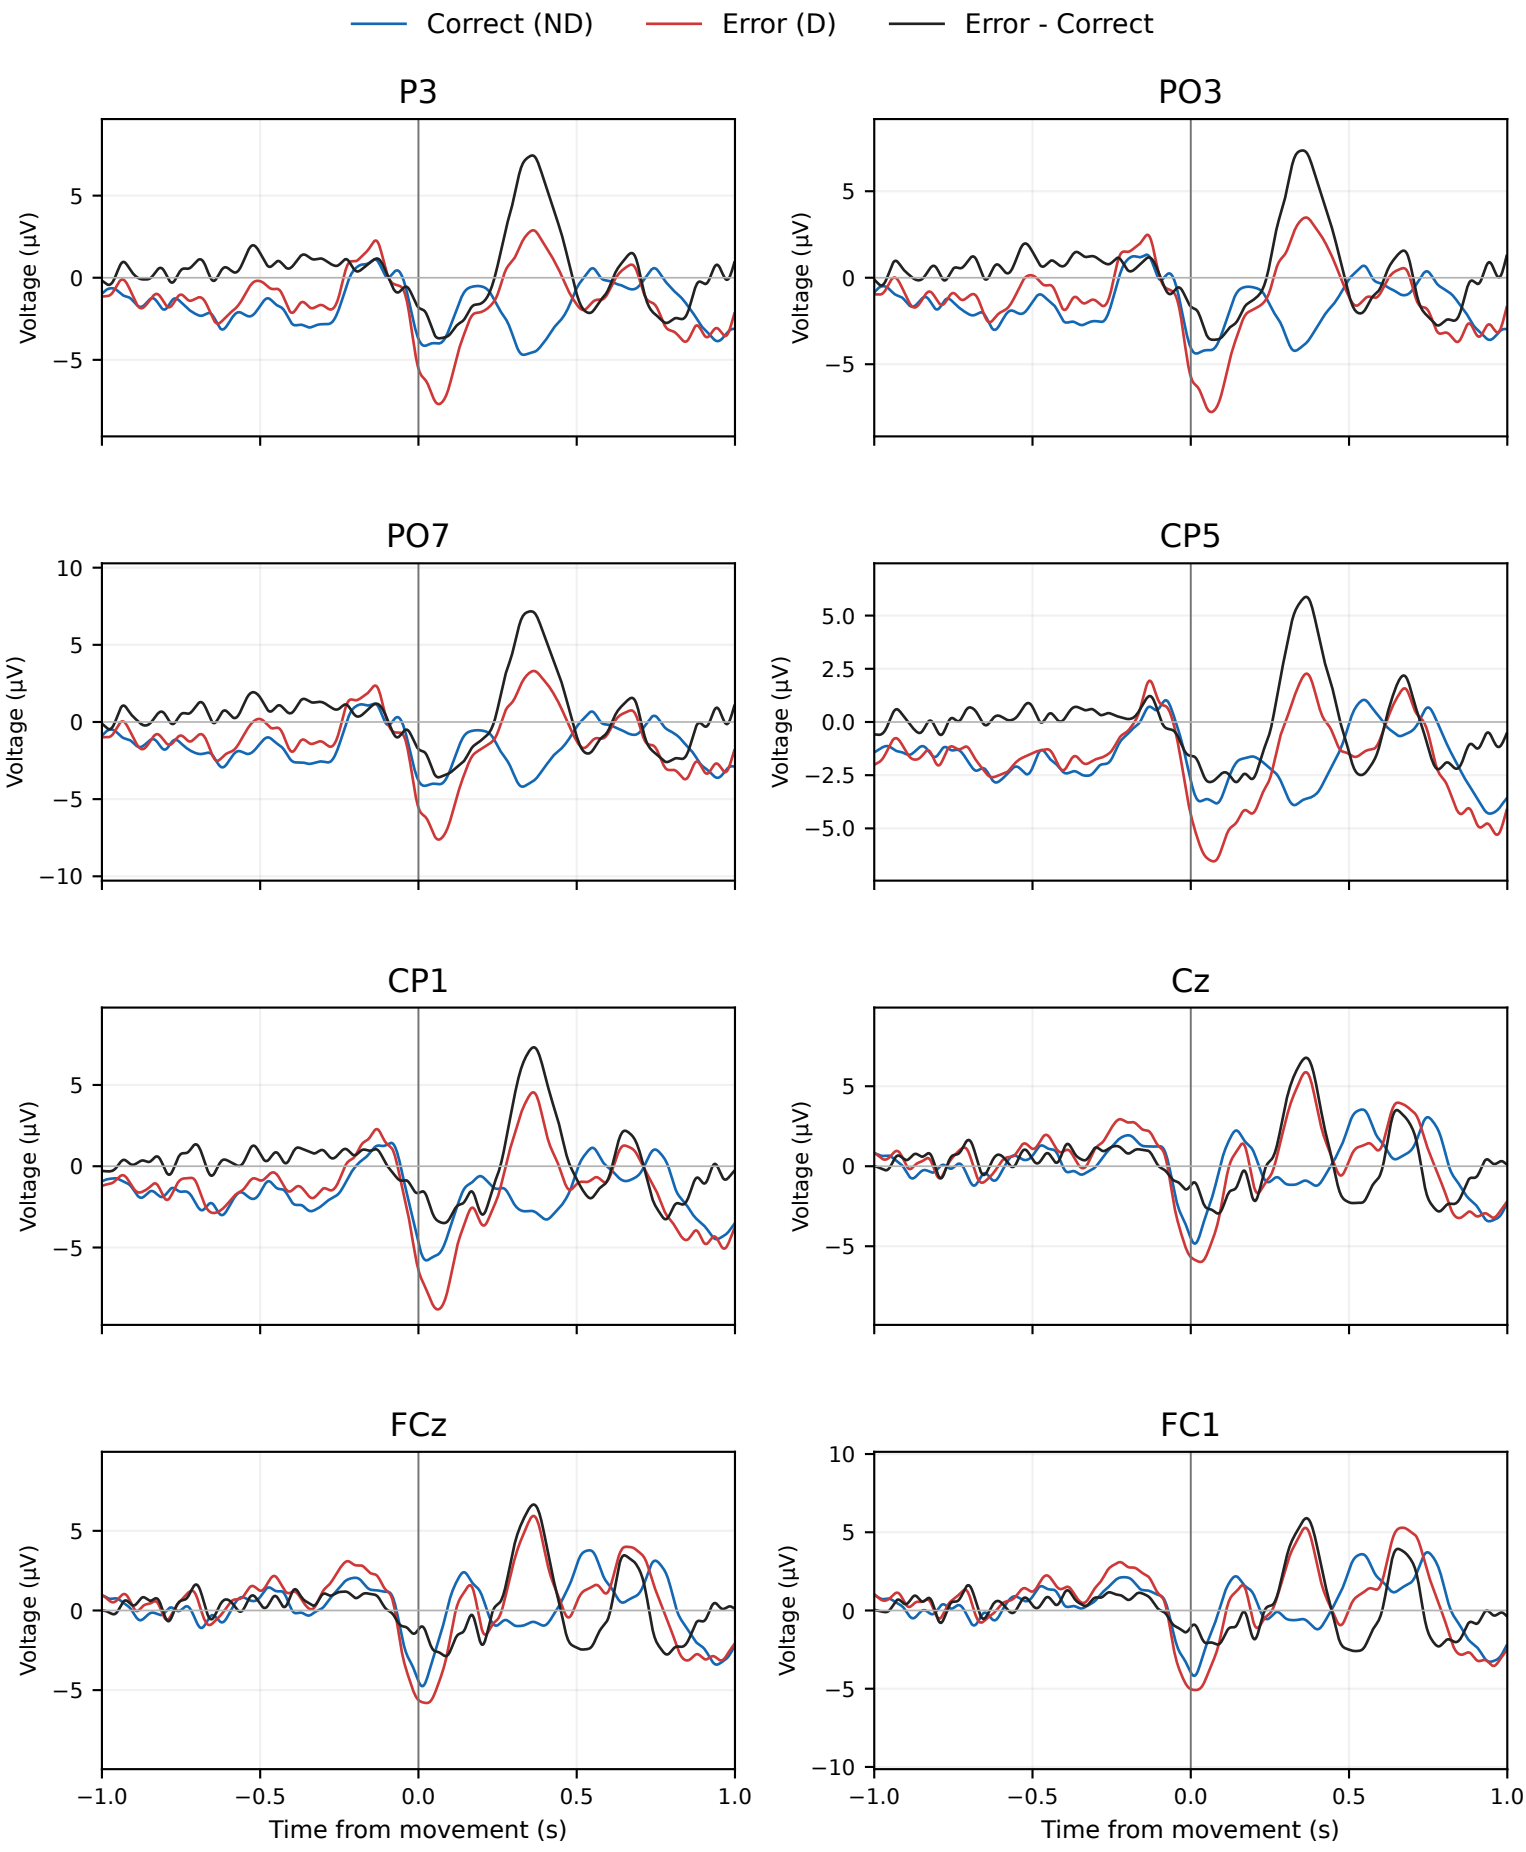

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

mka24 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=320; Error (D) n=165

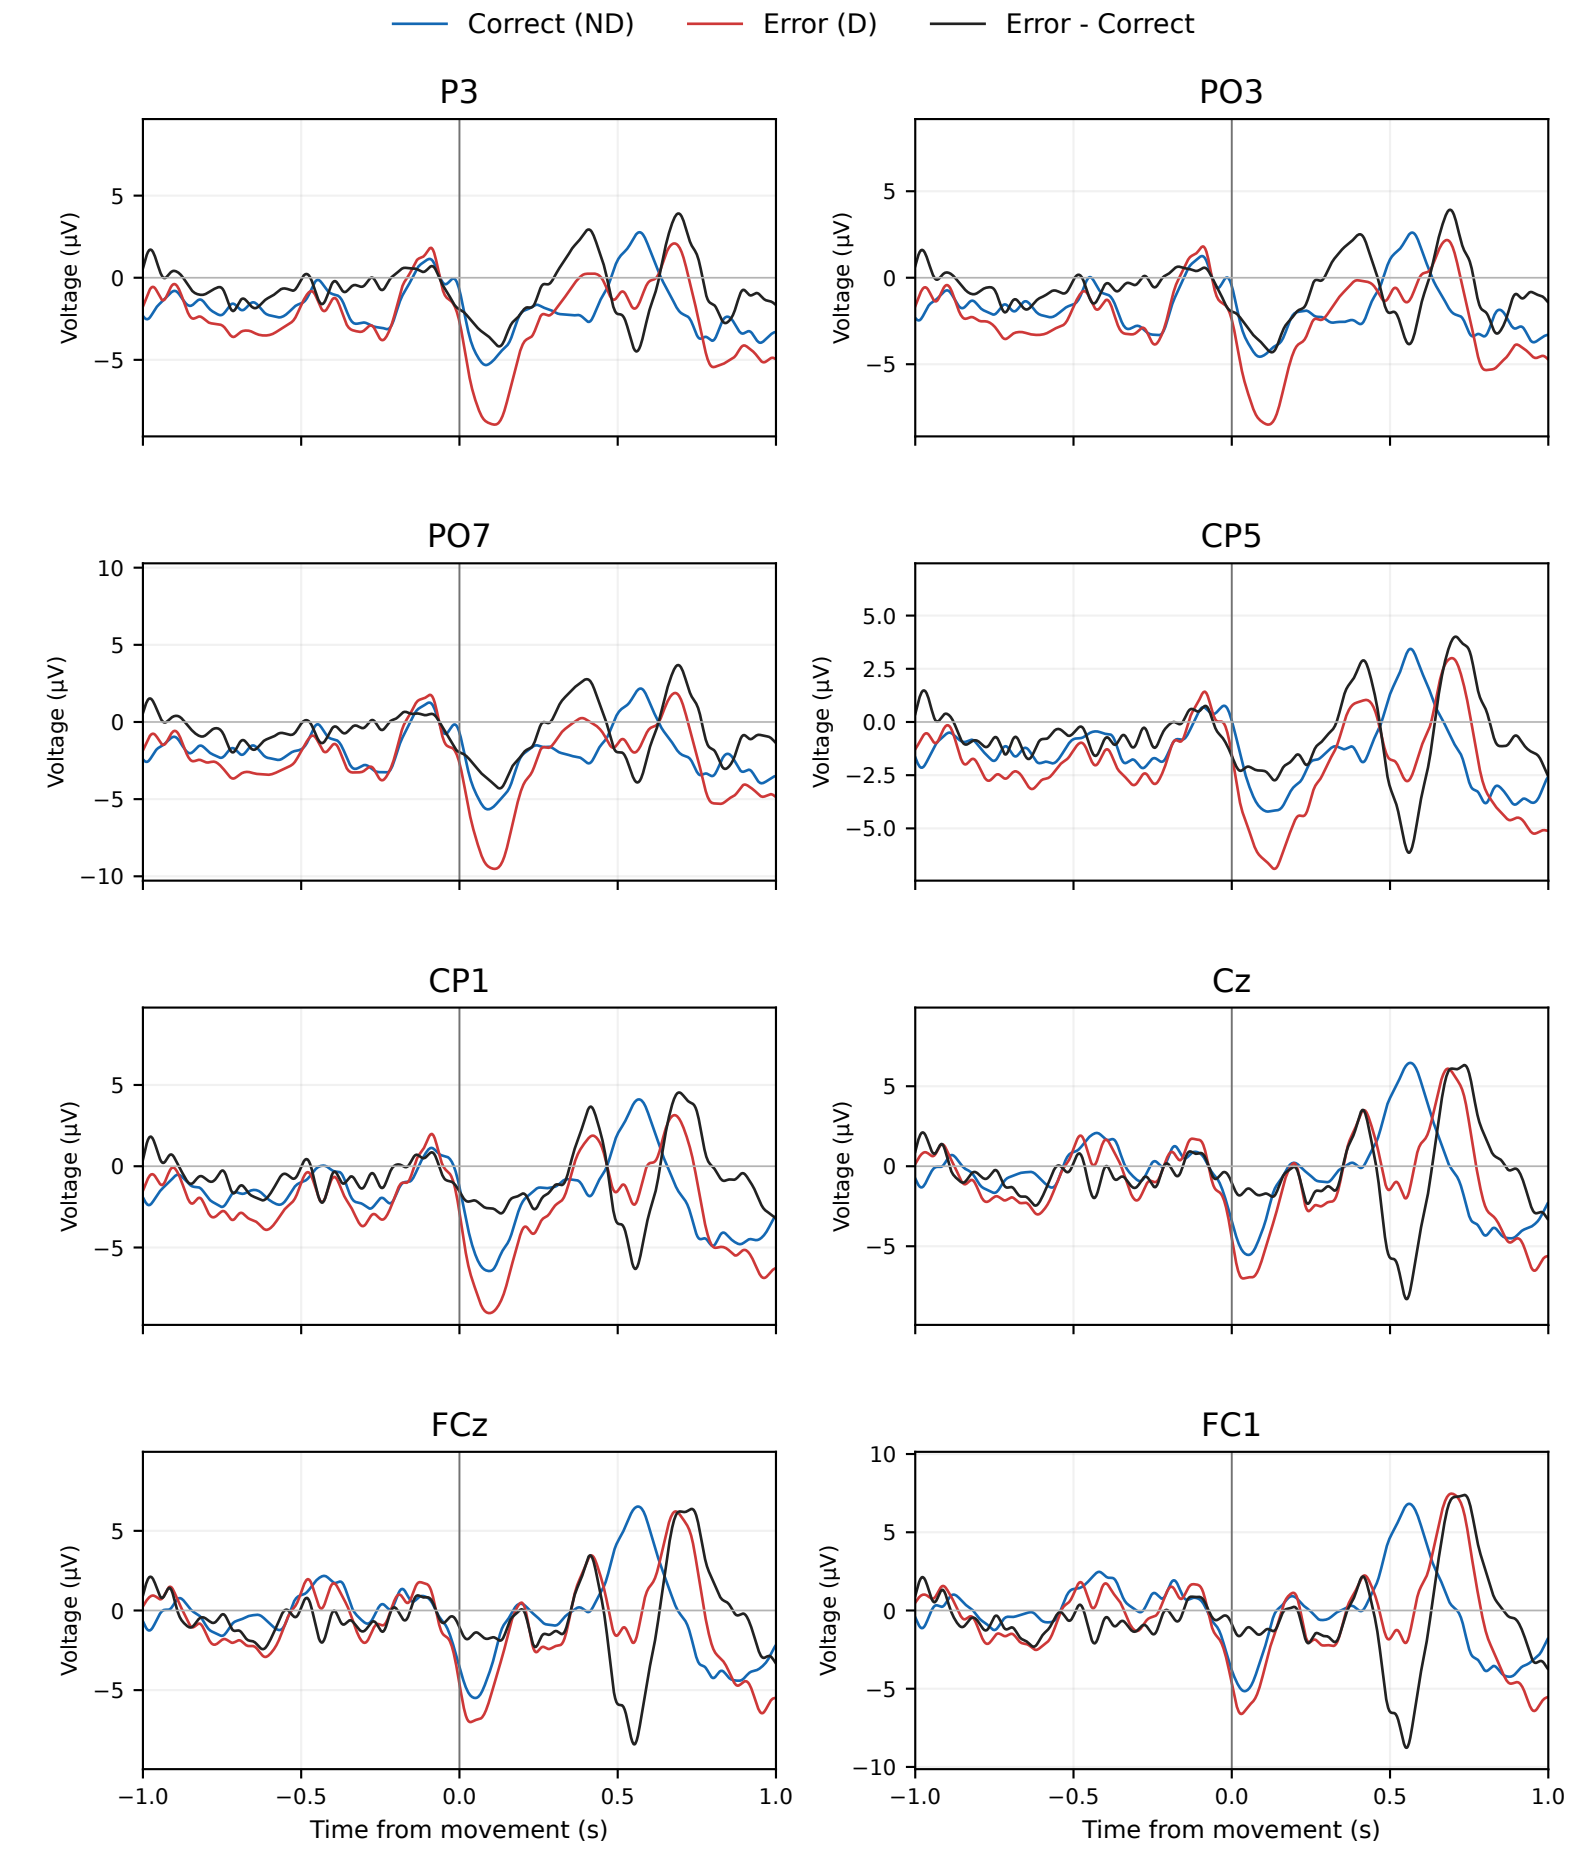

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

mka24 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=281; Error (D) n=149

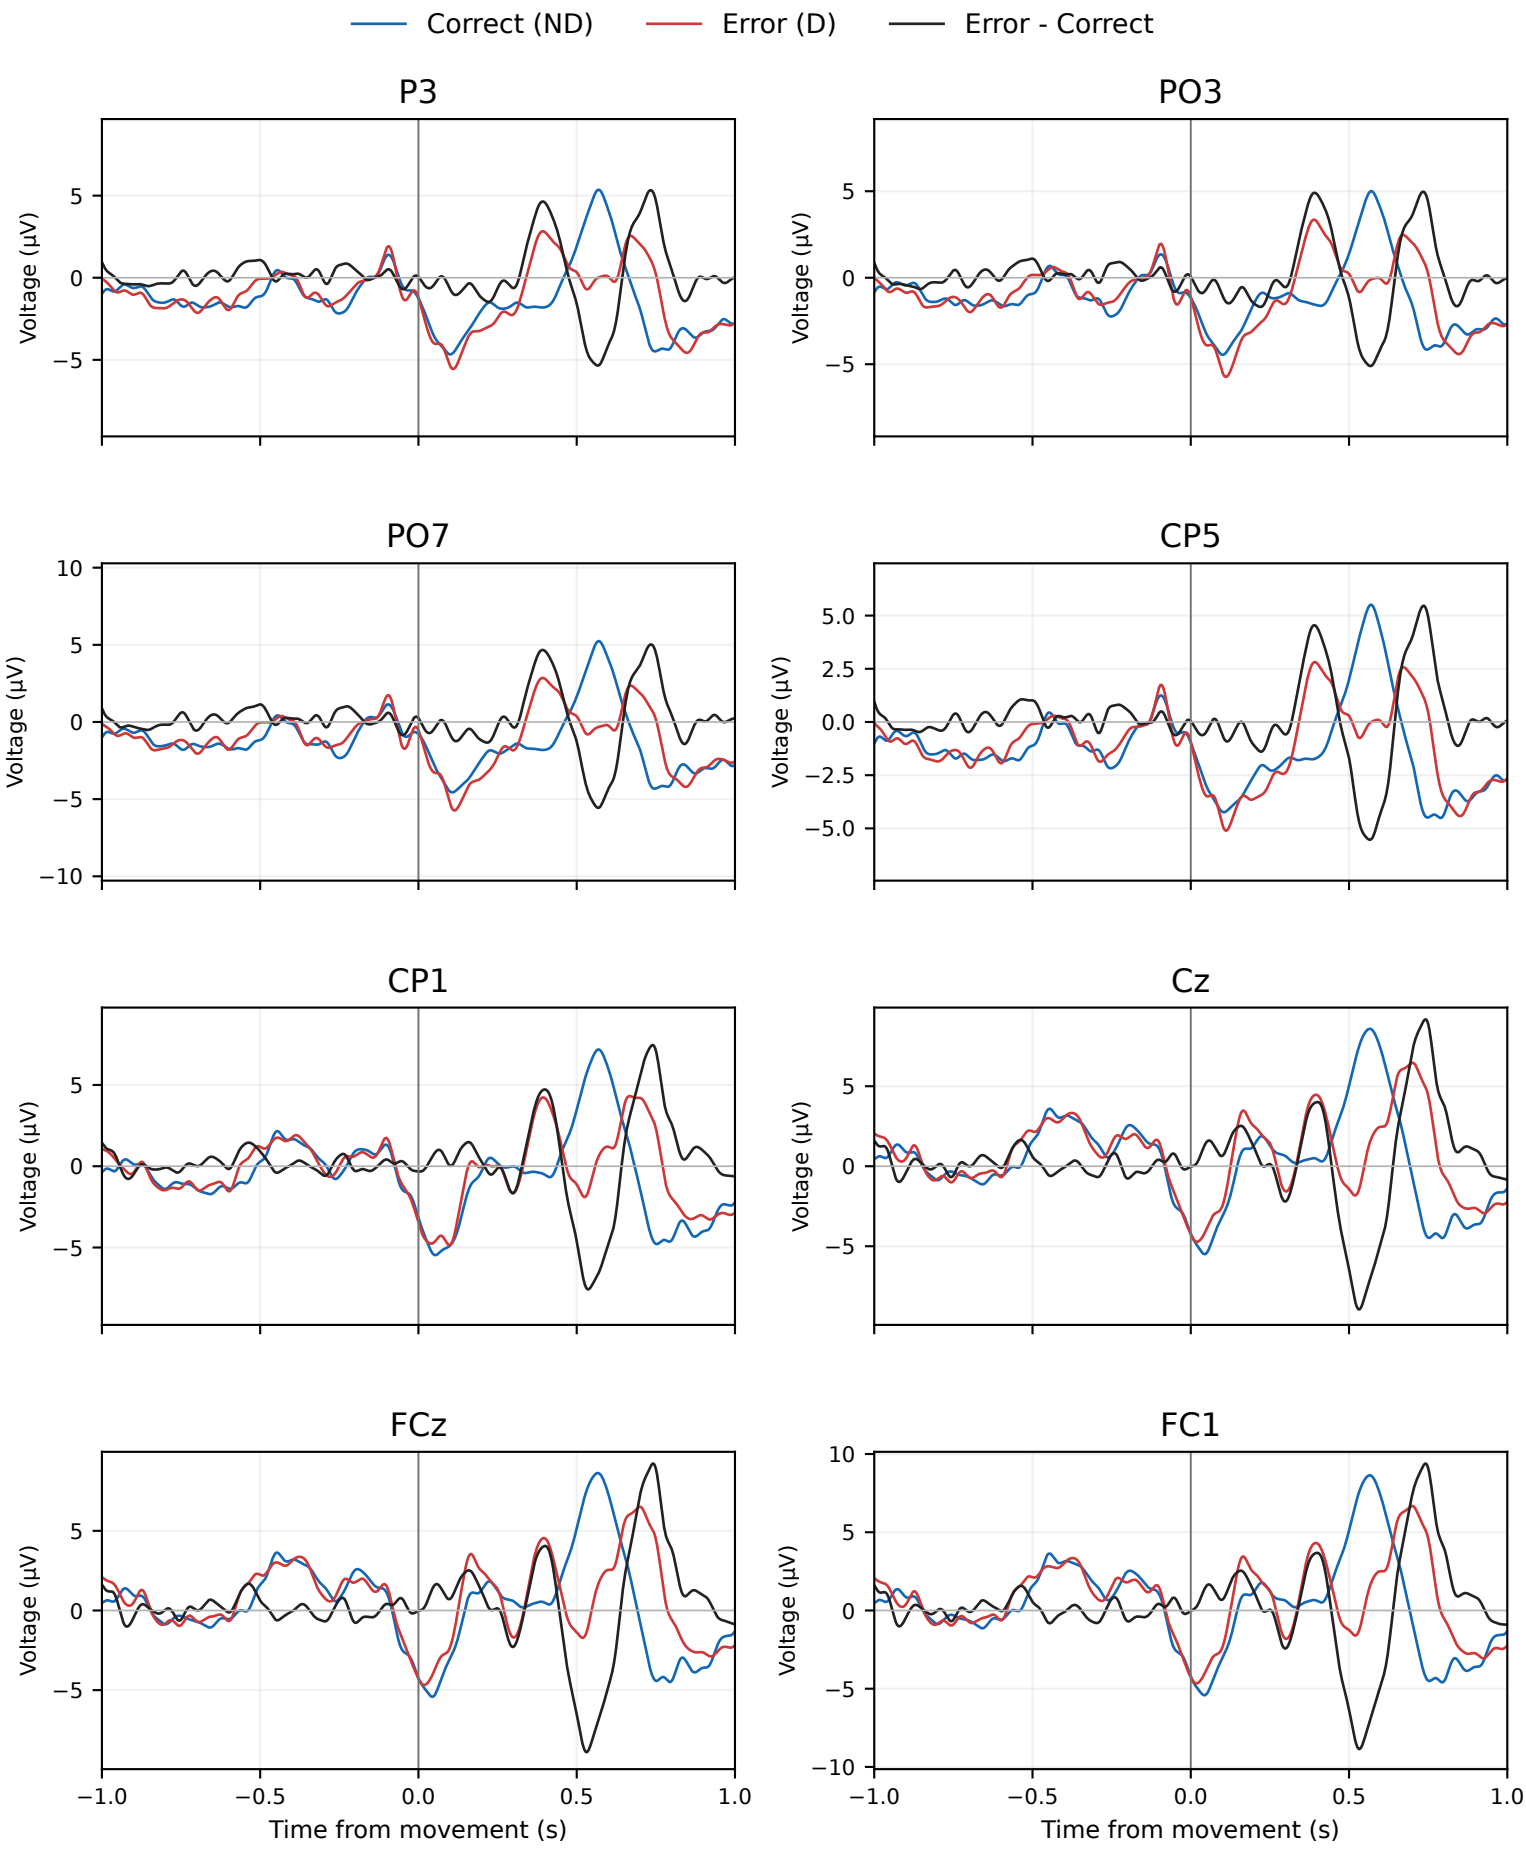

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

mle01 / pre: BP no-FORCe


Pilot (exploratory) | All accepted trials | Correct (ND) n=309; Error (D) n=166

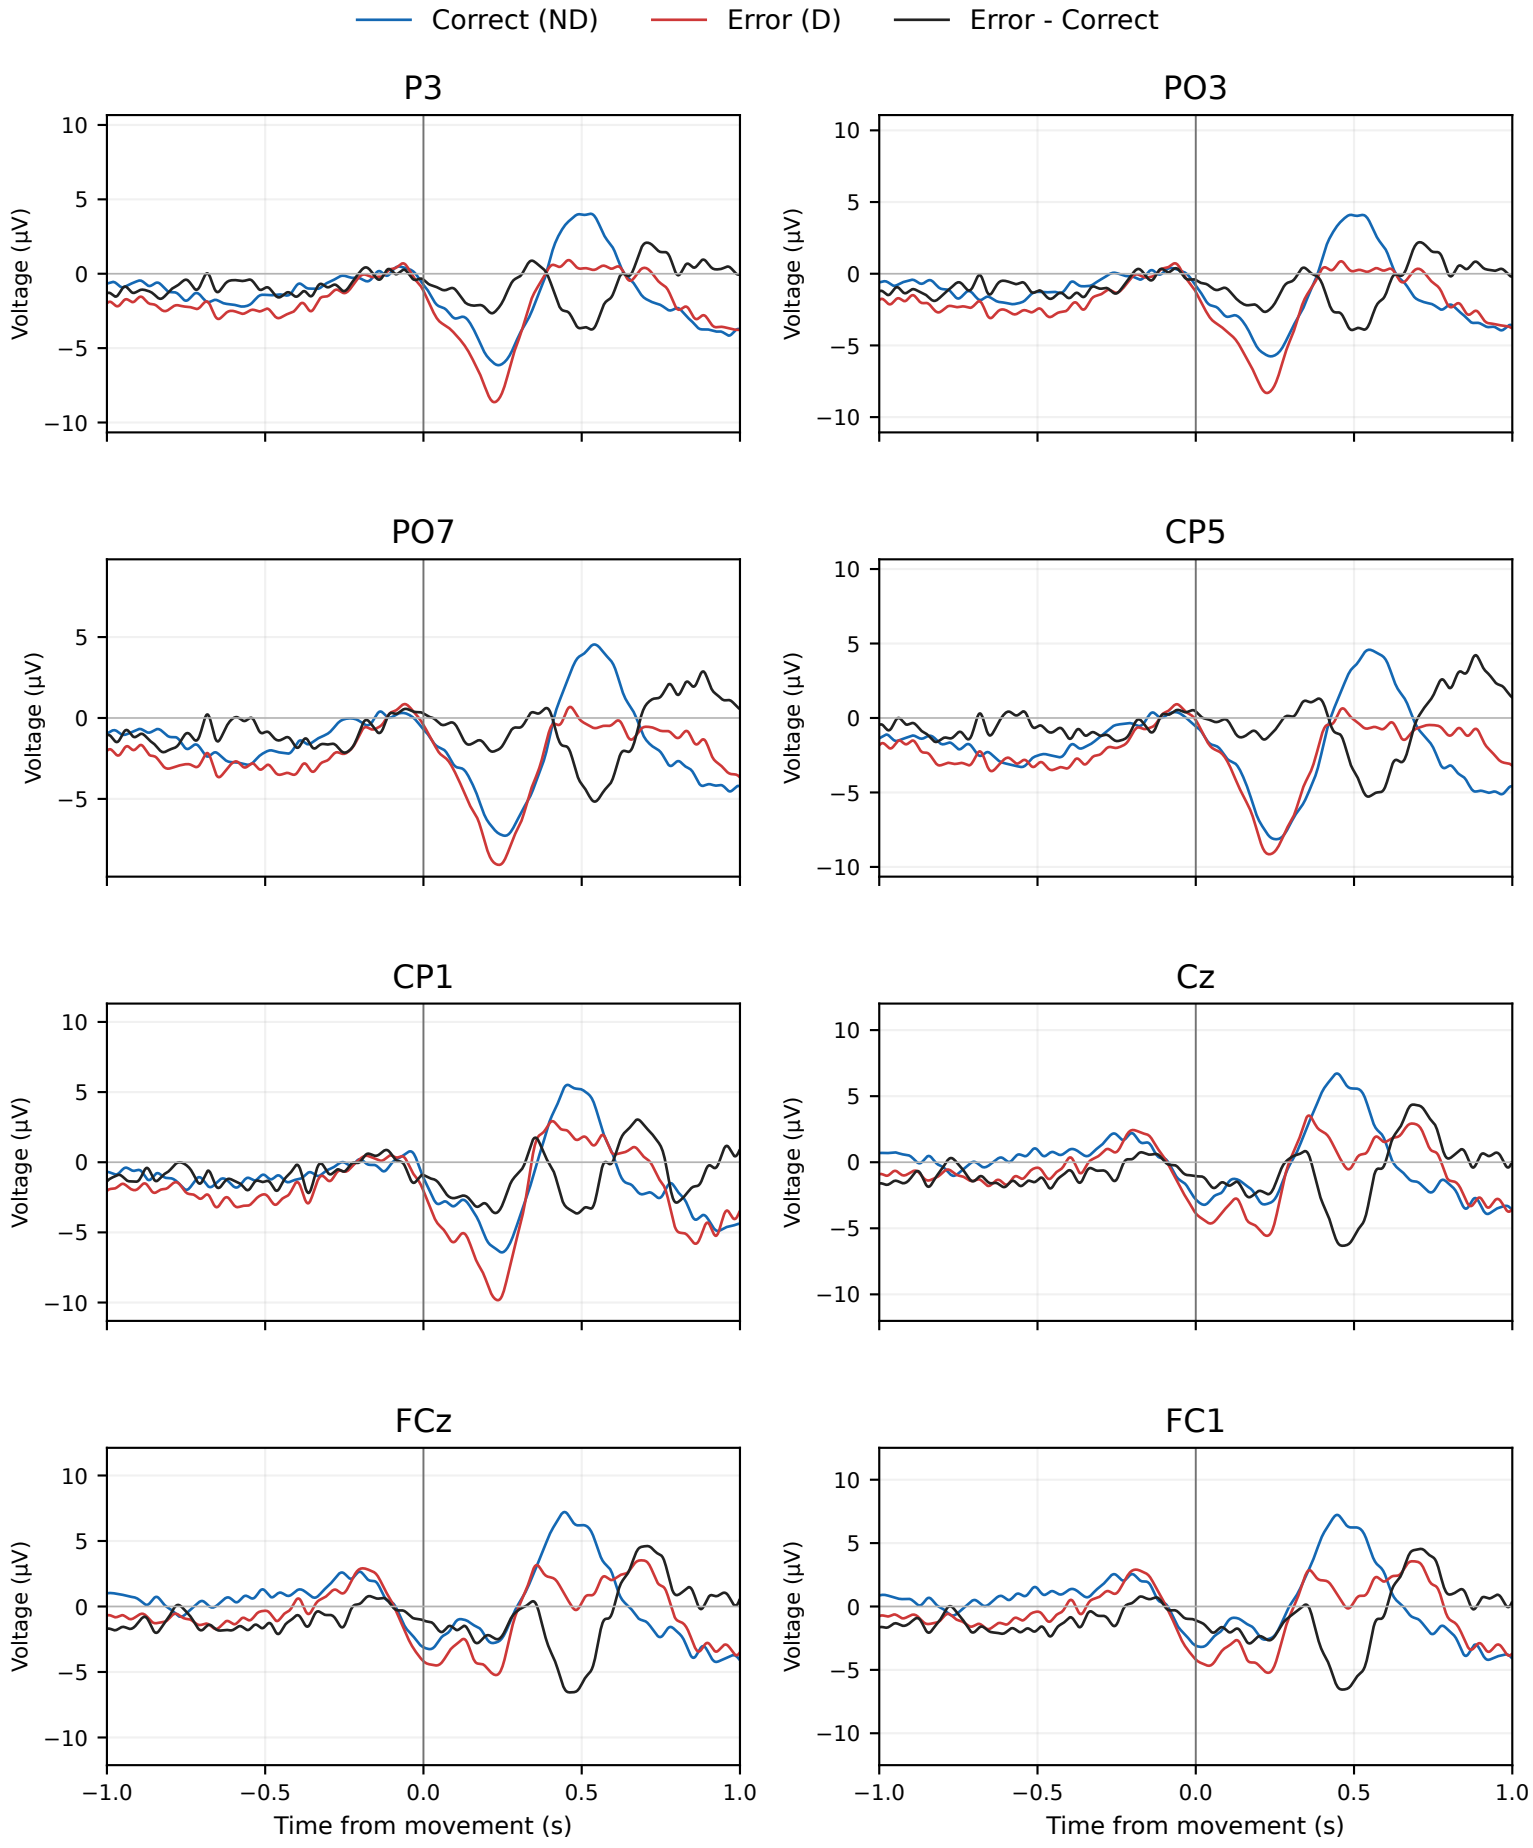

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

mle01 / post: BP no-FORCe


Pilot (exploratory) | All accepted trials | Correct (ND) n=220; Error (D) n=114

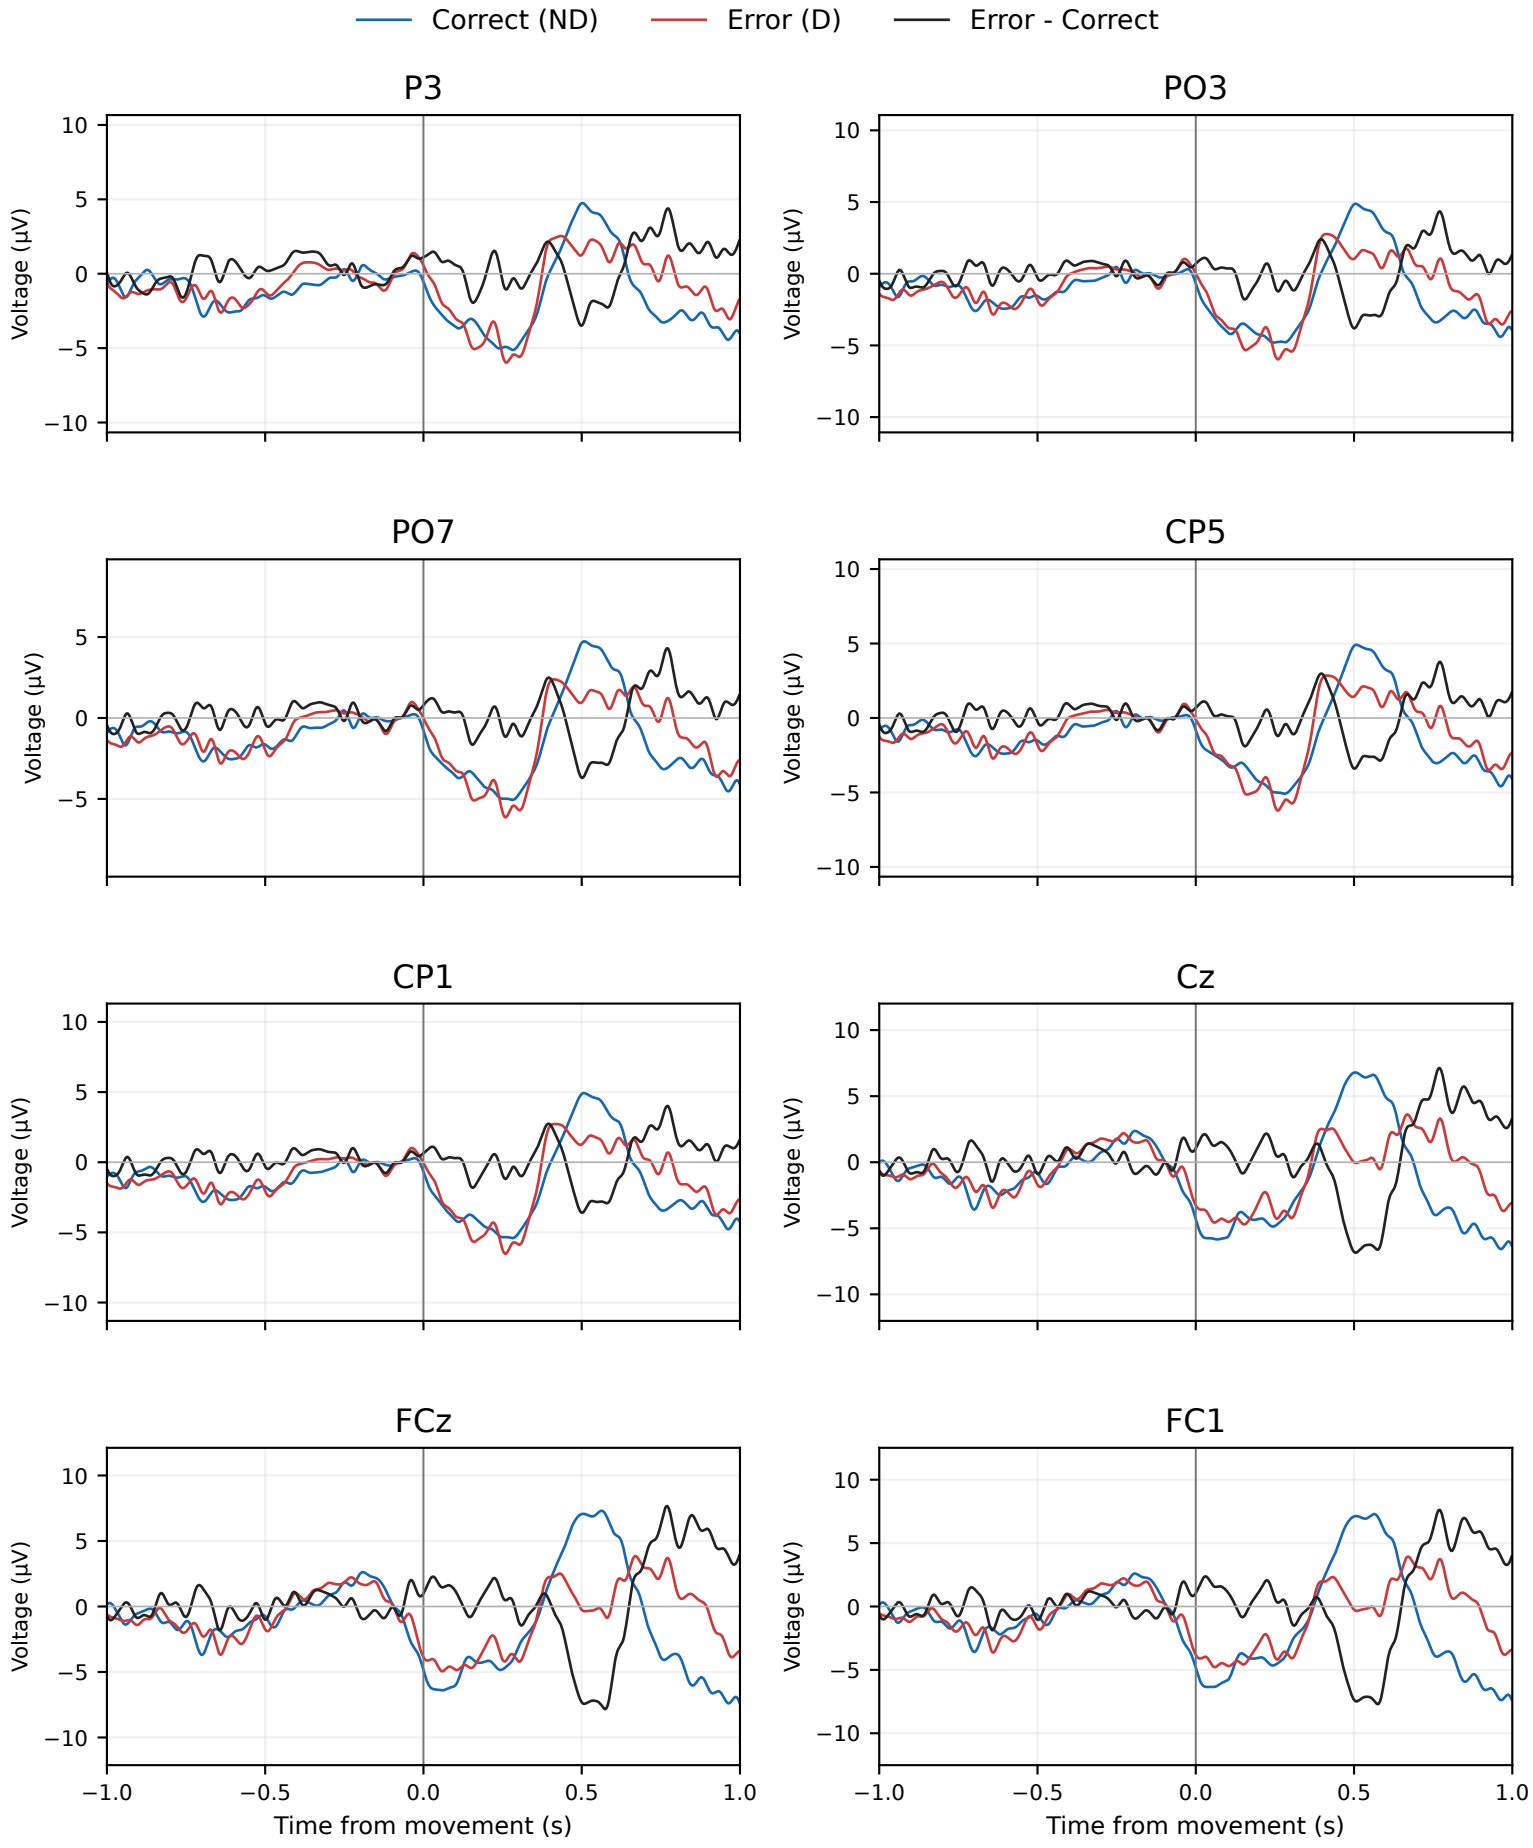

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

mle01 / retest: BP no-FORCe


Pilot (exploratory) | All accepted trials | Correct (ND) n=237; Error (D) n=133

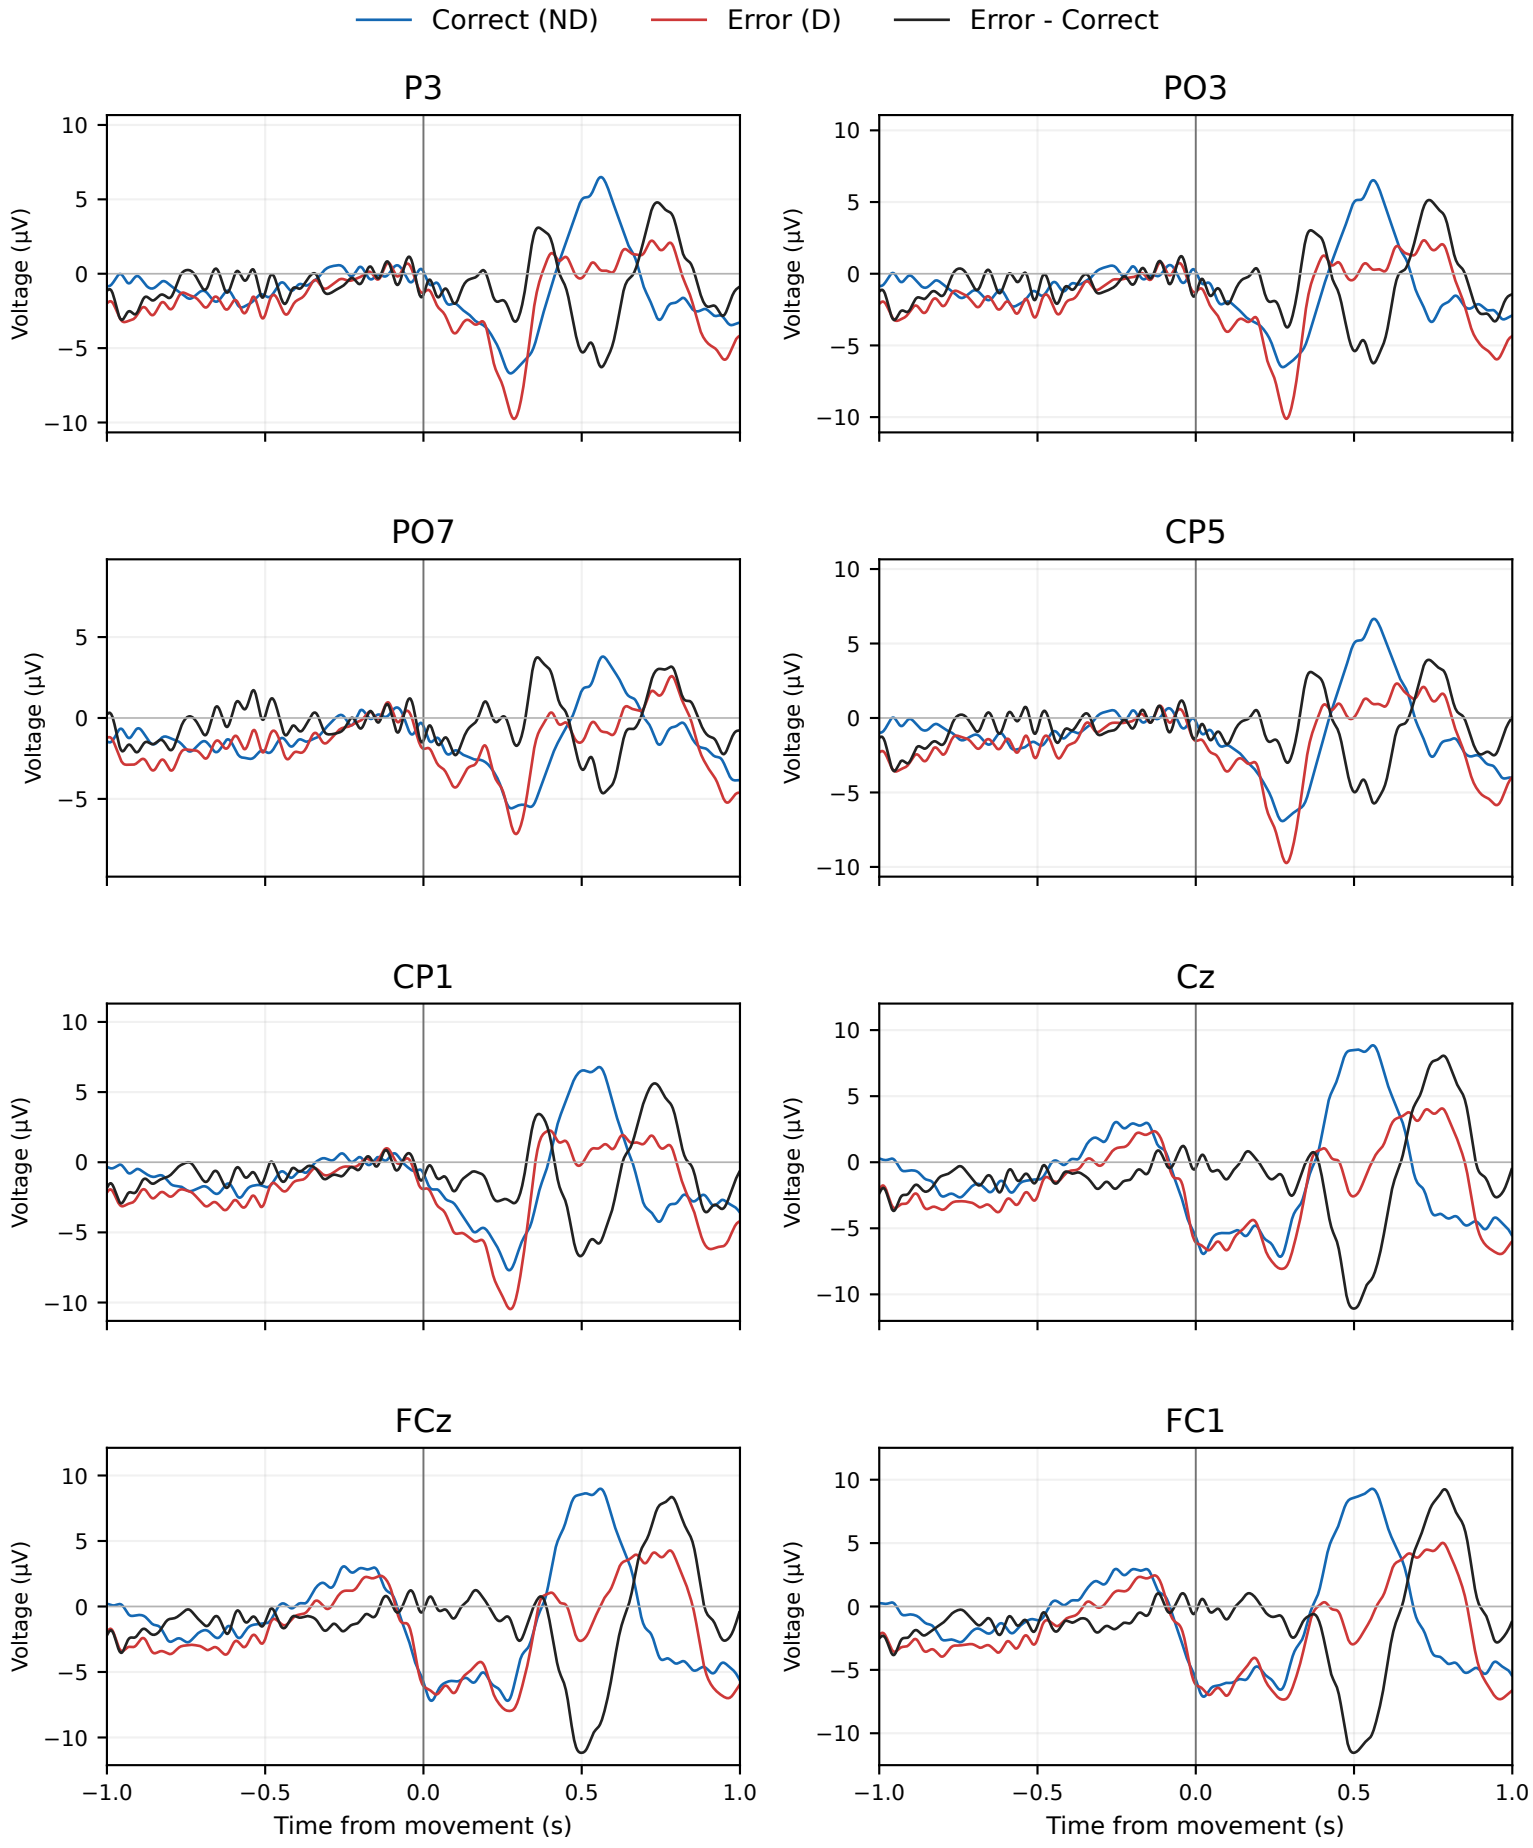

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

nfu22 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=319; Error (D) n=159

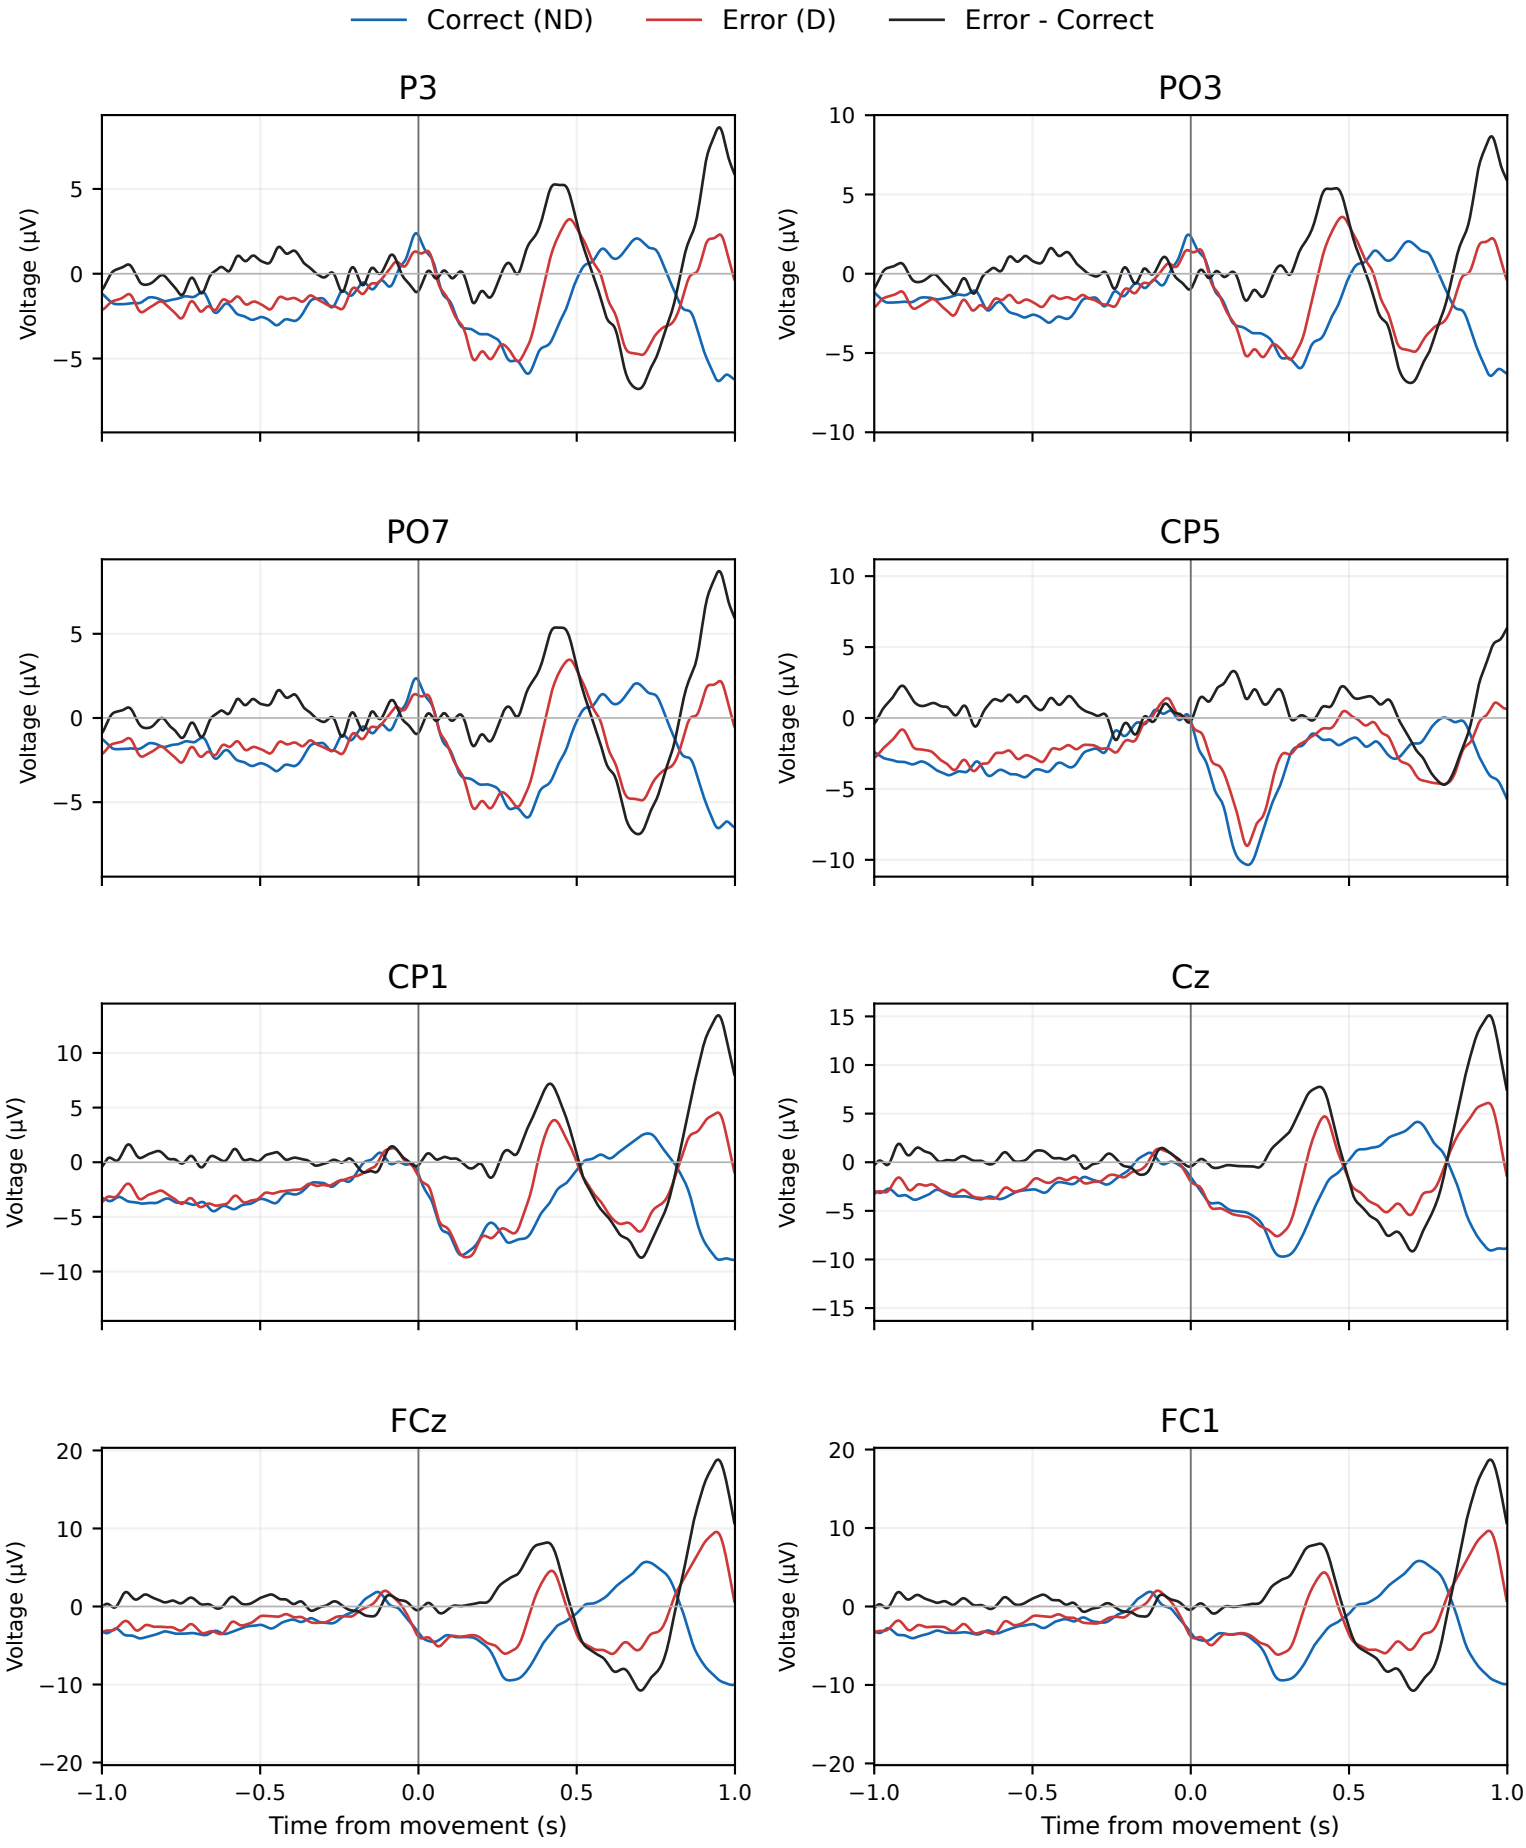

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

nfu22 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=318; Error (D) n=162

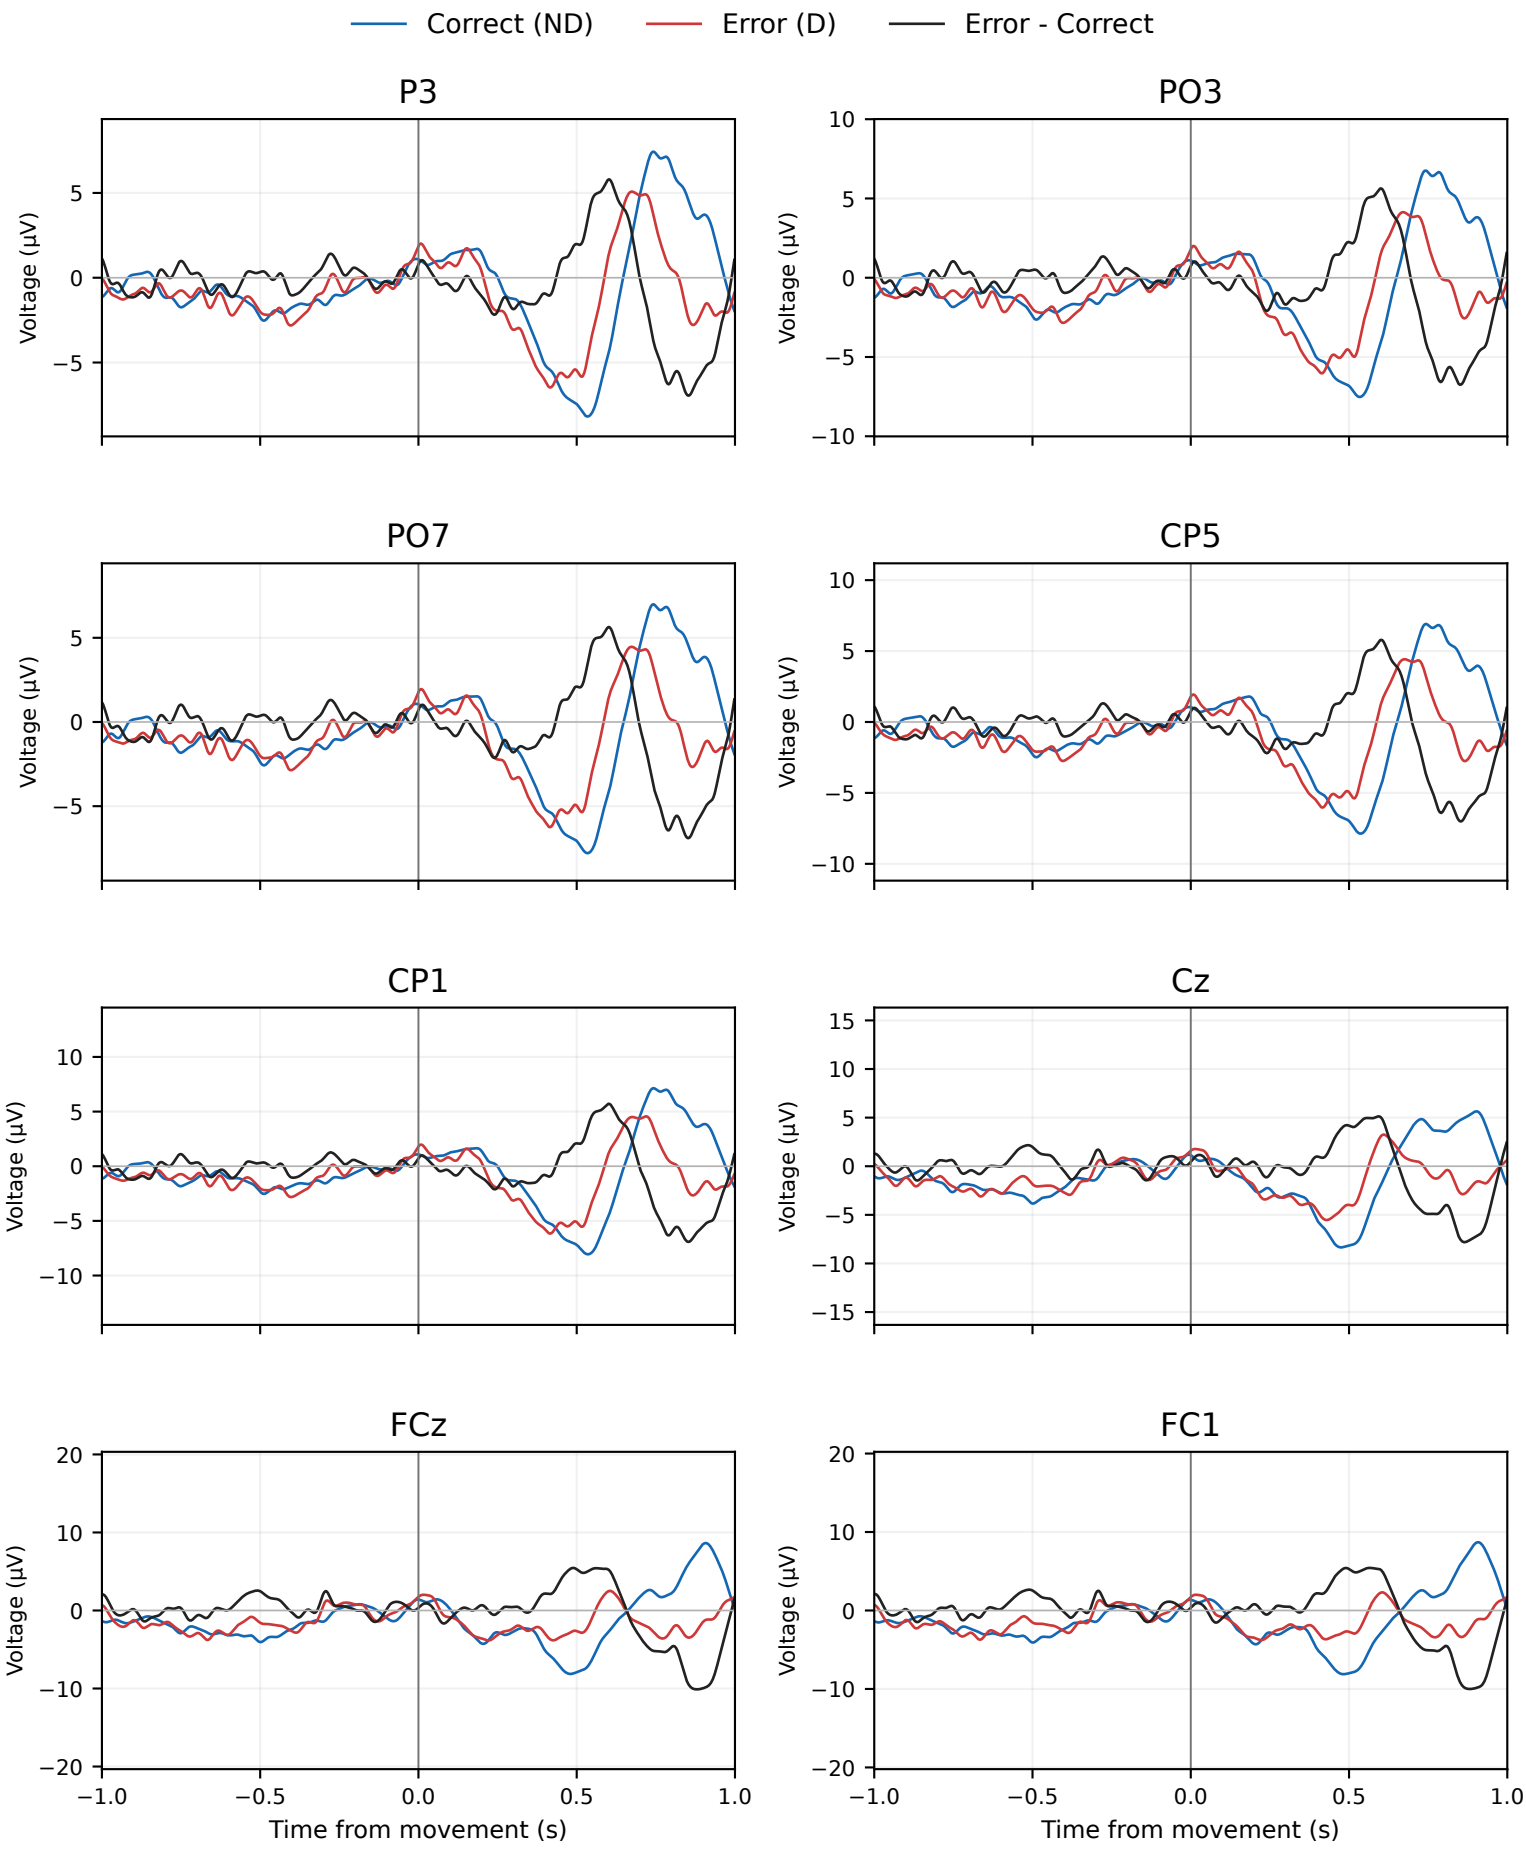

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

nfu22 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=316; Error (D) n=161

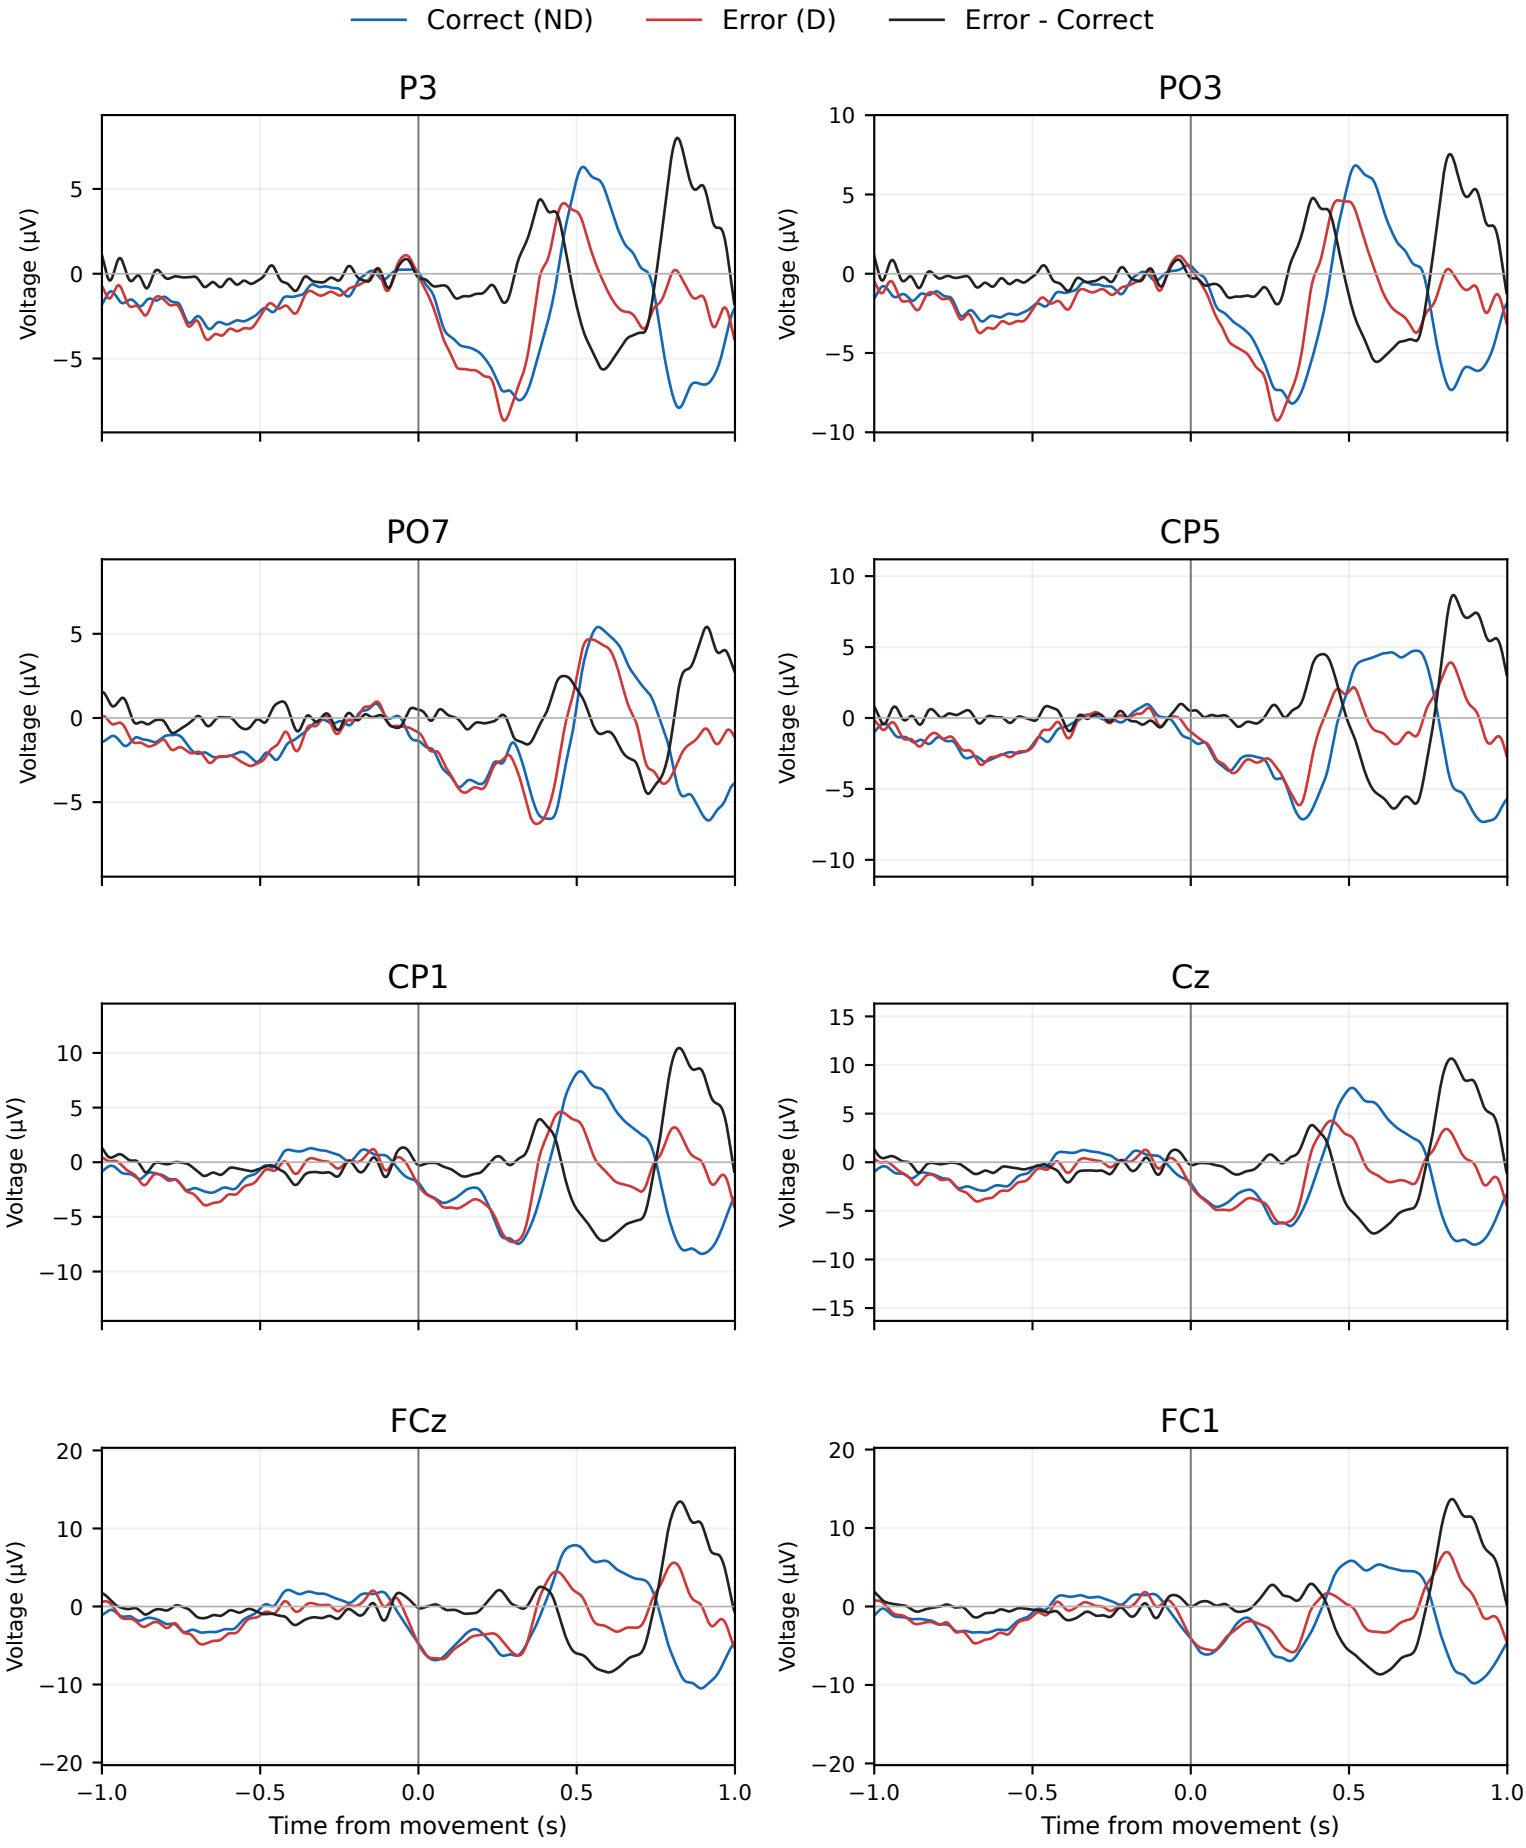

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

nsh23 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=314; Error (D) n=167

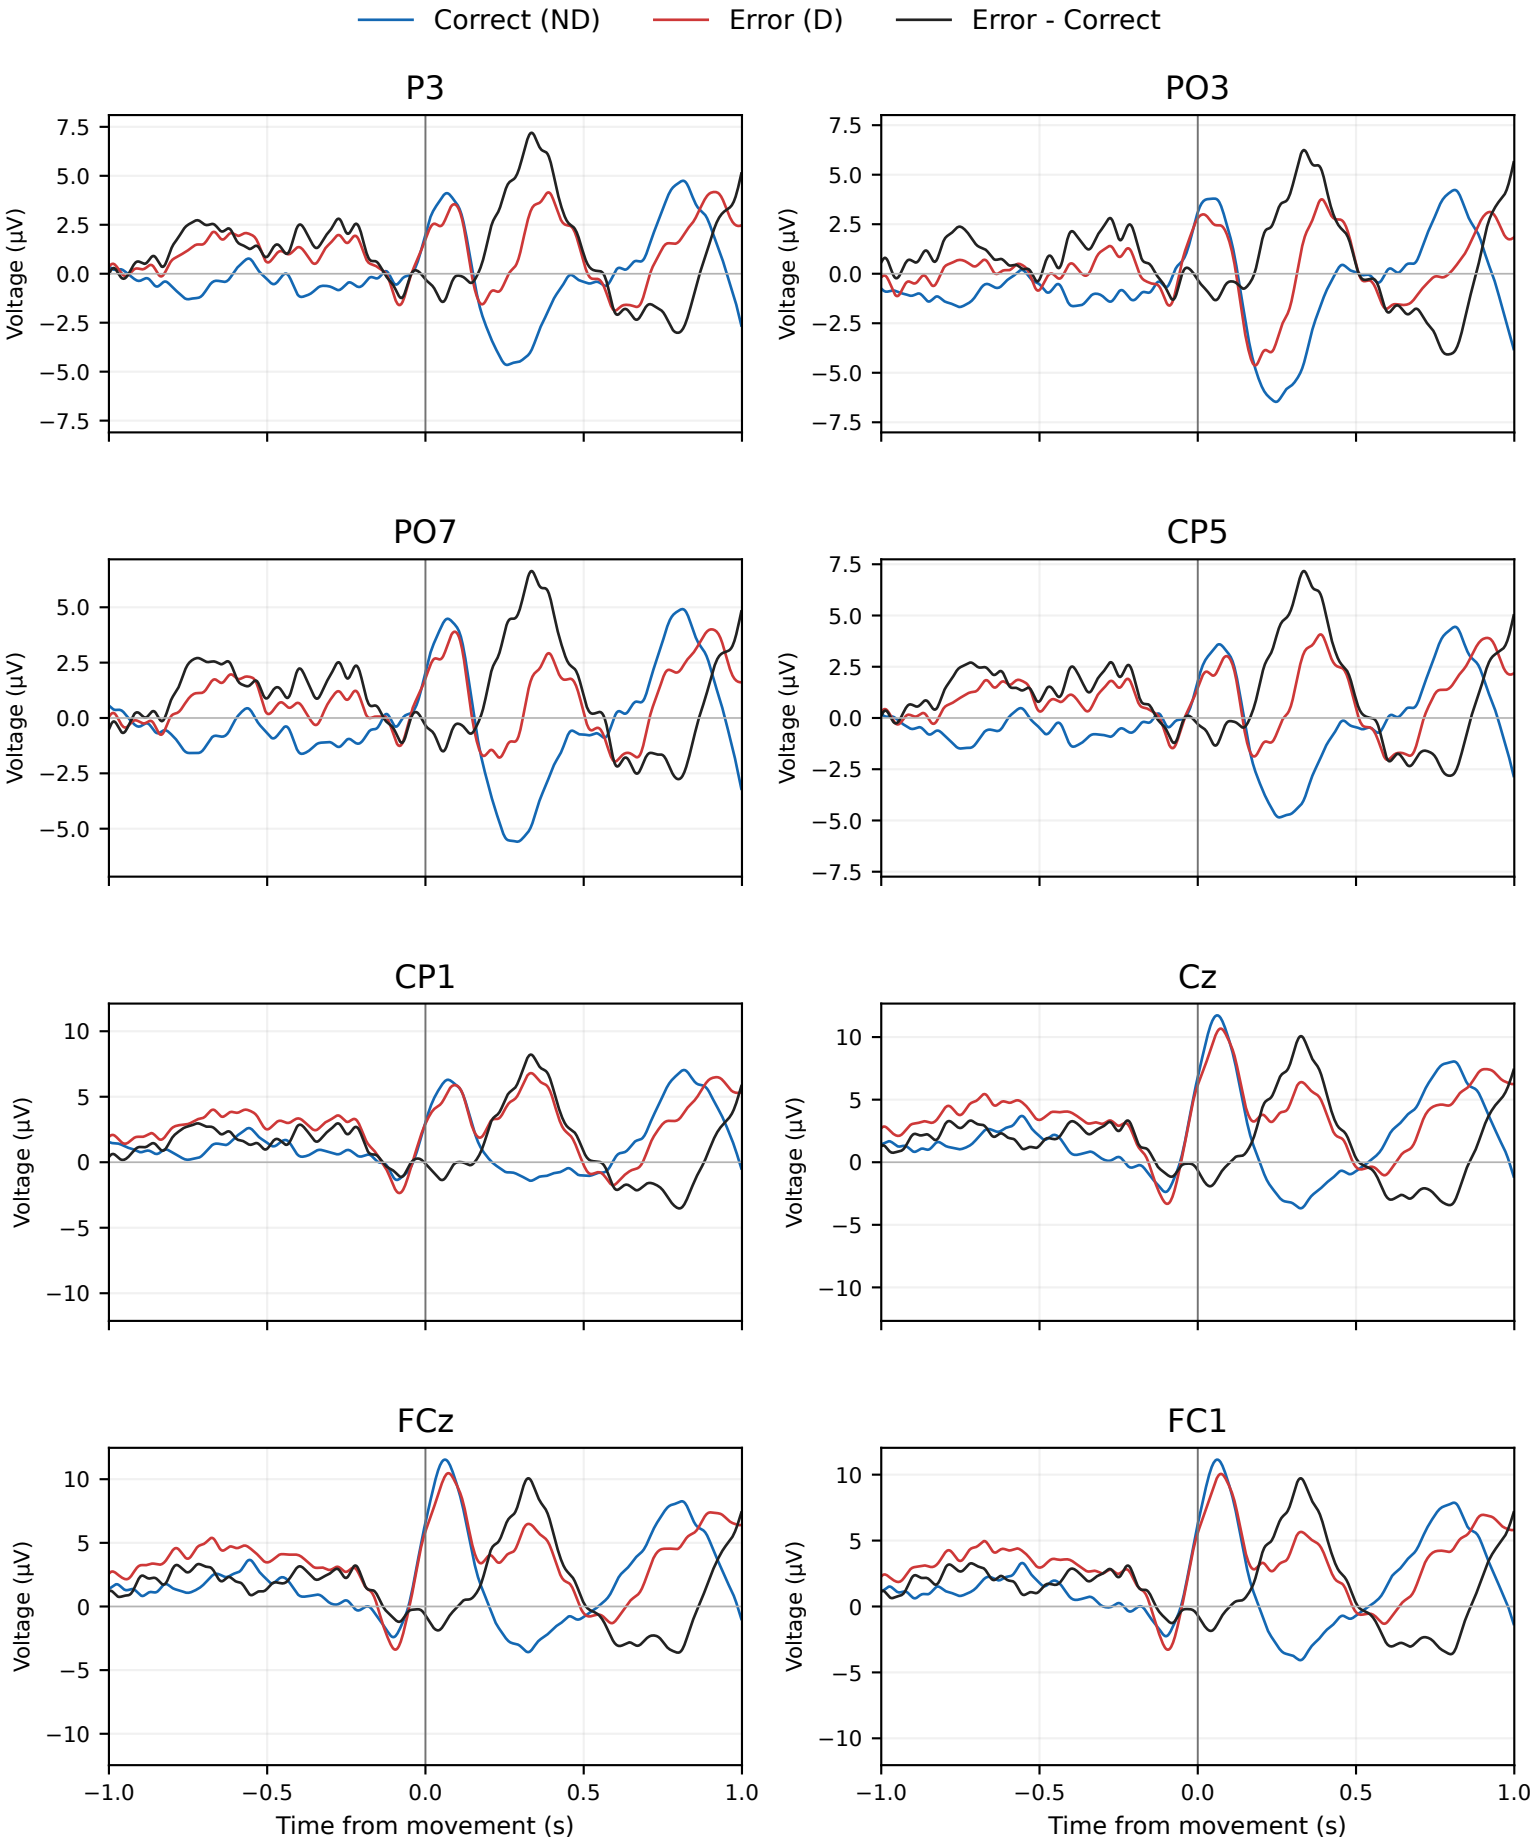

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

nsh23 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=309; Error (D) n=164

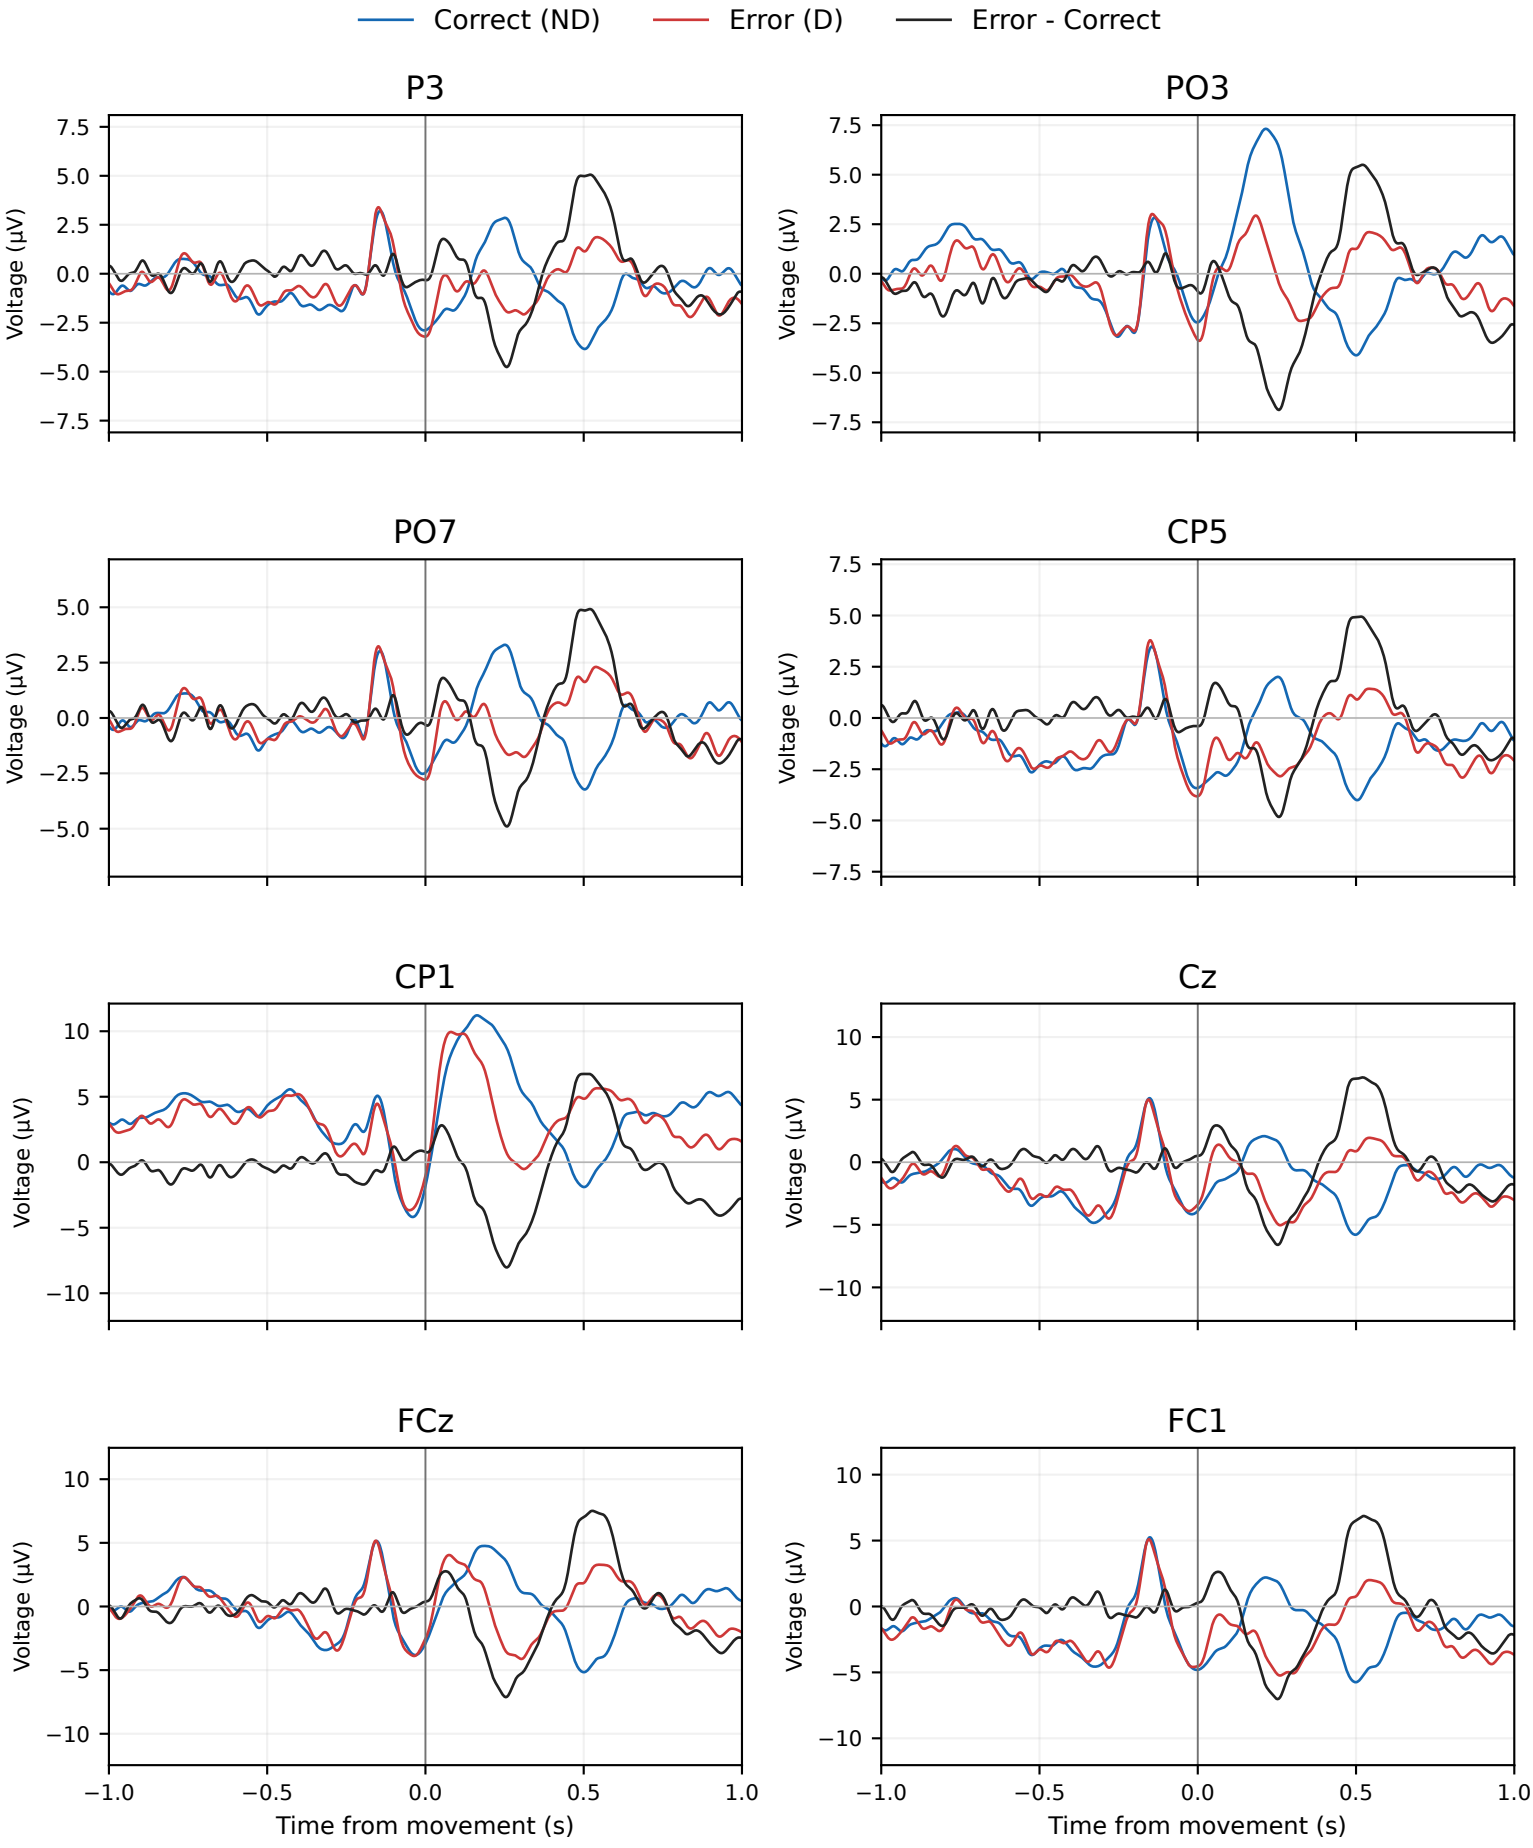

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

nsh23 / retest: BP no-FORCe

Non-pilot participant | All accepted trials | Correct (ND) n=321; Error (D) n=167

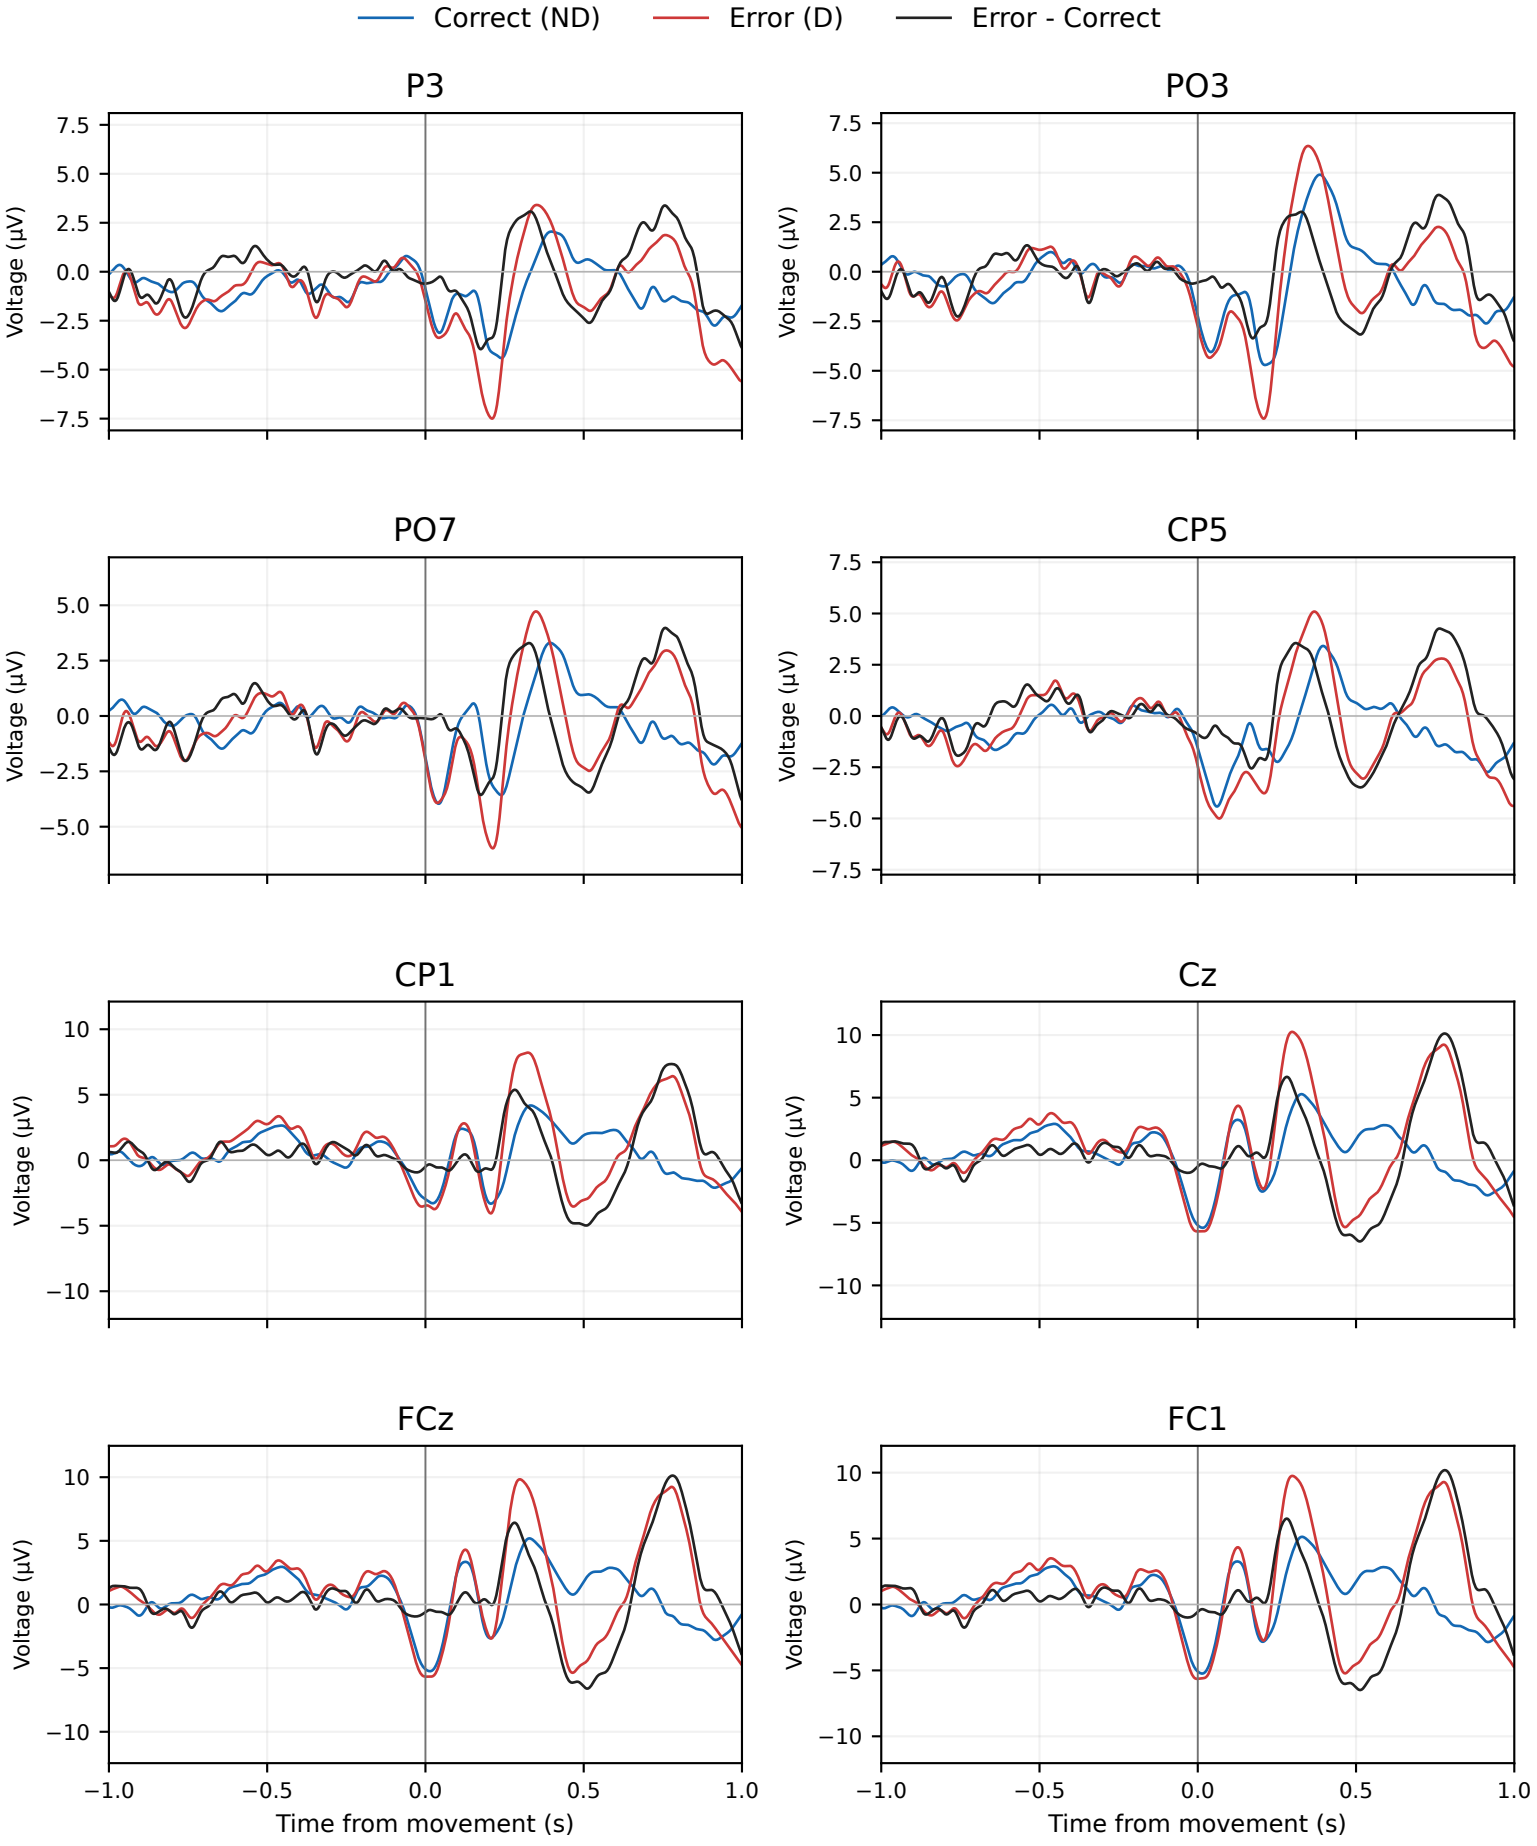


Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

rle13 / pre: BP no-FORCe

Non-pilot participant | All accepted trials | Correct (ND) n=8; Error (D) n=2

Correct (ND) Error (D) Error - Correct


Limited-data session: accepted trials shown; ineligible for classifier cross-validation.

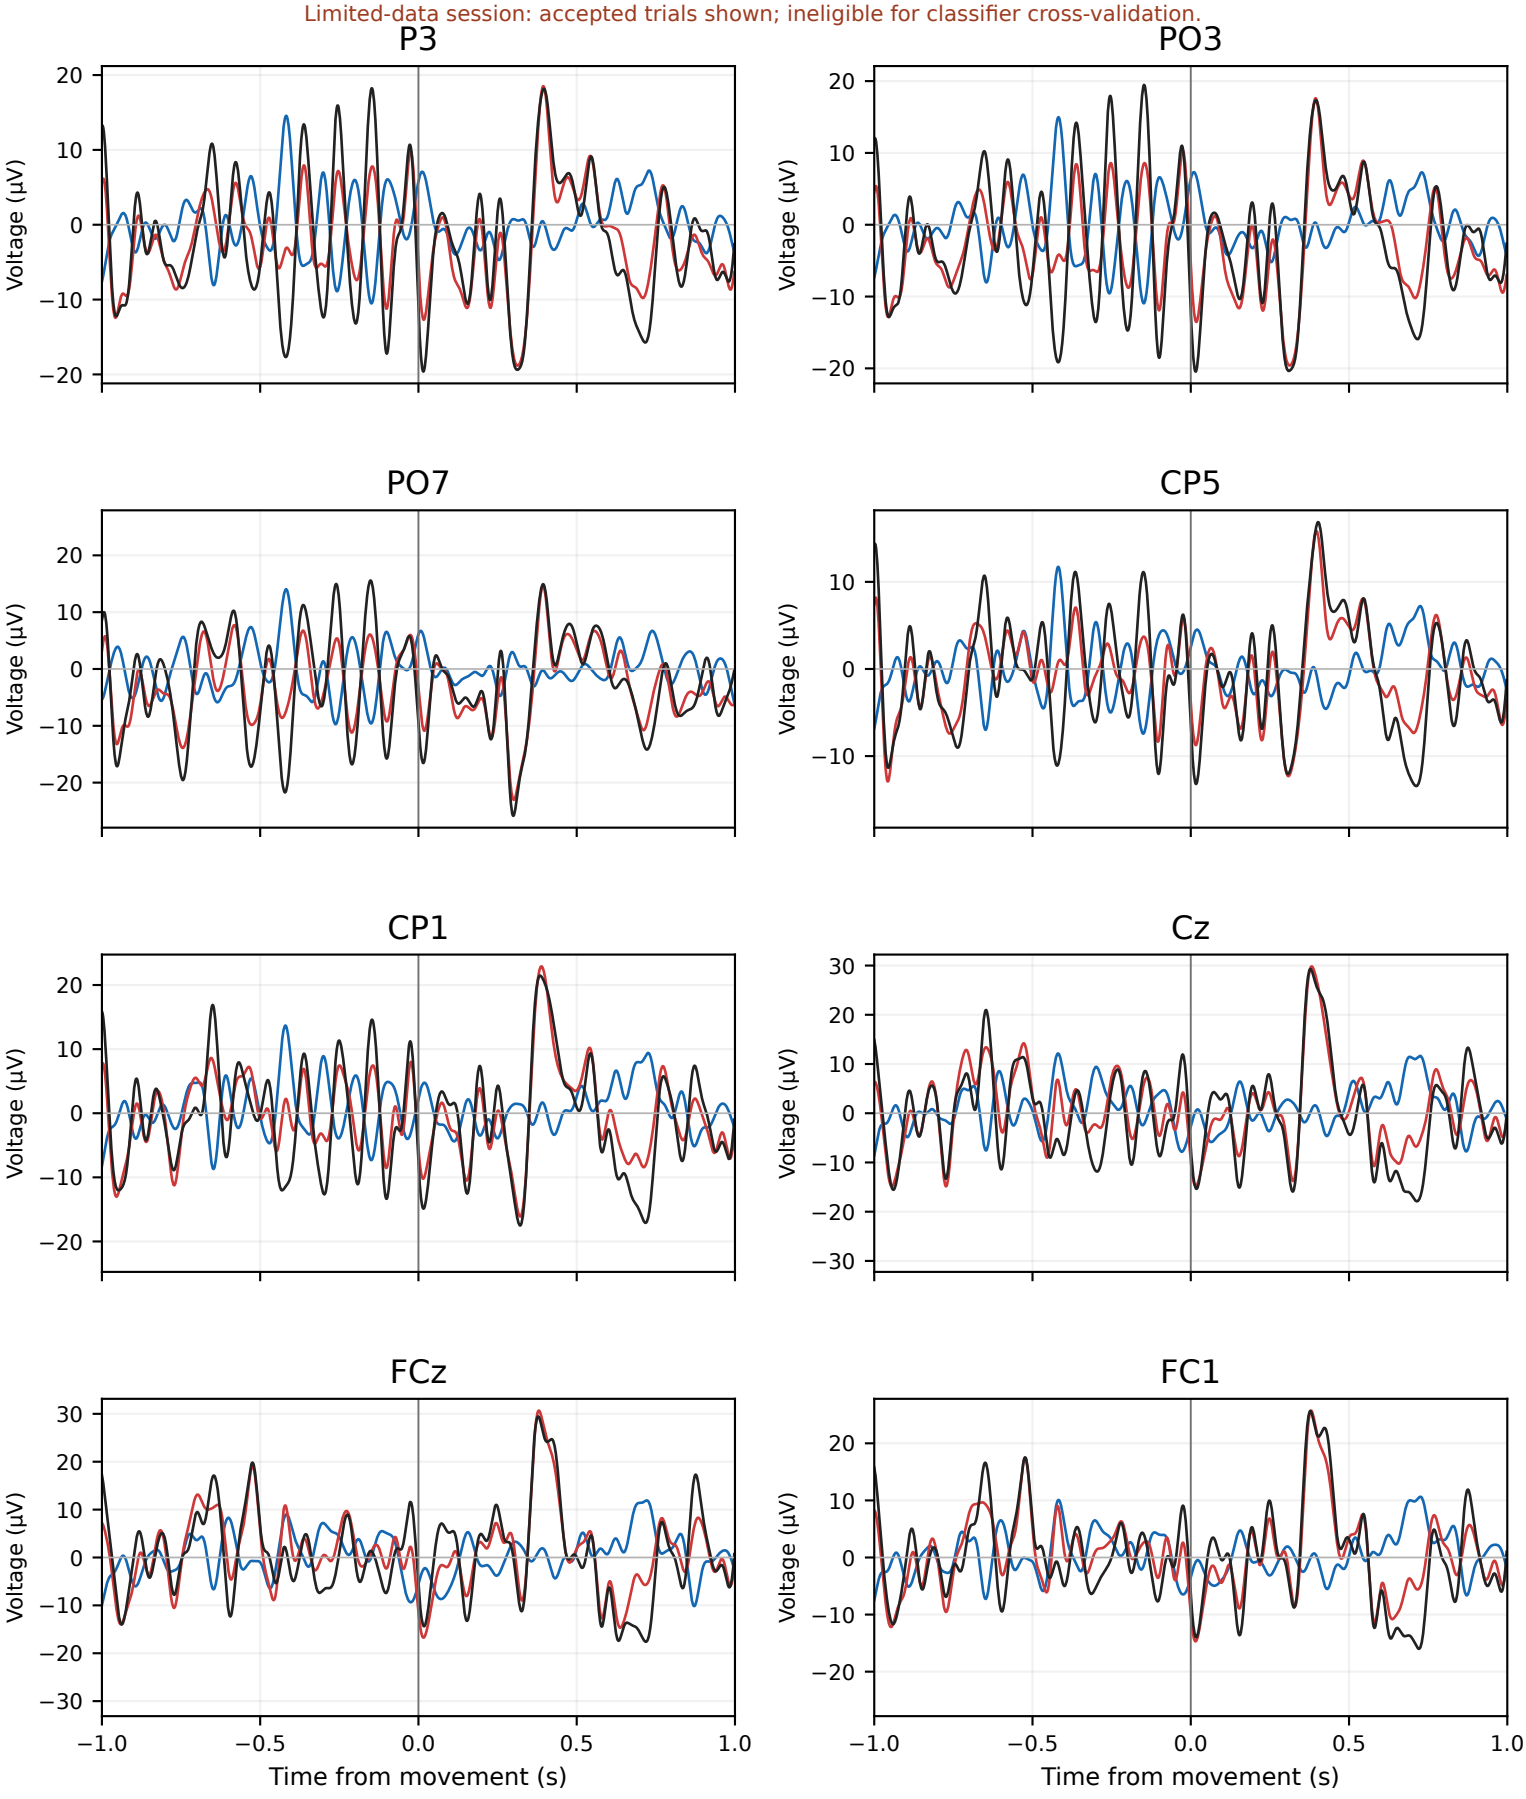

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

rle13 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=259; Error (D) n=133

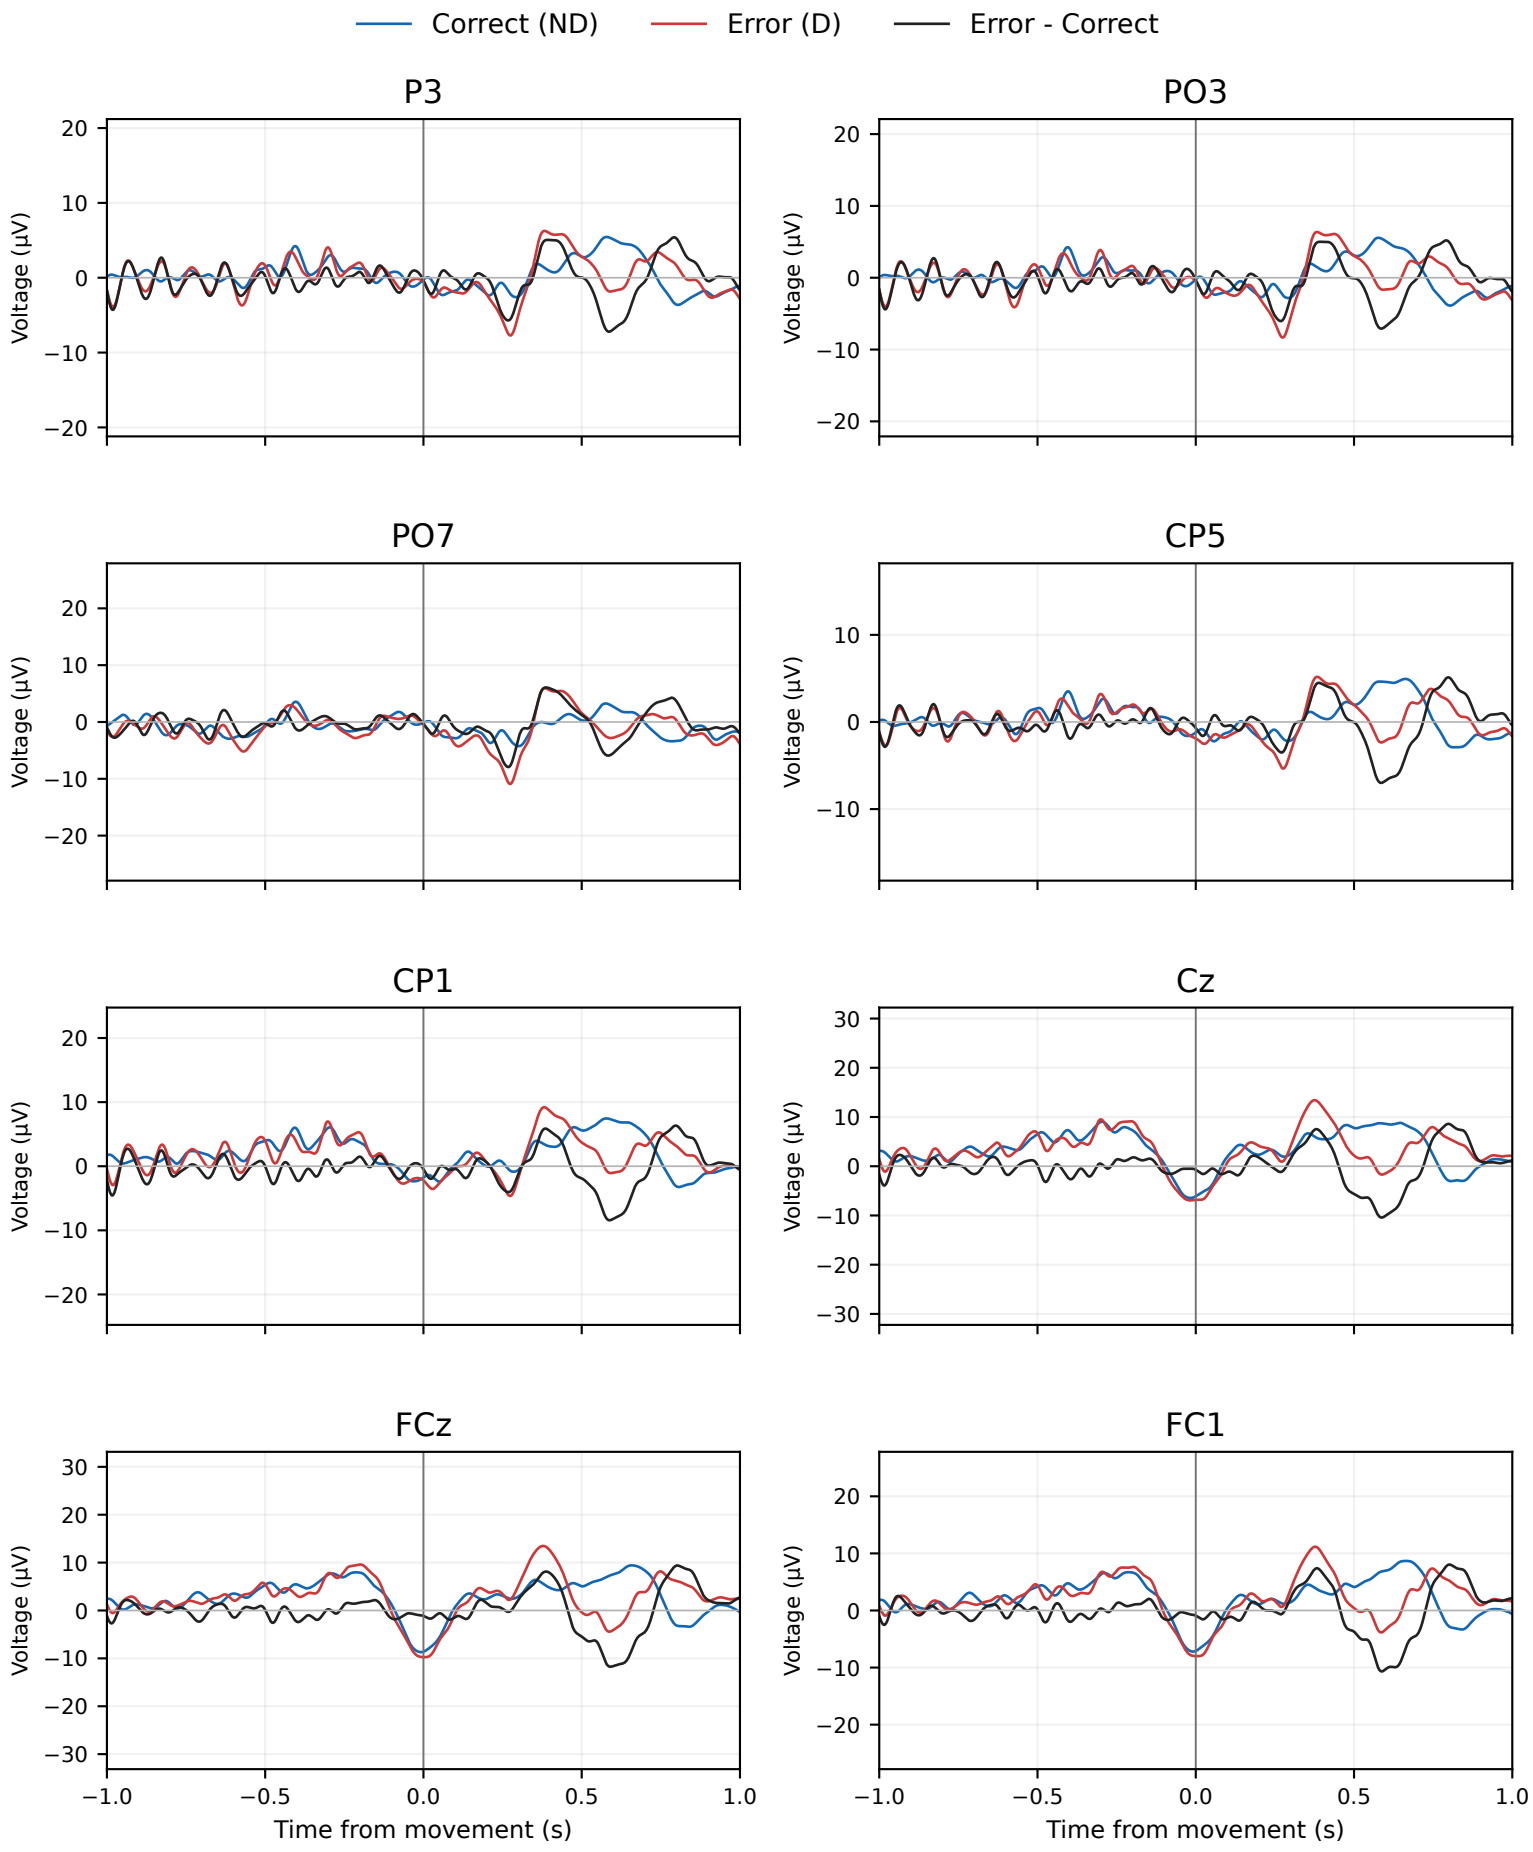

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

rle13 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=327; Error (D) n=168

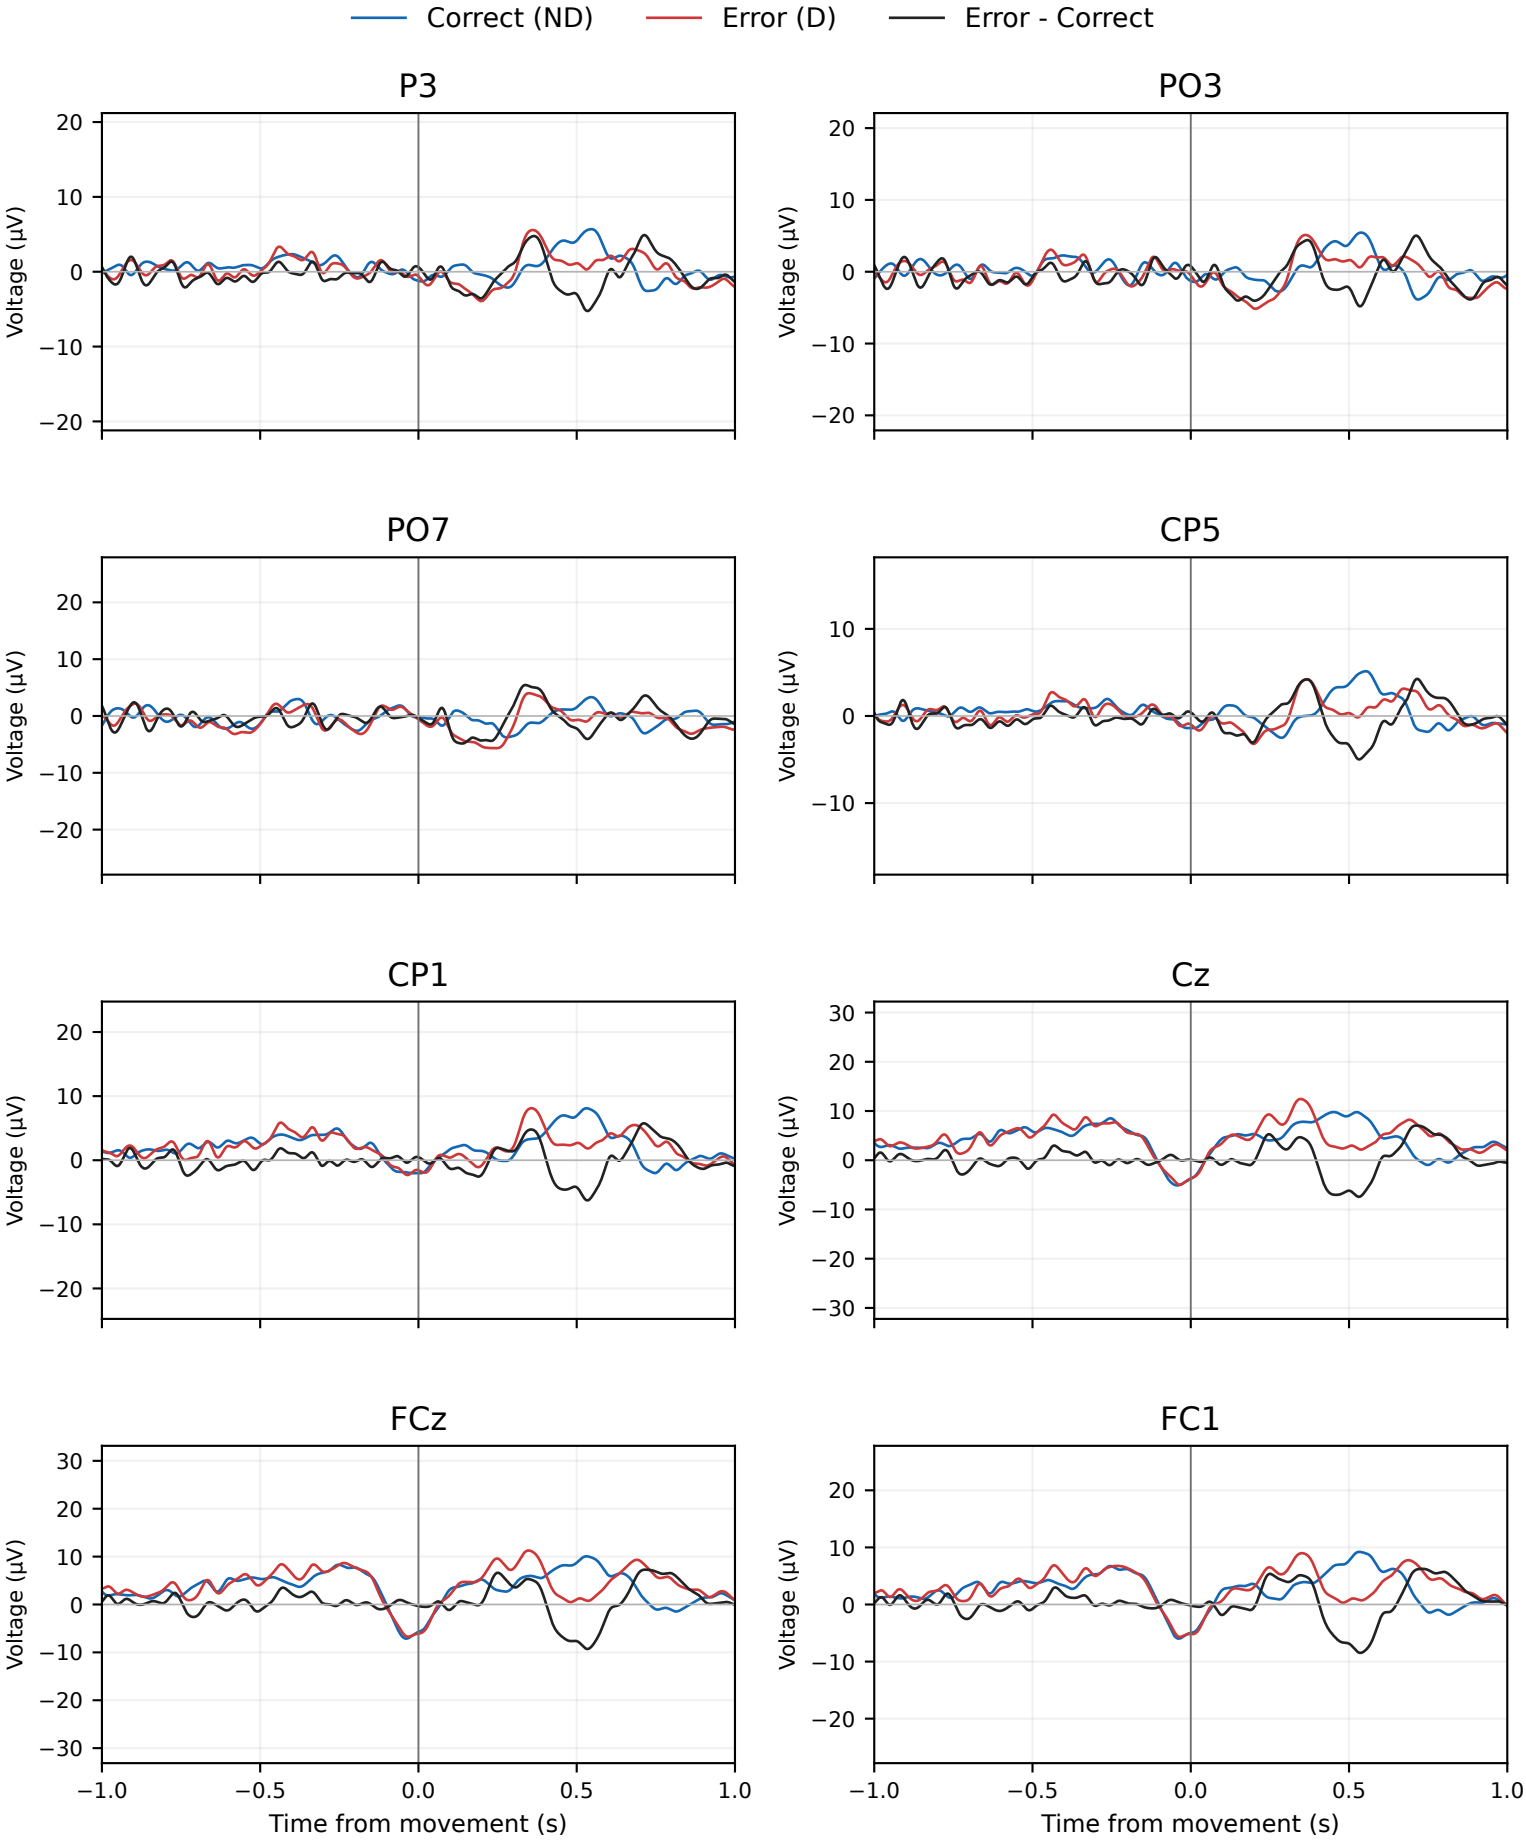

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

sga12 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=247; Error (D) n=136

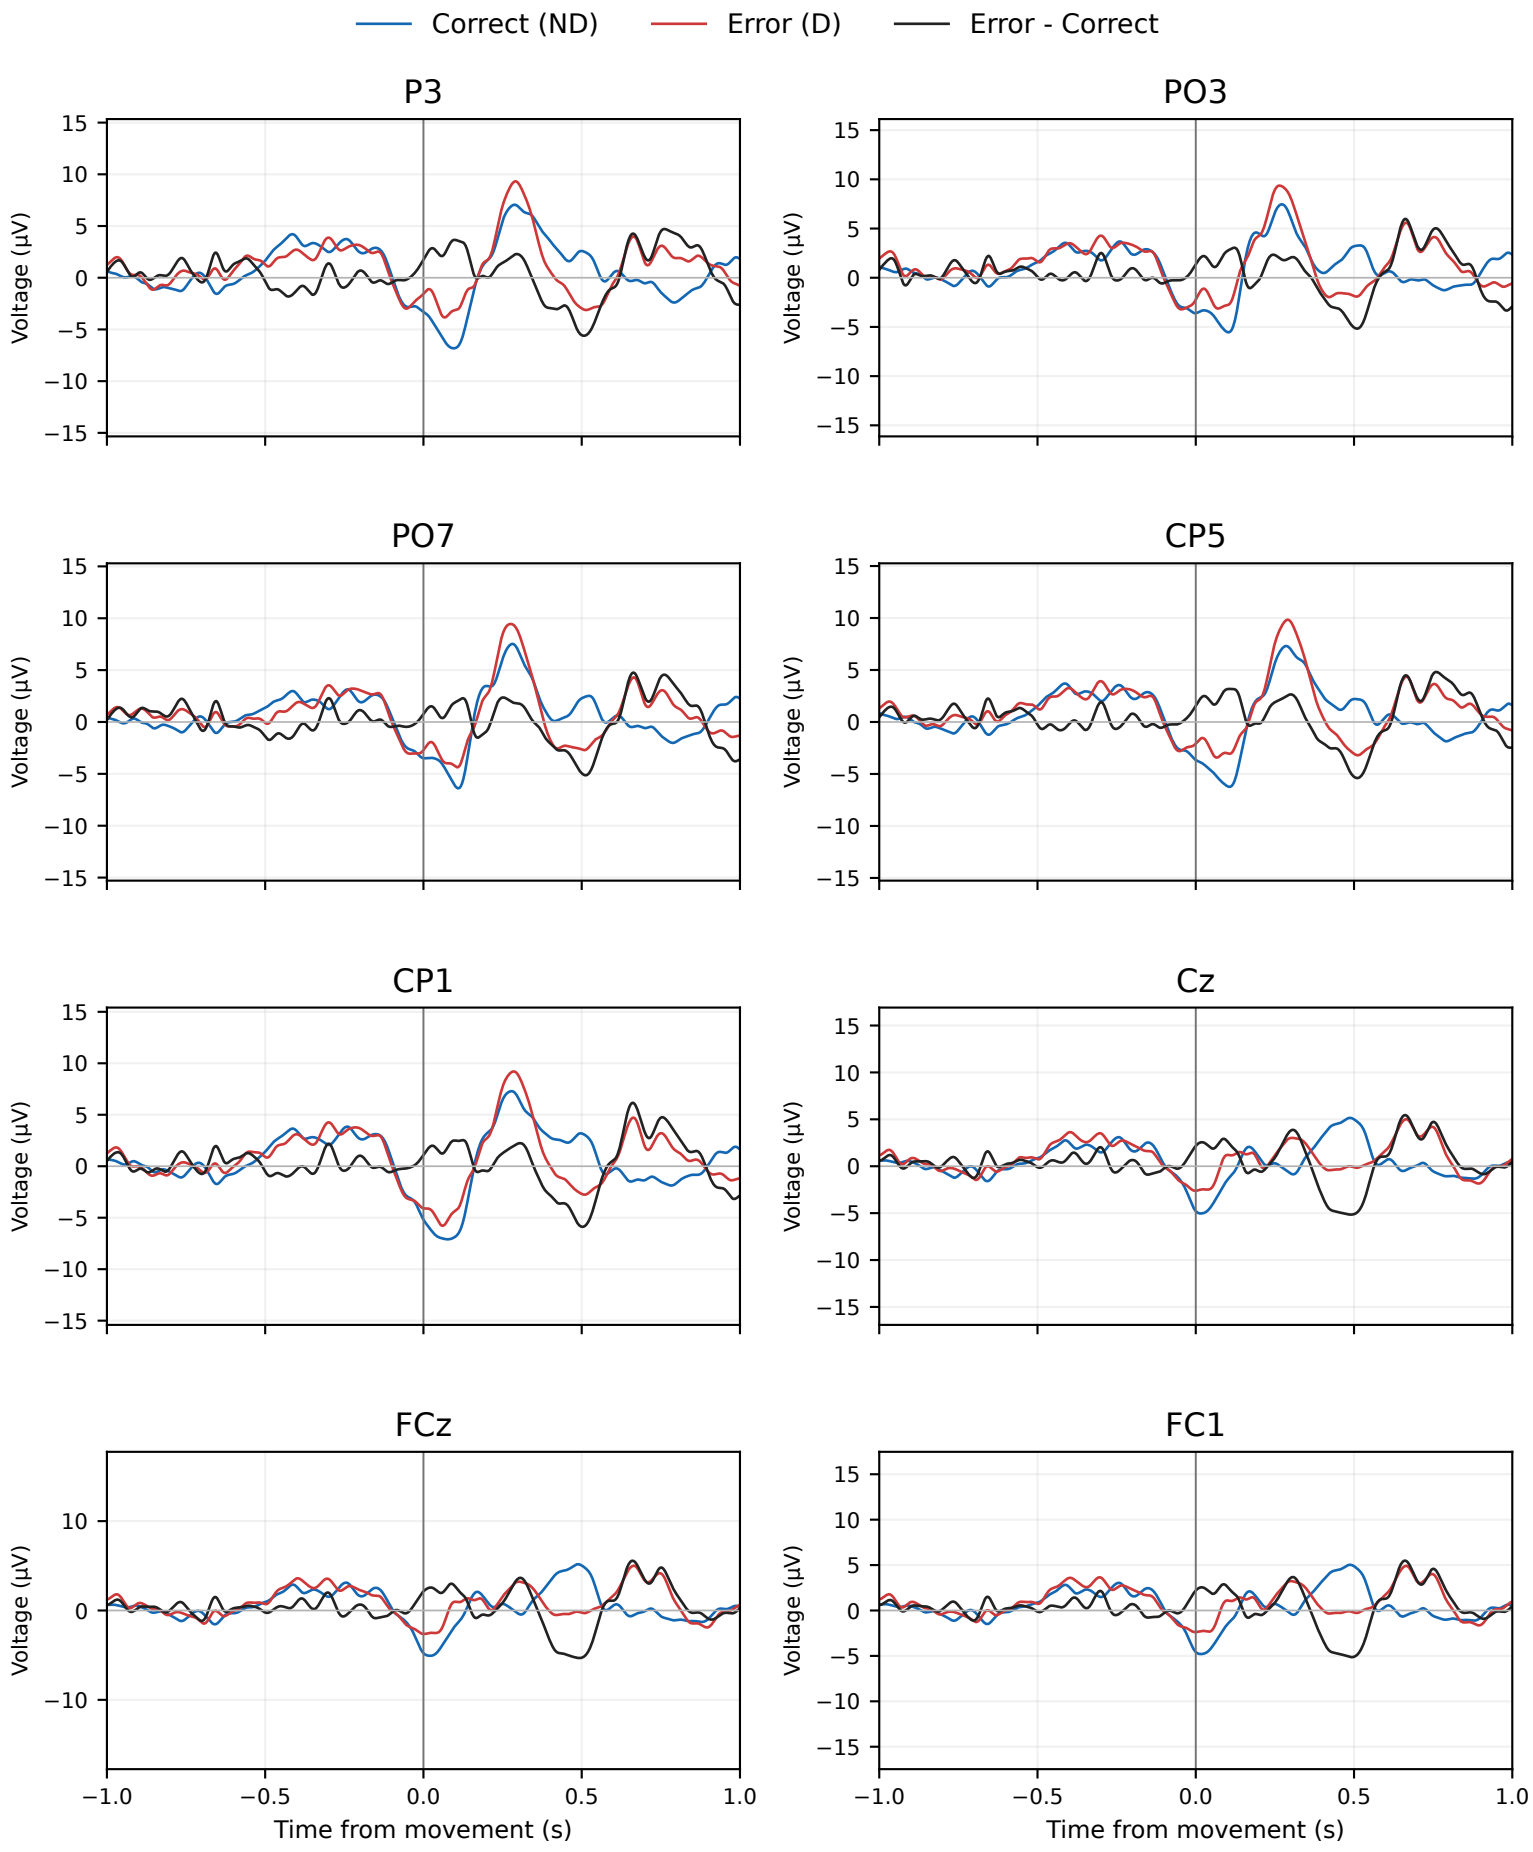

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

sga12 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=323; Error (D) n=160

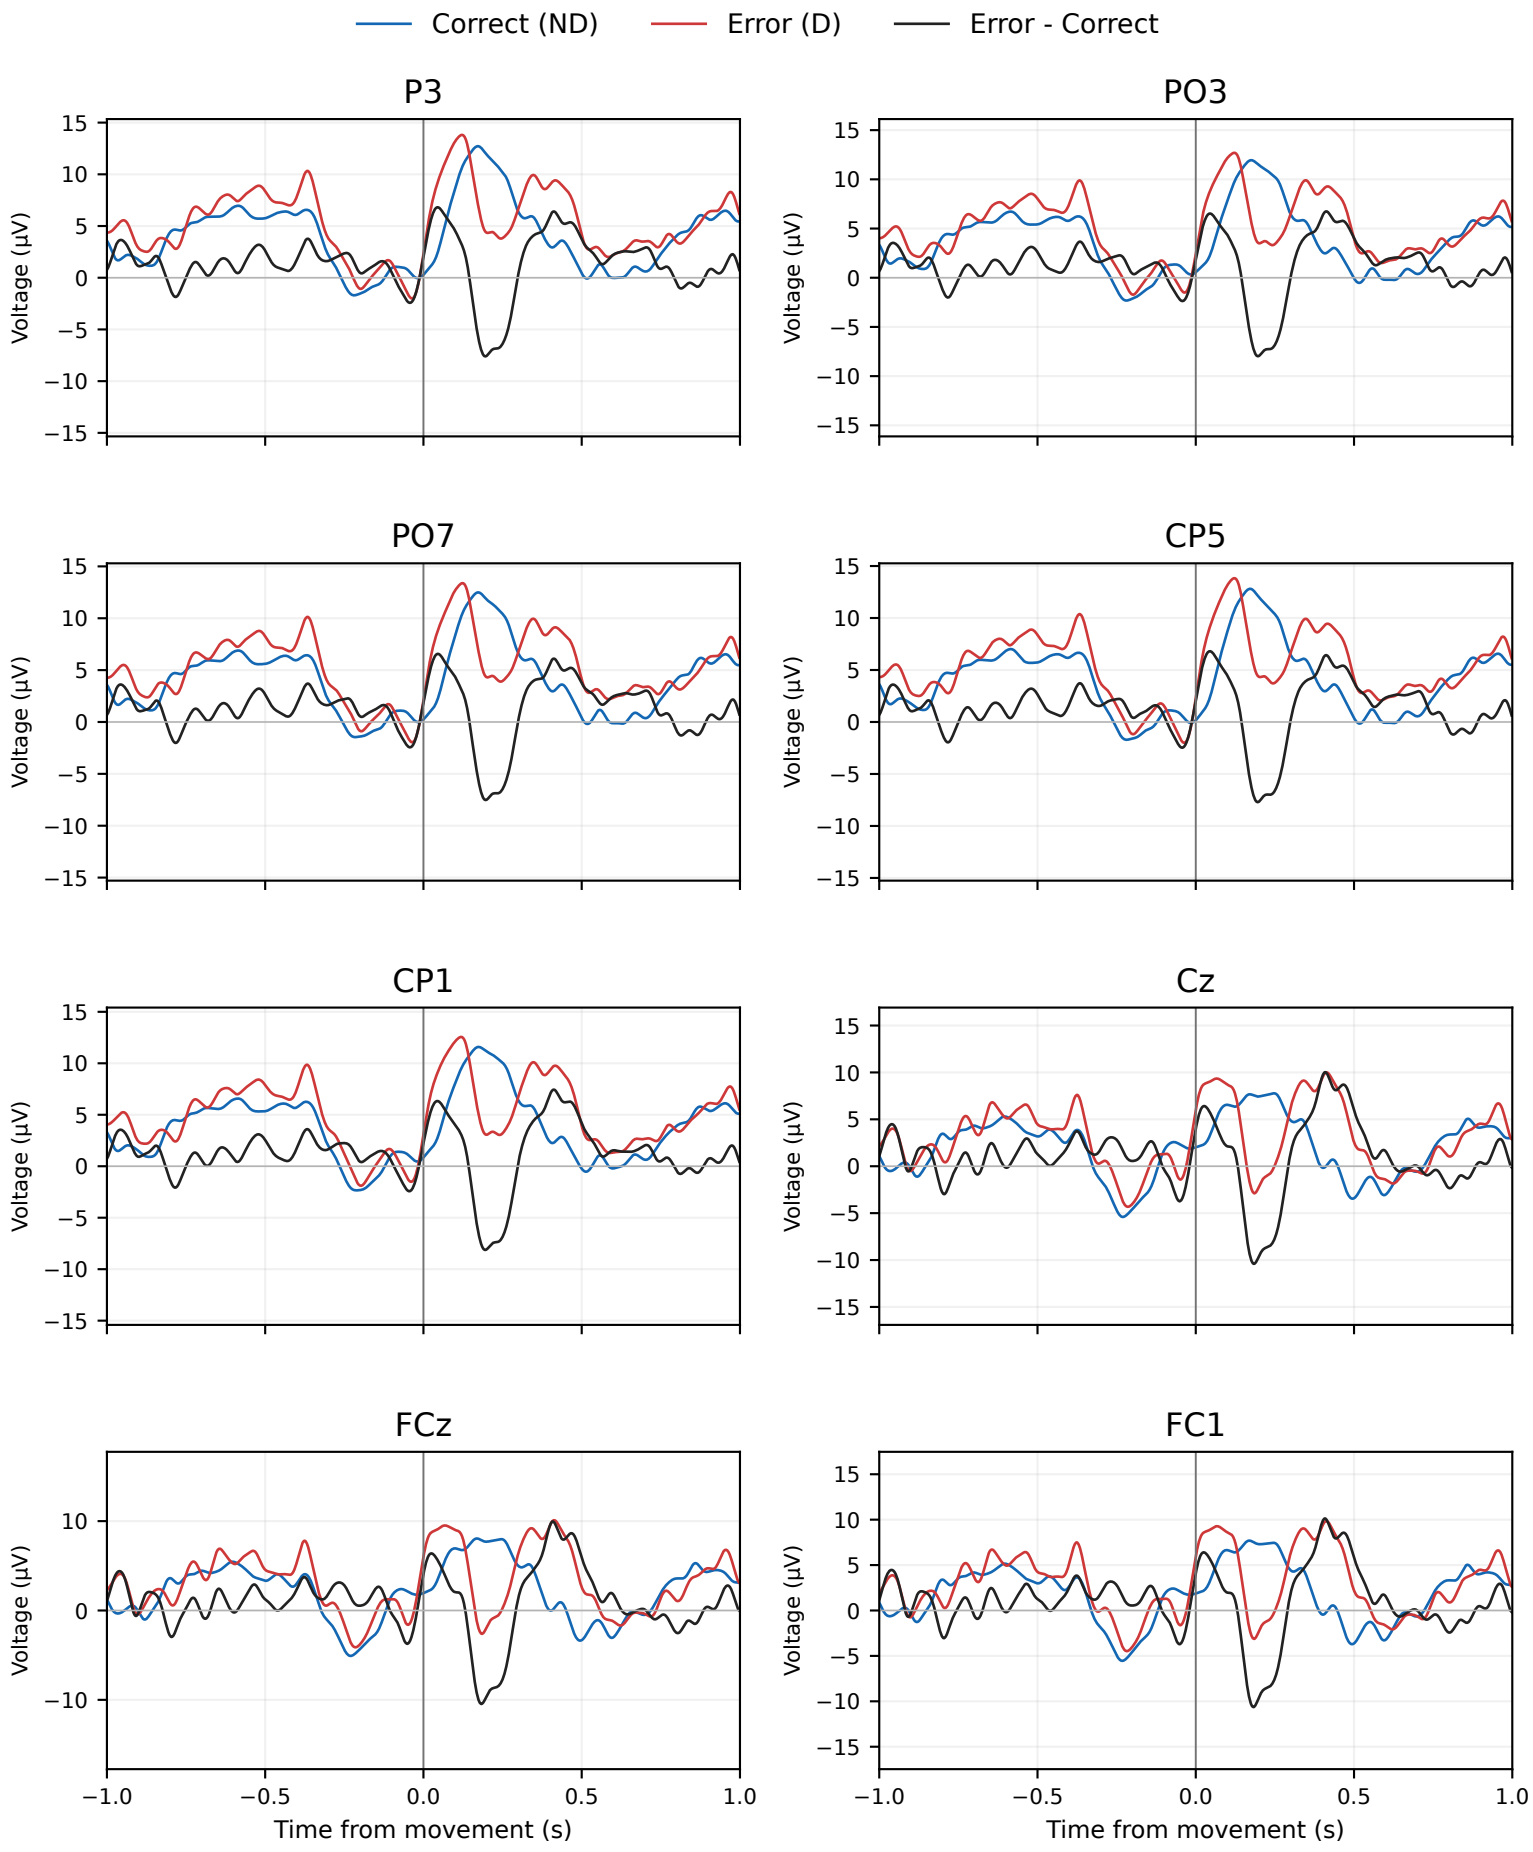

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

sga12 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=164; Error (D) n=91

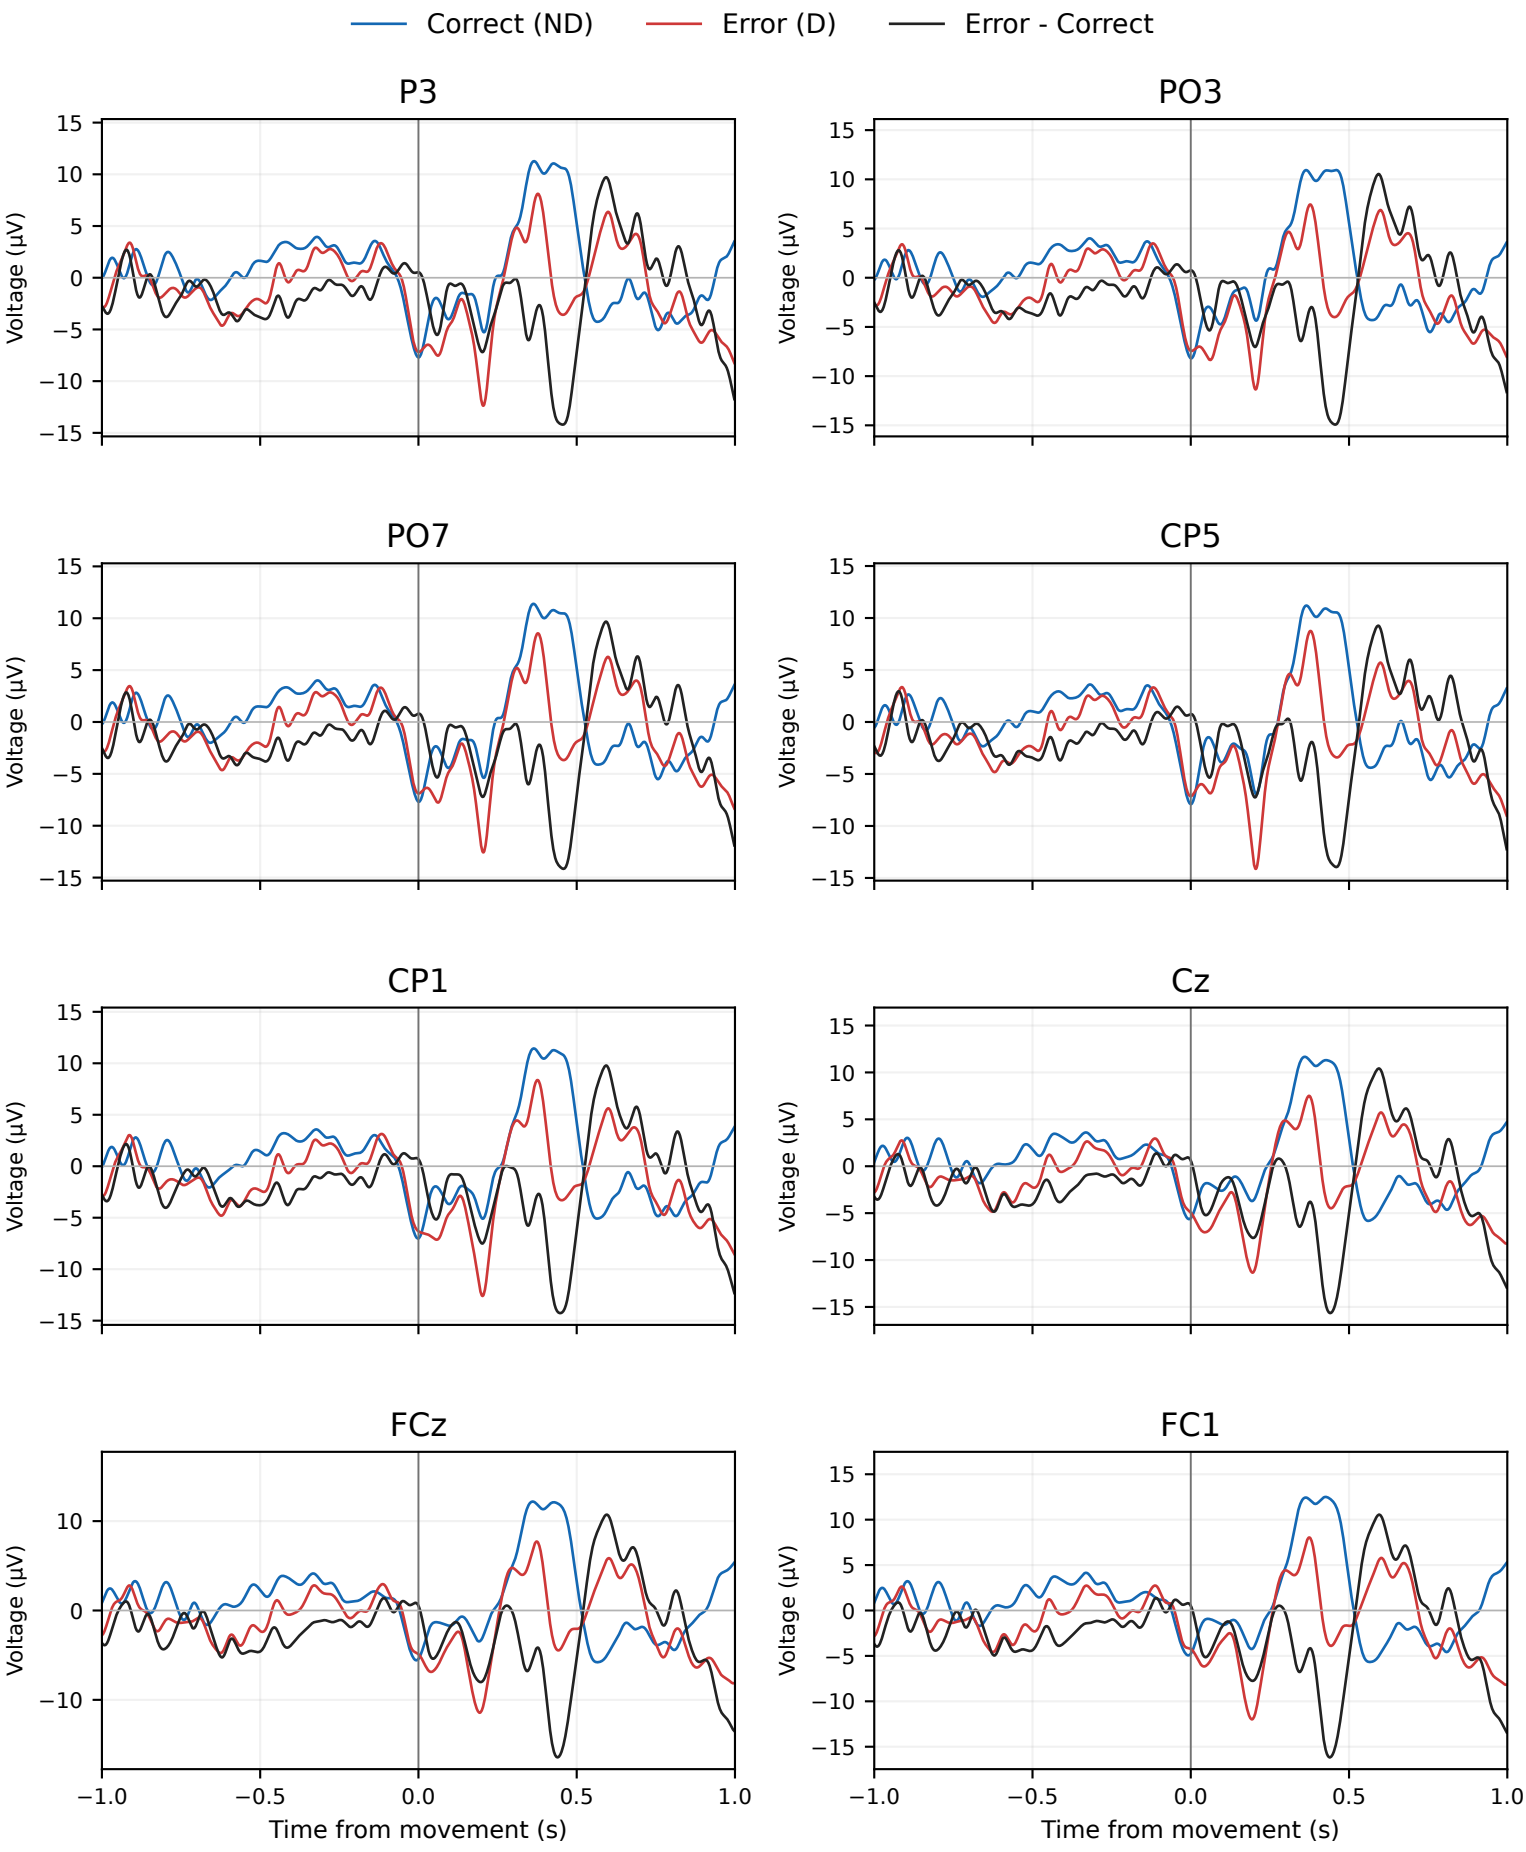

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

spe30 / pre: BP no-FORCe


Pilot (exploratory) | All accepted trials | Correct (ND) n=326; Error (D) n=169

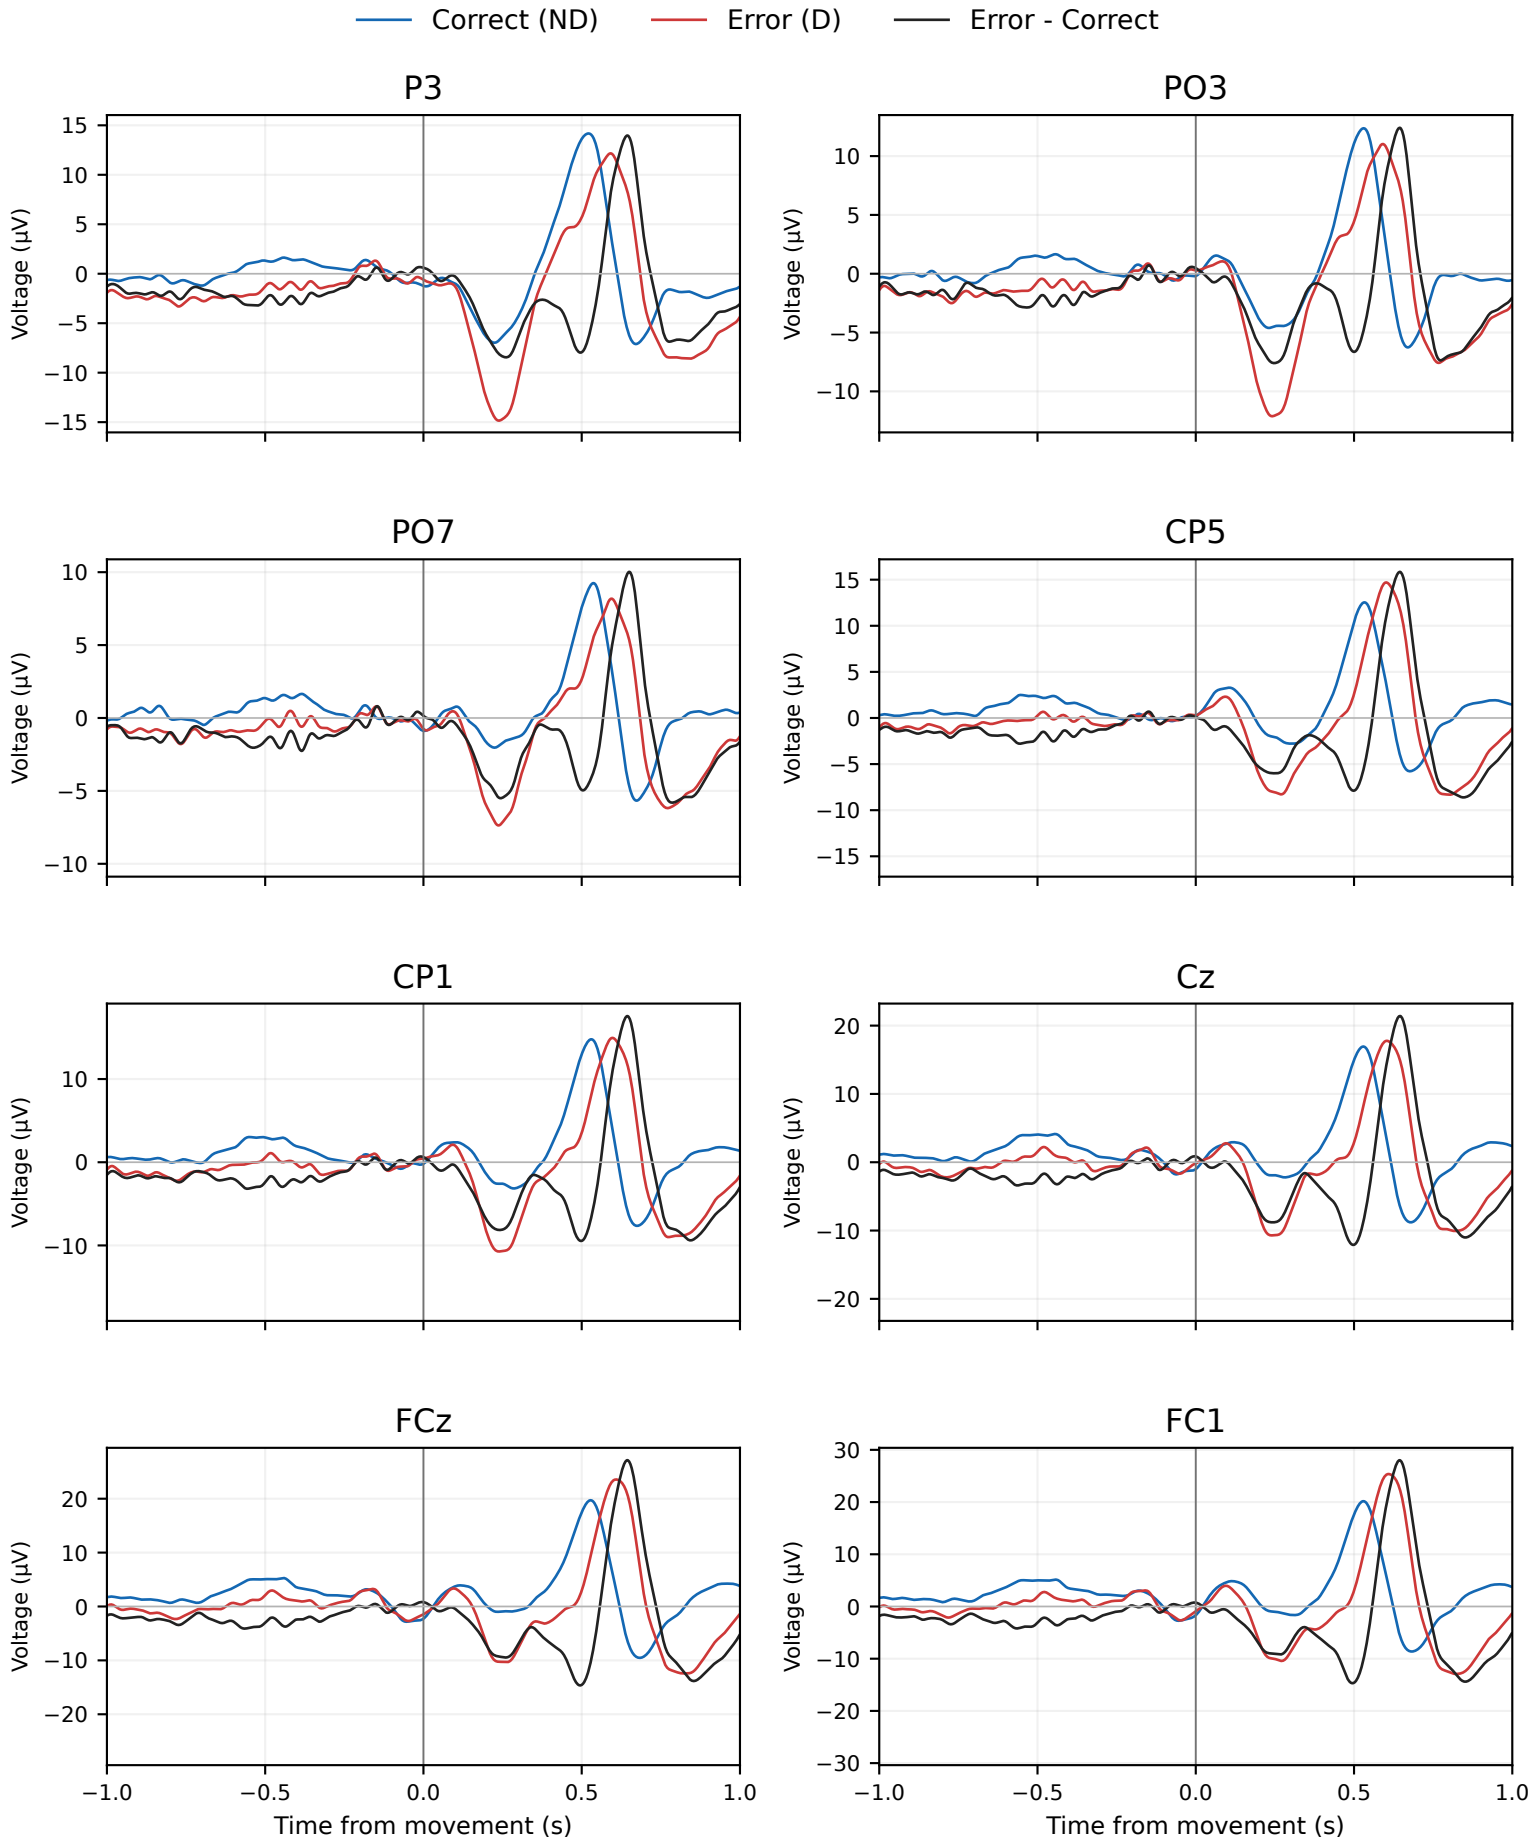

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

spe30 / post: BP no-FORCe


Pilot (exploratory) | All accepted trials | Correct (ND) n=329; Error (D) n=169

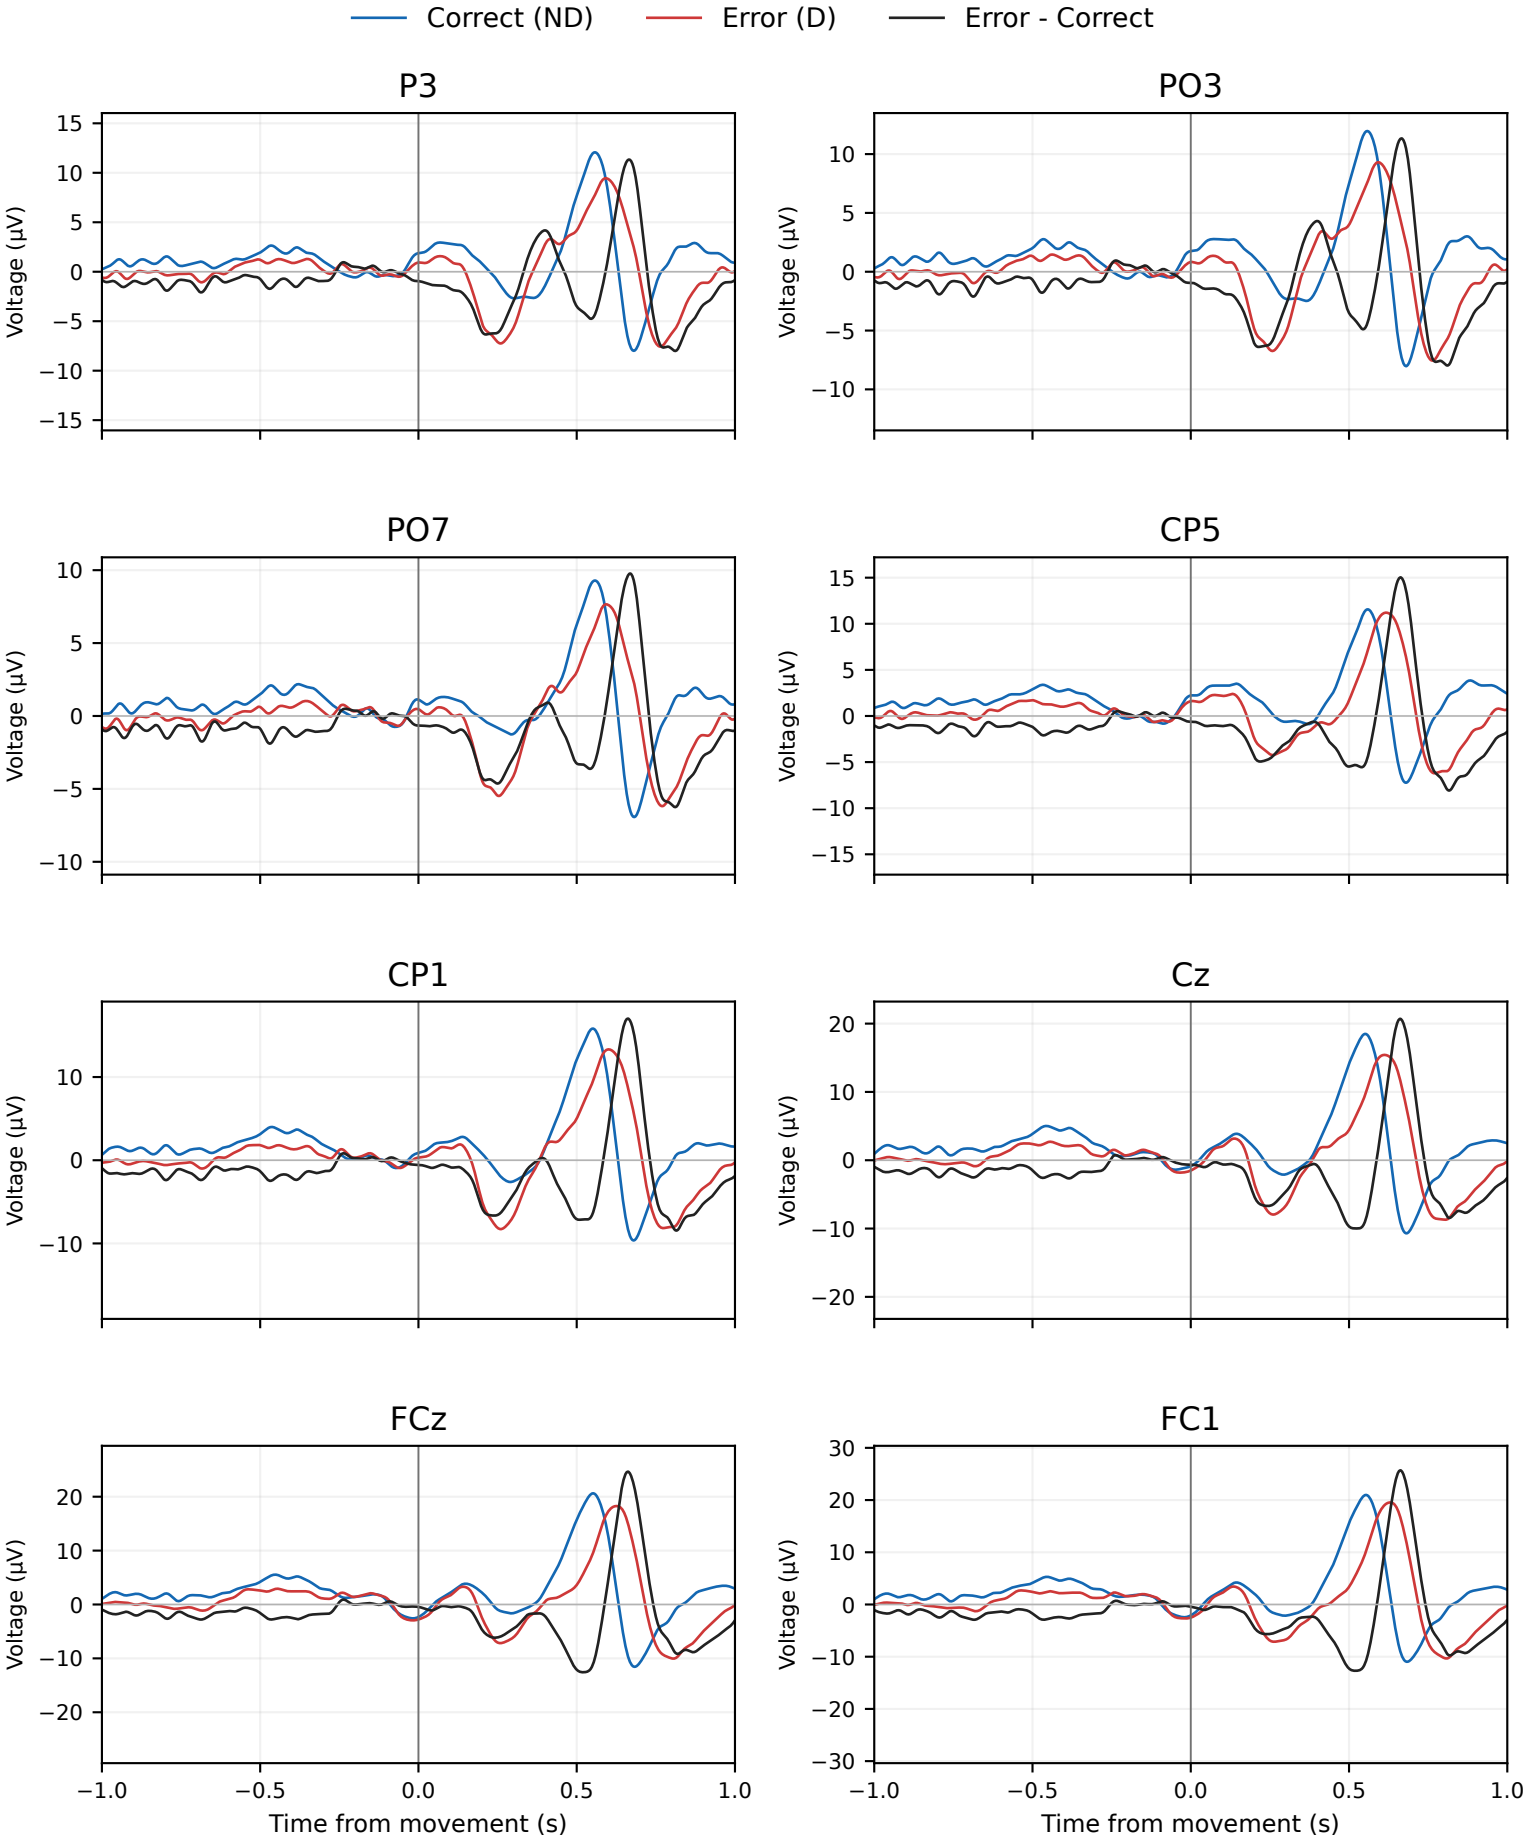

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

spe30 / retest: BP no-FORCe


Pilot (exploratory) | All accepted trials | Correct (ND) n=260; Error (D) n=133

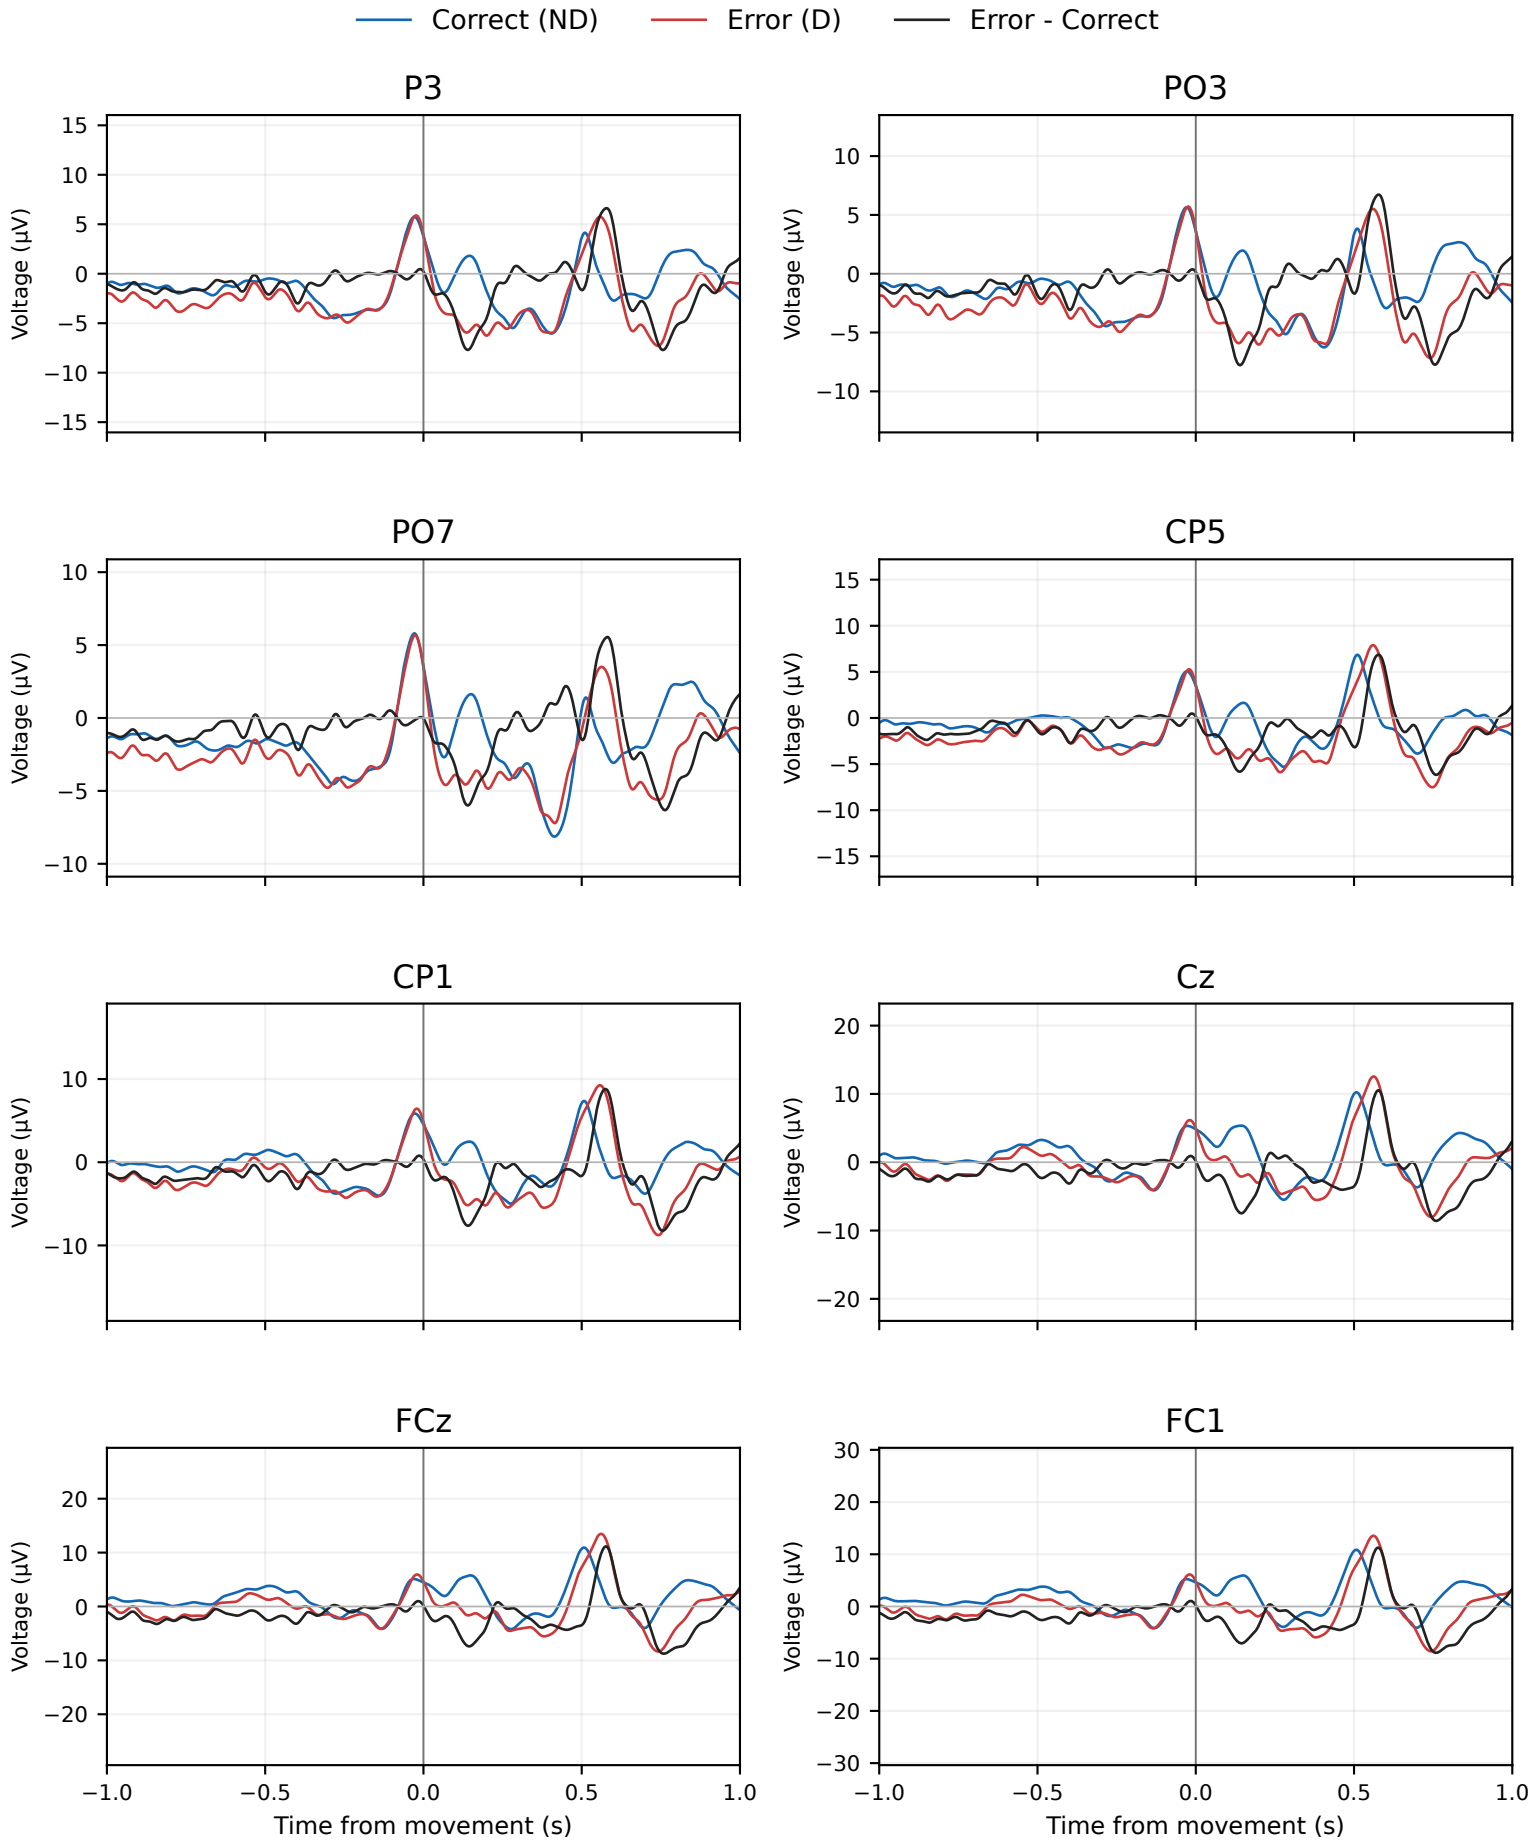

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

sto20 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=321; Error (D) n=166

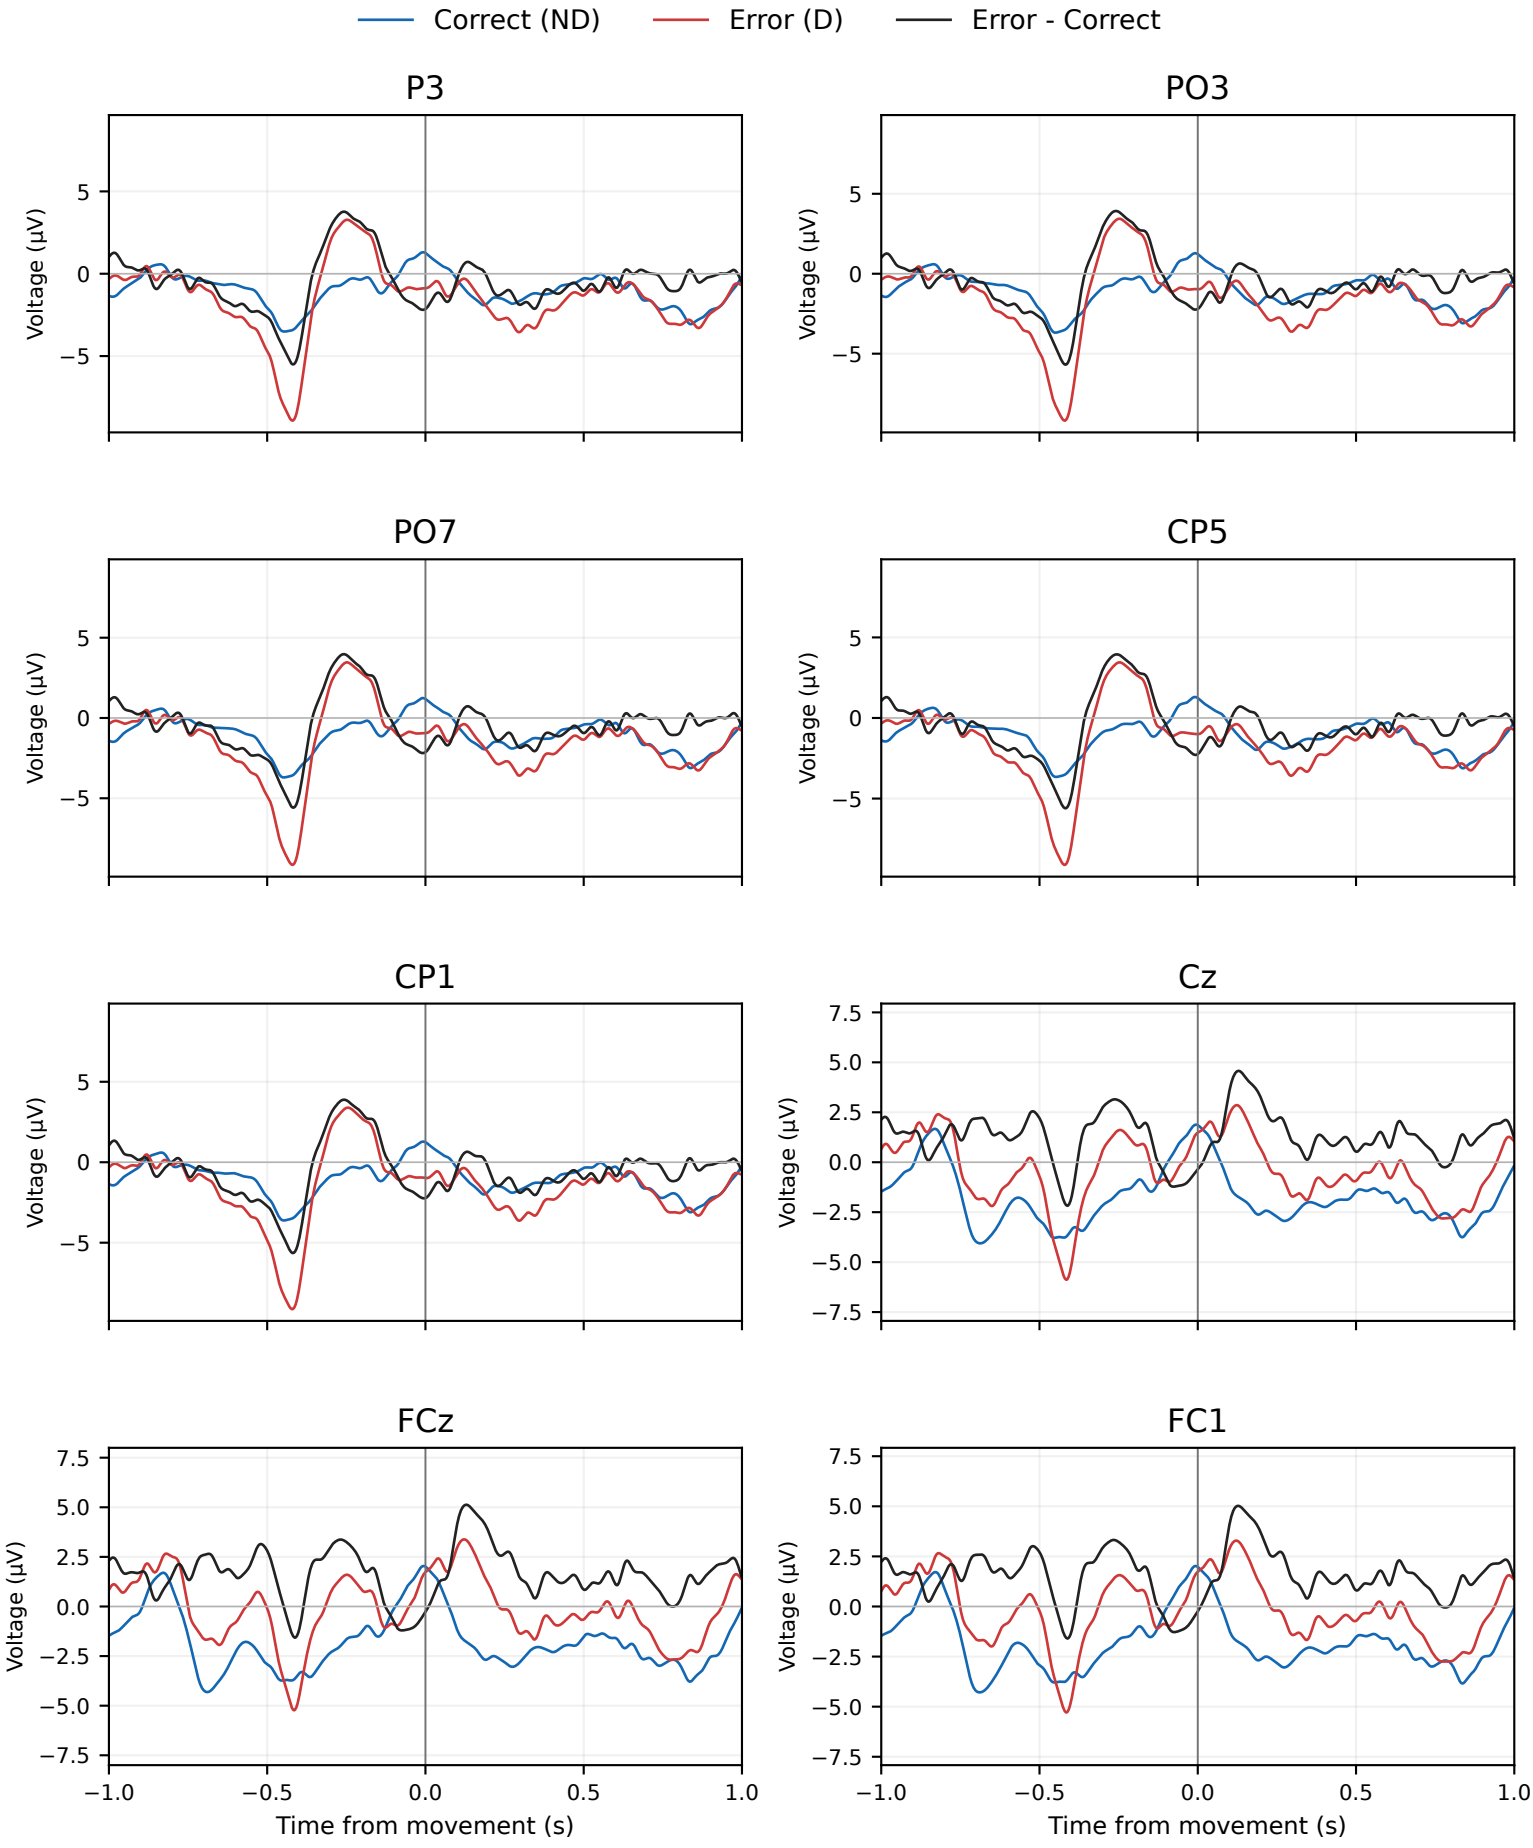

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

sto20 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=325; Error (D) n=164

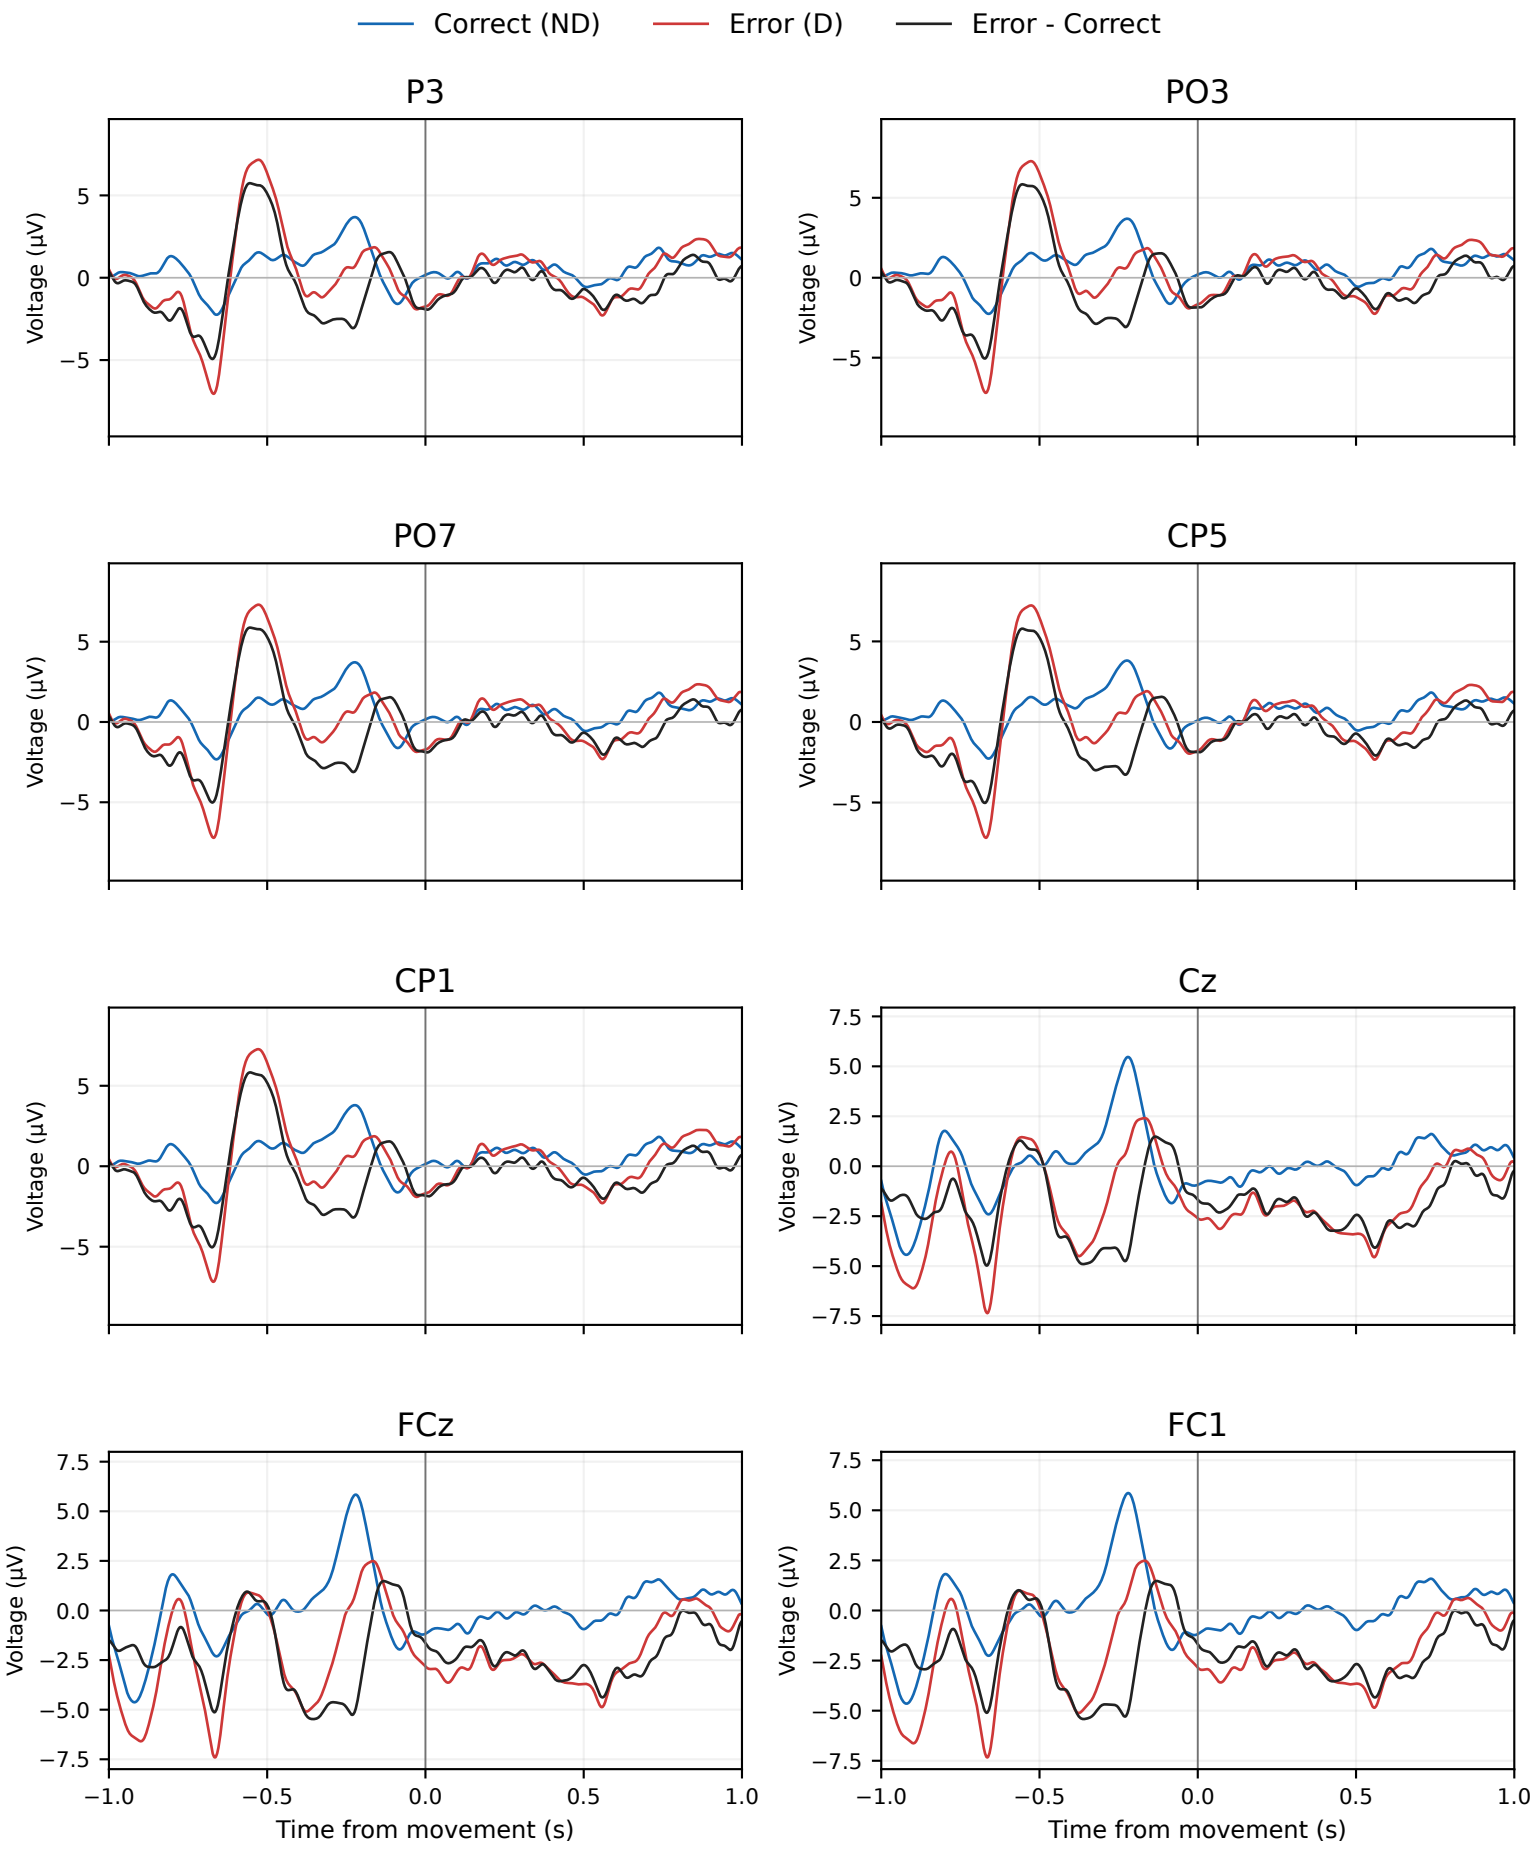

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

sto20 / retest: BP no-FORCe

Non-pilot participant | All accepted trials | Correct (ND) n=201; Error (D) n=114

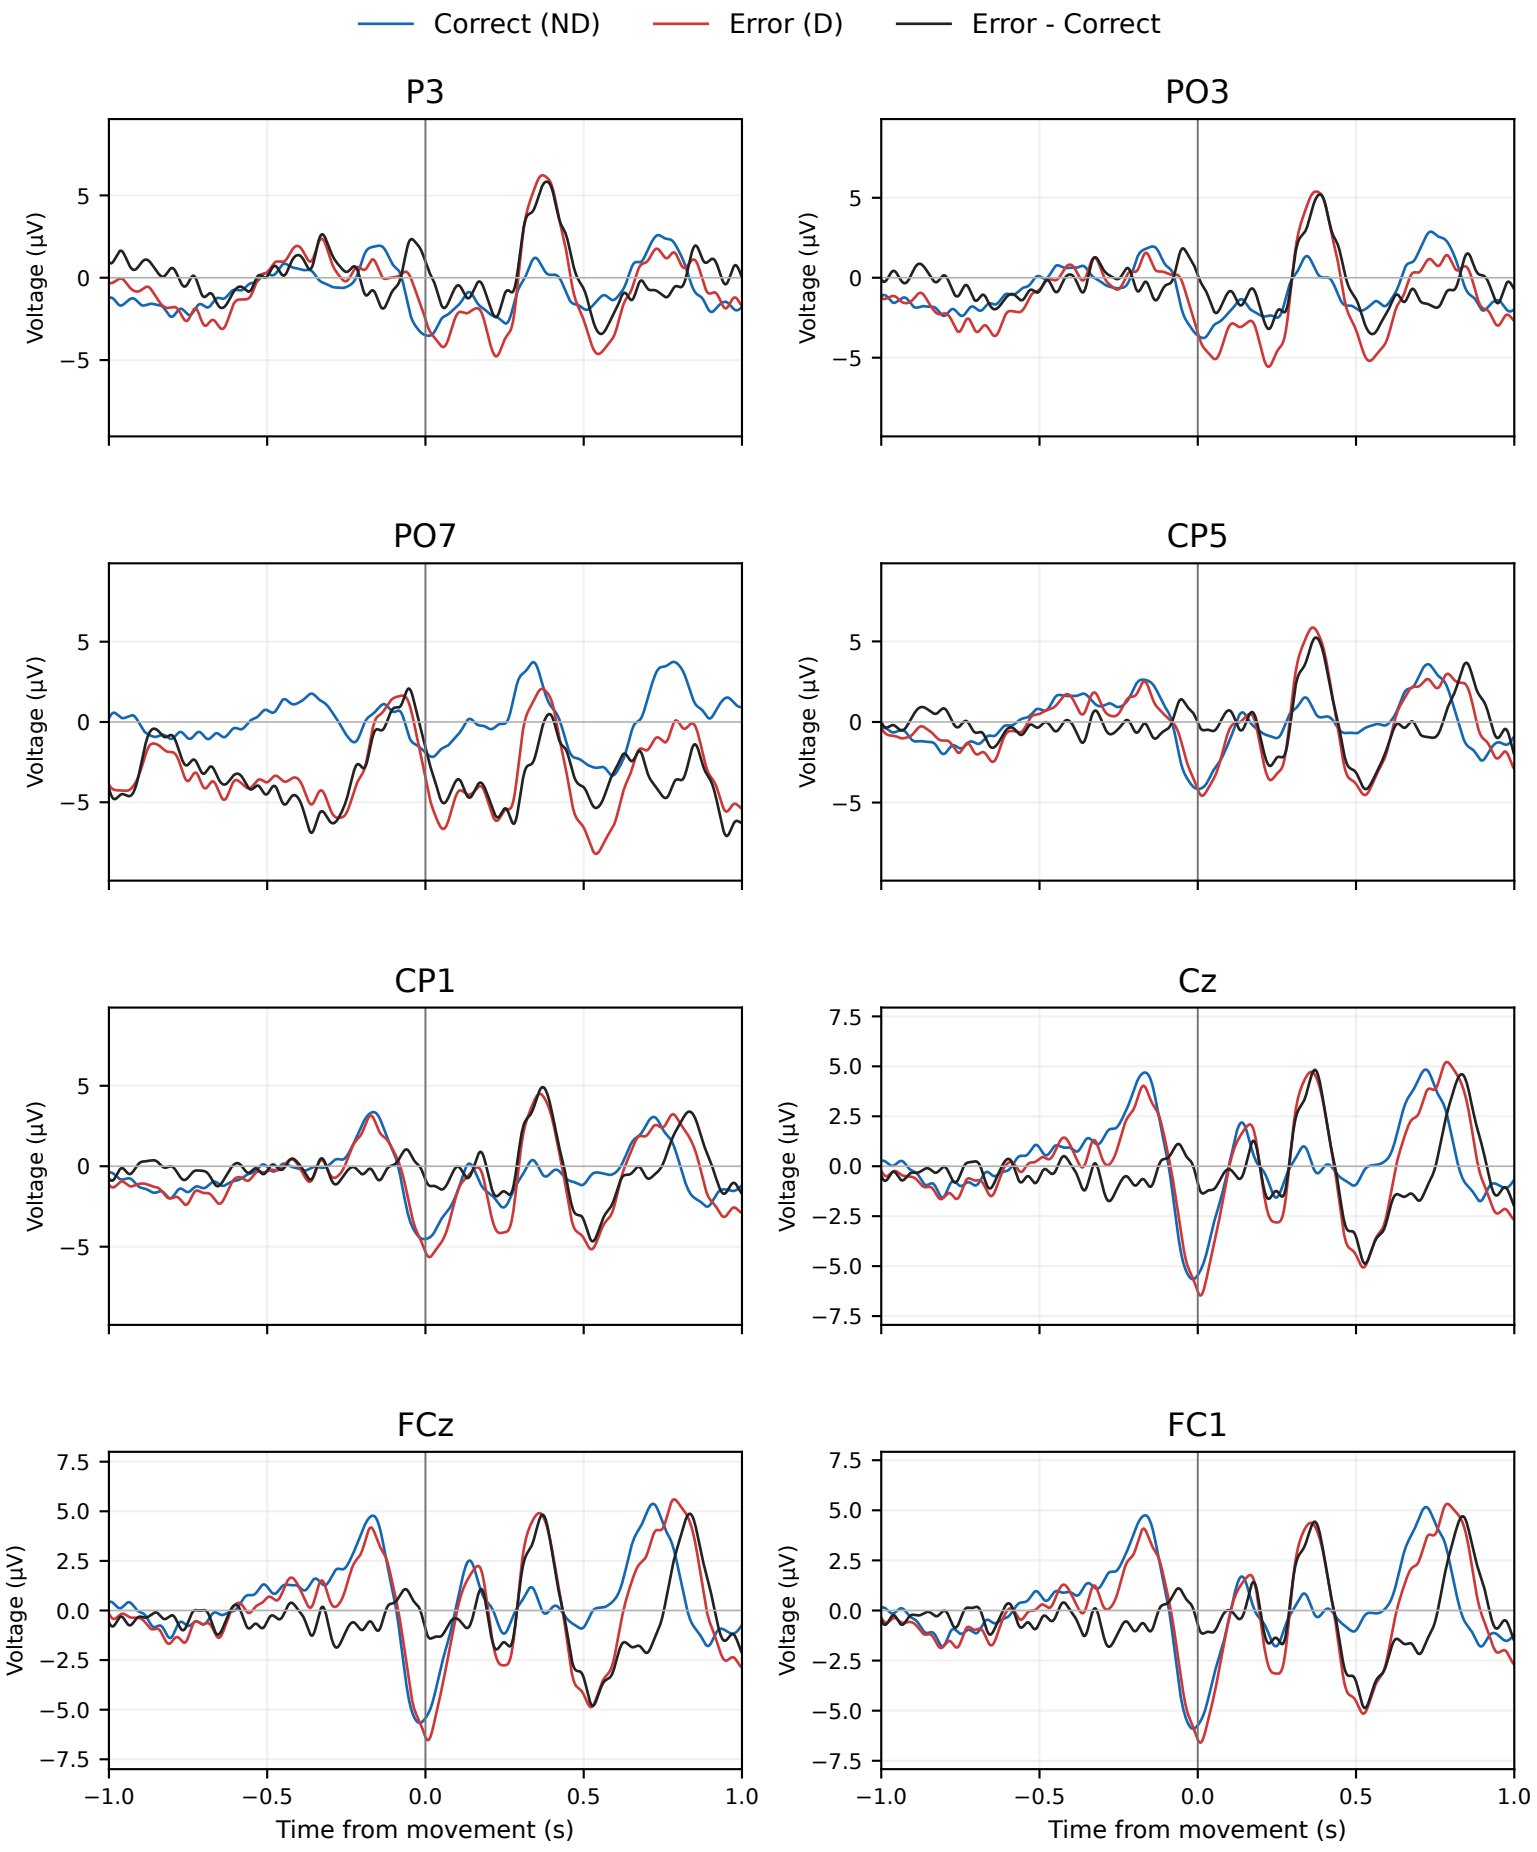


Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

vco27 / pre: BP no-FORCe

Non-pilot participant | All accepted trials | Correct (ND) n=9; Error (D) n=2

Correct (ND) Error (D) Error - Correct


Limited-data session: accepted trials shown; ineligible for classifier cross-validation.

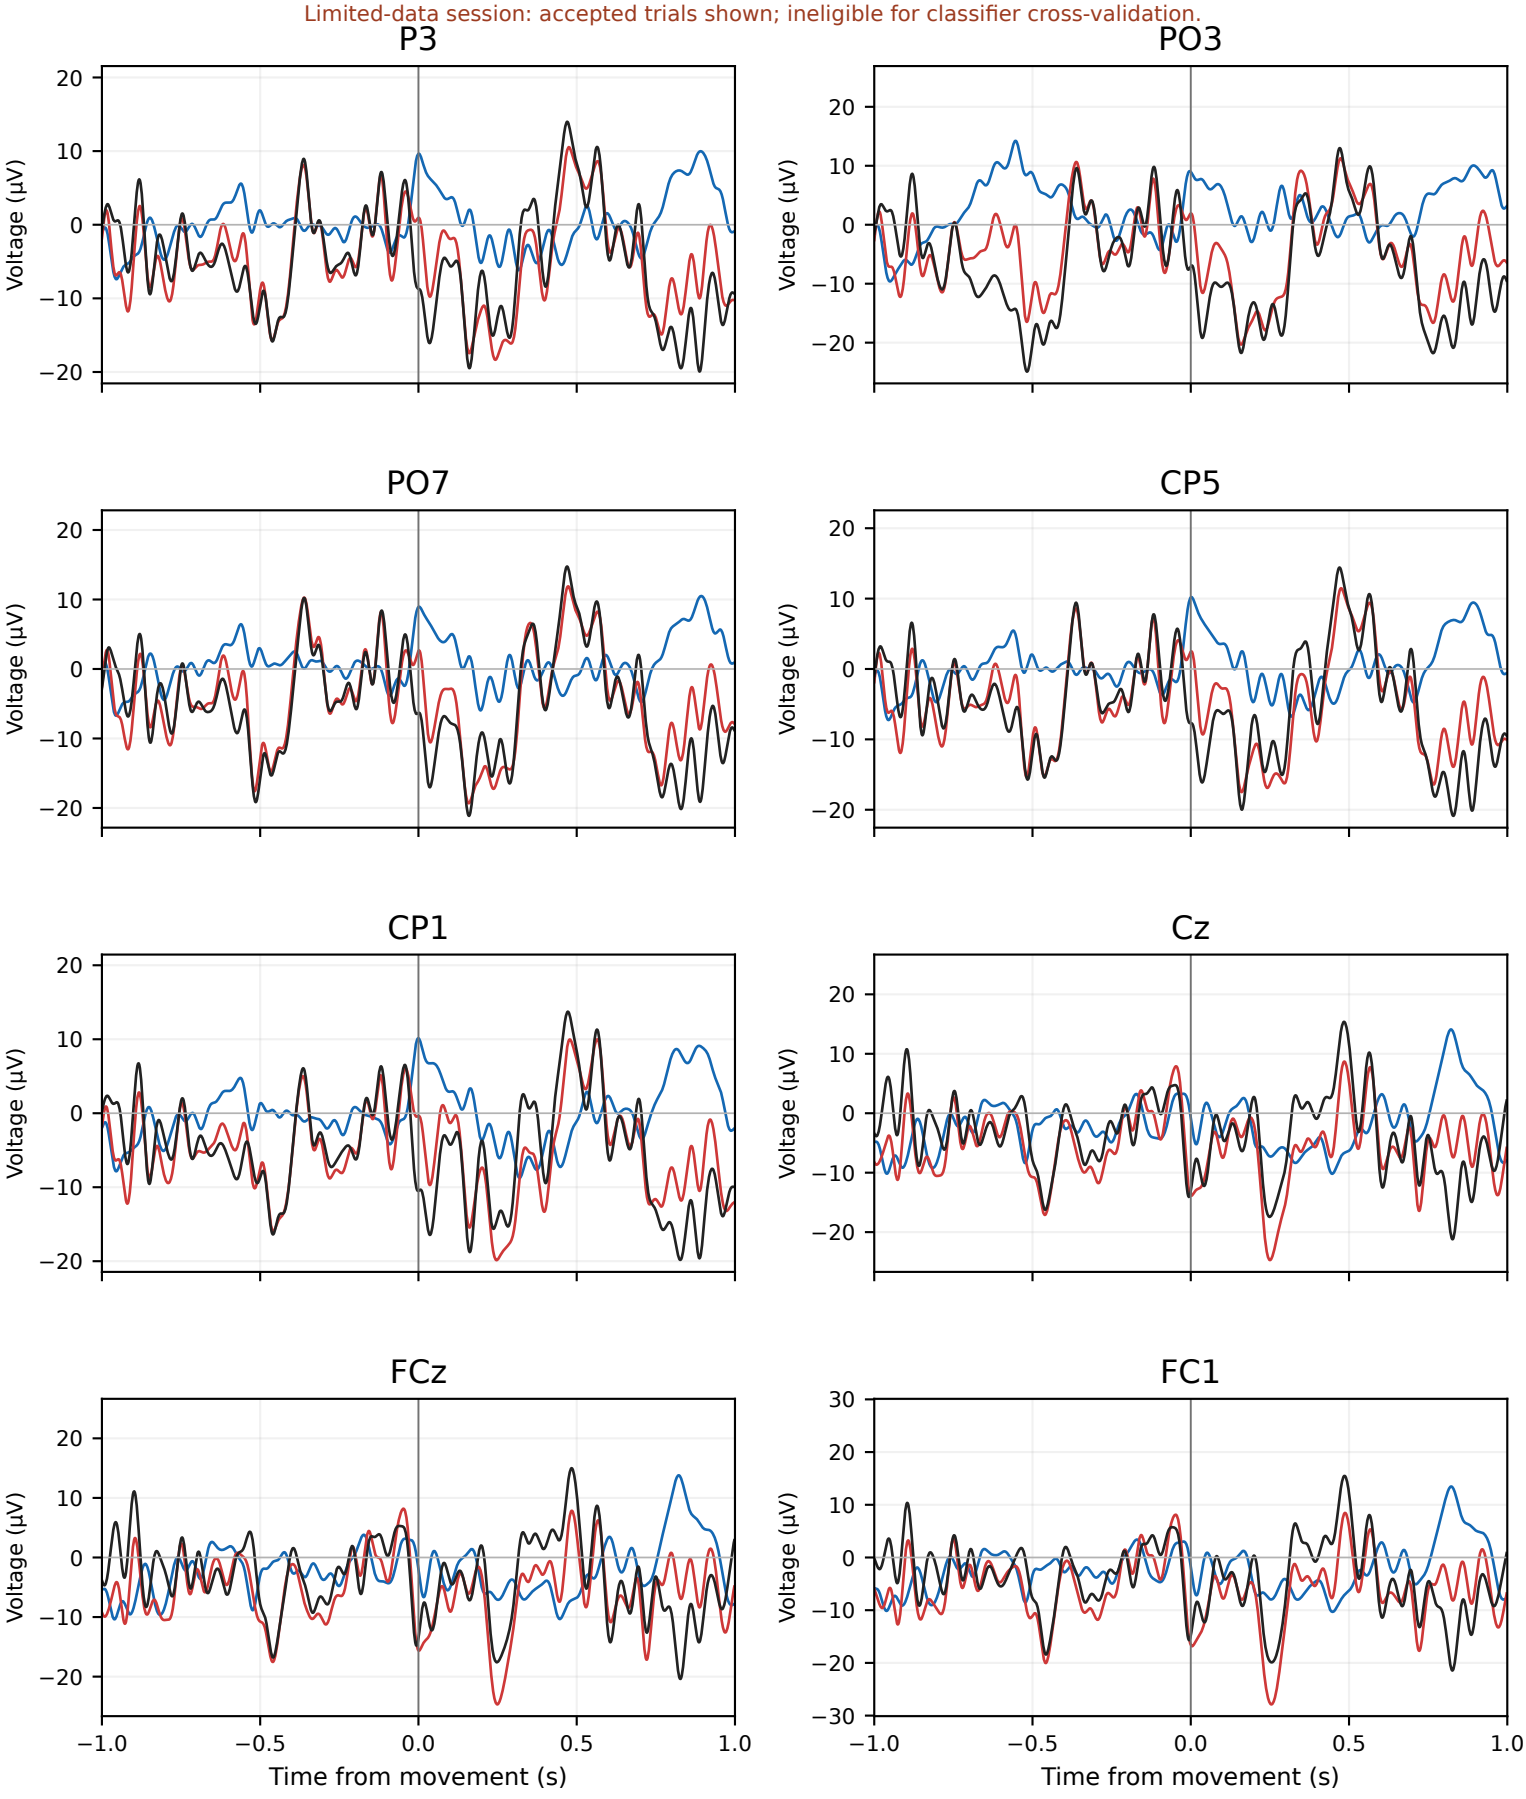

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

vco27 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=104; Error (D) n=60

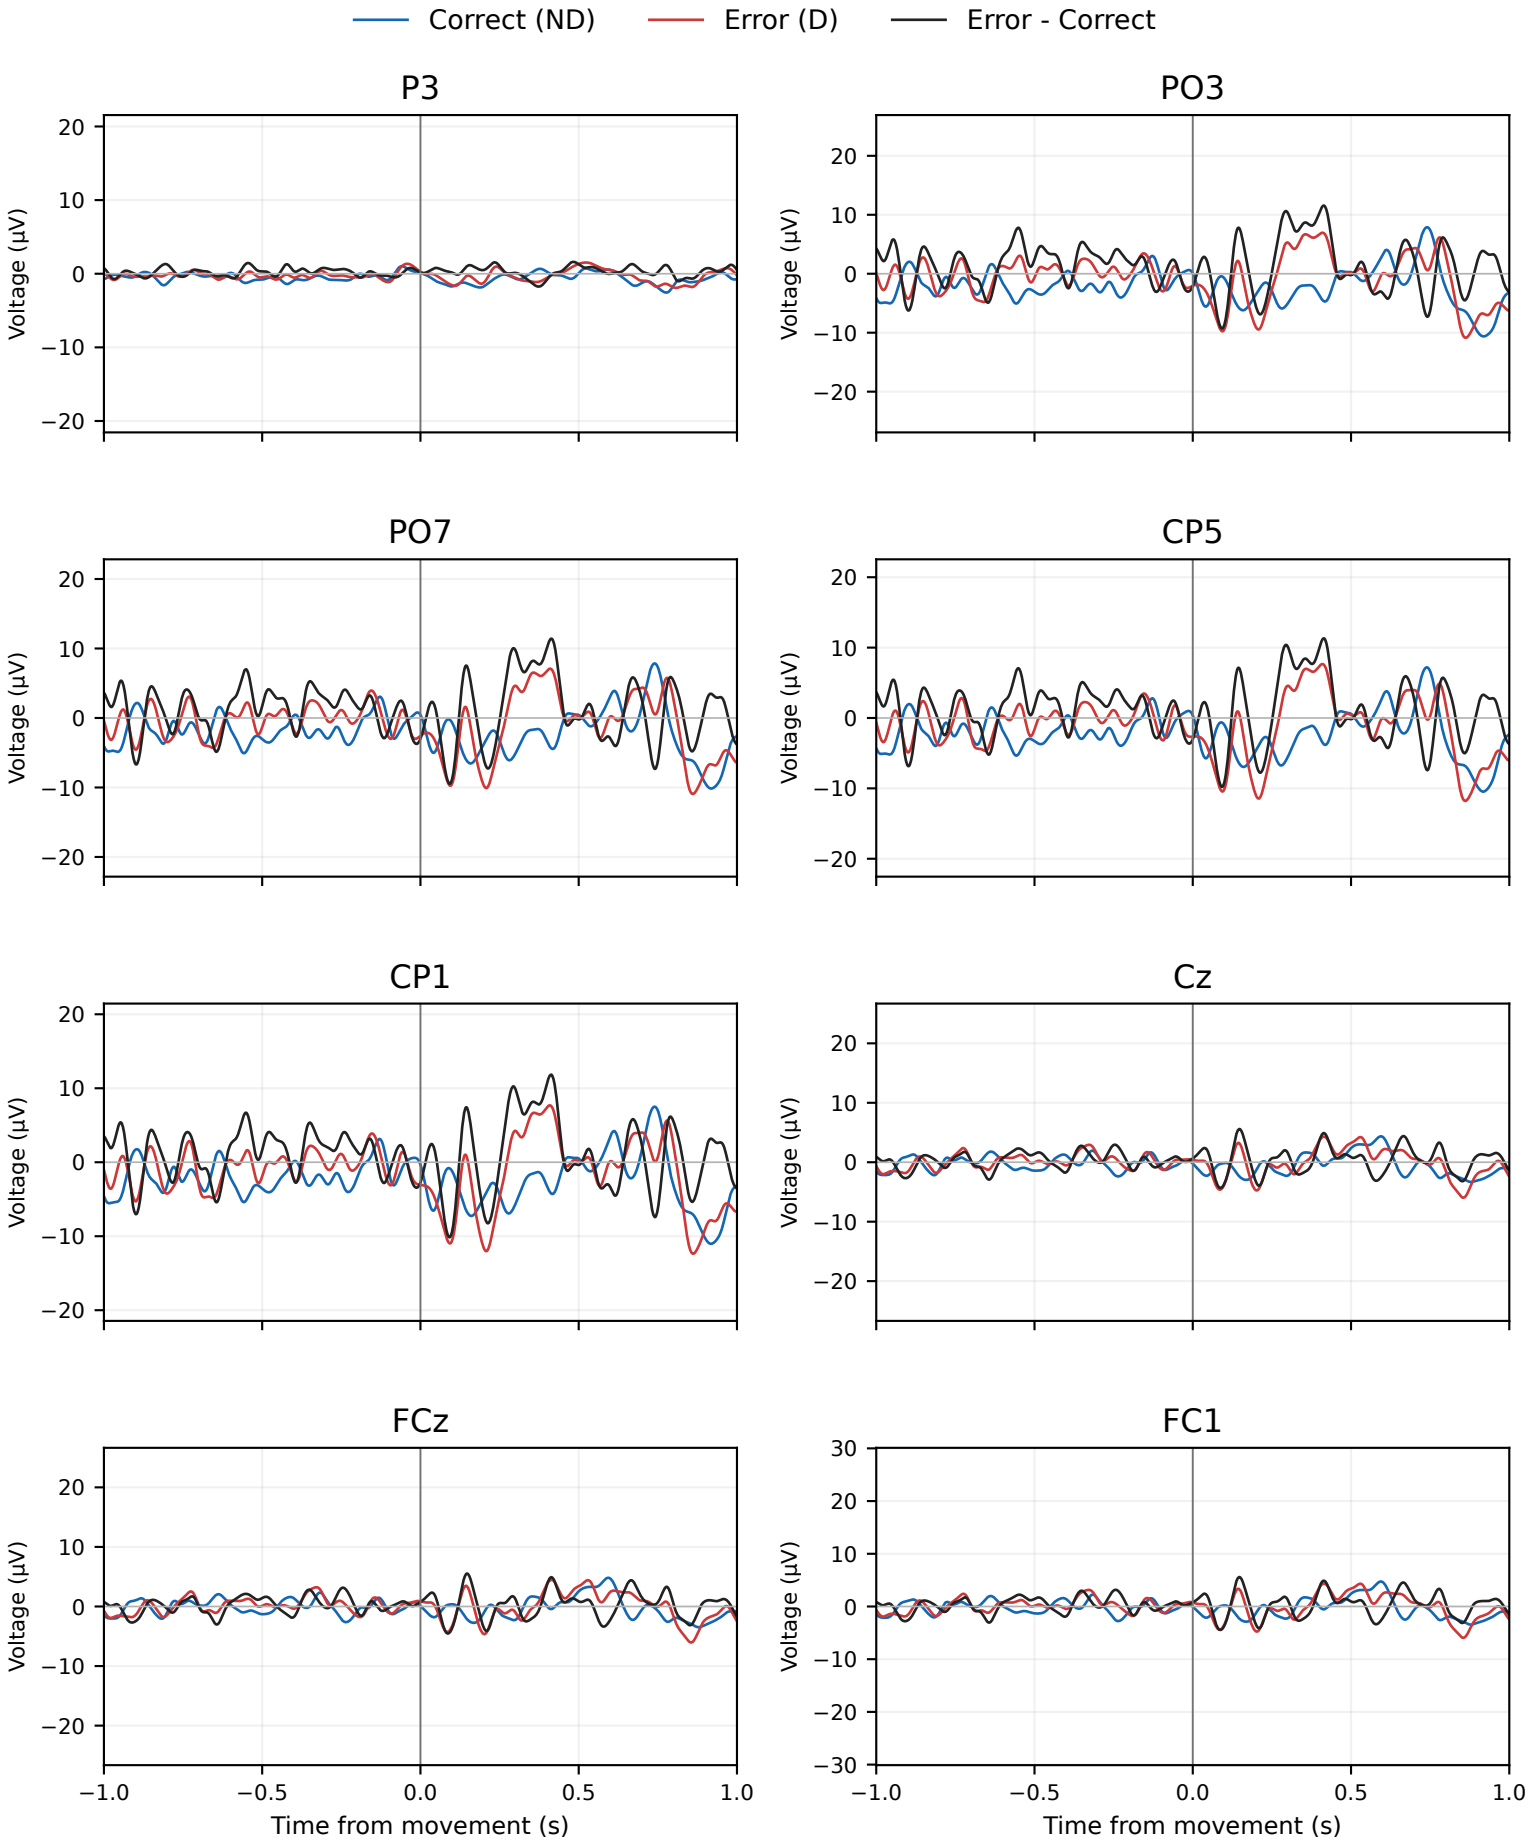

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

vco27 / retest: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=294; Error (D) n=154

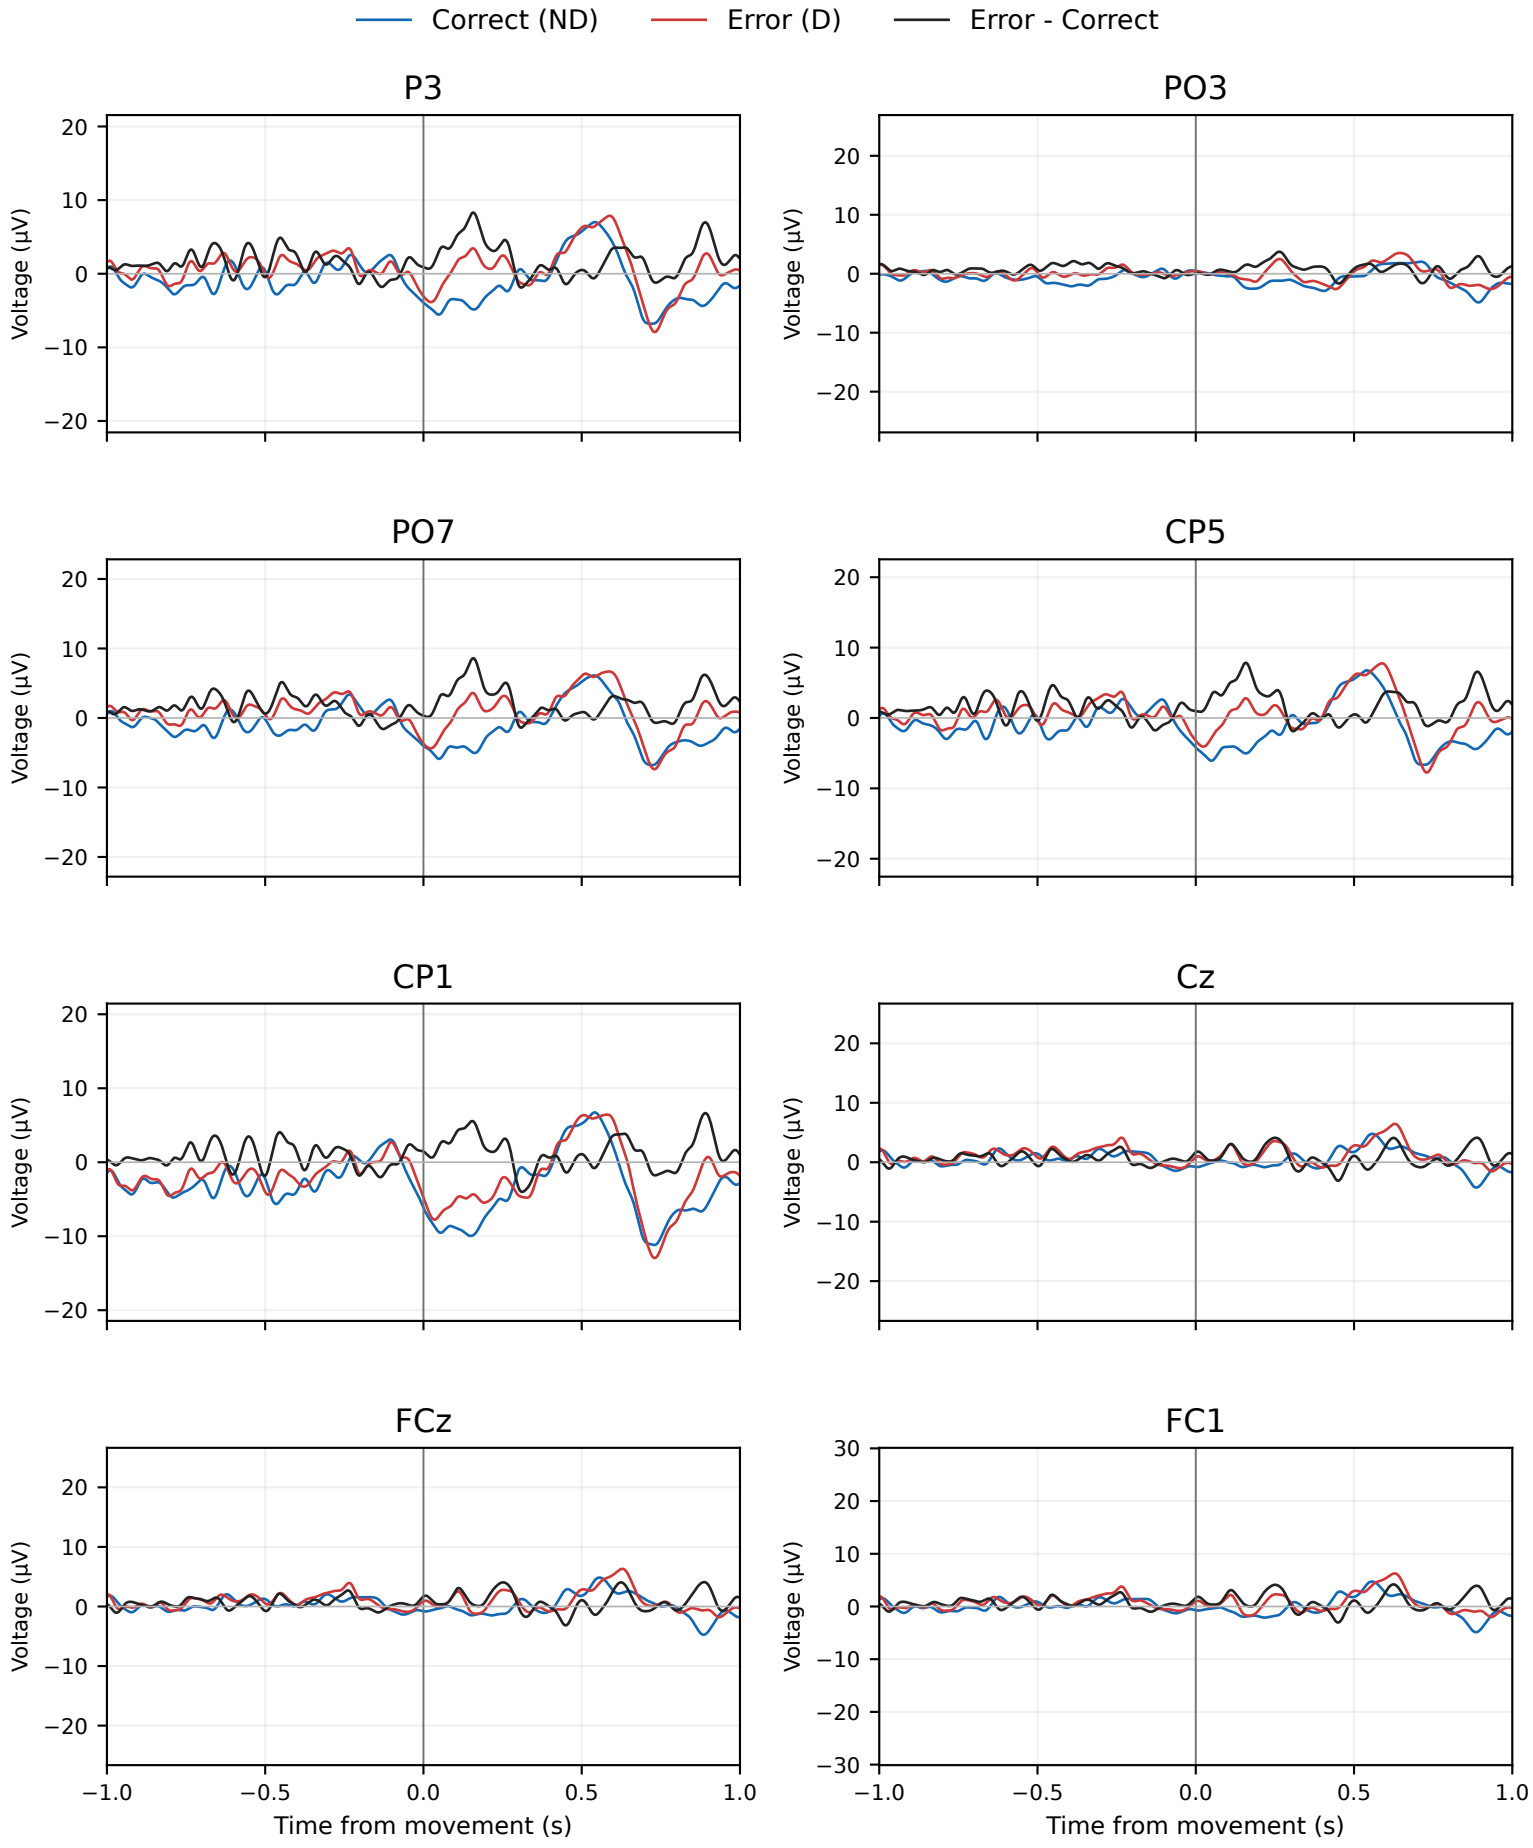

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

yle21 / pre: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=275; Error (D) n=64

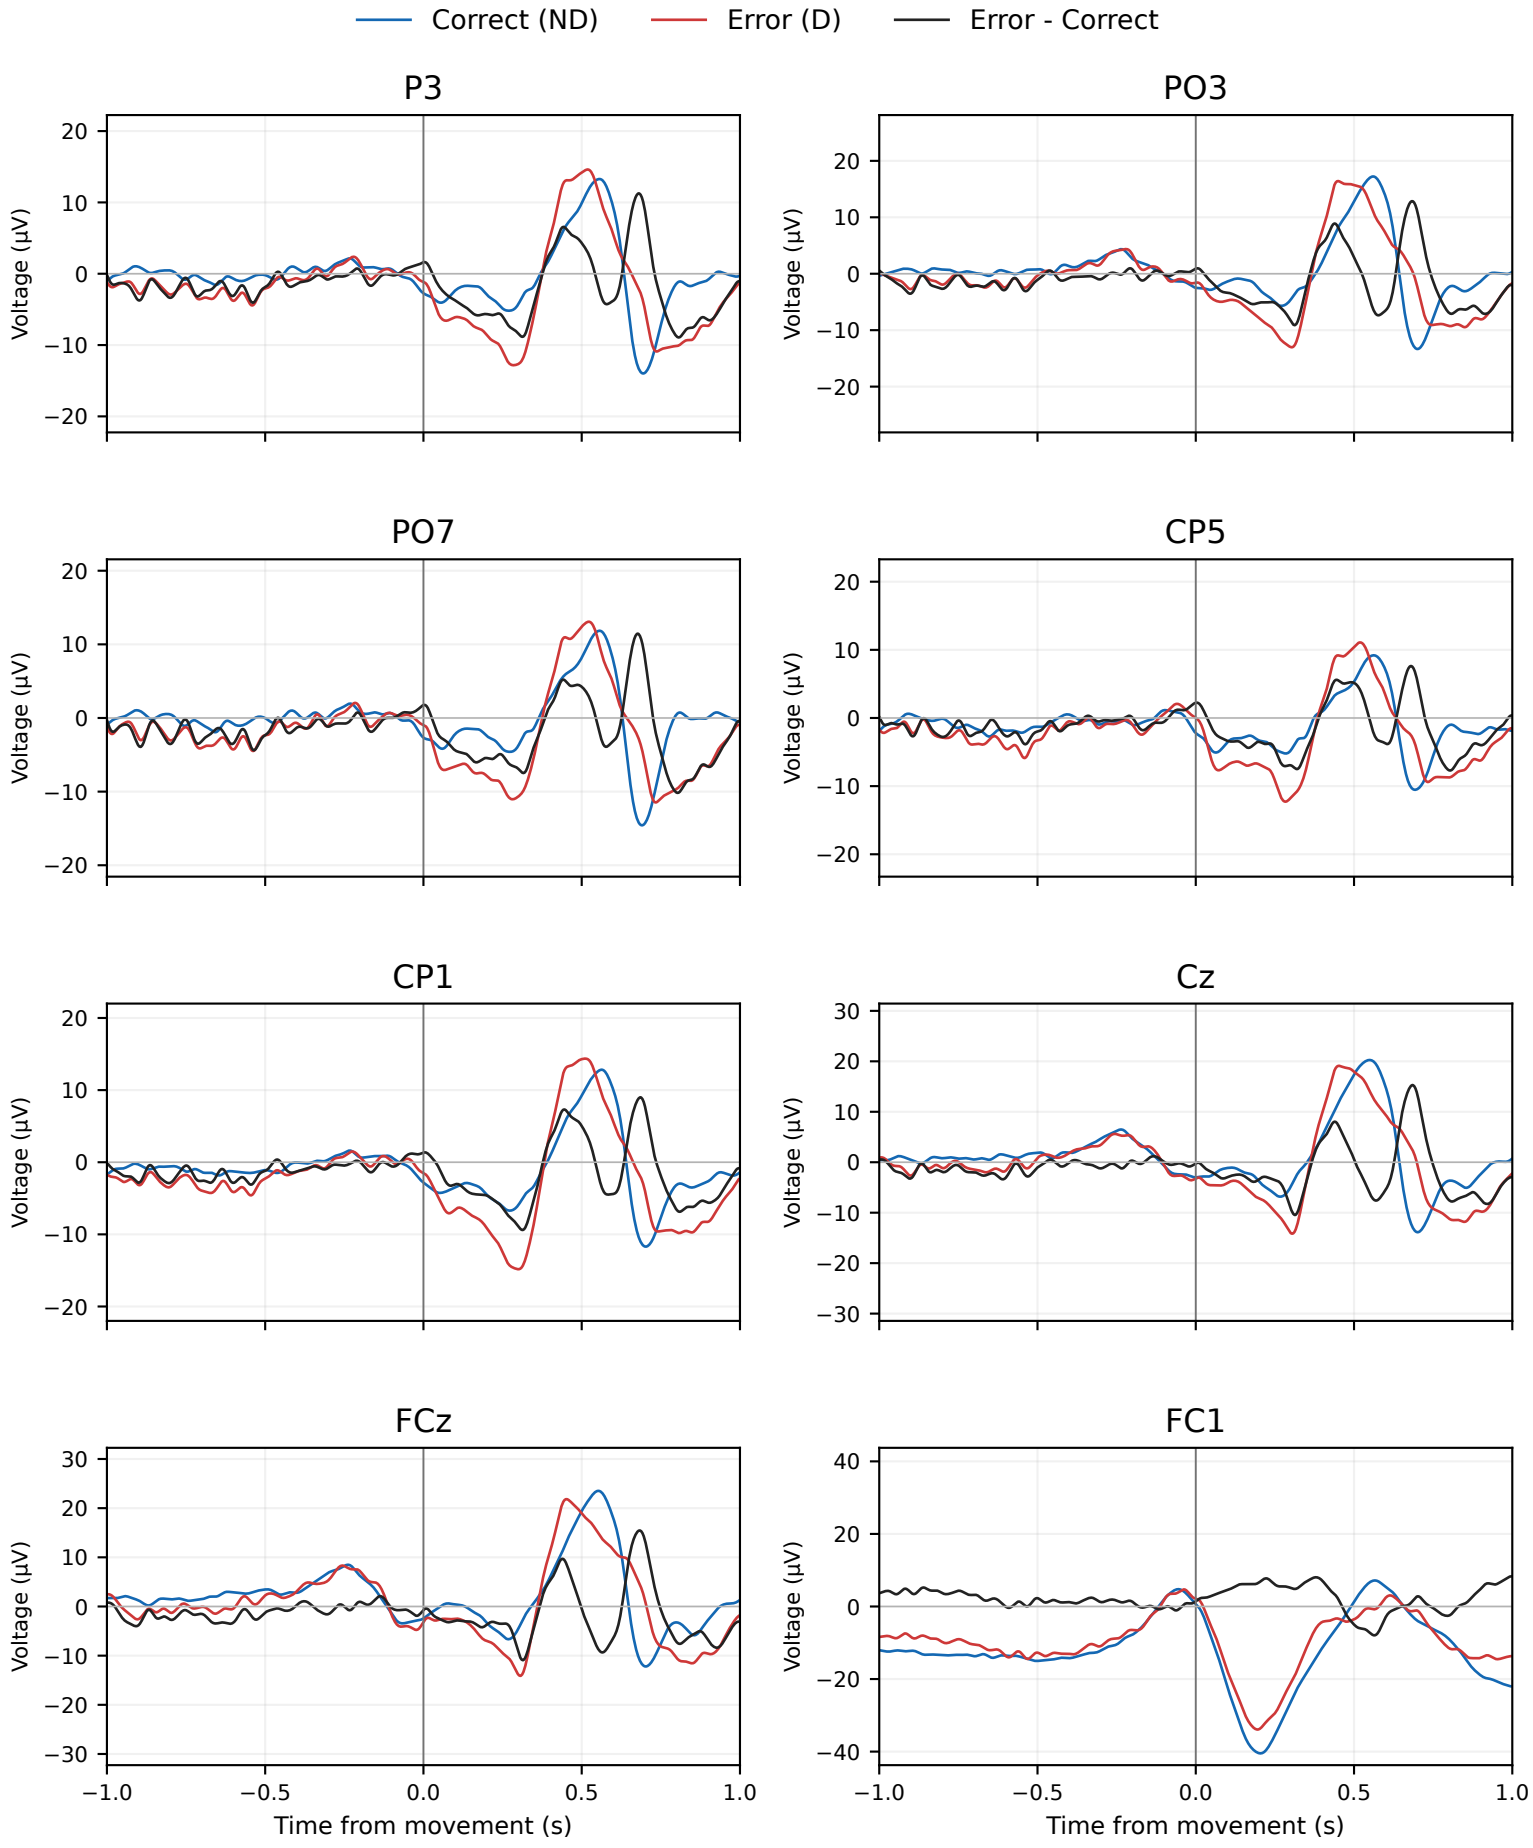

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

yle21 / post: BP no-FORCe


Non-pilot participant | All accepted trials | Correct (ND) n=259; Error (D) n=110

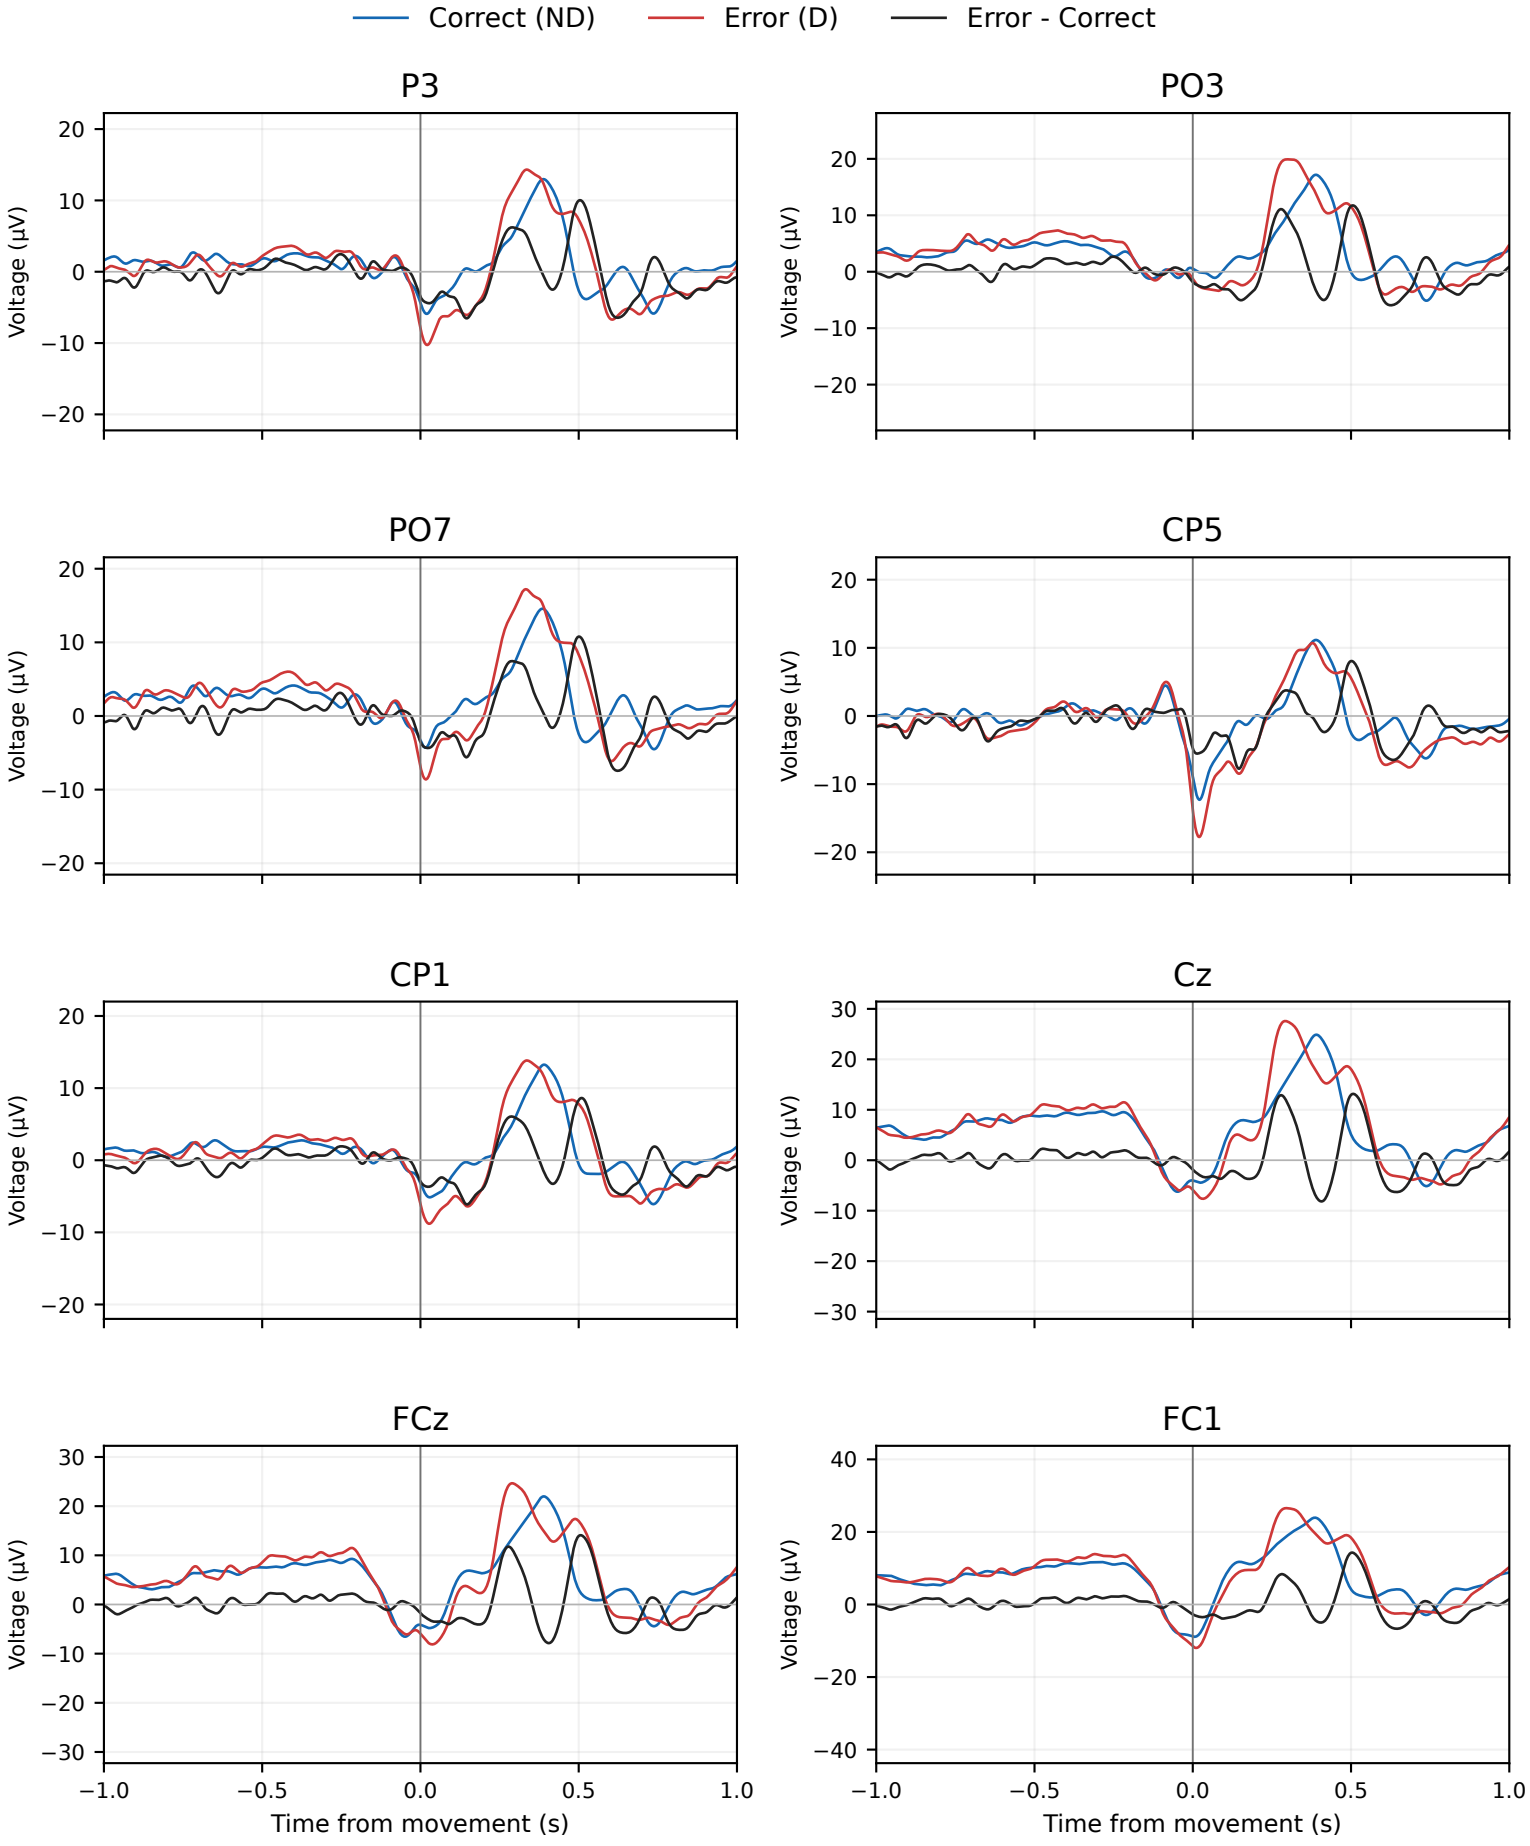

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.

yle21 / retest: BP no-FORCe

Non-pilot participant | All accepted trials | Correct (ND) n=277; Error (D) n=127

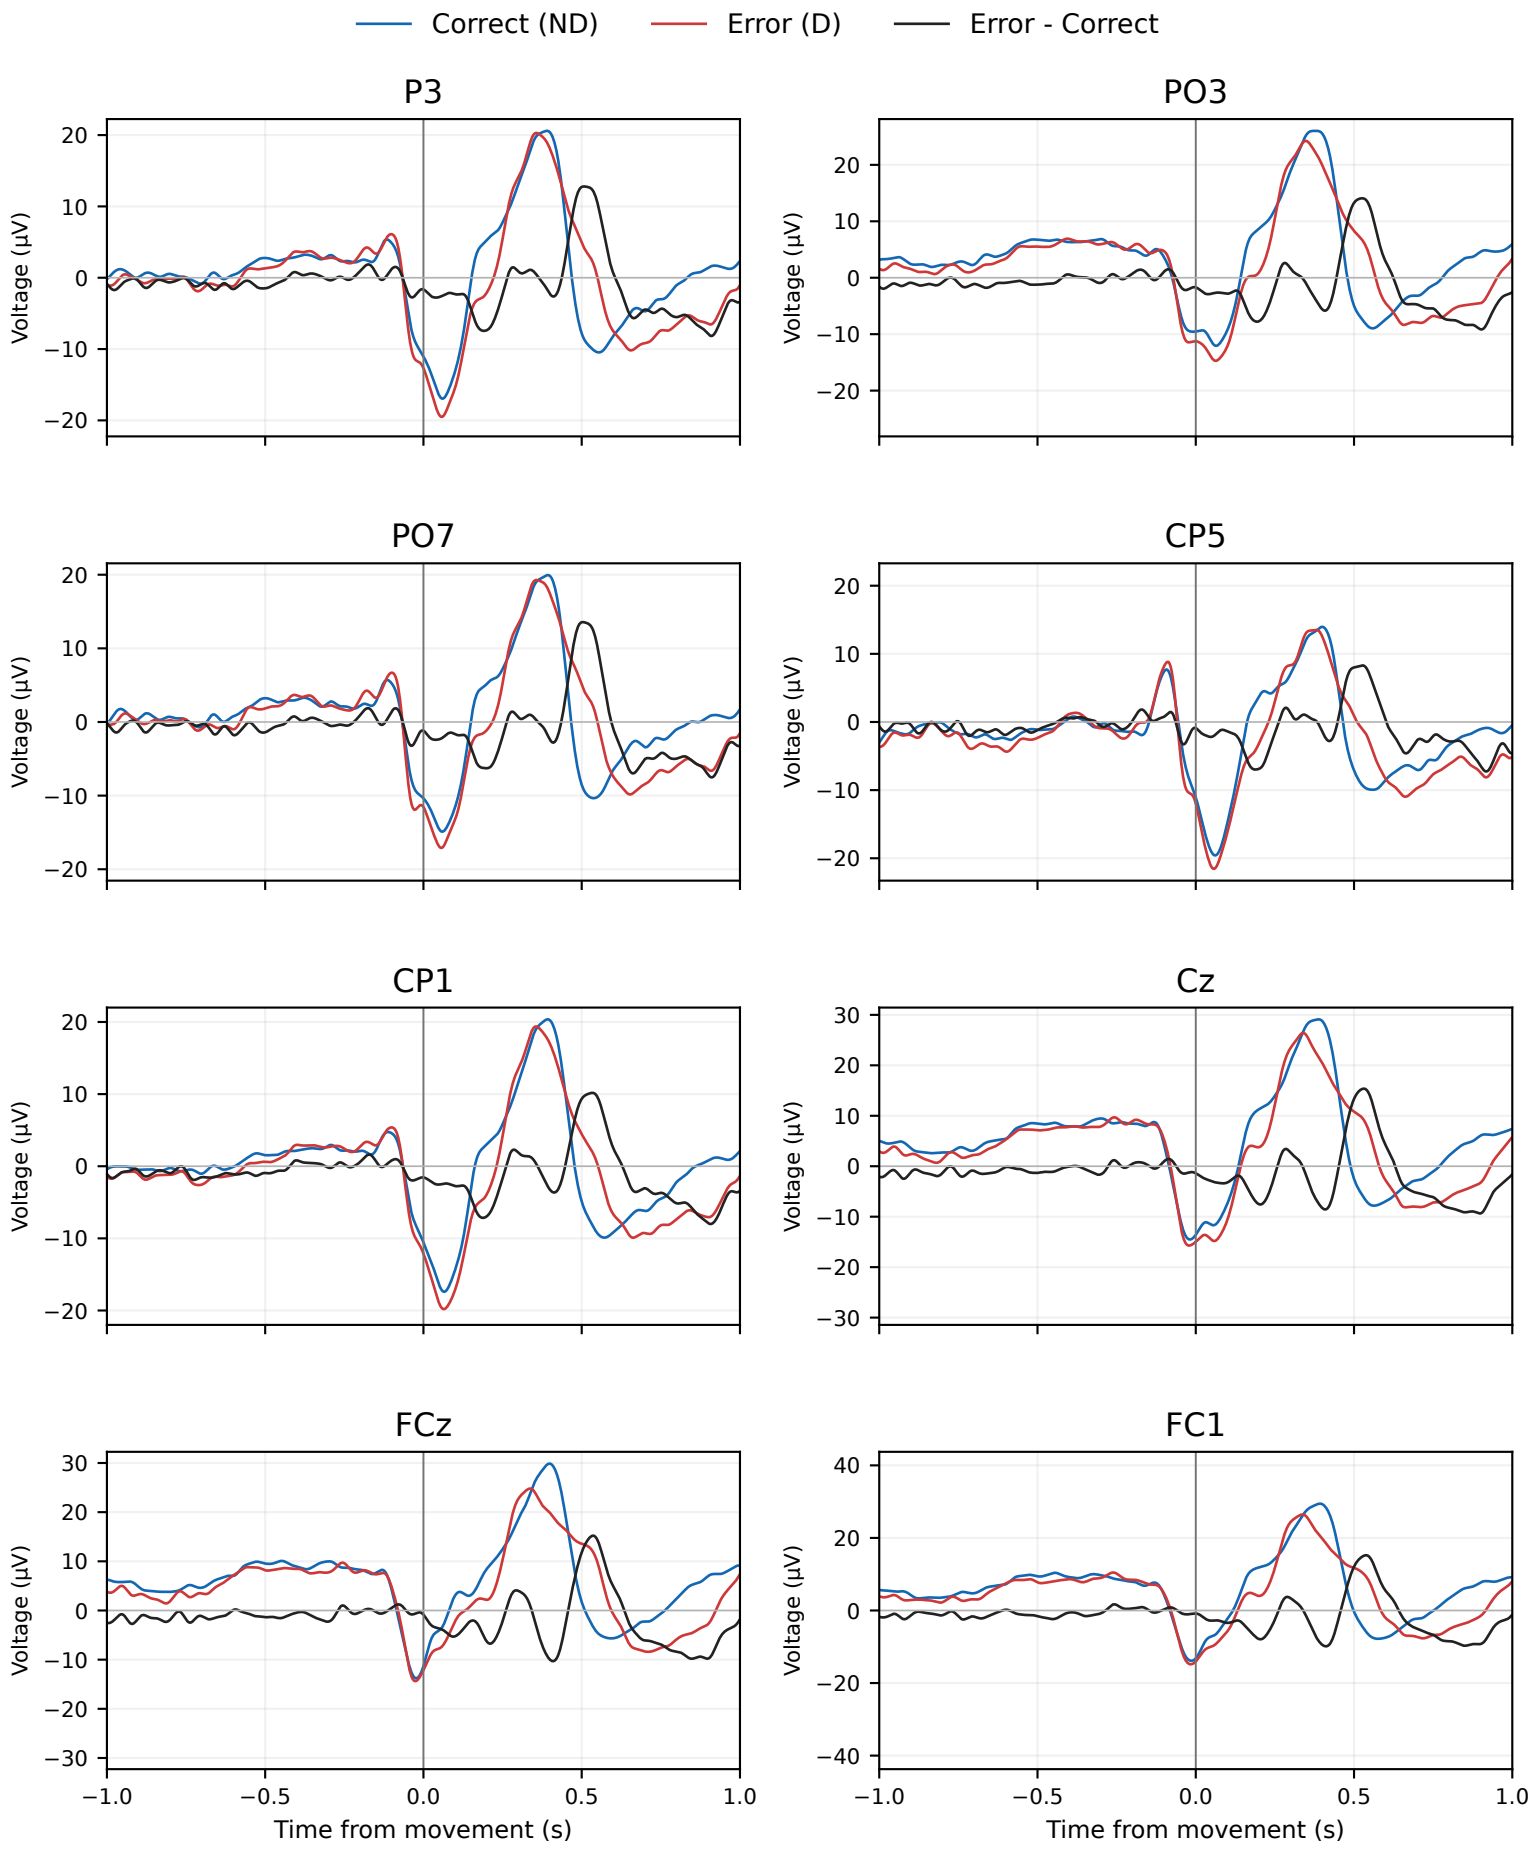

Continuous 1-20 Hz; baseline [-0.2,0) s; quality checks across the three-second context.
Same accepted IDs as decoder preparation; no FORCe acceptance restriction. Fixed axes across sessions per channel.