

1. Testing Network Dependence Using Multiscale Graph Correlation

There have been a work on the properties of the neuronal network based on these incomplete or inconsistent wiring diagrams. Varshney et al(2011) proposed “near-complete” wiring diagram of *C. elegans*. They are interested in local network properties as well as global network properties. We can naturally think that neuronal physical networks and some of the biological function or properties would be correlated each other.

We are given a connected, weighted and also directed network of , which is comprised of 279 nodes and 3225 (directed) edges between them. The given network illustrates the network in the region of pharynx, and the weight imposed on each edge is equivalent to the number of corresponding synapses. For vertex attributes, we have (1) cell class, (2) soma position, (3) neurotransmitters and (4) role.

1 Neuronal Network vs. Soma position

Soma position, among those four attributes, is the only attribute that can be treated as a continuous variable. - **A** : Distance matrix based on an adjacency matrix of A for which $A_{ij} = 0$ if and only if there exists an edge from node i to node j ; $A_{ij} = 1$ if they are NOT adjacent each other.

- A' Geodesic distance matrix A weighted by the count of synapses, using Dijkstra algorithm.

- **B** : $B_{ij} = (1 - \exp(-|X_i - X_j|)) / \max(B_{ij}; i, j = 1, \dots, n)$

- B' : Euclidean distance matrix of soma position.

- $\tilde{A} = HAH$ for any matrix A

Goal : Test $H_0 : f_{AB} = f_A f_B$

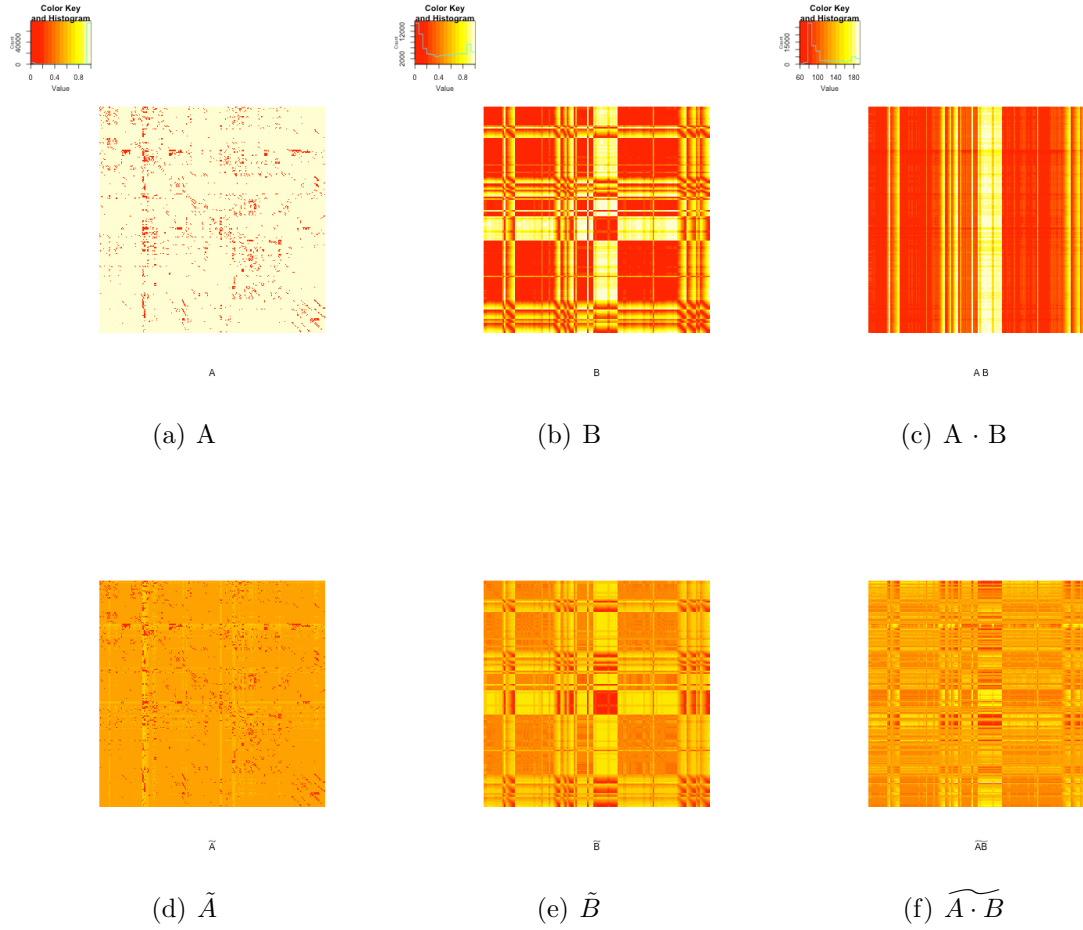


Figure 1.1: Heatmap of dissimilarity measures

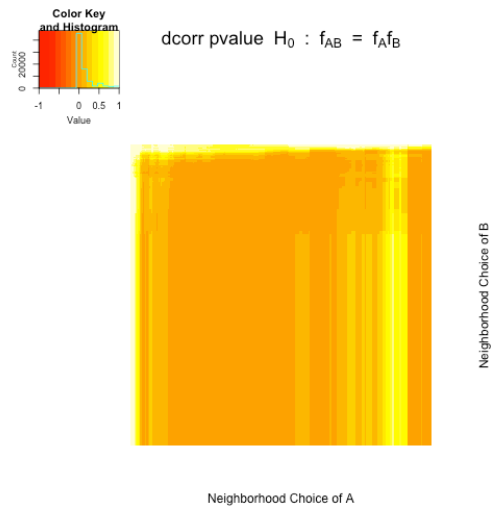


Figure 1.2: Local p-value matrix A vs B

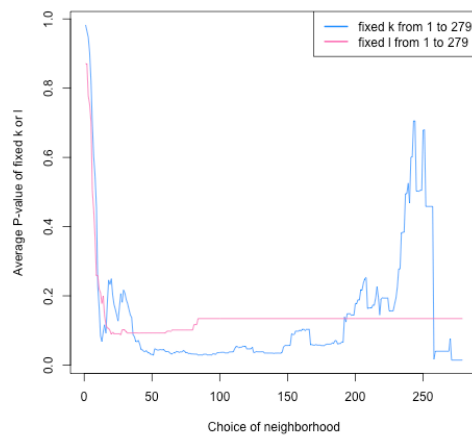


Figure 1.3: Local p-value depending on choice of neighborhood

Goal : Test $H_0 : f_{A'B'} = f_{A'}f_{B'}$

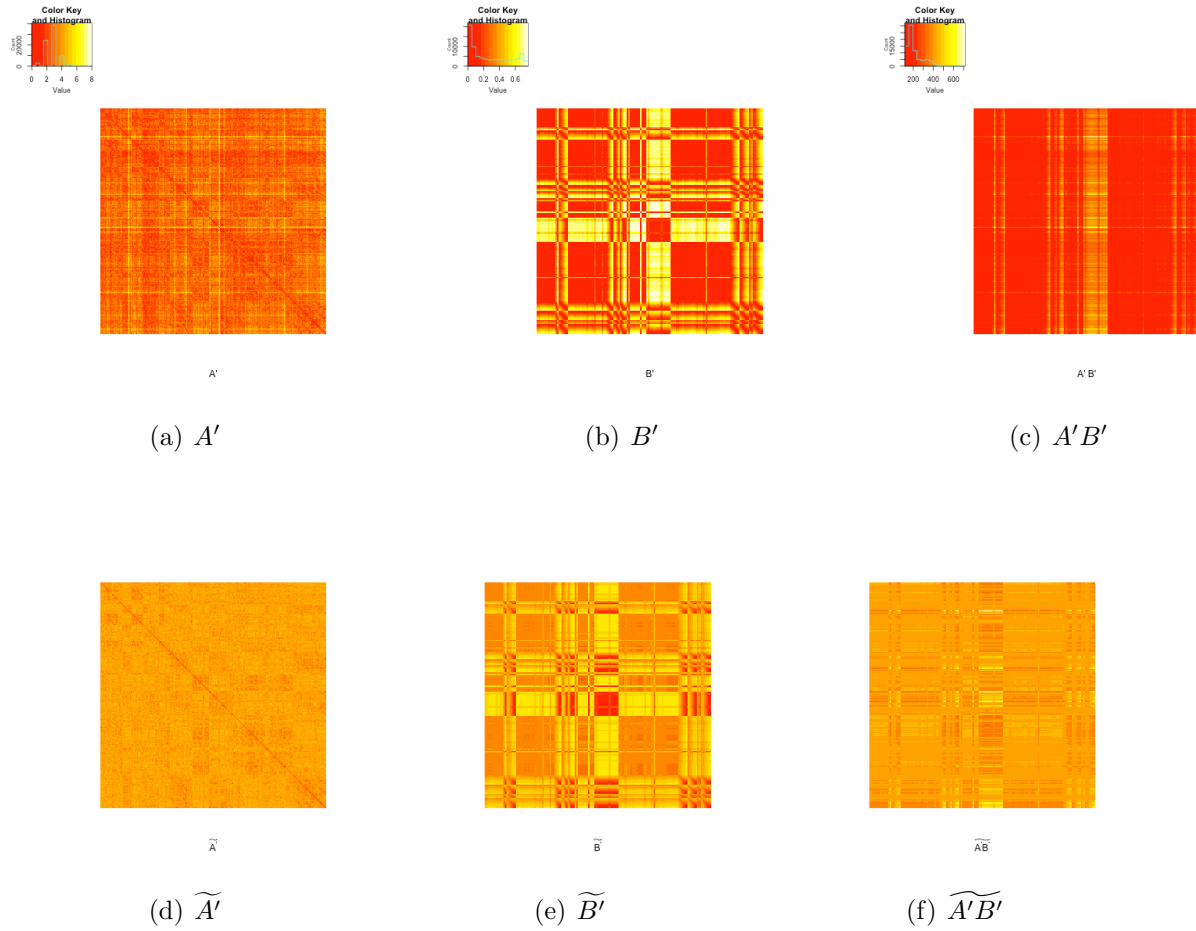


Figure 1.4: Heatmap of Geodesic Distance & Euclidean Distance

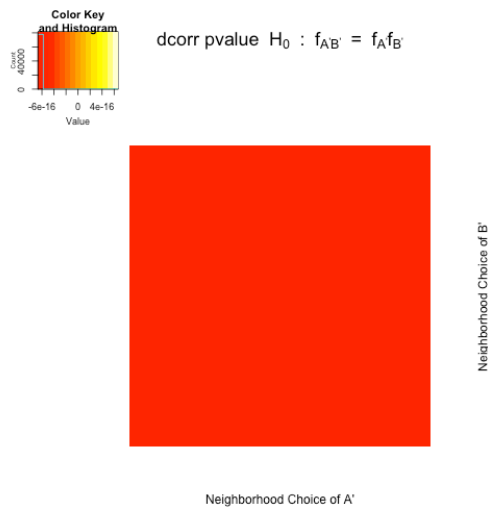


Figure 1.5: Local p-value matrix A' vs B'

P-values, in overall, shows lower value, or lowest value in the second hypothesis. (Euclidean distance measure is more sensitive than dissimilarity measure)

2 Neuronal Network vs. Cell type

- **C** : Dissimilarity matrix of Cell type & Cell Direction categories. - Right(96), Left(93), and other 24 categories(90).

Goal : Test $H_0 : f_{AC} = f_A f_C$

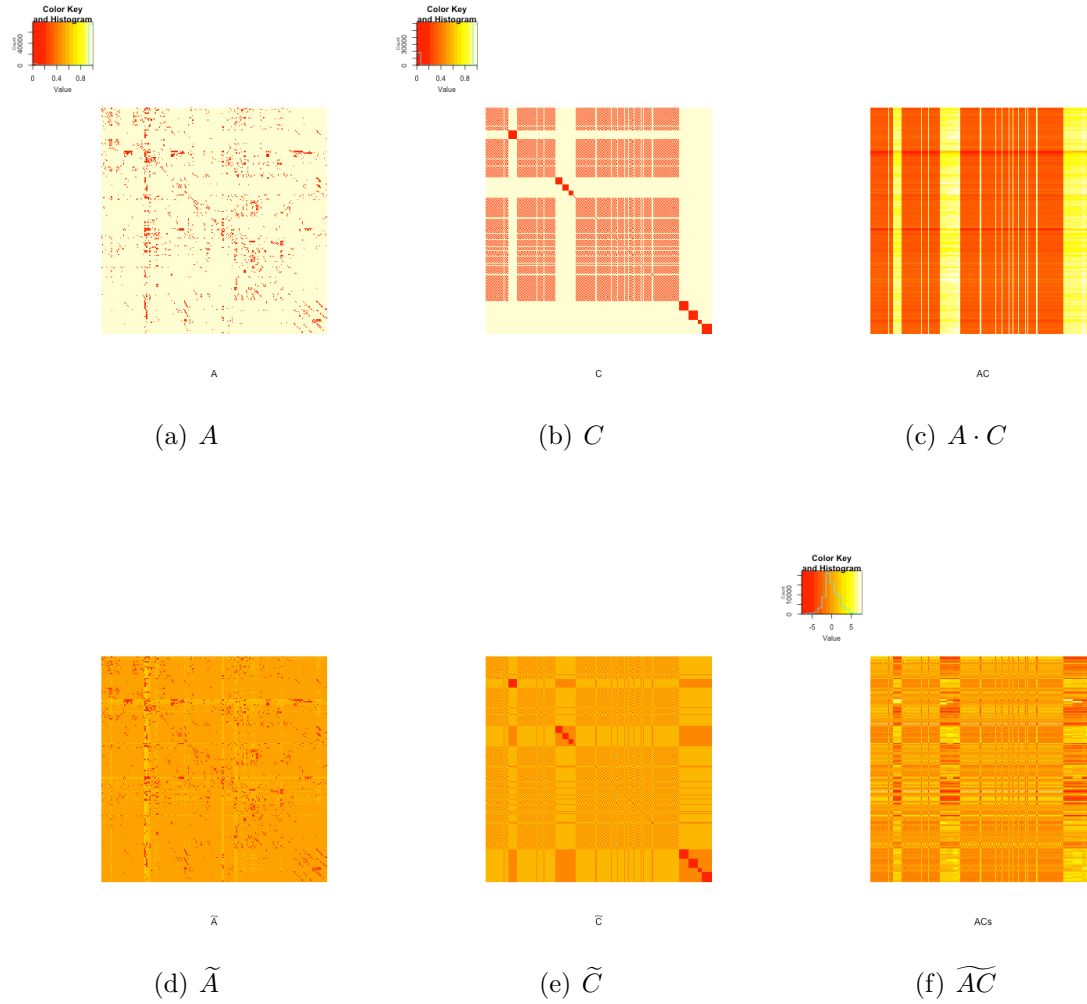


Figure 1.6: Heatmap of Dissimilarity measure for all networks

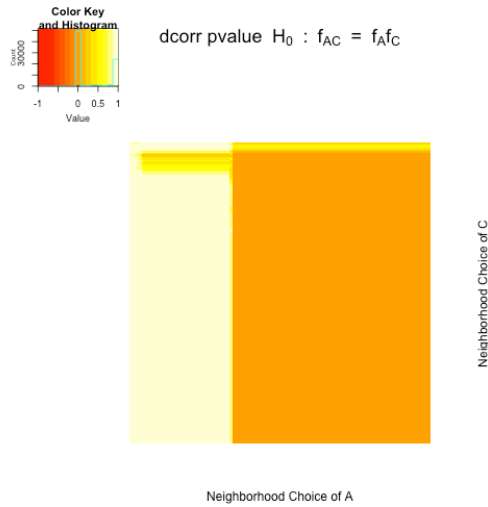


Figure 1.7: Local p-value matrix A vs C

Figure 1.7 shows that p-values are largely dependent on neighboring choice of A rather than that of C . It implies that the local p-values using a small number of neighbors in a neuronal network generally significant than those using a large number of neighbors, and their differences are larger than comparing the choice of distance matrix of cell types, C .

Instead of using dissimilarity matrix for neuronal network A , Euclidean distance of A' is used to test the following hypothesis :

Goal : Test $H_0 : f_{A'C} = f_{A'}f_C$

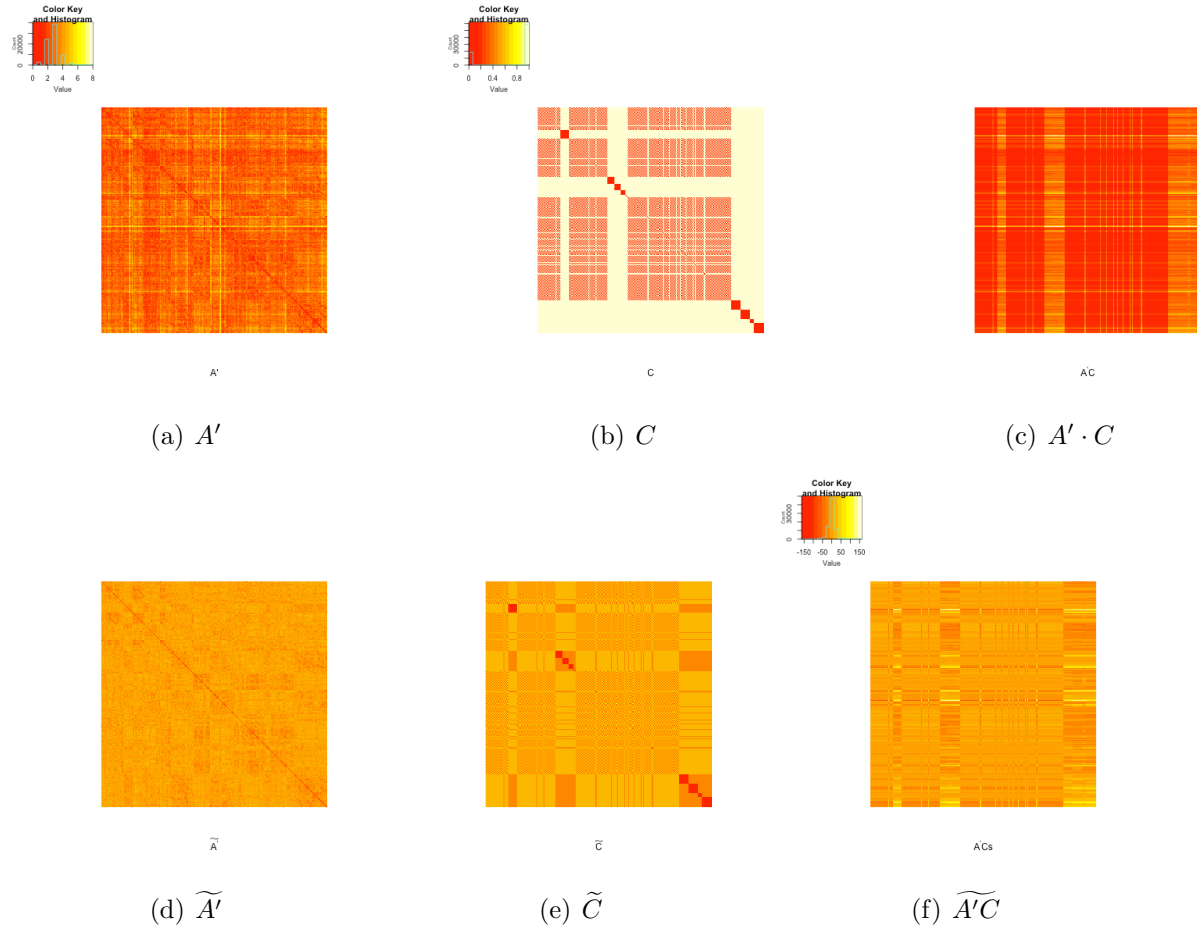


Figure 1.8: Heatmap of geodesic distance for all networks

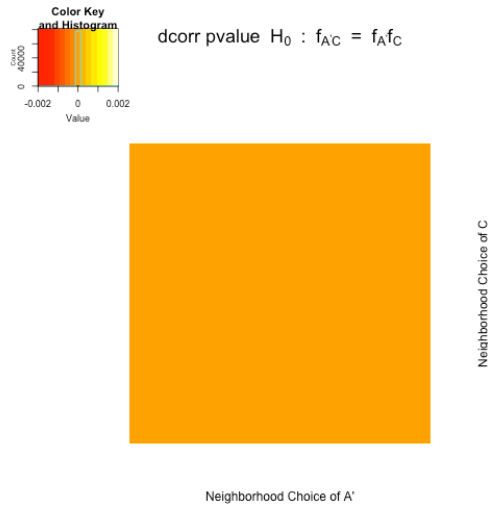


Figure 1.9: Local p-value matrix A' vs C

Compared to Figure ?? where we used a dissimilarity matrix (modified adjacency matrix), Figure ?? illustrates significant p-values all over the local tests.

3 Neuronal Network vs. Cell Direction

Let's consider two categories in cell - "R"ight and "L"eft. Because 90 out of 279 nodes do not have information whether they are right or left, We can only consider an induced subnetwork comprised of 189 nodes. Let A_s be a dissimilarity matrix of sub-network and A'_s be a geodesic distance matrix of subnetwork. Note that A_s can be defined as a sub-matrix of A , but how to define A'_s can be flexible - depending on whether you take account 90 nodes in calculating geodesic distance or not. I assume that a full network of 279 nodes well reflects all the connectivity, so include other 90 nodes in possible paths. Thus, A'_s can be also defined as a sub-matrix of A' .

Let D be a distance matrix of cell direction - Right or Left.

Goal : Test $H_0 : f_{A_s D} = f_{A_s} f_D$

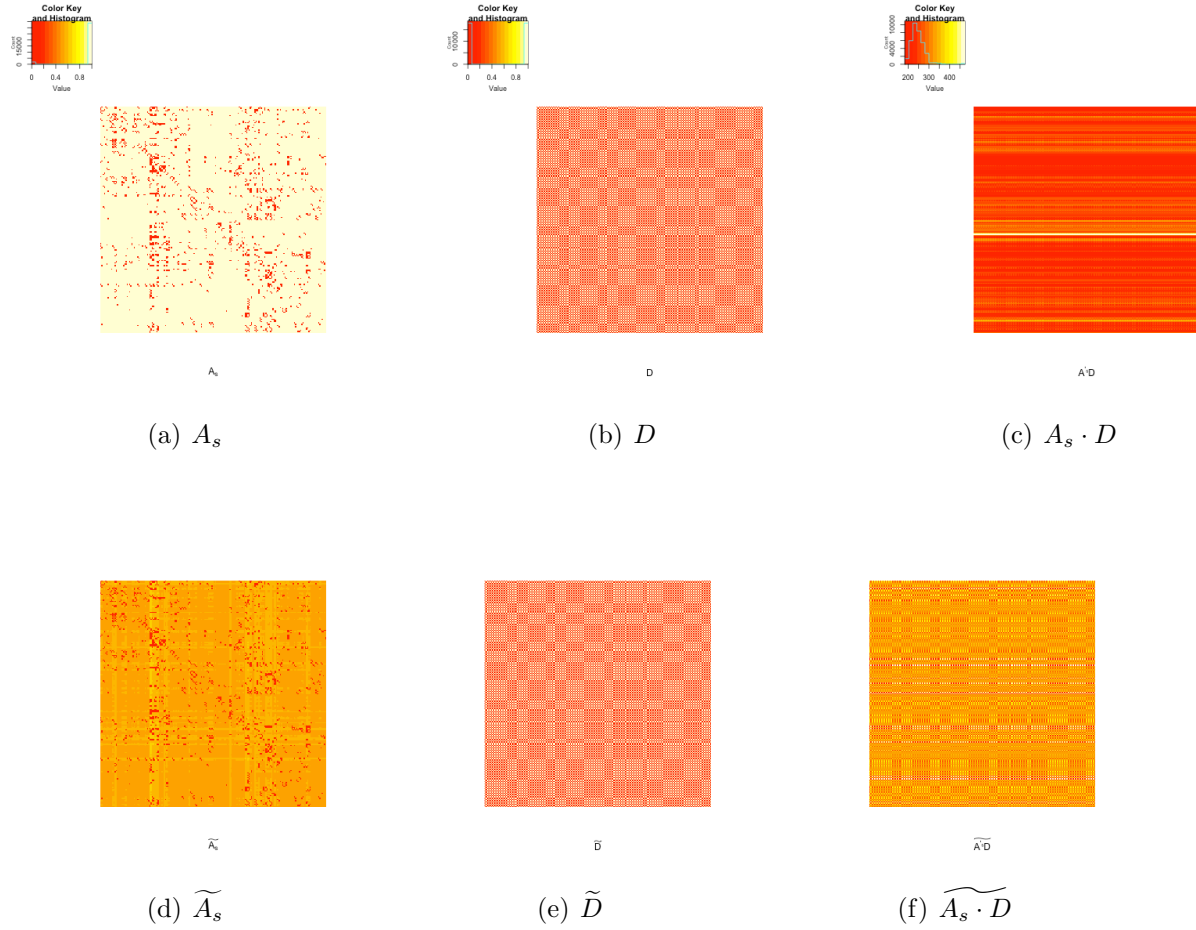


Figure 1.10: Heatmap of Dissimilarity measure for subnetworks

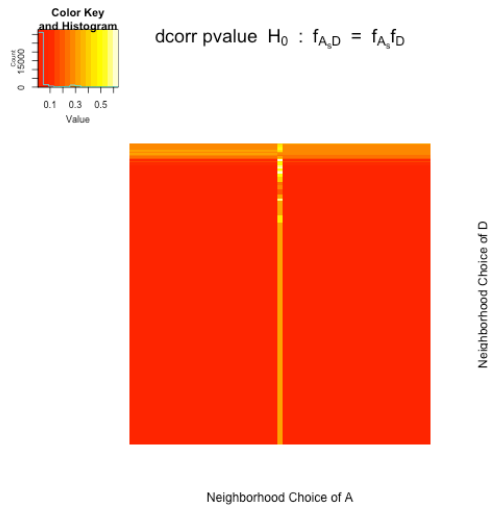


Figure 1.11: Local p-value matrix A_s vs D

Interestingly, Figure 1.13 shows that using a certain range of neighbors in A , p-values are

higher than (still could be significant at $\alpha = 0.05$, though) the other choices; while including more neighbors yields less p-values in the choice of distance D .

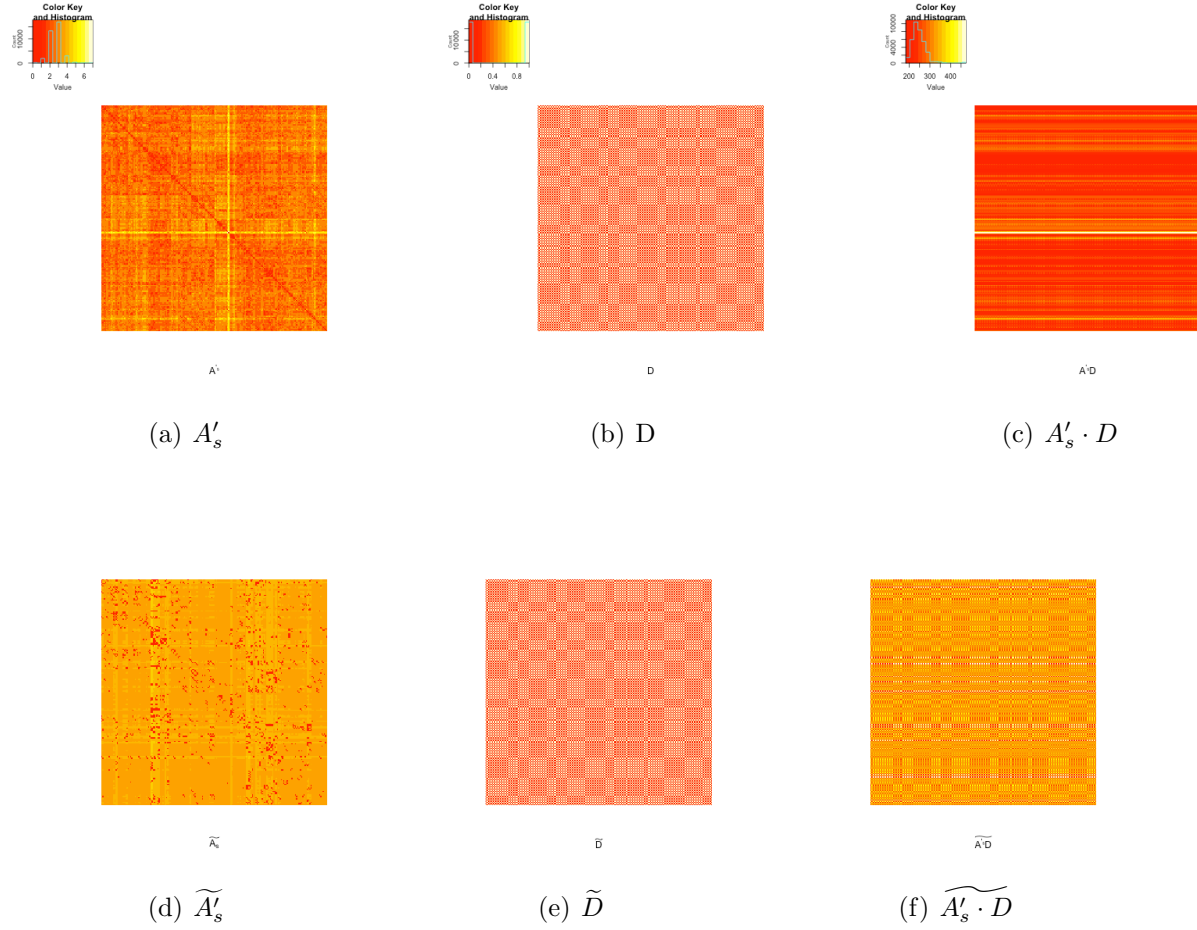


Figure 1.12: Heatmap of Geodesic Distance for subnetworks

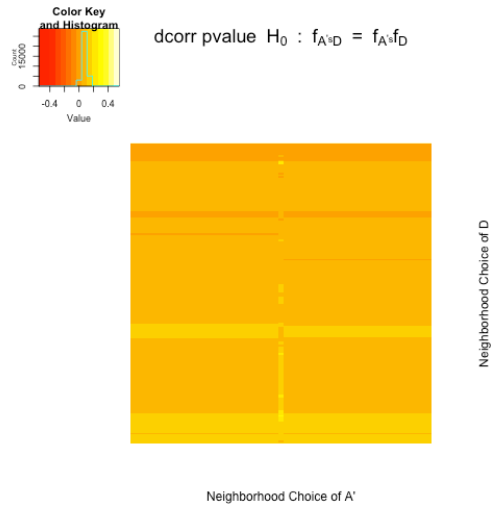


Figure 1.13: Local p-value matrix A'_s vs D