

pyAMICA: GPU-accelerated Adaptive Mixture Independent Component Analysis in Python with Fortran parity

Seyed Yahya Shirazi¹, Arnaud Delorme^{1,2}, and Scott Makeig¹

¹ Swartz Center for Computational Neuroscience, Institute for Neural Computation, University of California San Diego, USA ² Centre de Recherche Cerveau et Cognition (CerCo), CNRS, University of Toulouse, France ✉ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Open Journals](#)

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

Independent Component Analysis (ICA) is a standard method for separating electroencephalography (EEG) and electromyography (EMG) recordings into maximally independent sources, which isolates brain, muscle, and artifact activity for downstream analysis. Adaptive Mixture ICA (AMICA) generalizes single-model ICA to a mixture of ICA models with adaptive source densities, and produces the most dipolar (and thus most physiologically interpretable) component decompositions of EEG among the widely used algorithms benchmarked by Delorme et al. (2012). Its reference implementation, however, is a Fortran program parallelized with the Message Passing Interface (MPI) and distributed as a compiled binary driven from MATLAB/EEGLAB, which is difficult to install, runs only on the CPU, and is not usable from a Python scientific workflow.

pyAMICA is a Python implementation of AMICA that reproduces the reference Fortran results within numerical tolerance while running on the CPU, NVIDIA GPUs (CUDA), and Apple GPUs (Apple's MLX array framework (Hannun et al., 2023)). It is built on PyTorch (Paszke et al., 2019), NumPy (Harris et al., 2020), and SciPy (Virtanen et al., 2020), and exposes a scikit-learn-style estimator. In double precision it reproduces the reference score-function algebra to machine precision; it also runs in single precision (float32), which the CPU-only binary does not offer and which is numerically faithful (agreeing with double precision to four to five significant digits) yet required to use Apple GPUs, which have no float64 and host the fastest backend (MLX). pyAMICA writes output in the binary format that EEGLAB's AMICA loader reads: a single-model output file is byte-identical in layout to a native AMICA file and needs no manual re-interpretation, and multi-model output round-trips through the same loader. Correctness is defined as parity with the Fortran reference for the single-model case and, because multi-model AMICA is not partition-identifiable, as distributional equivalence for the multi-model case; both are validated on real EEG against the reference binary. The software is at <https://github.com/scn/pyAMICA> (archived at doi:10.5281/zenodo.21312148).

Statement of need

AMICA yields components that are well suited to equivalent-dipole source localization and to automated classification of independent components (Pion-Tonachini et al., 2019), and it separates EEG more effectively than most alternatives (Delorme et al., 2012; Palmer et al., 2012). The reference implementation is the original Fortran code: it depends on an MPI toolchain and precompiled binaries that are awkward to build across platforms, it cannot use a GPU, and it is invoked as an external process from MATLAB rather than called from Python. As neuroimaging analysis has moved toward Python, for example MNE-Python (Gramfort et

al., 2013), an AMICA that runs natively in Python and on a GPU, and that is validated to reproduce the Fortran reference numerically, is needed for modern pipelines and for studying the algorithm in an open codebase.

General-purpose Python ICA implementations do not fill this gap. scikit-learn and MNE-Python provide FastICA (Hyvärinen & Oja, 2000) and Infomax (Bell & Sejnowski, 1995; Lee et al., 1999), and Picard (Ablin et al., 2018) provides a faster maximum-likelihood ICA, but none implement AMICA's mixture of models, adaptive generalized-Gaussian source densities, or Newton updates, and so they do not reproduce AMICA decompositions. pyAMICA targets researchers who need AMICA specifically: EEG/EMG analysts who want AMICA-quality decompositions inside a Python pipeline, users of GPU hardware who want faster runs than the CPU-only binary, and methodologists who need a transparent reference implementation to inspect and build on.

Implementation and validation

pyAMICA provides a natural-gradient (Amari, 1998) expectation-maximization backend that ports the full AMICA algorithm: exact-EM mixture updates, a positive-definite Newton step (Palmer et al., 2008), symmetric zero-phase-component-analysis (ZCA) sphering, the five source-density families of the reference (generalized Gaussian, Gaussian, logistic, sub-Gaussian, and the extended-Infomax kurtosis switcher), a mixture of ICA models, and component sharing across models.

pyAMICA's conformity with the reference binary is measured on real sample EEG (Table 1) with two complementary metrics: Hungarian-matched component correlation, and the Amari distance (Amari et al., 1996), a standard unmixing-matrix comparison metric that needs no assignment step since it is permutation- and scale-invariant by construction. Both agree closely for the single model, and the source-density score functions and per-block sufficient statistics are bit-exact against the literal Fortran expressions. A mixture of ICA models is not partition-identifiable, so exact partition parity is the wrong bar for the multi-model case; it is instead assessed by distributional equivalence across ensembles of 20 runs each (Figure 1). Both metrics again agree: a run-level permutation test, which permutes the 40 runs as intact units to respect the dependence among pairwise values, finds no evidence that cross-implementation agreement is worse than Fortran's own run-to-run agreement. The single-run values are therefore intrinsic estimator spread rather than a shortfall. Equivalence is claimed for the partition structure; the multi-model log-likelihood distributions still differ slightly at a matched 100-iteration budget (pyAMICA reaches Fortran's mean with about twice as many iterations), so full-likelihood equivalence is not yet claimed. Per-run detail for both metrics is in the documentation.

Table 1: Single-model parity and multi-model distributional equivalence of pyAMICA with the Fortran reference on the bundled sample EEG.

Regime	Metric	Result (correlation / Amari distance)
Single-model	Log-likelihood gap to Fortran (−3.4018)	within ~0.005
Single-model	Conformity with Fortran	0.997 / 0.006
Single-model	Score functions and sufficient statistics	bit-exact ($\sim 10^{-15}$)
Multi-model	Single run (pyAMICA-Fortran; Fortran-Fortran)	0.65; 0.64 (sd 0.05) / 0.163; 0.174 (sd 0.02)
Multi-model	Ensemble equivalence, 20 runs each (permutation p)	$p = 0.96$ / $p > 0.999$

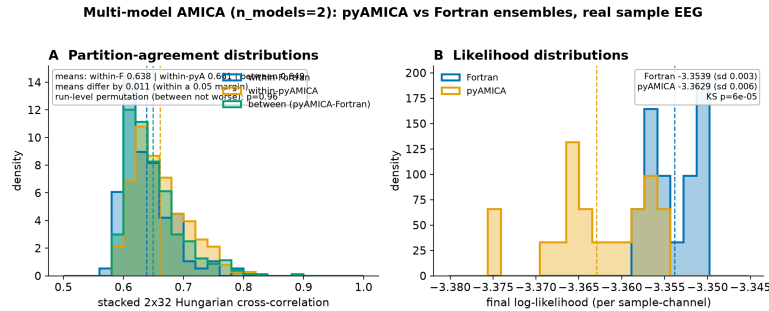


Figure 1: Multi-model solution-ensemble partition-correlation distributions for 20 pyAMICA and 20 Fortran fits of the sample EEG. The within-Fortran, within-pyAMICA, and between-implementation distributions overlap, so the single-run correlation reflects the estimator’s intrinsic run-to-run spread rather than a gap to the reference.

77 All backends converge to the same single-model log-likelihood on real EEG (maximum pairwise
78 difference ~0.003). On Apple Silicon the MLX backend is the fastest option and is roughly flat
79 with channel count (15-25 ms per iteration from 16 to 70 channels; see the documentation),
80 about eight times faster than double-precision multithreaded CPU; PyTorch-MPS is not a win
81 (at or worse than the CPU). On NVIDIA hardware double-precision CUDA is the reproducible
82 path and is overhead-bound at EEG scale, so single precision gives it little additional speedup
83 (Table 2). Native Fortran itself scales with CPU cores, unlike the CPU backends above:
84 with enough cores pinned it is competitive with, or faster than, the GPU it is compared
85 against on each machine (Table 2), though only by dedicating most cores of a much larger,
86 hotter host than a laptop GPU. A data-size sweep further shows cross-backend component
87 equivalence rising with frames per channel and plateauing near 0.98 once the decomposition
88 is well-determined, where two independent double-precision implementations (native Fortran
89 and PyTorch-CUDA) agree at 0.995; single-precision runs are seven-significant-digit, so double
90 precision remains the default for parity.

Table 2: Single-model throughput on real 70-channel EEG (n_mix=3, pdftype=0, block_size=512; warm, minimum of repeated runs). CPU, MPS, and MLX on Apple Silicon; CUDA on a separate NVIDIA RTX 4090; CUDA float32 is comparable (~36 ms). The two native-Fortran rows are from a separate core-count sweep (documentation) on the same two machines, at the core count where each backend’s throughput levels off; the other CPU rows above use the platform default thread count, so they are not core-matched to Fortran. Unlike the correctness comparison, this benchmark uses external data (OpenNeuro ds002718) and specific GPU hardware.

Backend (device)	Precision	ms / iteration
MLX (Apple GPU)	float32	25
CUDA (NVIDIA RTX 4090)	float64	39
Native Fortran (Intel Core i9-13900K, 24 cores)	float64	30
PyTorch CPU (Apple Silicon)	float64	193
Native Fortran (Apple Silicon, 8 cores)	float64	70
PyTorch MPS (Apple GPU)	float32	255
NumPy (reference, Apple Silicon)	float64	622

91 The correctness harness compares pyAMICA against Fortran with two metrics, Hungarian-
92 matched component correlation and Amari distance, and uses only the bundled real sample
93 EEG and Fortran binary, with no external download and no synthetic data. The full per-channel
94 and multi-model performance tables, the per-run Amari-distance detail, and the data-size
95 sweep are in the documentation (<https://eeglab.org/pyAMICA/guides/validation/>).

State of the field

pyAMICA complements rather than replaces EEGLAB (Delorme & Makeig, 2004) and its Fortran AMICA plugin: it reads and writes the same output format, so results move between the two, while adding GPU support and a Python API. Two other Python AMICA reimplementations have appeared (Esmaili, 2025; Herforth, 2026), both of which provide MNE-Python-compatible objects; pyAMICA instead offers a scikit-learn-style array API and byte-identical EEGLAB I/O, and does not yet ship an MNE-Python wrapper. What distinguishes pyAMICA is the rigor and scope of its Fortran-parity validation, beyond what either alternative publishes: bit-exact source-density score functions ($\sim 10^{-15}$), single-model component correlation and Amari distance against the reference, and a distributional-equivalence framework for the non-identifiable multi-model case, together with byte-identical EEGLAB output and an MLX backend for Apple GPUs.

Acknowledgements

We thank Jason Palmer and Ken Kreutz-Delgado, co-developers of AMICA, for the reference implementation, and the EEGLAB community for the tools and sample data used to validate this work. Two of the authors are original developers of the methods pyAMICA builds on: S.M. co-developed the AMICA algorithm (Palmer et al., cited above) and A.D. is a lead developer of EEGLAB (Delorme & Makeig, 2004). This work was supported by The Swartz Foundation (Old Field, NY) to the Swartz Center for Computational Neuroscience and by National Institutes of Health grant R01-NS047293 (to A.D. and S.M.).

References

- Ablin, P., Cardoso, J.-F., & Gramfort, A. (2018). Faster independent component analysis by preconditioning with hessian approximations. *IEEE Transactions on Signal Processing*, 66(15), 4040–4053. <https://doi.org/10.1109/TSP.2018.2844203>
- Amari, S.-I. (1998). Natural gradient works efficiently in learning. *Neural Computation*, 10(2), 251–276. <https://doi.org/10.1162/089976698300017746>
- Amari, S.-I., Cichocki, A., & Yang, H. H. (1996). A new learning algorithm for blind signal separation. *Advances in Neural Information Processing Systems*, 8, 757–763.
- Bell, A. J., & Sejnowski, T. J. (1995). An information-maximization approach to blind separation and blind deconvolution. *Neural Computation*, 7(6), 1129–1159. <https://doi.org/10.1162/neco.1995.7.6.1129>
- Delorme, A., & Makeig, S. (2004). EEGLAB: An open source toolbox for analysis of single-trial EEG dynamics including independent component analysis. *Journal of Neuroscience Methods*, 134(1), 9–21. <https://doi.org/10.1016/j.jneumeth.2003.10.009>
- Delorme, A., Palmer, J., Onton, J., Oostenveld, R., & Makeig, S. (2012). Independent EEG sources are dipolar. *PLoS ONE*, 7(2), e30135. <https://doi.org/10.1371/journal.pone.0030135>
- Esmaili, S. (2025). *Amica: Native python implementation of AMICA for MNE-Python and scientific EEG workflows*. <https://github.com/snesmaeli/amica>.
- Gramfort, A., Luessi, M., Larson, E., Engemann, D. A., Strohmeier, D., Brodbeck, C., Goj, R., Jas, M., Brooks, T., Parkkonen, L., & Hämäläinen, M. (2013). MEG and EEG data analysis with MNE-Python. *Frontiers in Neuroscience*, 7, 267. <https://doi.org/10.3389/fnins.2013.00267>
- Hannun, A., Digani, J., Katharopoulos, A., & Collobert, R. (2023). *MLX: Efficient and flexible*

- 140 *machine learning on apple silicon*. <https://github.com/ml-explore/mlx>.
- 141 Harris, C. R., Millman, K. J., Walt, S. J. van der, Gommers, R., Virtanen, P., Cournapeau, D.,
142 Wieser, E., Taylor, J., Berg, S., Smith, N. J., & others. (2020). Array programming with
143 NumPy. *Nature*, 585(7825), 357–362. <https://doi.org/10.1038/s41586-020-2649-2>
- 144 Herforth, J. (2026). *Pyamica: PyTorch AMICA, adaptive mixture independent component*
145 *analysis*. <https://github.com/DerAndereJohannes/pyamica>.
- 146 Hyvärinen, A., & Oja, E. (2000). Independent component analysis: Algorithms and applications.
147 *Neural Networks*, 13(4-5), 411–430. [https://doi.org/10.1016/S0893-6080\(00\)00026-5](https://doi.org/10.1016/S0893-6080(00)00026-5)
- 148 Lee, T.-W., Girolami, M., & Sejnowski, T. J. (1999). Independent component analysis using
149 an extended infomax algorithm for mixed subgaussian and supergaussian sources. *Neural*
150 *Computation*, 11(2), 417–441. <https://doi.org/10.1162/089976699300016719>
- 151 Palmer, J. A., Kreutz-Delgado, K., & Makeig, S. (2012). *AMICA: An adaptive*
152 *mixture of independent component analyzers with shared components*. Swartz
153 Center for Computational Neuroscience, University of California San Diego.
154 https://sccn.ucsd.edu/~jason/amica_a.pdf
- 155 Palmer, J. A., Kreutz-Delgado, K., Rao, B. D., & Makeig, S. (2008). Newton method for the
156 ICA mixture model. *2008 IEEE International Conference on Acoustics, Speech and Signal*
157 *Processing (ICASSP)*, 1805–1808. <https://doi.org/10.1109/ICASSP.2008.4517982>
- 158 Paszke, A., Gross, S., Massa, F., Lerer, A., Bradbury, J., Chanan, G., Killeen, T., Lin,
159 Z., Gimelshein, N., Antiga, L., & others. (2019). PyTorch: An imperative style, high-
160 performance deep learning library. *Advances in Neural Information Processing Systems*, 32,
161 8024–8035.
- 162 Pion-Tonachini, L., Kreutz-Delgado, K., & Makeig, S. (2019). ICLabel: An automated
163 electroencephalographic independent component classifier, dataset, and website.
164 *NeuroImage*, 198, 181–197. <https://doi.org/10.1016/j.neuroimage.2019.05.026>
- 165 Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D.,
166 Burovski, E., Peterson, P., Weckesser, W., Bright, J., & others. (2020). SciPy 1.0:
167 Fundamental algorithms for scientific computing in python. *Nature Methods*, 17(3),
168 261–272. <https://doi.org/10.1038/s41592-019-0686-2>