

Name **HideElementIf** **Version**

Updated by Mathias PFAUWADEL 1.0

Patch Notes

- 1.0 : 1st version working

To be Done

- More Options


Description

On an ObjectPage, allow you to hide or show and element(tab, property-group, view or html) according to a property of the object

ScreenShot


Here, we are on the objectPage of the aideArchitecture id = 3, we can see 3 tabs.

/evolve/sites/██████.fr/index.html#/cwtype=single&cwview=aidedarchitecture&lang=fr&cwid=3&cwtabid=tab3

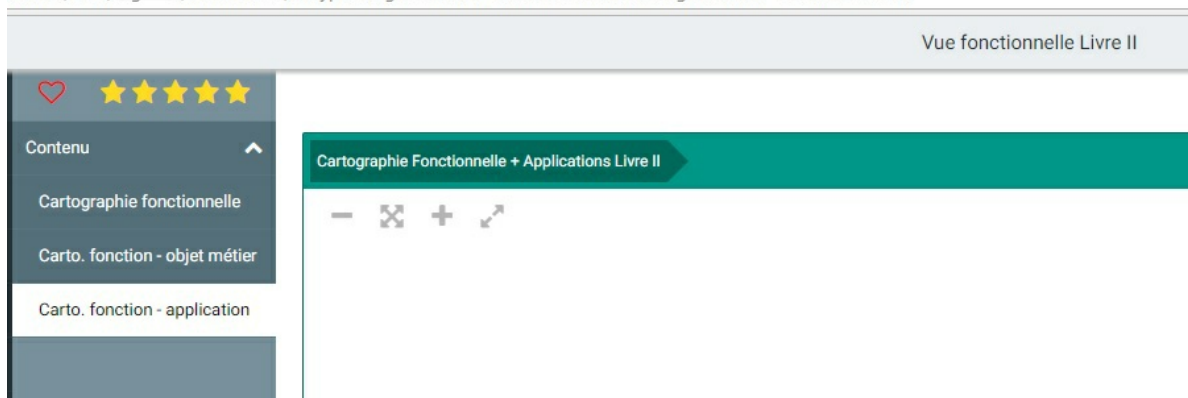

Here, we are on the objectPage of the aideArchitecture id = 82, we can see only 1 tab.

evolve/sites/██████.fr/index.html#/cwtype=single&cwview=aidedarchitecture&lang=fr&cwid=82&cwtabid=tab5

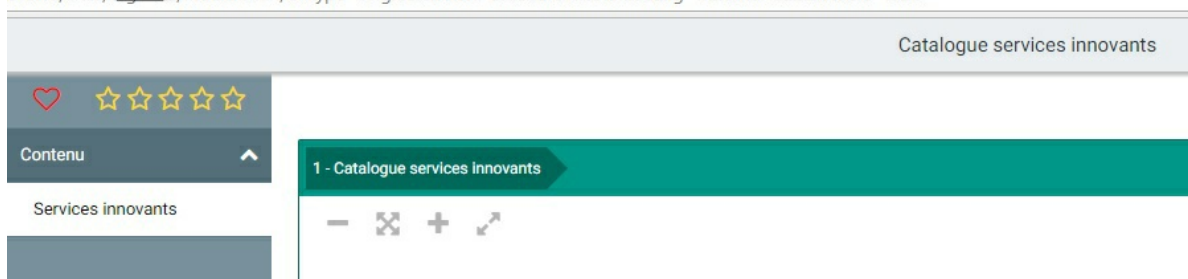

Configuration

The general structure is the following.


In Evolve\Site\bin\webDesigner\custom\Marketplace\libs\HideElementIf\src\hideElementIf.js

You can modify the configuration

```
/******  
Config  
*****  
  
var hideElementIf = {};  
hideElementIf.config = {  
    "{viewName}" : [{action},{action2}]  
    "{viewName2}" : [{action3}]  
};
```

{viewName} correspond to the objectPage pageName

evolve/sites/ /index.html#/cwtype=single&cwview=aidedarchitecture&lang=fr&cwid=82&cwtabid=tab5

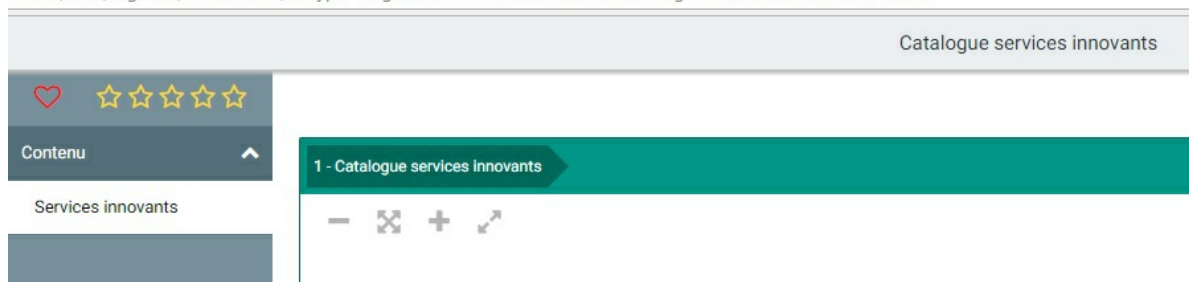

you can put as many view as you want

On each viewName you can add several action, action have the following syntax :

```
{  
    "style": "{style}",  
    "styleValue": "{styleValue}",  
    "type" : "{type}",  
    "id" : "{id}",  
    "class" : "{class}",  
    "property" : "{property}",  
    "operator" : "{logicalOperator}",  
    "value" : "{value}" /// can be value or an array  
}
```

{attributeToModify} correspond to the css style attribute we want to interact with, here we will act on display to hide or show an object.

{newValue} correspond to the css style value we want to put if the property match, here the value will be "none" if we want to hide an element and "block" if we want to show it.


{type} : describe the type of element we want to hide or show. Possible Value are :

- "tab" correspond to a tab
- "propertygroup": correspond to a propertygroup
- "class": correspond to the class of HTML elements
- "id": correspond to the id of HTML elements
- "view": correspond to another view for exemple on an objectpage, you can have 2 views and you want to display only one.

if you use type tab ,propertygroup ,id or view, you need to put the attribute id :


- {id} correspond to the html id, if you use type = id
- {id} correspond to the id of the element which is define in evolve, if you use type = tab,

propertygroup

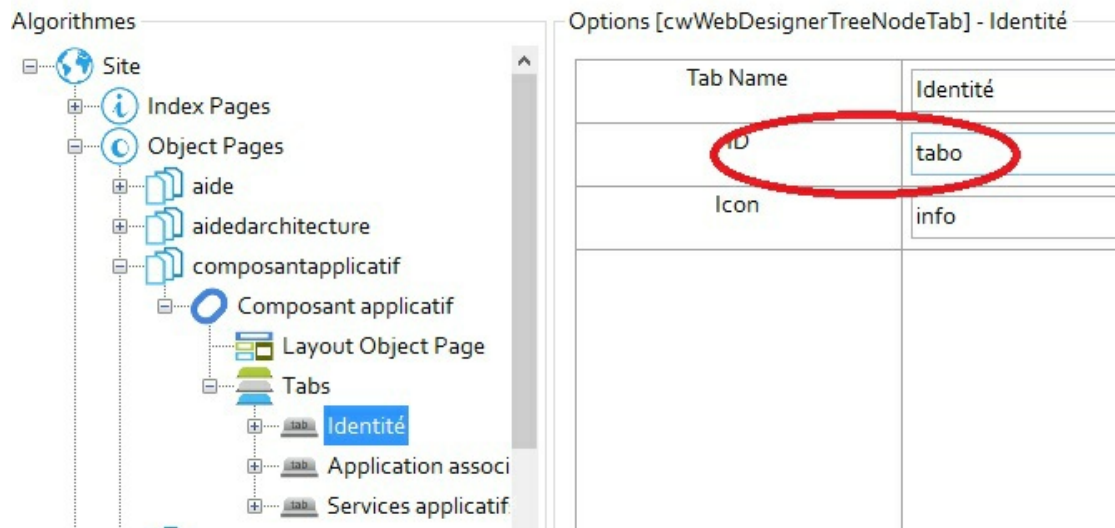

Options [cwWebDesignerTreeNodeTab] - Identité


Tab Name	Identité
ID	tabo
Icon	info

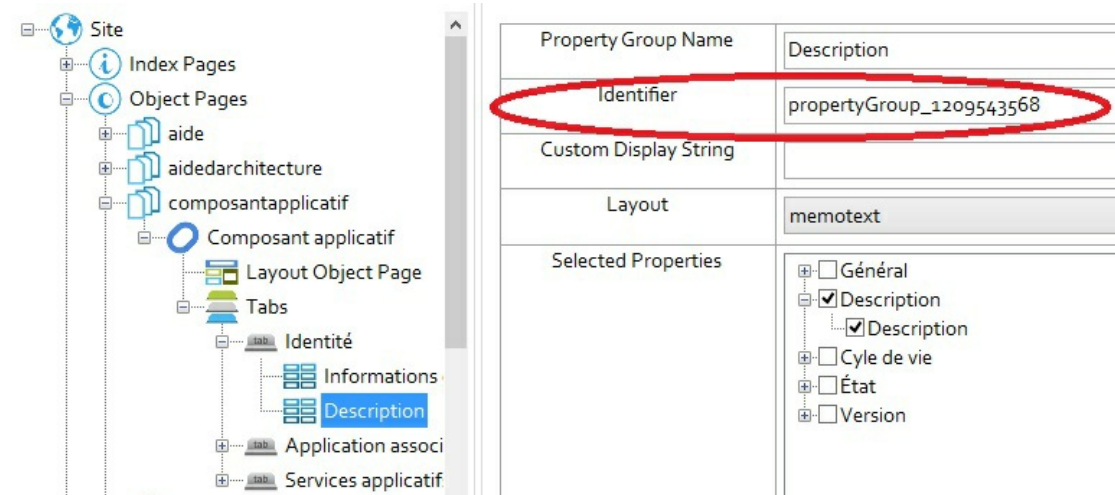

Options [cwWebDesignerTreeNodePage] - composantapplicatif

Property Group Name	Description
Identifier	propertyGroup_1209543568
Custom Display String	
Layout	memotext
Selected Properties	<input type="checkbox"/> Général <input checked="" type="checkbox"/> Description <input checked="" type="checkbox"/> Description <input type="checkbox"/> Cycle de vie <input type="checkbox"/> État <input type="checkbox"/> Version

- {id} correspond to the id of the pageName of the view which is define in evolve, if you use type = view, propertygroup

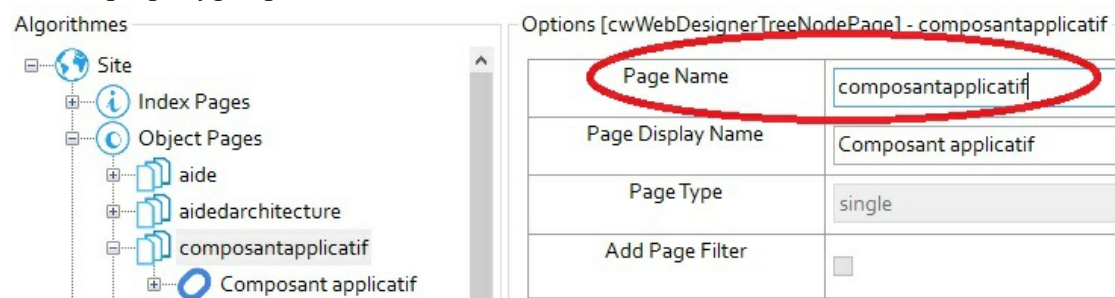

Options [cwWebDesignerTreeNodePage] - composantapplicatif

Page Name	composantapplicatif
Page Display Name	Composant applicatif
Page Type	single
Add Page Filter	<input type="checkbox"/>

if you use type class, you need to put the attribute class: {class} will describe the className of the HTML element, for exemple, "cw-edit-buttons" correspond to the value of the edit button

if you don't put property, the action will execute anyway.

if you put property, the action will execute if {property} {Operator} {value} is true

"{property}" correspond to the scriptname of property value (don't forget to select it in your objectpage in evolveDesigner)

"{Operator}" correspond to the logicalOperator can be : =, <, <=, >, >=, !=

"{value}" correspond to the value to compare, you can put several value in an array, if you put several value they will work like a "or"

Exemple :

Always Hide tab :

Here we want to hide all tab in the objectPage aidearchitecture

```
"aiedarchitecture" : [
{
  "style": "display",
  "styleValue": "none",
  "type" : "class",
  "class" : "cwTabLink",
},
```

Hide Tab :

Here we want to hide a specific tab in the objectPage aidearchitecture, if the id of the objectPage is different from 82.

```
"aiedarchitecture" : [
{
  "style": "display",
  "styleValue": "none",
  "type" : "tab",
  "id" : "tab5",
  "property" : "id",
  "sign" : "!=",
  "value" : "82"
},
```

Show propertyGroup:

```
{
  "style": "display",
  "styleValue": "black",
  "type" : "propertyGroup",
  "id" : "propertyGroup_1961166630",
},
```

Cohabitation with other specific

Here is a list of all the specific and the function they modified. If you have other personal specific that use the same function, you will need to merge them in to the main.js

https://docs.google.com/spreadsheets/d/19Mi3LsdQIRuTGFAZiGtLFPGcLhrScWZFTSsm-qQ_BiY/edit#gid=0