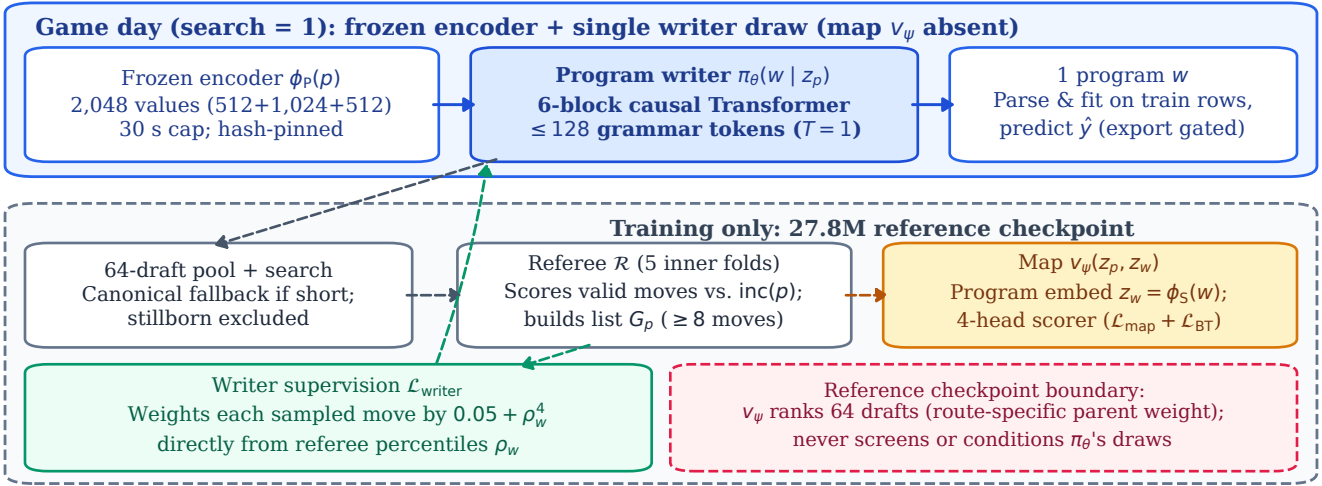
Game day (search = 1): frozen encoder + single writer draw (map v_ψ absent)
Frozen encoder $\phi_P(p)$
2,048 values (512+1,024+512)
30 s cap; hash-pinned
Program writer $\pi_\theta(w \mid z_p)$
6-block causal Transformer
≤ 128 grammar tokens ($T = 1$)
1 program w
Parse & fit on train rows,
predict $\hat{y}$ (export gated)
Training only: 27.8M reference checkpoint
64-draft pool + search
Canonical fallback if short;
stillborn excluded
Referee $\mathcal{R}$ (5 inner folds)
Scores valid moves vs. inc(p);
builds list G_p (≥ 8 moves)
Map $v_\psi(z_p, z_w)$
Program embed $z_w = \phi_S(w)$;
4-head scorer ($\mathcal{L}_{map} + \mathcal{L}_{BT}$)
Writer supervision $\mathcal{L}_{writer}$
Weights each sampled move by $0.05 + \rho_w^4$
directly from referee percentiles ρ_w
Reference checkpoint boundary:
v_ψ ranks 64 drafts (route-specific parent weight);
never screens or conditions π_θ's draws