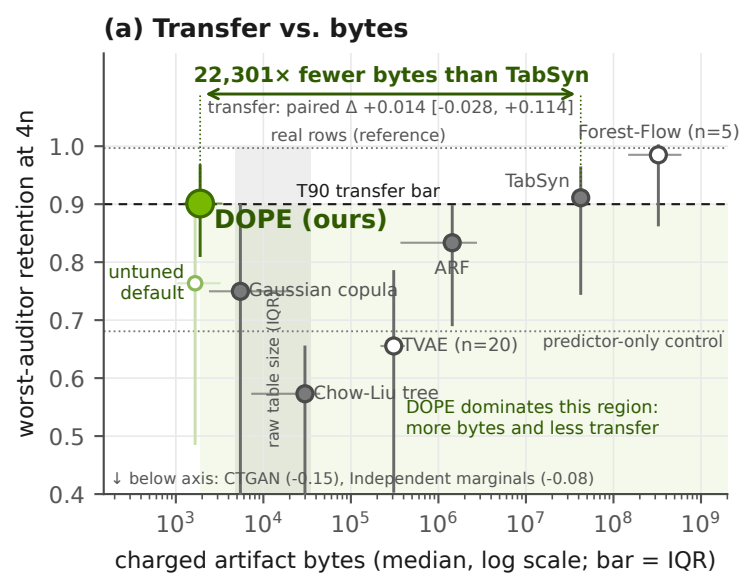
(a) Transfer vs. bytes
22,301× fewer bytes than TabSyn
transfer: paired Δ +0.014 [-0.028, +0.114]
real rows (reference)
Forest-Flow (n=5)
T90 transfer bar
TabSyn
DOPE (ours)
untuned default
Gaussian copula
ARF
raw table size IQR
TVAE (n=20)
predictor-only control
Chow-Liu tree
DOPE dominates this region: more bytes and less transfer
↓ below axis: CTGAN (-0.15), Independent marginals (-0.08)
worst-auditor retention at 4n
1.0
0.9
0.8
0.7
0.6
0.5
0.4
10^3 10^4 10^5 10^6 10^7 10^8 10^9
charged artifact bytes (median, log scale; bar = IQR)

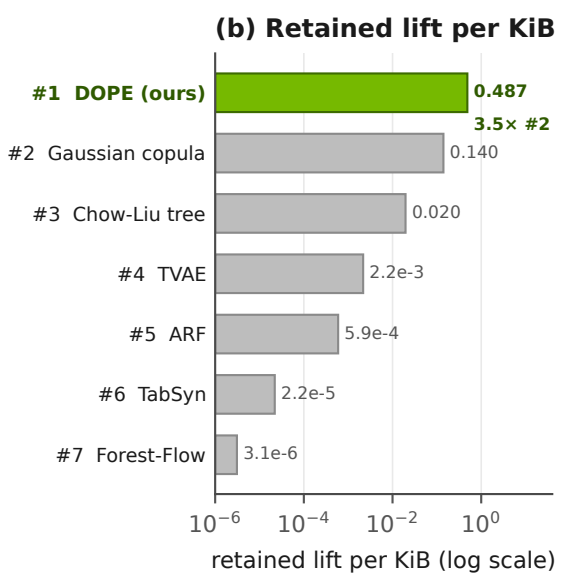
(b) Retained lift per KiB
#1 DOPE (ours)
0.487
3.5× #2
#2 Gaussian copula
0.140
#3 Chow-Liu tree
0.020
#4 TVAE
2.2e-3
#5 ARF
5.9e-4
#6 TabSyn
2.2e-5
#7 Forest-Flow
3.1e-6
10^{-6} 10^{-4} 10^{-2} 10^{0}
retained lift per KiB (log scale)