

List of student internships offered by newcleo

–academic year–
2025–2026

November 10, 2025

Preface

This document contains the internship offers supported by *newcleo*. Each offer contains the specifications and modalities for the application and execution of the internship work.

Please submit your CV and motivation letter to the contact person indicated in the internship offer.

The content of this document is licensed and distributed according to Creative Commons CC-BY-NC-SA, Attribution Noncommercial Share Alike.

About newcleo

Privately funded and headquartered in London, *newcleo* was launched in 2021 – and since raised a total of EUR 400m – to be an innovator in the field of nuclear energy. Its mission is to generate safe, clean, economic and practically inexhaustible energy for the world, through a radically innovative combination of existing, accessible technologies.

With visionary co-founders, *newcleo* capitalises on thirty years of R&D activity in metal-cooled fast reactors and liquid-lead cooling systems, and its senior management and advisory team can boast hundreds of years in cumulative hands-on experience.

Counting on around 800 highly skilled employees across Europe, *newcleo* has business, scientific, operations and industrial manufacturing capabilities in a vertically integrated model designed to deliver its ambitious timeline for its plan-to-market.

newcleo's technology, mostly comprising a novel approach to already qualified solutions, addresses equally well the three challenges affecting the nuclear industry to date:

- **Waste:** fast reactors are capable of efficient “burning” (i.e., fission) of depleted uranium, plutonium and minor actinides. When operated with mixed-oxide (MOX) fuel generated from reprocessed nuclear waste, *newcleo's* reactors not only ensure sustainability by closing the fuel cycle, but can also boost energy independence;
- **Safety:** lead-cooled reactors operate at atmospheric pressure. The properties of lead (thermal capacity and conductivity, boiling point, chemically inert, low neutron activation, shielding properties) together with *newcleo's* passive safety systems ensure very high levels of safety;
- **Cost:** *newcleo's* reactor design has been optimised over the last 20 years leading to the concept of an ultra-compact and transportable 200MWe module with improvements in energy density compared to other technologies. Costs are kept low by means of simplicity, compactness, modularity, atmospheric pressure operation and elevated output temperature.

newcleo is also working to significantly invest in MOX fuel manufacturing in developed countries, extracting energy from the current nuclear industry by-products.

newcleo is ready to develop a new, sustainable, and completely safe way of generating nuclear energy that will help humanity reach zero emissions and mitigate global warming.

List of Internships

| | | |
|----|--|----|
| 1 | Comparison of numerical acceleration methods for nonlinear iterations used in the computer code TRANSURANUS | 5 |
| 2 | Analysis and verification of the burnup model implemented in the computer code TRANSURANUS | 8 |
| 3 | Cross section preparation for LFR by Monte Carlo computer codes | 11 |
| 4 | Review about the utilization of Beryllium in reactor design | 14 |
| 5 | Refactoring and optimization of DASSH subchannel code | 17 |
| 6 | Implementation of Helium Contribution to the Fission Gas Swelling and Release Model in the Computer Code TRANSURANUS | 20 |
| 7 | Fuel management calculations with DRAGON5 and validation of simplified models | 23 |
| 8 | Numerical study of Fuel Assembly deformations in LFR | 26 |
| 9 | Beam-to-beam contacts for modelling Fuel Assembly interactions in LFR | 29 |
| 10 | Full-core calculation of LFR for maritime applications | 32 |

Comparison of numerical acceleration methods for nonlinear iterations used in the computer code TRANSURANUS

Elena Travaglia and Daniele Tomatis*

newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy

July 14, 2025

– *Internship proposal* –
(ID No. 1003986)

Keywords — TRANSURANUS, numerical acceleration, non-linear iterations

Topics — fuel performance, numerical mathematics, computational modelling

Location *newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy*

Starting date To be defined

Duration 4–6 months

Context

newcleo is currently in the process of developing advanced Lead-cooled Fast Reactor (LFR) units tailored for small and modular reactors. These units incorporate innovative features aimed at addressing the unique challenges associated with LFR technology. Simultaneously, the company is committed to meeting sustainability, economic, and safety objectives, aligning with the criteria set for the fourth generation of nuclear reactors.

In the context of fuel performance analysis, *newcleo* relies on the TRANSURANUS (TU) thermo-mechanical computer code, which is distributed by the Joint Research Center of the European Commission in Karlsruhe, Germany, under a collaboration research agreement [1, 2]. *Newcleo* has initiated a meticulous examination of the code to ensure its suitability and adaptability for applications involving LFR technology. The goal is to employ precise physical models that guarantee reliable results in numerical simulations. This ongoing effort also includes improving the code to broaden its scope and enhancing its performances.

*Contact person, daniele.tomatis@newcleo.com

Description

The thermal analysis of an integral fuel rod can be treated by superposing one-dimensional radial and axial solutions. Given the multitude of non-linearities inherent in these processes, only numerical solution techniques prove feasible. These techniques are of critical importance as they determine numerical stability and, to a considerable extent, the overall computational cost.

TU solves heat transfer by the Fourier equation in the radial coordinate of the fuel rod, whose discretized form brings to a tridiagonal system. The nonlinearity of the coefficients in the second order differential equation is handled by successive substitutions. The resulting non-linear iterations are accelerated by minimizing the residuals through a numerical scheme based on Regula Falsi, initially implemented by Lassmann [3].

This procedure was adopted because calculating the temperature of a fuel rod, which is schematically shown in Fig. 1, is a computationally intensive task. Therefore, it is important to focus on obtaining convergence and minimizing the total numerical effort required.

In the current internship the student will perform a complete literature review of the existing models to solve heat conduction equation and technique to accelerate the convergence of such numerical method. Some of this technique will be implemented and their performance will be compared.

The student will be introduced to the use of TU and will join the team of TU developers at *newcleo*, learning the best practices for collaborative work and quality-assured code development. The production of a technical report is expected at the end of the internship to describe the work done by the student and to compile the analysis of the results.

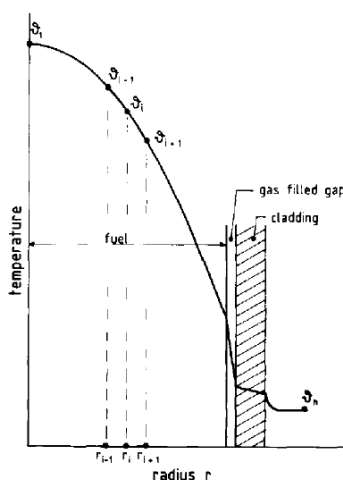


Figure 1: Schematic representation of the stationary radial temperature profile in a slice of the fuel rod

Work plan

- a) Literature review and retrieval of the existing work
- b) Discussion of the problem
- c) Implementation and verification of the numerical solution

- d) Analysis of the numerical results
- e) Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear, industrial or Software Engineering; Applied Physics; Mathematics.

Required computer skills: Basic knowledge of Linux operative system and software programming (previous experience in FORTRAN is appreciated, but not fundamental).

Knowledge of \LaTeX editing is appreciated, but not required.

References

- [1] K Lassmann. Transuranus: a fuel rod analysis code ready for use. *Journal of Nuclear Materials*, 188:295–302, 1992.
- [2] K Lassmann and H Blank. Modelling of fuel rod behaviour and recent advances of the transuranus code. *Nuclear Engineering and design*, 106(3):291–313, 1988.
- [3] K. Lassmann. A fast and simple iteration scheme for the temperature calculation in a fuel rod. *Nuclear Engineering and Design*, 103(2):211–214, 1987.

Analysis and verification of the burnup model implemented in the computer code TRANSURANUS

Elena Travaglia and Daniele Tomatis*

newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy

July 14, 2025

– *Internship proposal* –
(ID No. 1003987)

Keywords — TRANSURANUS, Burnup model, LFR

Topics — nuclear fuel design, fuel performance and thermomechanics, computational modeling

Location *newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy*

Starting date To be defined

Duration 5–6 months

Context

Currently, *newcleo* is designing advanced Lead-cooled nuclear Fast Reactors (LFR). These units incorporate innovative features aimed to address the unique challenges associated with the decarbonization of the energy market and reprocessing of spent nuclear fuel. Concurrently, the company is dedicated to fulfilling sustainability, economic, and safety goals, in line with the criteria established for the fourth generation of nuclear reactors.

In the domain of fuel performance analysis, *newcleo* relies on the TRANSURANUS (TU) thermo-mechanical computer code, which is provided by the Joint Research Center of the European Commission in Karlsruhe, Germany, under a collaboration agreement [1, 2]. *newcleo* is performing a thorough examination of the code to check that it can reliably reproduce the physical behavior of LFR fuel rods.

This ongoing endeavour also includes improving the code to broaden its range of applications, with a specific focus on providing trustworthy predictions for modeling LFR fuel rods. The final goal of this initiative is to develop an improved version of the code.

*Contact person, daniele.tomatis@newcleo.com

Description

The performance of a fuel rod is greatly influenced by several physical phenomena. The exposure of the fuel rod to neutron irradiation determines the time evolution of the isotopic concentrations, and of the power density distribution within the fuel. The power density is the main driving force of the local temperature profile. The temperature heavily affects material properties and many physical phenomena, such as fuel restructuring, actinide redistribution, fission gas release, creep of fuel and cladding [1, 2]. A thorough description of the time evolution of the isotopic concentration of heavy metals in the fuel is thus crucial. Accordingly, one of the first stages in describing fuel rod behaviour is to compute at each radial position in the fuel: the local burnup, the build-up of heavy metal nuclides and the formation of fission products. The equations used to describe these phenomena constitute the so-called burnup models.

A model called TUBRNP, developed by Lassmann in 1994 [3], is implemented in TU. This model predicts the radial power density distribution based on burnup together with the radial profiles of actinide concentrations.

During the internship, the student will study and verify the implementation of the simplified burnup model. In particular, it will be requested to revise the implementation of the calculation of the radial neutron flux distribution in the fuel slices that is currently preventing the use of user-input distributions.

In addition, to assess the physical consistency of the isotopic composition evolution in case of anomalous behavior, a parallel inventory analysis of LFR fuel rods will be performed using the depletion module of the OpenMC Monte Carlo code.

The student will be introduced to the use of TU for the calculation of fuel rods used in nuclear reactors. He/she will join the team of TU developers at newcleo where he will learn effective collaborative practices and methods for developing code with ensured quality. At the conclusion of the internship, the student is expected to produce a technical report detailing his/her contributions and experiences during the internship period.

Work plan

- a) Literature review and retrieval of the existing work relating to TUBRNP
- b) Code implementation
- c) Analysis of the results
- d) Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear, Industrial or Software Engineering; Applied Physics

Computer skills: FORTRAN, Linux.

Knowledge of \LaTeX editing is appreciated, but not required.

References

- [1] K Lassmann. Transuranus: a fuel rod analysis code ready for use. *Journal of Nuclear Materials*, 188:295–302, 1992.

- [2] K Lassmann and H Blank. Modelling of fuel rod behaviour and recent advances of the transuranus code. *Nuclear Engineering and design*, 106(3):291–313, 1988.
- [3] K. Lassmann, C. O'Carroll, J. van de Laar, and C.T. Walker. The radial distribution of plutonium in high burnup uo2 fuels. *Journal of Nuclear Materials*, 208(3):223–231, 1994.

Cross section preparation for LFR by Monte Carlo computer codes

Gianluca Cirillo*¹ and Daniele Tomatis¹

¹*newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy*

July 14, 2025

– *Internship proposal* –
(ID No. 1008549)

Keywords — LFR, OpenMC, cross section preparation

Topics — Physical modelling, neutron transport, reactor physics

Location newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy

Starting date To be defined

Duration 5 months

Context

newcleo is designing small lead fast reactors (LFR) operating in a pool that contains all the primary system components. Cooling is done by molten lead which shields photon radiation and has low neutron absorption.

The core can show high heterogeneity to meet the criteria of compactness, target neutron leakage and power shape, breeding or burning features. The core is made of a main active zone, possibly surrounded by a shielding or breeding blanket.

Although computer simulation by Monte Carlo codes like OpenMC [1] allows today to carefully represent many details of the reactor, simplified calculation schemes relying on homogenization theory and equivalence theory must still be adopted to perform faster core calculations [2, 3], thus easing the whole design process. During this internship, the student will prepare homogenized cross sections by OpenMC and use them after to perform calculations with the deterministic full-core codes VARIANT [4] and DONJON [5].

*Contact person, gianluca.cirillo@newcleo.com

Description

Deterministic computer codes allow fast neutron calculations and are largely employed in reactor physics and analysis. They rely on assumptions and approximations that must be carefully verified and validated. For instance, using lattice calculations of fuel elements in fundamental mode neglects the environment effects and the local core conditions, introducing sometimes an inconvenient limitation in the calculation scheme. Provided that the material inventory of all fuel elements is known, the Monte Carlo simulation can be used to overcome this limitation, yet paying a higher computational cost.

A new feature in the code OpenMC to prepare homogenized cross sections on hexagonal grids is currently under development and it will be tested during this internship, together with a reduced nuclide chain suitable to lead fast reactors. After, a suitable interface will be developed to load the set of homogenized data into VARIANT and DONJON, which use different solution methods to obtain the neutron flux distribution over the full core. These codes use low-order transport methods, with a lower computational effort. Besides, the core configurations calculated by OpenMC and used for detailed cross section preparation will allow to assess the performance of low-order transport solutions. The setup of the calculation input files and the interfaces will be performed on git version control. Finally, the candidate will produce a technical report at the end of the internship to compile the results, by quantifying the gain in runtime obtained while using the deterministic codes and by assessing the performance in physical accuracy and numerical precision.

Work plan

- a) Literature review and study of homogenization and equivalence theory.
- b) Training and practice with the computer codes.
- c) Setup of the core model by OpenMC.
- d) Preparation of the cross section model.
- e) Setup of the core calculations.
- f) Analysis of results and preparation of the final report.

Applicant profile

Master student in Nuclear Engineering or student in Applied Mathematics and Physics.

Background: fundamentals in applied mathematics and the physics of nuclear reactors.

Required computer skills: Linux, Python (intermediate), \LaTeX scientific editing (optional).

References

- [1] P. K. Romano, N. E. Horelik, B. R. Herman, A. G. Nelson, B. Forget, and K. Smith. Openmc: A state-of-the-art monte carlo code for research and development. *Annals of Nuclear Energy*, 82:90–97, 2015.
- [2] George I Bell and Samuel Glasstone. *Nuclear reactor theory*. US Atomic Energy Commission, Washington, DC (United States), 1970.
- [3] J. R. Lamarsh and A. J. Baratta. *Introduction to Nuclear Engineering. 2nd Edition*. Addison-Wesley, Reading, 1983.
- [4] Gérald Rimpault, Danièle Plisson, Jean Tommasi, Robert Jacqmin, Jean-Marie Rieunier, Denis Verrier, and Didier Biron. The ERANOS code and data system for fast reactor neutronic analyses. In *PHYSOR 2002-International Conference on the New Frontiers of Nuclear Technology: Reactor Physics, Safety and High-Performance Computing*, 2002.
- [5] A Hébert. DRAGON and DONJON: a legacy open-source reactor physics project at Polytechnique Montréal. In *Proceedings of the IAEA Technical Meeting on the Development and Application of Open-Source Modelling and Simulation Tools for Nuclear Reactors, Milano, Italy, June, 2022*.

Review about the utilization of Beryllium in reactor design

Alex Aimetta¹ and Daniele Tomatis ^{*1}

¹newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy

July 14, 2025

– *Internship proposal* –
(ID No. 1008987)

Keywords — FBR, nuclear fuel management, fuel design, core cycle, neutron activation

Topics — Reactor physics and analysis, radiation transport, core design.

Location newcleo S.p.A. - C.so Stati Uniti 38, Torino (TO), Italy

Starting date To be defined

Duration 3 months

Context

newcleo is developing innovative small modular reactors based on lead-cooled fast reactor (LFR) technology. The use of alternative materials is considered to achieve target performance for long-term operation without refueling. This internship focuses on performing a complete literature review about the utilization of Beryllium in nuclear reactors, providing the engineering teams with essential data to improve the design of future reactor units.

Description

The results provided by this internship will support the design of a small modular LFR, where the employment of beryllium could be particularly beneficial in reducing the size of the systems.

The internship focuses on a bibliographic review about the possibility of employing beryllium as a reflector in LFRs, with specific interest on applications to small modular reactors in the fast neutron regime. In the literature, there are studies which show the impact in terms of reactivity of the (n,2n) reactions of beryllium, leading to systems with smaller critical dimensions [1]. The above mentioned feature is of particular interest for small modular reactors [2]. However, other studies show that beryllium is affected by severe issues in terms of neutron activation and gas production, making the disposal of systems employing beryllium an even more delicate task [3].

*Contact person, daniele.tomatis@newcleo.com

Additionally, beryllium is characterized by quite high values of (γ, n) cross sections at energies characteristic of fission product's γ radiation: it has been shown that the impact of photonuclear neutrons can be neglected for stationary states, but it has non-negligible effects on the kinetics of the reactor [4, 5]. The presence of lead, which has a strong shielding effect against photons, could possibly alleviate the magnitude of these phenomena.

The student will have to find several references in the literature in order to understand if the advantages of using beryllium in fast fission reactors are supported by physical and engineering considerations, taking into account all the pros and the cons of employing such a nuclide and analysing its behaviour in the presence of lead.

During the internship, the student will have to collect as many data as possible, with the aim of providing valuable information about the possible use of beryllium in the design of a small modular LFR, supporting the design of this nuclear system. At the end of the internship, the student will write a technical report summarizing all the main findings of the bibliographic review. The student will be followed by the Codes and Methods group members of newcleo.

Work plan

During the internship, the student will need to perform a detailed bibliographic review in order to conclude if the use of beryllium can be beneficial in small modular LFRs, considering both aspects related to change in reactivity due to $(n, 2n)$ and (γ, n) reactions, and to safety and radiological issues related to the presence of beryllium.

The student will examine significant topics concerning reactor physics of fast reactors. These include mainly theoretical and engineering aspects underlying the behaviour of neutrons and photons in the presence of beryllium and lead.

The expected working plan is detailed in the following:

- a) Literature review on beryllium behaviour in fast systems
- b) Literature review on fission systems employing beryllium
- c) Discussion of current core configurations
- d) Analysis of bibliographic references
- e) Preparation of a technical report

Applicant profile

Bachelor student in Nuclear Engineering, Applied Mathematics and Physics.

Background: fundamentals in reactor physics.

Required computer skills: Knowledge of \LaTeX editing is appreciated.

References

- [1] P.K. Job and M. Srinivasan. Evaluation of reactivity bonus due to $(n, 2n)$ multiplication in Be/BeO-reflected ^{233}U uranyl nitrate solution systems. *Annals of Nuclear Energy*, 9(4):209–213, 1982.
- [2] A. Tomberlin T. *Beryllium-a unique material in nuclear applications*. Citeseer, 2004.

- [3] G. R. Longhurst, K. Tsuchiya, C. H. Dorn, S. L. Folkman, T. H. Fronk, M. Ishihara, H. Kawamura, T. N. Tranter, R. Rohe, M. Uchida, and E. Vidal and. Managing beryllium in nuclear facility applications. *Nuclear Technology*, 176(3):430–441, 2011.
- [4] Tsuyoshi Misawa, Seiji Shiroya, and Keiji Kanda and. Study on reactivity worth of beryllium by $(n,2n)$ and (γ,n) reactions. *Nuclear Technology*, 116(1):9–18, 1996.
- [5] G Hordósy, Andras Keresztúri, Cs Hegedűs, and P Vértes. Influence of the photoneutrons on the kinetics of beryllium reflected core of the budapest research reactor. 1998.

Refactoring and optimization of DASSH subchannel code

Gabriele Ottino^{*1}, Francesco Pepe^{1,2}, and Daniele Tomatis¹

¹*newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy*

²*Politecnico di Torino, Corso Duca degli Abruzzi 24, 10129 Torino, Italy*

July 14, 2025

– *Internship proposal* –

(ID No. 1009187)

Keywords — LMFR, Subchannel code, Python

Topics — Code development, heat transfer, thermal-hydraulics, numerical simulation

Location newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 6 months

Context

The accurate and fast prediction of thermal-hydraulic behavior of nuclear reactor cores is essential to support and speed up the design activities of Lead-cooled Fast Reactors (LFR). Subchannel codes play a key role in modeling coolant flow, pressure drop, and heat transfer phenomena both in single assemblies and at the core level. Among the others, DASSH ([1], [2], [3]) is a Python-based code originally developed at the Argonne National Laboratory (IL, USA). Currently, newcleo is actively developing it to expand its range of application to include the conditions in which its reactors operate. As the models used in DASSH become more complex, improving its computational performance together with its reliability, maintainability and readability has become a priority. The refactoring of the code is then under evaluation, including the possible use of faster compiled languages like Fortran 2018 or C++ to rewrite some critical sections of the code.

Description

DASSH is a Python-based subchannel code originally used for the steady-state thermal-hydraulic analysis of reactor cores, particularly in liquid metal-cooled fast reactors. The original version of

^{*}Contact person, gabriele.ottino@newcleo.com

the code, developed at the Argonne National Laboratory, is open-source and can be downloaded from <https://github.com/dassh-dev/dassh.git>. *newcleo* has forked the original repository (https://github.com/newcleo-dev-team/dassh_nc) to introduce new advanced features, to improve the code accuracy and to extend its application domain. Although Python ([4], [5]) ensures rapid development and code readability, it could introduce performance limitations when applied to large, computationally demanding problems.

The aim of this internship is to refactor from scratch DASSH code with the aim of improving its readability, maintainability and computational performance. After gathering a deep insight of the current architecture, the candidate will identify the portions of the code that significantly impact the code runtime. Following this diagnostic phase, optimization strategies will be considered and implemented. These may include:

- integration with modules written in C++ or Fortran 2018, that will substitute the computationally most expensive portions of the code;
- adoption of parallelization techniques whenever useful;
- refactoring of some of the already existing Python classes.

During the implementation phase, it will be necessary to ensure that any optimization does not affect the accuracy of the original code, thus updating and/or integrating the test suite accordingly. The refactoring activity will include also the setup of the automatic documentation framework, with the aim of limiting as most as possible any inconsistency between the base code and its manual.

The activity will be carried out under the supervision of the Codes and Methods team at *newcleo*.

Work plan

- a) Analysis of the original code architecture and identification of the most critical sections.
- b) Definition of a more suitable code architecture.
- c) Code implementation.
- d) Update and integration of the test suite, possibly exploiting CI/CD pipelines.
- e) Setup of the automatic documentation framework.
- f) Preparation of a technical report.

Applicant profile

Master student in Industrial Engineering, Computer Engineering or Computer Science.

Skills and background:

- Basic knowledge of object-oriented software programming (Python, Fortran 2018, C/C++);
- Basic knowledge of Linux OS;
- Fundamentals in thermo-fluid dynamics and numerical simulations (appreciated, but not fundamental).

Nice to have: experience using Git and \LaTeX . Basic knowledge of liquid metal-cooled fast reactors.

References

- [1] Milos Atz, Micheal Smith, and Florent Heidet. Dashed software for ducted assembly thermal hydraulics calculations - overview and benchmark. 2020.
- [2] Milos Atz, Micheal A. Smith, and Florent Heidet. *Ducted Assembly Steady State Heat Transfer Software (DASSH) - Theory Manual*. ANL/NSE-21/33, Argonne National Laboratory, 2021.
- [3] Milos Atz, Micheal A. Smith, and Florent Heidet. *Ducted Assembly Steady State Heat Transfer Software (DASSH) - User Guide*. ANL/NSE-21/34, Argonne National Laboratory, 2021.
- [4] Lutz Mark. *Learning Python: Powerful Object-Oriented Programming*. O'Reilly Media, Sebastopol, USA, 5 edition, 2013.
- [5] Giridhar Chetan. *Learning Python Design Patterns*. Packt Publishing, Birmingham - Mumbai, 2 edition, 2016.

Implementation of Helium Contribution to the Fission Gas Swelling and Release Model in the Computer Code TRANSURANUS

Daniele Tomatis^{*1} and Andrea Croci¹

¹newcleo SpA, Via Galliano 27, 10129 Torino, Italy

August 4, 2025

– *Internship proposal* –
(ID No. 1009581)

Keywords — Helium, Fission Gas Release, Swelling, TRANSURANUS

Topics — nuclear fuel design, fuel performance and thermomechanics, computational modelling

Location newcleo SpA, Via Galliano 27, 10129 Torino, Italy

Starting date October 2025

Duration 6 months

Context

newcleo is designing an advanced small modular Lead-cooled Fast Reactor (LFR). To perform the fuel performance analysis, newcleo relies on the TRANSURANUS (TU) thermo-mechanical computer code, which is provided by the Joint Research Centre of the European Commission in Karlsruhe, Germany, under a collaboration agreement [1, 2]. newcleo is currently carrying out a verification and validation of the code to check that it can reliably reproduce the physical behaviour of Mixed Oxide (MOX) fuel rods for LFR usage. This ongoing endeavour also includes improving the code to broaden its range of applications, with a specific focus on providing trustworthy predictions for modelling LFR fuel rods. The final goal of this initiative is to develop an improved version of the code.

Description

Among the many phenomena that occur in a fuel pin under irradiation, Fission Gas Release (FGR) and Fission Gas Swelling (FGS) are fundamental to be correctly modelled in a fuel performance code. They are the result of a continuous production of Fission Gas (FG) atoms,

^{*}Contact person, daniele.tomatis@newcleo.com

such as Xenon (Xe) and Krypton (Kr), and other gases like Helium (He), that accumulate in the fuel matrix. This causes volume increase (swelling) and, under certain conditions, such gases can be released into pin's free volume [3] leading to degradation of the thermal conductivity of the fuel rod filling gas (usually He) and increase of the internal fuel rod pressure. These effects reduce the safety margins for the mechanical resistance of the cladding. TU implements a physics-based model to deal with FGR and FGS [4, 5, 6], which, however, does not consider the contribution of He to the gas release and swelling. Commonly employed oxide fuels, especially MOX, produce He through α decay of heavy nuclides and ternary fissions, contributing to the increased internal rod pressure at high burnup levels [7]. In view of its importance for MOX fuels, the inclusion of He in the physics-based model is of great interest.

In this internship, the student will perform a complete literature review of the existing models for FG behaviour, focusing on He and then, he/she will implement in TU all the necessary code changes to include the contribution of He to the swelling and release. Finally, the code will be tested against available experimental data. The student will be introduced to using TU for fuel performance analysis and will become part of the TU development team at newcleo, where they will learn best practices for collaborative development and producing high-quality, reliable code. At the end of the internship, the student is expected to produce a technical report detailing their work and presenting an analysis of the results.

Work plan

- a) Literature review on FG behaviour in oxide and MOX fuels
- b) Code implementation, verification and test
- c) Analysis of the results
- d) Preparation of a technical report

Applicant profile

Master student in Nuclear, Mechanical or Energy Engineering; Applied Physics.

Computer skills: FORTRAN, Linux, Python.

Knowledge of LATEX editing is appreciated, but not required.

References

- [1] K. Lassmann. Transuranus: a fuel rod analysis code ready for use. *Journal of Nuclear Materials*, 188:295–302, 1992.
- [2] K.Lassmann and H. Benk. Modelling of fuel rod behaviour and recent advances of the transurauns code. *Nuclear Engineering and Design*, 106(3):291–313, 1998.
- [3] K. Lassmann and H. Benk. Numerical algorithms for intragranular fission gas release. *Journal of Nuclear Materials*, 280(2):127–135, 2000.
- [4] Giovanni Pastore. *Modelling of Fission Gas Swelling and Release in Oxide Nuclear Fuel and Application to the TRANSURANUS Code*. Doctoral dissertation, Politecnico di Milano, Department of Energy, 2012.

- [5] Giovanni Pastore, Lelio Luzzi, Valentino Di Marcello, and Paul Van Uffelen. Physics-based modelling of fission gas swelling and release in uo_2 applied to integral fuel rod analysis. *Nuclear Engineering and Design*, 256:75–86, 2013.
- [6] Giovanni Pastore, L.P. Swiler, J.D. Hales, S.R. Novascone, D.M. Perez, B.W. Spencer, L. Luzzi, P. Van Uffelen, and R.L. Williamson. Uncertainty and sensitivity analysis of fission gas behavior in engineering-scale fuel modeling. *Journal of Nuclear Materials*, 456:398–408, 2015.
- [7] K. Katsuyama, T. Mitsugi, and T. Asaga. Evaluation of helium release behavior in mox fuel. In *Proceedings of the 1998 ANS Winter Meeting*, pages 115–116, Washington, D.C., 1998. Materials Science and Technology session.

Fuel management calculations with DRAGON5 and validation of simplified models

Sigtryggur Hauksson ^{*1}, Nicolò Abrate ², and Daniele Tomatis³

¹*newcleo, EDF Lab Paris-Saclay, Bd Gaspard Monge, 91120 Palaiseau, France*

²*Politecnico di Torino, Dipartimento Energia, Corso Duca degli Abruzzi 24, 10129, Torino, Italy*

³*newcleo S.p.A., Via Galliano 27, 10129 Torino, Italy*

October 16, 2025

– *Internship proposal* –

(ID No. 1010548)

Keywords — LFR, lattice calculation, linear reactivity model, DRAGON

Topics — Nuclear fuel management, neutron transport, reactor physics

Location EDF Lab Paris-Saclay, Bd Gaspard Monge, 91120 Palaiseau, or *newcleo* S.p.A., Via Galliano 27, 10129 Torino, Italy

Starting date Winter 2026

Duration 6 months

Context

newcleo is designing new Lead-cooled Fast Reactor (LFR) units for small modular reactors. These reactors sustain a fast neutron spectrum allowing for fission of heavier actinides, such as plutonium that is a by-product of light water reactors. Cooling is done by molten lead which shields photon radiation and has low neutron absorption.

Nuclear reactors are operated with multi-batch reloading plans, which permit to reduce the reactivity margin to control at the beginning of cycle, and to increase the overall fuel utilization [2]. The goal of this internship is to devise calculational schemes for multi-batch reloading plans. The candidate will work both on full-core calculations and on simplified approaches known as the one-batch approximation and the linear reactivity model [1] which extrapolate properties of a single fuel assembly to the whole reactor during burnup and reloading. The candidate will use the lattice transport computer code DRAGON5, which solves the Boltzmann transport equation deterministically, and the full-core modelization code DONJON [4, 3]. Both of these codes have been developed at Polytechnique Montréal, Québec, Canada, and are used at *newcleo* for LFR calculations. The candidate will develop full-core calculation schemes for multi-batch reloading plans using DRAGON and DONJON. He/she will furthermore assess how simpler approaches perform for LFRs in comparison to full-core calculations.

^{*}Contact person, sigtryggur.hauksson@newcleo.com

Description

The candidate will firstly develop calculational schemes for multi-batch reloading plans in DRAGON and DONJON. At newcleo, full-core calculations with DONJON are being implemented, relying on cross sections prepared with DRAGON and dedicated nuclear data libraries. Furthermore, burnup calculations with the EVO: module in DRAGON have been performed and shown to give accurate results in comparison with reference Monte Carlo calculations. The candidate will merge these full-core and evolution calculations, in order to devise calculations schemes for burnup in a full core. These schemes will allow the candidate to calculate quantities such as reactivity swing and discharge burnup, as well as power maps, for different multi-batch reloading plans.

In the second half of the internship, the candidate will verify the quality of simpler approaches to full-core burnup and multi-batch reloading calculations. These simpler approaches, namely the one-batch approximation and the linear reactivity model, use calculations of a single assembly to infer properties of the whole core. The one-batch approximation is simple and gives results independent of the fuel management scheme for the equilibrium cycle. It takes the evolution of a single fuel assembly from fresh fuel to discharge burnup and assumes that results in the middle of the evolution are representative of average properties of the reactor. The linear reactivity model is more advanced and allows to accomodate different fuel management schemes for the equilibrium cycle, as well as nonsteady-state applications, such as reactor startup. The model assumes that the reactivity only depends on burnup, and that the dependence is linear. Evolution in a single assembly is calculated, and the average of quantities at different stages of the evolution is taken to represent the full core. In the internship, leakage antireactivity will be treated as a constant contribution, previously evaluated with Monte Carlo simulations.

The candidate will test the quality of the one-batch approximation and the linear reactivity model by comparing their results with full-core calculations with DONJON, using the schemes previously devised. These comparison will be done for different fuel management strategies. The candidate will furthermore provide theoretical justification for the two models. If time permits, more advanced features of the linear reactivity model will be studied, and assessed by comparing with full-core calculations. Specifically, the assumption that batches contribute equally to power can be relaxed to accomodate varying batch sizes. Furthermore, the candidate could study how the linear reactivity model can be applied to reactor startup. Finally, the candidate will produce a technical report at the end of the internship compiling the results.

Work plan

- a) Literature review and study of the main physical phenomena.
- b) Training and practice with DRAGON and DONJON.
- c) Development of calculational schemes for reloading plans with DONJON.
- d) Setup of calculations with simplified approaches (one-batch approximation and linear reactivity model).
- e) Verification of simplified approaches.
- f) If time permits: more advanced features of the linear reactivity model.
- g) Analyze the results and preparation of the final report.

Applicant profile

Master student in Nuclear Engineering or student in Applied Mathematics and Physics.

Background: fundamentals in applied mathematics and the physics of nuclear reactors.

Required computer skills: Linux, Python (intermediate), \LaTeX scientific editing (optional).

References

- [1] M. J. Driscoll, T. J. Downar, and E. E. Pilat. *The linear reactivity model for nuclear fuel management*. American Nuclear Society, 1990.
- [2] M. R. Egan. Elements of nuclear reactor fueling theory. *Progress in Nuclear Energy*, 14(3):313–360, 1984.
- [3] Alain Hébert. DRAGON5 and DONJON5, the contribution of École Polytechnique de Montréal to the SALOME platform. *Annals of Nuclear Energy*, 87:12–20, 2016.
- [4] G. Marleau, A. Hébert, and R. Roy. A user guide for DRAGON Version 5, 2025.

Numerical study of Fuel Assembly deformations in LFR

Andrea Lario*¹ and Gabriele Ottino¹

¹newcleo SpA, Via Galliano 27, 10129 Torino, Italy

November 10, 2025

– *Internship proposal* –
(ID No. 1010756)

Keywords — Beam models, FEM, structural deformations

Topics — Structural mechanics, beam theory

Location newcleo S.p.A., Corso Stati Uniti 38, 10128, Torino, Italy

Starting date Second quarter of 2026

Duration 5–6 months

Context

To design an inherently safe Lead-cooled Fast Reactor (LFR), it is crucial to predict mechanical deformations accurately since changes in the spacing between neighbouring fuel assemblies (FAs) can result in altered neutron production and absorption, thus affecting the overall reactivity. Accurate prediction of FA deformations can be achieved by using structural computational tools based on Finite Element Methods (FEMs). However, their intrinsically high computational cost and the need to perform many calculations to solve the coupling between neutronics and thermal-hydraulics limit their application in ordinary design work. An alternative approach is based on simplified 1D methods, which approximate each FA as a beam element. While this is a considerable simplification, when applied to nuclear core reactors it retains most of the physical phenomena that are of interest for investigation and ensures fast predictions, requiring a limited number of input parameters. There are only a few scientific tools available for analysing FA deformation in core reactors that are based on 1D tools [1, 2]. The goal is to develop a scientific computational tool based on 1D beam elements for design and safety calculations, accepting some degree of approximation in the solution.

*Contact person: andrea.lario@newcleo.com

Description

Both elastic and inelastic deformations affect the shape of fuel assemblies in a reactor core. These deformations are driven by various factors; in particular, high thermal gradients induce bowing, while irradiation and stress induce the inelastic effects of creep and swelling. Additionally, local forces acting on an assembly can arise when FAs come into contact with each other.

The aim of the internship is to investigate the deformation of fuel assemblies when subjected to elastic and inelastic deformations. The investigation will be carried out by using models of different accuracy and detail. After gaining an in-depth understanding of the existing literature, the candidate will identify the most suitable models and range of parameters for describing the configurations of interest at *newcleo* in terms of, for example, geometry, temperature gradients, irradiation and materials.

Beam models based on Bernoulli or Timoshenko theory will be implemented, and their predictions will be compared with analytical solutions (whenever available) or results produced with FEM solvers for structural mechanics.

Expected results include: a comparison between the considered models; the identification of the parameters that most affect the deformation of fuel assemblies; the evaluation of modelling the single phenomena involved; the study of the mutual interaction among these phenomena.

This work will be carried out under the supervision of the Codes and Methods team at *newcleo*.

Work plan

- (a) Provide a comprehensive review of the literature;
- (b) Identify the relevant physical phenomena and aspects of *newcleo*'s LFR core and fuel elements;
- (c) Select test configurations and compare the results provided by models of different accuracy;
- (d) Perform parametric studies to identify the factors that have the greatest influence on the results and to assess the effects introduced by simplifications;
- (e) Prepare a technical report.

Applicant profile

Master student in Nuclear Engineering, Civil Engineering, Aerospace Engineering or Mechanical Engineering. Skills and background:

- Basic knowledge of software programming (Python/FORTRAN 2018 are appreciated);
- Basic knowledge of Linux OS;
- Fundamentals in numerical simulations;
- Knowledge of Finite Element Method software for structural mechanics, either commercial or open-source.

Nice to have: experience using \LaTeX . Basic knowledge of liquid metal-cooled fast reactors.

References

- [1] Nicholas Wozniak, Emily R. Shemon, and James J. Grudzinski. Review of tools for modeling core radial expansion in liquid metal-cooled fast reactors. Technical report, Argonne National Laboratory (ANL), Argonne, IL (United States), Nov. 2020.
- [2] G. A. McLennan NUBOW: a FORTRAN-IV program for the static elastic structural analysis of bowed reactor cores. Technical report, Argonne National Laboratory (ANL), Argonne, IL (United States), Apr. 1974.

Beam-to-beam contacts for modelling Fuel Assembly interactions in LFR

Andrea Lario^{*1} and Gabriele Ottino¹

¹newcleo SpA, Via Galliano 27, 10129 Torino, Italy

November 10, 2025

– *Internship proposal* –
(ID No. 1010757)

Keywords — Contact model, structural deformations, numerical modelling

Topics — Structural mechanics, beam theory

Location Corso Stati Uniti 38, 10128, Torino, Italy

Starting date Second quarter of 2026

Duration 5–6 months

Context

Mechanical deformation of the core structures causes relevant reactivity feedback in fast reactors. Accurate prediction of the geometry modifications and of their positioning into the core can be obtained by using structural computational tools based on Finite Element Methods (FEMs). However, the high computational cost of these tools and the need to perform many calculations to solve the coupling between neutronics and thermal-hydraulics limit their application in ordinary design work. To overcome these limitations, simplified mechanical models with lower computational effort should be used. These approaches, based on 1D beam theory, trade computational speeds for accuracy, but they still describe the phenomena (thermal bowing, creep, swelling, and contacts) which contribute the most to the mechanical deformation of the FAs. There are only a few scientific tools available for analysing FA deformation in core reactors that are based on 1D tools [1, 2].

The goal of the research is to develop a scientific computational tool that can predict fast the deformation of fuel assemblies by considering the reciprocal forces acting on the contacting beams.

^{*}Contact person andrea.lario@newcleo.com

Description

Significant deformations due to both elastic and inelastic effects can result in bowed FAs coming into contact with each other during the operative life of the fuel assembly.

The fact that fuel assemblies can either be in contact or have clearances introduces non-linearities in the system of equations which describe the mechanical behaviour of the core, making ordinary linear mathematical techniques inapplicable. On the other hand, iterative solvers could be computationally expensive or lack stability.

The internship aims at studying an efficient and robust numerical techniques for solving contacts among FAs approximated as 1D beams.

After gathering a deep insight of the works available in the literature identifying appropriate test cases, the candidate will select suitable methods to solve the contacts efficiently and robustly. Two distinct models shall be possibly developed:

- simplified 2D contact model, which will be used to predict the deformation of FAs when they mutually come into contact;
- possible extension of the model to 3D geometry.

In both cases results will be compared against data available in the literature or obtained using FEM-based codes for structural analysis. Codes will be written in both Fortran 2018 and Python.

The activity will be carried out under the supervision of the *Codes and Methods* team at newcleo.

Work plan

- (a) Provide a comprehensive literature review;
- (b) Select the best methods for solving contacts occurring when beam elements come in contacts;
- (c) Identify proper test cases;
- (d) Implement and verify the selected methods, focusing on numerical robustness and efficiency;
- (e) Prepare a technical report.

Applicant profile

Master student in Nuclear Engineering, Civil Engineering, Aerospace Engineering or Mechanical Engineering. Skills and background:

- Basic knowledge of software programming (Python/FORTRAN 2018 are appreciated);
- Basic knowledge of Linux OS;
- Fundamentals in numerical simulations and numerical analysis.

Nice to have: experience using Git and \LaTeX . Basic knowledge of liquid metal-cooled fast reactors.

References

- [1] Nicholas Wozniak, Emily R. Shemon, and James J. Grudzinski. Review of tools for modeling core radial expansion in liquid metal-cooled fast reactors. Technical report, Argonne National Laboratory (ANL), Argonne, IL (United States), Nov. 2020.
- [2] G. A. McLennan NUBOW: a FORTRAN-IV program for the static elastic structural analysis of bowed reactor cores. Technical report, Argonne National Laboratory (ANL), Argonne, IL (United States), Apr. 1974.

Full-core calculation of LFR for maritime applications

Gianluca Cirillo¹ and Daniele Tomatis ^{*1}

¹newcleo, Corso Stati Uniti 38, 10128 Torino, Italy

November 10, 2025

– *Internship proposal* –
(ID No. 1010758)

Keywords — LFR, DRAGON-DONJON, deterministic neutron transport, core cycle.

Topics — Reactor physics, core analysis and design, fuel management.

Location Turin office, Italy or Saclay office, France

Starting date Beginning of 2026

Duration 6 months

Context

newcleo is developing innovative small modular reactors based on lead-cooled fast reactor (LFR) technology. A sealed unit intended for long-term extended operation is currently under study for ship propulsion and remote/off-shore power generation. The internship focuses on the setup of an advanced calculation scheme for this LFR unit by the deterministic computer codes DRAGON5/DONJON [1], with comparison against the Monte Carlo computer code OpenMC [2] for performance assessment.

Description

The reactor considered in this work is of the sealed type seeking inherent safety by means of passive cooling systems and employing robust materials to ensure long-term reliability, as in [3, 4]. Continuous reactor operation for at least 20 years is targeted. Excess reactivity control at beginning of cycle is achieved by means of fertile elements and burnable absorbers.

The internship focuses on full-core neutron calculations of liquid lead fast reactors (LFRs) using the deterministic codes DRAGON/DONJON. Calculations are in eigenvalue mode to reproduce operation in critical state by control elements progressively inserted over time. The feasibility of using different types of control elements will be investigated. The calculations will

*Contact person, daniele.tomatis@newcleo.com

be performed with assumed distributions of temperature and thermal expansion for geometry deformation.

Several calculations are necessary to find optimal configurations for reactor design, which limits the applicability of the Monte Carlo method indeed. The use of fast deterministic methods is then essential in the engineering framework.

During the internship, the student will be introduced to the physics and engineering of the LFR reactors, acquiring notions and developing skills in deterministic transport methods and neutral particle transport [5]. The student will become a proficient user of DRAGON/DONJON and will improve his/her Python programming to perform post-processing and analysis of simulation results. At the end of the internship, the student will write a technical report on the analysis of the results from the numerical simulations. The student will be followed by members of the Codes and Methods group of newcleo.

Work plan

During the internship, the student will be introduced to open-source transport computer codes for modeling LFR reactors and calculating maps of the released thermal power.

The student will contribute to the setup of an industrial calculation scheme suitable for fast reactor physics. These include the theoretical aspects underlying particle transport simulation and adequate modeling of the fuel elements.

The expected working plan is detailed in the following:

- a) Literature review on off-grid and long-term reactors
- b) Discussion of target key performance parameters
- c) DRAGON/DONJON introduction and training
- d) Setup of the LFR full reactor model
- e) Analysis of the results
- f) Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear Engineering, Applied Mathematics and Physics.

Background: fundamentals in reactor physics and Monte Carlo methods.

Required computer skills: A good knowledge of Python and Linux operating systems (or willingness to learn). Knowledge of \LaTeX editing is appreciated.

References

- [1] Guy Marleau, Alain Hébert, and Robert Roy. A user guide for dragon version 5, 2025.
- [2] Paul K. Romano, Nicholas E. Horelik, Bryan R. Herman, Adam G. Nelson, Benoit Forget, and Kord Smith. Openmc: A state-of-the-art monte carlo code for research and development. *Annals of Nuclear Energy*, 82:90–97, 2015. Joint International Conference on Supercomputing in Nuclear Applications and Monte Carlo 2013, SNA + MC 2013. Pluri- and Trans-disciplinarity, Towards New Modeling and Numerical Simulation Paradigms.

- [3] J. Wallenius, S. Qvist, I. Mickus, S. Bortot, P. Szakalos, and J. Ejenstam. Design of sealer, a very small lead-cooled reactor for commercial power production in off-grid applications. *Nuclear Engineering and Design*, 338:23–33, 2018.
- [4] Keith E Holbert. A review of maritime nuclear reactor systems. *Journal of Nuclear Engineering*, 6(1):5, 2025.
- [5] George I Bell and Samuel Glasstone. *Nuclear reactor theory*. US Atomic Energy Commission, Washington, DC (United States), 1970.
- [6] Alain Hébert. *Applied reactor physics*. Presses inter Polytechnique, 2009.