

API First Web Development with Python

a tutorial for falsy

author: dameng

Python 快速入门

- 内建类型
- 流程控制
- 函数与方法

```
a = 1+1.0
print(a, type(a))
```

2.0 <class 'float'>

```
b = 1+1j
print(b, type(b))
```

(1+1j) <class 'complex'>

```
c = 0x10 + 10_00 + 0o10
print(c, type(c))
```

1024 <class 'int'>

```
print(1-0.8)
print(1-0.5-0.25-0.125,1-0.875)
from decimal import Decimal as Dec
a = Dec('1')
b = Dec('0.8')
print(a-b)
```

0.19999999999999996

0.125 0.125

0.2

```
print("hello"+" '*2+'world')
a = "hello"
b = 123.456
print("{} {}".format(a, b))
print("{a} {b}".format(a=a, b=b))
print(f"{a} {b}")
print("{} {:.2f}".format(a,b))
import math
print('PI = {0.pi}'.format(math))
```

hello world

hello 123.456

hello 123.456

hello 123.456

hello 123.46

PI = 3.141592653589793

```
a = [1,2,3]
b = ["4", "5", "6"]
c = a + b
print(c, type(c))
c.append(7)
print(c)
```

[1, 2, 3, '4', '5', '6'] <class 'list'>
[1, 2, 3, '4', '5', '6', 7]

```
a = {1: 'a', 2: 'b'}
print(a, type(a))
b = (1,2,3)
print(b, type(b))
c = {1, 2, 3}
print(c, type(c))
print('*'*20)
a[3] = 'c'
print(a)
c.add(2)
print(c)
```

{1: 'a', 2: 'b'} <class 'dict'>

(1, 2, 3) <class 'tuple'>

{1, 2, 3} <class 'set'>

{1: 'a', 2: 'b', 3: 'c'}

{1, 2, 3}

```
s = 90
if s >= 60:
    print('passed')
else:
    print('failed')

ans = 'passed' if s >= 60 else 'failed'
print(ans)
ans = s >= 60 and 'passed' or 'failed'
print(ans)
```

passed
passed
passed

```
for i in [1,2]:
    print(i)
print('*'*20)
for k,v in {1:'a', 2:'b', 3:'c'}.items():
    print(k, v)
print('*'*20)
for i,v in enumerate([1, '2']):
    print(i,v)
else:
    print('done')
```

```
1
2
*****
1 a
2 b
3 c
*****
0 1
1 2
done
```

```
m = int(input('number 1: '))
n = int(input('number 2: '))
while n != 0:
    r = m % n
    m = n
    n = r
print("GCD:", m)
```

number 1: 360
number 2: 128
GCD: 8

```
a = 10
while a > 0:
    print(a, end='.')
    a -= 1
else:
    print('done')
```

10.9.8.7.6.5.4.3.2.1.done

```
a = [i for i in range(5)]
print(a)
a = list(map(lambda x: x*2, a))
print(a)
a = list(filter(lambda x: x%3 == 0, a))
print(a)
import functools as fn
a = fn.reduce(lambda x,y: x+y, range(11))
print(a)
```

[0, 1, 2, 3, 4]
[0, 2, 4, 6, 8]
[0, 6]
55

```
a = {x:x*100 for x in range(10)}
print(a)
```

{0: 0, 1: 100, 2: 200, 3: 300, 4: 400, 5: 500,

```
a = {1, 2, 3}
b = {1, 4, 7}
print(a&b)
print(a|b)
print(a^b)
print(a-b)
print(b-a)
```

{1}
{1, 2, 3, 4, 7}
{2, 3, 4, 7}
{2, 3}
{4, 7}

```
def show():
    print('test')

def hello(people):
    print('hello {}'.format(people))
show()
hello('john')
```

```
test
hello john
```

```
class Person:
    def __init__(self, name, age):
        self.name = name
        self.age = age
    def hello(self):
        print('hello {}'.format(self.name))
    def show(self):
        print('{} is {} years old'.format(self.name, self.age))
```

```
p = Person('jack', 18)
p.hello()
p.show()
```

```
hello jack
jack is 18 years old
```

```
class Person:
    pass

def constructor(self, name, age):
    self.name = name
    self.age = age
def hello(self):
    print('hello {}'.format(self.name))
def show(self):
    print('{} is {} years old'.format(self.name, self.age))
```

```
Person.__init__ = constructor
Person.hello = hello
Person.show = show
```

```
p = Person('jack', 18)
p.hello()
p.show()
```

```
hello jack
jack is 18 years old
```

Save the Cheerleader, save the World



Who saves the CRUD Boy?



HTTP API

- 设计API
- 实现业务逻辑
- 测试相应的逻辑
- 编写对应的文档
- 部署

```
def get_it(name):  
    return {  
        'get': name  
    }
```

Request URL

```
http://0.0.0.0:8001/v1/hello?name=john
```

Request Headers

```
{  
    "Accept": "application/json"  
}
```

Response Body

```
{  
    "get": "john"  
}
```

Curl

```
curl -X GET --header 'Accept: application/json' 'http://0.0.0.0:8001/v1/hello?name=john'
```


HTTP Restful API is Easy

- Get
- Post
- Delete
- Put
-

- Get
- Post

While the biz logics depends,
this tutorial is only about the API ...

有没有统一的规范?

- Swagger



- Raml



- Blueprint



Demo of OAI(Swagger) 2.0

meta data

```
1. swagger: "2.0"
2. info:
3.   title: Sample API
4.   description: API description in Markdown.
5.   version: 1.0.0
```

```
6.
7. host: api.example.com
8. basePath: /v1
9. schemes:
10.  - https
```

base url

paths

```
11.
12. paths:
13.   /users:
14.     get:
15.       summary: Returns a list of users.
16.       description: Optional extended description in Markdown.
17.       produces:
18.         - application/json
19.       responses:
20.         200:
21.           description: OK
```

add parameters

```
1. paths:
2.   /users/{userId}:
3.     get:
4.       summary: Returns a user by ID.
5.       parameters:
6.         - in: path
7.           name: userId
8.           required: true
9.           type: integer
10.          minimum: 1
11.          description: Parameter description in Markdown.
12.       responses:
13.         200:
14.           description: OK
```

paths

params

post example

paths

```
1. paths:
2.   /users:
3.     post:
4.       summary: Adds a new user
5.       requestBody:
6.         content:
7.           application/json:
8.             schema: # Request body contents
9.               type: object
10.            properties:
11.              id:
12.                type: integer
13.              name:
14.                type: string
15.            example: # Sample object
16.              id: 10
17.              name: Jessica Smith
18.       responses:
19.         '200':
20.           description: OK
```

params

post with ref obj

```
post:
  tags: [POST]
  operationId: test.post_it
  summary: 测试post请求
  parameters:
    - name: name
      in: body
      schema:
        $ref: '#/definitions/PostBody'
  responses:
    200:
      description: Return response
  consumes:
    - application/json
  produces:
    - text/html
    - application/json
```

```
definitions:
  PostBody:
    type: object
    properties:
      name:
        type: string
      age:
        type: integer
    example:
      name: 'meng'
      age: 18
```

```
# things.py

# Let's get this party started!
import falcon

# Falcon follows the REST architectural style, meaning (among
# other things) that you think in terms of resources and state
# transitions, which map to HTTP verbs.
class ThingsResource(object):
    def on_get(self, req, resp):
        """Handles GET requests"""
        resp.status = falcon.HTTP_200 # This is the default status
        resp.body = ('\nTwo things awe me most, the starry sky '
                     'above me and the moral law within me.\n'
                     '\n'
                     '~ Immanuel Kant\n\n')

# falcon.API instances are callable WSGI apps
app = falcon.API()


# Resources are represented by long-lived class instances
things = ThingsResource()

# things will handle all requests to the '/things' URL path
app.add_route('/things', things)
```

Introduce the Falcon Framework

Fal.s.y

- Falcon(as the backend)
- swagger
- yml

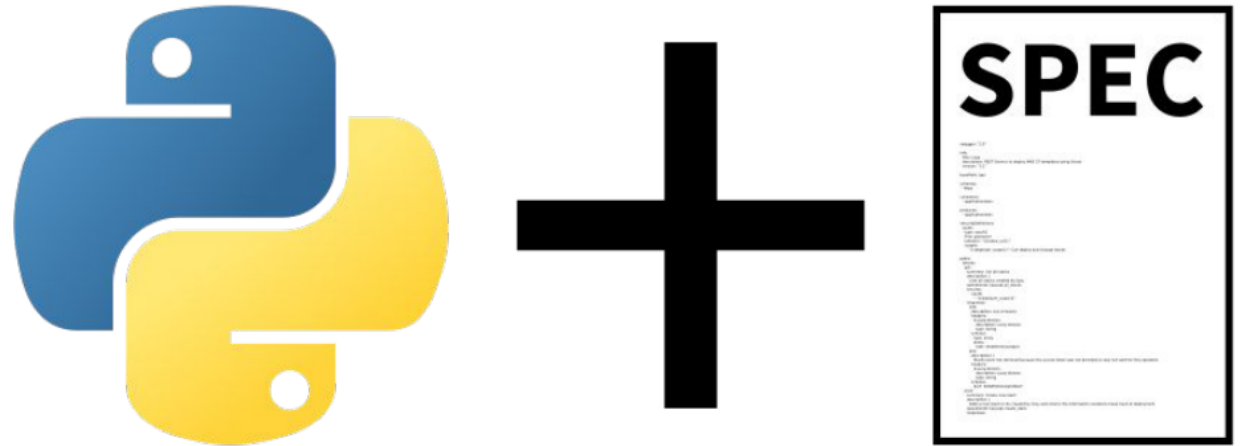

Step 1

- 编写Spec 文件

```
swagger: '2.0'
info:
  title: FALSY SIMPLE DEMO API
  version: "0.1"
  contact:
    name: 'dameng'
basePath: "/v1"
```

```
'/test':
  get:
    tags: [GET]
    operationId: test.get_it
    summary: 测试get请求
    parameters:
      - name: name
        in: query
        type: string
        default: 'john'
    responses:
      200:
        description: Return response
```

Step 2

- 编写python handler

```
def get_it(name):  
    return {  
        'get': name  
    }
```

Step 3

- 将spec和python函数绑定

```
from falsy.falsy import FALSY  
  
f = FALSY()  
f.swagger('test.yml', ui=True, theme='normal')  
api = f.api
```

Step 4

- 运行server
- `gunicorn serve:api --bind 127.0.0.1:8181`

需求变更了?

- 如果需要将传入的参数从querymeter变为pathmeter?

```
'/hello/{name}':
```

```
  get:
```

```
    tags: [测试]
```

```
    operationId: demo.get_it
```

```
    summary: 测试简单的get请求，hello somebody
```

```
    parameters:
```

```
      - name: name
```

```
        in: path
```

```
        type: string
```

```
        default: 'john'
```

```
def get_it(name):  
    return {  
        'get': name  
    }
```

代码不变

UI

test

Show/Hide | List Operations | Expand Operations

GET

/hello/{name}

测试简单的get请求, hello somebody

Parameters

Parameter	Value	Description	Parameter Type	Data Type
name	<input type="text" value="john"/>		path	string

Response Messages

HTTP Status Code	Reason	Response Model	Headers
200	Return response		

Try it out!

[Hide Response](#)

Curl

```
curl -X GET --header 'Accept: application/json' 'http://127.0.0.1:8181/v1/hello/john'
```

Request URL

```
http://127.0.0.1:8181/v1/hello/john
```

Request Headers

```
{  "Accept": "application/json"}
```

Response Body

```
{  "get": "john"}
```

Response Code

```
200
```

不仅仅是get请求，
其它的
带有body的请求呢？

```
post:
  tags: [POST]
  operationId: test.post_it
  summary: 测试post请求
  parameters:
    - name: name
      in: body
      schema:
        type: object
        properties:
          name:
            type: string
          age:
            type: integer
```


body中数据的另一种呈现方式

```
post:
  tags: [POST]
  operationId: test.post_it
  summary: 测试post请求
  parameters:
    - name: name
      in: body
      schema:
        $ref: '#/definitions/PostBody'
```


```
definitions:
  PostBody:
    type: object
    properties:
      name:
        type: string
      age:
        type: integer
    example:
      name: 'meng'
      age: 18
```

讲到这里。。。。

- 基本的CRUD已经可以使用Falsy完成
- 但是这还远远不够。。。

世界是丰富多彩的

```
f = FALSY()  
f.swagger('test.yml', ui=True, theme='normal')  
api = f.api
```



- **normal**
- **impress**
- **material**

Normal UI

test

Show/Hide | List Operations | Expand Operations

GET

/hello/{name}

测试简单的get请求, hello somebody

Parameters

Parameter	Value	Description	Parameter Type	Data Type
name	<input type="text" value="john"/>		path	string

Response Messages

HTTP Status Code	Reason	Response Model	Headers
200	Return response		

Try it out!

[Hide Response](#)

Curl

```
curl -X GET --header 'Accept: application/json' 'http://127.0.0.1:8181/v1/hello/john'
```

Request URL

```
http://127.0.0.1:8181/v1/hello/john
```

Request Headers

```
{  "Accept": "application/json"}
```

Response Body

```
{  "get": "john"}
```

Response Code

```
200
```


Bonus

- Curl script
- multi-language support
- vertical view

Impress UI

BASE URL
http://127.0.0.1:8181/v1

ACCESS TOKEN (JWT)



[debug in jwt.io](#)

test

GET /hello/{name}

GET /hello/{name}

测试简单的get请求, hello somebody

Parameters

name

string

Test this endpoint

TRY


Response Messages


200 Return response


Bonus


- most comfortable UI
- json highlights
- popup window
- horizontal view


Material UI


 FALSY SIMPLE DEMO API


 Contact
dameng

 YAML
swagger.yaml

 Host
http://127.0.0.1:8181

 Base URL
/v1

 API version
0.1



test

GET /hello

test

GET /hello

test

GET /hello

testing

INFO

SCRIPTS

RESULT

Response type

application/json

Parameters

name

john

in: query
type: string

Response messages

200 Return response



Bonus

- Angular script
- material style

当我们的api变得越来越多

- 对spec文件进行拆分

```
tags: [Method]
operationId: ops.hello.get_it
summary: 测试get请求
parameters:
  - name: name
    in: query
    type: string
    default: 'john'
responses:
  200:
    description: Return persons
```

```
swagger: '2.0'
info:
  title: FALSY SIMPLE DEMO API
  version: "0.1"
consumes:
  - application/json
produces:
  - application/json
basePath: "/v1"
paths:
  '/hello':
    get: !include ./get.yml
    post: !include ./post.yml
```

```
tags: [Method]
operationId: ops.hello.post_it
summary: 测试post请求
parameters:
  - name: name
    in: query
    type: string
    default: 'john'
responses:
  200:
    description: Return persons
```

```
f = FALSY(static_path='test', static_dir='demo/simple/static')
f.swagger('ymls/spec.yml', ui=True, ui_language='zh-cn', theme='responsive')
api = f.api
```

```
swagger: '2.0'
info:
  title: FALSY SIMPLE DEMO API
  version: "0.1"
consumes:
  - application/json
produces:
  - application/json
basePath: "/v1"
paths:
  '/hello':
    get: !include ./get.yml
    post: !include ./post.yml
```

```
tags: [Method]
operationId: ops.hello.get_it
summary: 测试get请求
parameters:
  - name: name
    in: query
    type: string
    default: 'john'
responses:
  200:
    description: Return persons
```

```
tags: [Method]
operationId: ops.hello.post_it
summary: 测试post请求
parameters:
  - name: name
    in: query
    type: string
    default: 'john'
responses:
  200:
    description: Return persons
```

```
.
├── __init__.py
├── ops
│   ├── hello.py
│   └── __init__.py
├── serve.py
├── static
└── ymls
    ├── get.yml
    ├── post.yml
    └── spec.yml
```

```
def get_it(name):
    return {
        'get': name
    }
```

```
def post_it(name):
    return {
        'post': name
    }
```

validationId

```
'/hello':
  get:
    tags: [GET]
    operationId: ops.hello.get_it
    summary: 测试get请求,name小于6字符会报错
    parameters:
      - name: name
        validationId: ops.validate.validate_get_more_than_6
        in: query
        type: string
        default: 'jesse'
    responses:
      200:
        description: Return response
```

```
def get_it(name):
    return {
        'get': name
    }
```

```
def validate_get_more_than_6(name):
    if len(name) < 6:
        return False, 'less than 6'
    return True
```

beforeId

```
basePath: "/v1"
beforeId: ops.validate.before_check_get_more_than_6
paths:
  '/hello':
    get:
      tags: [GET]
      operationId: ops.hello.get_it
      summary: 测试get请求,name小于6字符会报错
      parameters:
        - name: name
          in: query
          type: string
          default: 'jesse'
```

```
def get_it(name):
    return {
        'get': name
    }
```

```
def before_check_get_more_than_6(req, resp, name):
    if len(name) < 6:
        raise Exception('less than or equal to 6')
    return
```

exceptionId

```
"/hello":  
  post:  
    tags: [Method]  
    operationId: ops.hello.post_it  
    exceptionId: ops.hello.post_excp  
    summary: 测试post请求  
    parameters:  
      - name: name  
        in: query  
        type: string  
        default: 'john'  
    responses:  
      200:  
        description: Return persons
```


```
def post_it(name):  
    raise CustomException('post:'+name)  
  
def post_excp(req, resp, error):  
    if type(error) == CustomException:  
        resp.body = json.dumps({  
            'error caught': str(error)  
        })  
        resp.status = falcon.HTTP_500
```

all about the Id ?

- operationId
- validationId
- beforeId
- afterId
- exceptionId

Live Show

顺带把这张图献给那些
showcase必败的team

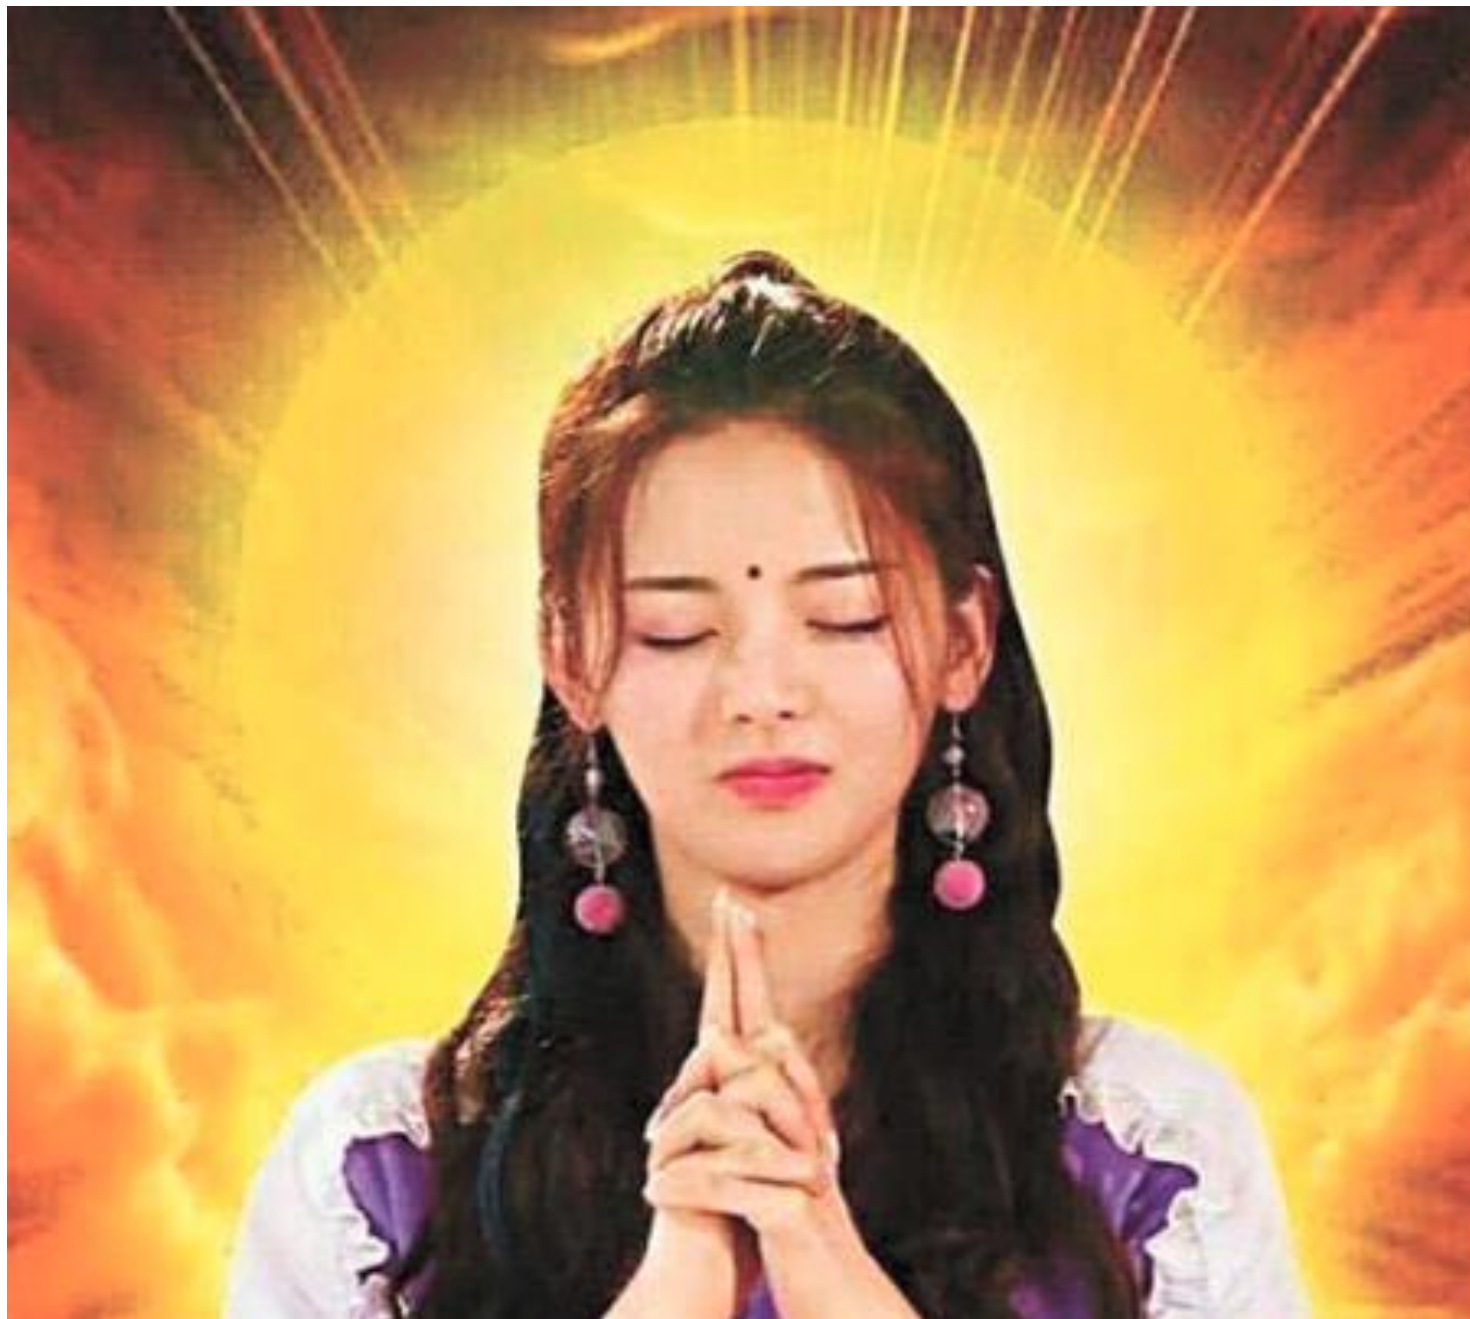

Q&A

Thanks!