


# **mise bootstrapで dotfilesを宣言的に**

**@newt239**

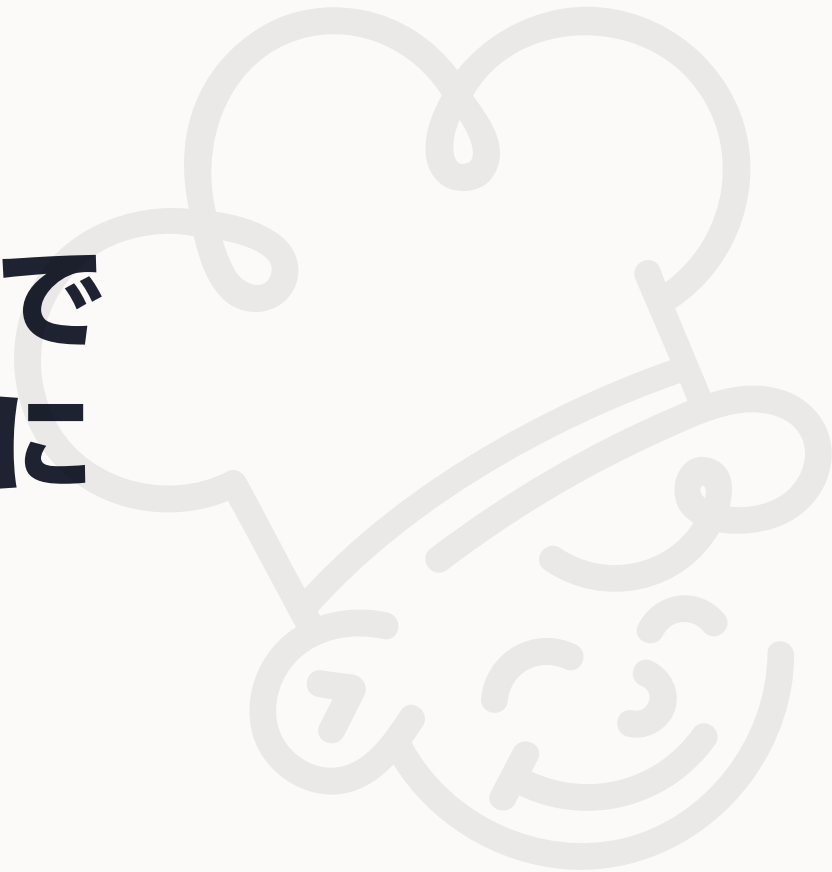


# | newt @newt239

- 芝浦工業大学 B3
- Webフロントエンドエンジニア
- 興味領域
  - デザインシステム
  - Webアクセシビリティ
  - フロントエンドエコシステム
  - Web標準



# | mise bootstrap

- mise の設定ファイルにマシンの状態を宣言し、コマンド 1 つで反映
- 対象はパッケージ・dotfiles・macOS の設定・ログインシェル・ツール
- v2026.6.6 で experimental 機能として追加

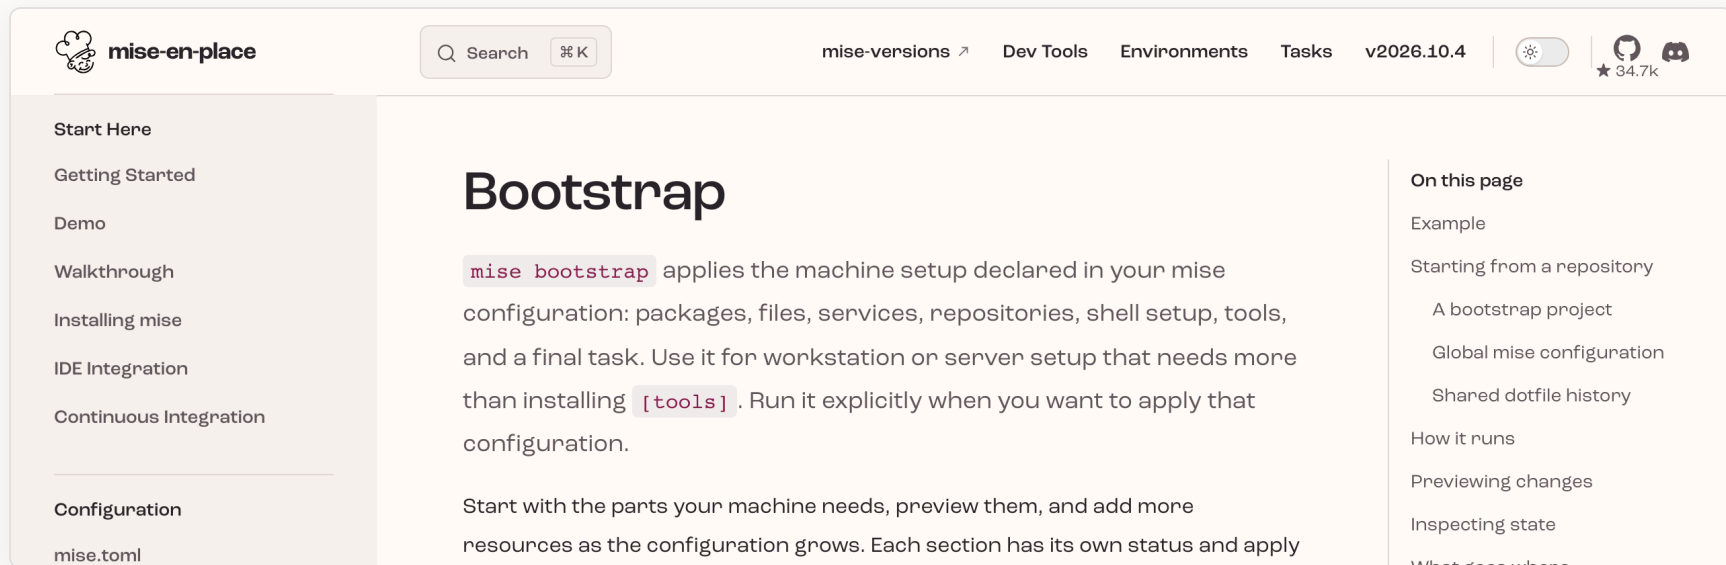

The screenshot shows the 'mise-en-place' website. The header includes the logo, a search bar, and navigation links for 'mise-versions', 'Dev Tools', 'Environments', 'Tasks', and 'v2026.10.4'. A sidebar on the left lists navigation items: 'Start Here', 'Getting Started', 'Demo', 'Walkthrough', 'Installing mise', 'IDE Integration', 'Continuous Integration', 'Configuration', and 'mise.toml'. The main content area is titled 'Bootstrap' and contains the following text: 'mise bootstrap applies the machine setup declared in your mise configuration: packages, files, services, repositories, shell setup, tools, and a final task. Use it for workstation or server setup that needs more than installing [tools]. Run it explicitly when you want to apply that configuration.' Below this, it says 'Start with the parts your machine needs, preview them, and add more resources as the configuration grows. Each section has its own status and apply'. On the right, there is a 'On this page' section with links to 'Example', 'Starting from a repository', 'A bootstrap project', 'Global mise configuration', 'Shared dotfile history', 'How it runs', 'Previewing changes', 'Inspecting state', and 'What does where'.

# | Before: Makefile + シェルスクリプト

- `make` で `init` → `link` → `defaults` → `brew` の順にスクリプトを実行
- 処理の手順を記述する手続き型。再実行時の挙動はスクリプトごとに異なる

```
dotfiles/  
├─ Makefile  
├─ .bin/  
│   ├─ init.sh  
│   ├─ link.sh  
│   ├─ mise.sh  
│   ├─ brew.sh  
│   ├─ defaults.sh  
│   └─ Brewfile  
├─ editor/  
│   └─ vscode.sh  
└─ home/  
    └─ .mise.toml
```

```
all: init link defaults brew
```

```
init:  
    @.bin/init.sh
```

```
link:  
    @.bin/link.sh
```

```
defaults:  
    @.bin/defaults.sh
```

```
brew:  
    @.bin/brew.sh
```

# シンボリックリンク

- `symlink-each` で `home/` 以下をファイル単位でリンク
- `home/` 以外に置いたファイルはリンク先ごとにリンク元を指定

**Before** `.bin/link.sh`

```
link() {  
    mkdir -p "$(dirname "$2")"  
    ln -fns "$REPO/$1" "$2"  
}  
  
cd "$REPO/home"  
find . -type f ! -name .DS_Store |  
    while read -r f; do  
        link "home/${f#./}" "$HOME/${f#./}"  
    done  
  
link config/gnupg/gpg-agent.conf \  
    "$HOME/.gnupg/gpg-agent.conf"
```

**After** `home/.mise.toml`

```
[dotfiles."~"]  
source = "~/dotfiles/home"  
mode = "symlink-each"  
exclude = [".DS_Store"]  
  
[dotfiles."~/.gnupg/gpg-agent.conf"]  
source = "~/dotfiles/config/gnupg/gpg-agent.conf"
```

# | macOS の設定

- Dock・Finder・キーボード・トラックパッドは専用のキーで記述
- ネストした plist は `defaults_entries` の `path` で該当する値だけを変更

**Before** `.bin/defaults.sh`

```
defaults write com.apple.dock autohide -bool true
defaults write com.apple.finder AppleShowAllFiles -bool true
defaults write com.apple.symbolichotkeys.plist AppleSymbolicHotKeys -dict-add 64 "
    <dict>
      <key>enabled</key><false/>
      <key>value</key><dict>
        <key>type</key><string>standard</string>
        <key>parameters</key>
        <array>
          <integer>65535</integer>
          <integer>49</integer>
          <integer>1048576</integer>
        </array>
      </dict>
    </dict>
"
```

**After** `home/.mise.toml`

```
[bootstrap.macos.dock]
autohide = true

[bootstrap.macos.finder]
show_all_files = true

[[bootstrap.macos.defaults_entries]]
domain = "com.apple.symbolichotkeys"
key = "AppleSymbolicHotKeys"
path = ["64", "enabled"]
value = false
```

# パッケージ

- `brew:` `brew-cask:` `mas:` のプレフィックスでインストール元を指定
- `mise.<環境名>.toml` に分割し、`-E <環境名>` で読み込むファイルを切り替え

**Before** `.bin/Brewfile`

```
cask "google-chrome"
cask "visual-studio-code"
brew "mise"
cask "docker-desktop"
cask "ghostty"

brew "curl"
brew "direnv"
brew "gh"
brew "postgresql@17", restart_service: true, link: true
brew "mas"
```

**After** `home/.mise.toml` / `home/.mise.work.toml`

```
[bootstrap.packages]
"brew:curl" = "latest"
"brew:direnv" = "latest"
"brew:gh" = "latest"
"brew:postgresql@17" = "latest"
"brew:mas" = "latest"

"brew-cask:google-chrome" = "latest"
"brew-cask:visual-studio-code" = "latest"
"brew-cask:docker-desktop" = "latest"
"brew-cask:ghostty" = "latest"
"mas:1429033973" = "latest"
```

# ログインシェルとツール

- ログインシェルも宣言の対象
- `[tools]` のインストールは `bootstrap` の手順の 1 つとして実行

**Before** `.bin/init.sh / .bin/mise.sh`

```
if [ "$SHELL" != "/bin/zsh" ]; then
    chsh -s /bin/zsh
fi
```

```
source ~/.zshrc
if [ ! -f "$HOME/.mise.toml" ]; then
    echo ".mise.tomlファイルが見つかりません。"
    exit 1
fi
mise install
```

**After** `home/.mise.toml`

```
[bootstrap.user]
login_shell = "/bin/zsh"

[tools]
go = "1.26.1"
python = "3.14.3"
rust = "1.94.0"
node = "24.21.0"
```

# | mise bootstrap status

- 宣言した項目ごとに現在の状態を一覧表示
- `differs` は宣言と実際の状態が一致していない項目

```
$ mise bootstrap status -C home -E work
dotfiles  ~                               symlink-each ~/dotfiles/home    differs
dotfiles  ~/.gnupg/gpg-agent.conf symlink ~/dotfiles/config/gnupg/gpg-agent.conf  applied
defaults  com.apple.dock autohide                  true      set
defaults  com.apple.dock persistent-apps        array (7 items) differs
defaults  NSGlobalDomain InitialKeyRepeat          10        set
defaults  NSGlobalDomain com.apple.keyboard.fnState false      differs
user       login_shell                          /bin/zsh   set
tools      node@24.21.0                             24.21.0    installed
packages   brew:gh                                    2.100.0    installed
packages   brew-cask:ghostty                         1.3.1      installed (auto-updates)
```

# | CI

- `mise bootstrap plan` で適用内容を事前に確認
- `--only dotfiles` で適用する対象を限定
- `dotfiles status --missing` で未適用のリンクを確認

```
- name: Validate config
  run: |
    mise trust ~/dotfiles/home/.mise.toml
    mise bootstrap plan -C ~/dotfiles/home
    mise bootstrap dotfiles status -C ~/dotfiles/home -E work
- name: Apply dotfiles
  run: mise bootstrap -C ~/dotfiles/home --yes --only dotfiles --force-dotfiles
- name: Check convergence
  run: mise bootstrap dotfiles status -C ~/dotfiles/home --missing
```

## | 参考

- [Bootstrap | mise-en-place](#)
- [続・dotfiles管理、miseに全部任せてみた ~mise の最新 bootstrap 機能を追う~](#)
- [newt239/dotfiles](#)