
Security Pillar

AWS Well-Architected Framework

Security Pillar: AWS Well-Architected Framework

Copyright © 2023 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Amazon's trademarks and trade dress may not be used in connection with any product or service that is not Amazon's, in any manner that is likely to cause confusion among customers, or in any manner that disparages or discredits Amazon. All other trademarks not owned by Amazon are the property of their respective owners, who may or may not be affiliated with, connected to, or sponsored by Amazon.

Table of Contents

Abstract and introduction	1
Introduction	1
Security foundations	2
Design principles	2
Definition	2
Shared responsibility	2
AWS response to abuse and compromise	4
Governance	5
AWS account management and separation	6
SEC01-BP01 Separate workloads using accounts	7
SEC01-BP02 Secure account root user and properties	9
Operating your workloads securely	12
SEC01-BP03 Identify and validate control objectives	13
SEC01-BP04 Keep up-to-date with security threats	13
SEC01-BP05 Keep up-to-date with security recommendations	14
SEC01-BP06 Automate testing and validation of security controls in pipelines	15
SEC01-BP07 Identify threats and prioritize mitigations using a threat model	16
SEC01-BP08 Evaluate and implement new security services and features regularly	18
Identity and access management	20
Identity management	20
SEC02-BP01 Use strong sign-in mechanisms	20
SEC02-BP02 Use temporary credentials	22
SEC02-BP03 Store and use secrets securely	24
SEC02-BP04 Rely on a centralized identity provider	28
SEC02-BP05 Audit and rotate credentials periodically	29
SEC02-BP06 Leverage user groups and attributes	31
Permissions management	32
SEC03-BP01 Define access requirements	33
SEC03-BP02 Grant least privilege access	35
SEC03-BP03 Establish emergency access process	37
SEC03-BP04 Reduce permissions continuously	38
SEC03-BP05 Define permission guardrails for your organization	40
SEC03-BP06 Manage access based on lifecycle	41
SEC03-BP07 Analyze public and cross-account access	41
SEC03-BP08 Share resources securely within your organization	43
SEC03-BP09 Share resources securely with a third party	46
Detection	50
SEC04-BP01 Configure service and application logging	50
Implementation guidance	7
Resources	8
SEC04-BP02 Analyze logs, findings, and metrics centrally	53
Implementation guidance	7
Resources	8
SEC04-BP03 Automate response to events	55
Implementation guidance	7
Resources	8
SEC04-BP04 Implement actionable security events	56
Implementation guidance	7
Resources	8
Infrastructure protection	57
Protecting networks	58
SEC05-BP01 Create network layers	58
SEC05-BP02 Control traffic at all layers	60
SEC05-BP03 Automate network protection	61

SEC05-BP04 Implement inspection and protection	62
Protecting compute	63
SEC06-BP01 Perform vulnerability management	64
SEC06-BP02 Reduce attack surface	66
SEC06-BP03 Implement managed services	67
SEC06-BP04 Automate compute protection	68
SEC06-BP05 Enable people to perform actions at a distance	69
SEC06-BP06 Validate software integrity	70
Data protection	71
Data classification	71
SEC07-BP01 Identify the data within your workload	71
SEC07-BP02 Define data protection controls	74
SEC07-BP03 Automate identification and classification	75
SEC07-BP04 Define data lifecycle management	76
Protecting data at rest	76
SEC08-BP01 Implement secure key management	77
SEC08-BP02 Enforce encryption at rest	78
SEC08-BP03 Automate data at rest protection	80
SEC08-BP04 Enforce access control	80
SEC08-BP05 Use mechanisms to keep people away from data	82
Protecting data in transit	83
SEC09-BP01 Implement secure key and certificate management	83
SEC09-BP02 Enforce encryption in transit	84
SEC09-BP03 Automate detection of unintended data access	85
SEC09-BP04 Authenticate network communications	86
Incident response	87
Design goals of cloud response	87
Educate	88
Prepare	88
SEC10-BP01 Identify key personnel and external resources	89
SEC10-BP02 Develop incident management plans	89
SEC10-BP03 Prepare forensic capabilities	92
SEC10-BP05 Pre-provision access	93
SEC10-BP06 Pre-deploy tools	95
Simulate	96
SEC10-BP07 Run game days	97
Iterate	98
SEC10-BP04 Automate containment capability	98
Application security	100
SEC11-BP01 Train for application security	100
Implementation guidance	7
Resources	8
SEC11-BP02 Automate testing throughout the development and release lifecycle	102
Implementation guidance	102
Resources	103
SEC11-BP03 Perform regular penetration testing	104
Implementation guidance	7
Resources	8
SEC11-BP04 Manual code reviews	106
Implementation guidance	7
Resources	107
SEC11-BP05 Centralize services for packages and dependencies	107
Implementation guidance	7
Resources	8
SEC11-BP06 Deploy software programmatically	109

Implementation guidance	7
Resources	8
SEC11-BP07 Regularly assess security properties of the pipelines	110
Implementation guidance	7
Resources	8
SEC11-BP08 Build a program that embeds security ownership in workload teams	111
Implementation guidance	7
Resources	8
Conclusion	114
Contributors	115
Further reading	116
Document revisions	117
Notices	119
AWS glossary	120

Security Pillar - AWS Well-Architected Framework

Publication date: **April 10, 2023** ([Document revisions \(p. 117\)](#))

The focus of this paper is the security pillar of the [AWS Well-Architected Framework](#). It provides guidance to help you apply best practices, current recommendations in the design, delivery, and maintenance of secure AWS workloads.

Introduction

The [AWS Well-Architected Framework](#) helps you understand trade-offs for decisions you make while building workloads on AWS. By using the Framework, you will learn current architectural best practices for designing and operating reliable, secure, efficient, cost-effective, and sustainable workloads in the cloud. It provides a way for you to consistently measure your workload against best practices and identify areas for improvement. We believe that having well-architected workloads greatly increases the likelihood of business success.

The framework is based on six pillars:

- Operational Excellence
- Security
- Reliability
- Performance Efficiency
- Cost Optimization
- Sustainability

This paper focuses on the security pillar. This will help you meet your business and regulatory requirements by following current AWS recommendations. It's intended for those in technology roles, such as chief technology officers (CTOs), chief information security officers (CSOs/CISOs), architects, developers, and operations team members.

After reading this paper, you will understand AWS current recommendations and strategies to use when designing cloud architectures with security in mind. This paper doesn't provide implementation details or architectural patterns but does include references to appropriate resources for this information. By adopting the practices in this paper, you can build architectures that protect your data and systems, control access, and respond automatically to security events.

Security foundations

The security pillar describes how to take advantage of cloud technologies to protect data, systems, and assets in a way that can improve your security posture. This paper provides in-depth, best-practice guidance for architecting secure workloads on AWS.

Design principles

In the cloud, there are a number of principles that can help you strengthen your workload security:

- **Implement a strong identity foundation:** Implement the principle of least privilege and enforce separation of duties with appropriate authorization for each interaction with your AWS resources. Centralize identity management, and aim to eliminate reliance on long-term static credentials.
- **Maintain traceability:** Monitor, alert, and audit actions and changes to your environment in real time. Integrate log and metric collection with systems to automatically investigate and take action.
- **Apply security at all layers:** Apply a defense in depth approach with multiple security controls. Apply to all layers (for example, edge of network, VPC, load balancing, every instance and compute service, operating system, application, and code).
- **Automate security best practices:** Automated software-based security mechanisms improve your ability to securely scale more rapidly and cost-effectively. Create secure architectures, including the implementation of controls that are defined and managed as code in version-controlled templates.
- **Protect data in transit and at rest:** Classify your data into sensitivity levels and use mechanisms, such as encryption, tokenization, and access control where appropriate.
- **Keep people away from data:** Use mechanisms and tools to reduce or eliminate the need for direct access or manual processing of data. This reduces the risk of mishandling or modification and human error when handling sensitive data.
- **Prepare for security events:** Prepare for an incident by having incident management and investigation policy and processes that align to your organizational requirements. Run incident response simulations and use tools with automation to increase your speed for detection, investigation, and recovery.

Definition

Security in the cloud is composed of seven areas:

- [Security foundations \(p. 2\)](#)
- [Identity and access management \(p. 20\)](#)
- [Detection \(p. 50\)](#)
- [Infrastructure protection \(p. 57\)](#)
- [Data protection \(p. 71\)](#)
- [Incident response \(p. 87\)](#)
- [Application security \(p. 100\)](#)

Shared responsibility

Security and Compliance is a shared responsibility between AWS and the customer. This shared model can help relieve the customer's operational burden as AWS operates, manages, and controls the components from the host operating system and virtualization layer down to the physical security of the facilities in which the service operates. The customer assumes responsibility and management of

the guest operating system (including updates and security patches), and other associated application software in addition to the configuration of the AWS provided security group firewall. Customers should carefully consider the services they choose as their responsibilities vary depending on the services used, the integration of those services into their IT environment, and applicable laws and regulations. The nature of this shared responsibility also provides the flexibility and customer control that permits the deployment. As shown in the following chart, this differentiation of responsibility is commonly referred to as Security “of” the Cloud versus Security “in” the Cloud.

AWS responsibility “Security of the Cloud” – AWS is responsible for protecting the infrastructure that runs all of the services offered in the AWS Cloud. This infrastructure is composed of the hardware, software, networking, and facilities that run AWS Cloud services.

Customer responsibility “Security in the Cloud” – Customer responsibility will be determined by the AWS Cloud services that a customer selects. This determines the amount of configuration work the customer must perform as part of their security responsibilities. For example, a service such as Amazon Elastic Compute Cloud (Amazon EC2) is categorized as Infrastructure as a Service (IaaS) and, as such, requires the customer to perform all of the necessary security configuration and management tasks. Customers that deploy an Amazon EC2 instance are responsible for management of the guest operating system (including updates and security patches), any application software or utilities installed by the customer on the instances, and the configuration of the AWS-provided firewall (called a security group) on each instance. For abstracted services, such as Amazon S3 and Amazon DynamoDB, AWS operates the infrastructure layer, the operating system, and platforms, and customers access the endpoints to store and retrieve data. Customers are responsible for managing their data (including encryption options), classifying their assets, and using IAM tools to apply the appropriate permissions.

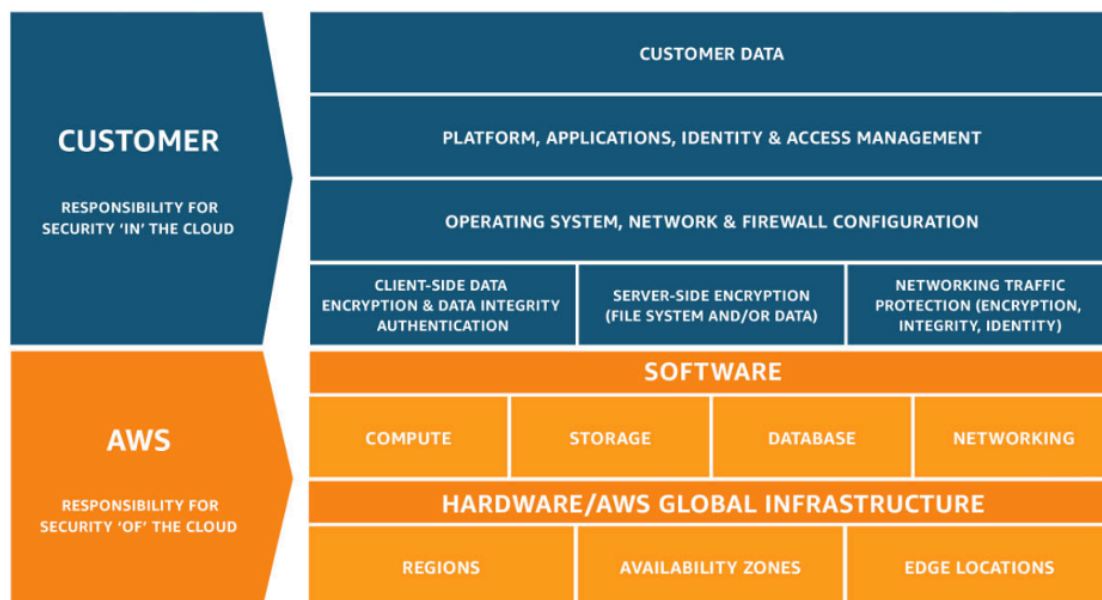


Figure 1: AWS Shared Responsibility Model.

This customer/AWS shared responsibility model also extends to IT controls. Just as the responsibility to operate the IT environment is shared between AWS and its customers, so is the management, operation, and verification of IT controls shared. AWS can help relieve customer burden of operating controls by managing those controls associated with the physical infrastructure deployed in the AWS environment that may previously have been managed by the customer. As every customer is deployed differently in AWS, customers can take advantage of shifting management of certain IT controls to AWS, which results in a (new) distributed control environment. Customers can then use the AWS control and compliance documentation available to them to perform their control evaluation and verification procedures as required. The following are examples of controls that are managed by AWS, AWS customers, or both.

Inherited Controls – Controls that a customer fully inherits from AWS.

- Physical and Environmental controls

Shared Controls – Controls that apply to both the infrastructure layer and customer layers, but in separate contexts or perspectives. In a shared control, AWS provides the requirements for the infrastructure and the customer must provide their own control implementation within their use of AWS services. Examples include:

- Patch Management – AWS is responsible for patching and fixing flaws within the infrastructure, but customers are responsible for patching their guest operating system and applications.
- Configuration Management – AWS maintains the configuration of its infrastructure devices, but customers are responsible for configuring their own guest operating systems, databases, and applications.
- Awareness and Training – AWS trains AWS employees, but customers must train their own employees.

Customer Specific – Controls that are solely the responsibility of the customer based on the application they are deploying within AWS services. Examples include:

- Service and Communications Protection or Zone Security, which might require a customer to route or zone data within specific security environments.

AWS response to abuse and compromise

Abuse activities are observed behaviors of AWS customers' instances or other resources that are malicious, offensive, illegal, or could harm other internet sites. AWS works with you to detect and address suspicious and malicious activities from your AWS resources. Unexpected or suspicious behaviors from your resources can indicate that your AWS resources have been compromised, which signals potential risks to your business. Remember that you have alternate methods of contact in your AWS account. Be sure to use best practices when adding contacts, both for security and billing. Although your root account email is the primary target of communication from AWS, AWS also communicates security issues and billing issues to the secondary email addresses. Adding an email address that goes to only one person means that you have added a single point of failure to your AWS account. Make sure that you've added at least one distribution list to your contacts.

AWS detects abuse activities in your resources using mechanisms, such as:

- AWS internal event monitoring
- External security intelligence against AWS network address space
- Internet abuse complaints against AWS resources

Although the AWS abuse response team aggressively monitors and shuts down unauthorized activity running on AWS, the majority of abuse complaints refer to customers who have legitimate business on AWS. Some examples of common causes of unintentional abuse activities include:

- **Compromised resource** – An unpatched Amazon EC2 instance could be infected and become a botnet agent.
- **Unintentional abuse** – An overly aggressive web crawler might be classified as a denial-of-service attack by some internet sites.
- **Secondary abuse** – An end user of the service provided by an AWS customer might post malware files on a public Amazon S3 bucket.
- **False complaints** – Sometimes internet users mistakenly report legitimate activities as abuse.

AWS is committed to working with AWS customers to prevent, detect, and mitigate abuse, and to defend against future recurrences. We encourage you to review the AWS [Acceptable Use Policy](#), which describes prohibited uses of the web services offered by Amazon Web Services and its affiliates. To support timely response to abuse notifications from AWS, make sure that your AWS account contact information is accurate. When you receive an AWS abuse warning, your security and operational staff should immediately investigate the matter. A delay can prolong the reputation impact and legal implications to yourself and others. More importantly, the implicated abuse resource might be compromised by malicious users, and ignoring the compromise could magnify damages to your business.

Governance

Security governance, as a subset of the overall approach, is meant to support business objectives by defining policies and control objectives to help manage risk. Achieve risk management by following a layered approach to security control objectives—each layer builds upon the previous one. Understanding the AWS Shared Responsibility Model is your foundational layer. This knowledge provides clarity on what you are responsible for on the customer side and what you inherit from AWS. A beneficial resource is [AWS Artifact](#), which gives you on-demand access to AWS' security and compliance reports and select online agreements.

Meet most of your control objectives at the next layer. This is where the platform-wide capability lives. For example, this layer includes the AWS account vending process, integration with an identity provider such as AWS IAM Identity Center (successor to AWS Single Sign-On), and the common detective controls. Some of the output of the platform governance process is here too. When you want to start using a new AWS service, update service control policies (SCPs) in the AWS Organizations service to provide the guardrails for initial use of the service. You can use other SCPs to implement common security control objectives, often referred to as security invariants. These are control objectives or configuration that you apply to multiple accounts, organization units, or the whole AWS organization. Typical examples are limiting the Regions that infrastructure runs in or preventing the deactivation of detective controls. This middle layer also contains codified policies such as config rules or checks in pipelines.

The top layer is where the product teams meet control objectives. This is because the implementation is done in the applications that the product teams control. This could be implementing input validation in an application or ensuring that identity passes between microservices correctly. Even though the product team owns the configuration, they can still inherit some capability from the middle layer.

Wherever you implement the control, the goal is the same: manage risk. A range of risk management frameworks apply to specific industries, regions, or technologies. Your main objective: highlight the risk based on likelihood and consequence. This is the *inherent risk*. You can then define a control objective that reduces either the likelihood, consequence, or both. Then, with a control in place, you can see what the resulting risk is likely to be. This is the *residual risk*. Control objectives can apply to one or many workloads. The following diagram shows a typical risk matrix. The likelihood is based on frequency of previous occurrences and the consequence is based on the financial, reputational and time cost of the event.

Likelihood	Risk Level				
Very Likely	Low	Medium	High	Critical	Critical
Likely	Low	Medium	Medium	High	Critical
Possible	Low	Low	Medium	Medium	High
Unlikely	Low	Low	Medium	Medium	High
Very unlikely	Low	Low		Medium	High
Consequence	Minimal	Low	Medium	High	Severe

Figure 2: Risk level likelihood matrix

AWS account management and separation

We recommend that you organize workloads in separate accounts and group accounts based on function, compliance requirements, or a common set of controls rather than mirroring your organization's reporting structure. In AWS, accounts are a hard boundary. For example, account-level separation is strongly recommended for isolating production workloads from development and test workloads.

Manage accounts centrally: AWS Organizations [automates AWS account creation and management](#), and control of those accounts after they are created. When you create an account through AWS Organizations, it is important to consider the email address you use, as this will be the root user that allows the password to be reset. Organizations allows you to group accounts into [organizational units \(OUs\)](#), which can represent different environments based on the workload's requirements and purpose.

Set controls centrally: Control what your AWS accounts can do by only allowing specific services, Regions, and service actions at the appropriate level. AWS Organizations allows you to use service control policies (SCPs) to apply permission guardrails at the organization, organizational unit, or account level, which apply to all [AWS Identity and Access Management \(IAM\)](#) users and roles. For example, you can apply an SCP that restricts users from launching resources in Regions that you have not explicitly allowed. AWS Control Tower offers a simplified way to set up and govern multiple accounts. It automates the setup of accounts in your AWS Organization, automates provisioning, applies [guardrails](#) (which include prevention and detection), and provides you with a dashboard for visibility.

Configure services and resources centrally: AWS Organizations helps you configure [AWS services](#) that apply to all of your accounts. For example, you can configure central logging of all actions performed across your organization using [AWS CloudTrail](#), and prevent member accounts from deactivating logging. You can also centrally aggregate data for rules that you've defined using [AWS Config](#), allowing you to audit your workloads for compliance and react quickly to changes. AWS CloudFormation [StackSets](#) allow you to centrally manage AWS CloudFormation stacks across accounts and OUs in your organization. This allows you to automatically provision a new account to meet your security requirements.

Use the delegated administration feature of security services to separate the accounts used for management from the organizational billing (management) account. Several AWS services, such as GuardDuty, Security Hub, and AWS Config, support integrations with AWS Organizations including designating a specific account for administrative functions.

Best practices

- [SEC01-BP01 Separate workloads using accounts \(p. 7\)](#)
- [SEC01-BP02 Secure account root user and properties \(p. 9\)](#)

SEC01-BP01 Separate workloads using accounts

Establish common guardrails and isolation between environments (such as production, development, and test) and workloads through a multi-account strategy. Account-level separation is strongly recommended, as it provides a strong isolation boundary for security, billing, and access.

Desired outcome: An account structure that isolates cloud operations, unrelated workloads, and environments into separate accounts, increasing security across the cloud infrastructure.

Common anti-patterns:

- Placing multiple unrelated workloads with different data sensitivity levels into the same account.
- Poorly defined organizational unit (OU) structure.

Benefits of establishing this best practice:

- Decreased scope of impact if a workload is inadvertently accessed.
- Central governance of access to AWS services, resources, and Regions.
- Maintain security of the cloud infrastructure with policies and centralized administration of security services.
- Automated account creation and maintenance process.
- Centralized auditing of your infrastructure for compliance and regulatory requirements.

Level of risk exposed if this best practice is not established: High

Implementation guidance

AWS accounts provide a security isolation boundary between workloads or resources that operate at different sensitivity levels. AWS provides tools to manage your cloud workloads at scale through a multi-account strategy to leverage this isolation boundary. For guidance on the concepts, patterns, and implementation of a multi-account strategy on AWS, see [Organizing Your AWS Environment Using Multiple Accounts](#).

When you have multiple AWS accounts under central management, your accounts should be organized into a hierarchy defined by layers of organizational units (OUs). Security controls can then be organized and applied to the OUs and member accounts, establishing consistent preventative controls on member accounts in the organization. The security controls are inherited, allowing you to filter permissions available to member accounts located at lower levels of an OU hierarchy. A good design takes advantage of this inheritance to reduce the number and complexity of security policies required to achieve the desired security controls for each member account.

[AWS Organizations](#) and [AWS Control Tower](#) are two services that you can use to implement and manage this multi-account structure in your AWS environment. AWS Organizations allows you to organize accounts into a hierarchy defined by one or more layers of OUs, with each OU containing a number of member accounts. [Service control policies](#) (SCPs) allow the organization administrator to establish granular preventative controls on member accounts, and [AWS Config](#) can be used to establish proactive and detective controls on member accounts. Many AWS services [integrate with AWS Organizations](#) to provide delegated administrative controls and performing service-specific tasks across all member accounts in the organization.

Layered on top of AWS Organizations, [AWS Control Tower](#) provides a one-click best practices setup for a multi-account AWS environment with a [landing zone](#). The landing zone is the entry point to the multi-account environment established by Control Tower. Control Tower provides several [benefits](#) over AWS Organizations. Three benefits that provide improved account governance are:

- Integrated mandatory security controls that are automatically applied to accounts admitted into the organization.
- Optional controls that can be turned on or off for a given set of OUs.
- [AWS Control Tower Account Factory](#) provides automated deployment of accounts containing pre-approved baselines and configuration options inside your organization.

Implementation steps

1. **Design an organizational unit structure:** A properly designed organizational unit structure reduces the management burden required to create and maintain service control policies and other security controls. Your organizational unit structure should be [aligned with your business needs, data sensitivity, and workload structure](#).
2. **Create a landing zone for your multi-account environment:** A landing zone provides a consistent security and infrastructure foundation from which your organization can quickly develop, launch, and deploy workloads. You can use a [custom-built landing zone or AWS Control Tower](#) to orchestrate your environment.
3. **Establish guardrails:** Implement consistent security guardrails for your environment through your landing zone. AWS Control Tower provides a list of [mandatory](#) and [optional](#) controls that can be deployed. Mandatory controls are automatically deployed when implementing Control Tower. Review the list of highly recommended and optional controls, and implement controls that are appropriate to your needs.
4. **Restrict access to newly added Regions:** For new AWS Regions, IAM resources such as users and roles are only propagated to the Regions that you specify. This action can be performed through the [console when using Control Tower](#), or by adjusting [IAM permission policies in AWS Organizations](#).
5. **Consider AWS [CloudFormation StackSets](#):** StackSets help you deploy resources including IAM policies, roles, and groups into different AWS accounts and Regions from an approved template.

Resources

Related best practices:

- [SEC02-BP04 Rely on a centralized identity provider \(p. 28\)](#)

Related documents:

- [AWS Control Tower](#)
- [AWS Security Audit Guidelines](#)
- [IAM Best Practices](#)
- [Use CloudFormation StackSets to provision resources across multiple AWS accounts and regions](#)
- [Organizations FAQ](#)
- [AWS Organizations terminology and concepts](#)
- [Best Practices for Service Control Policies in an AWS Organizations Multi-Account Environment](#)
- [AWS Account Management Reference Guide](#)
- [Organizing Your AWS Environment Using Multiple Accounts](#)

Related videos:

- [Enable AWS adoption at scale with automation and governance](#)
- [Security Best Practices the Well-Architected Way](#)
- [Building and Governing Multiple Accounts using AWS Control Tower](#)
- [Enable Control Tower for Existing Organizations](#)

Related workshops:

- [Control Tower Immersion Day](#)

SEC01-BP02 Secure account root user and properties

The root user is the most privileged user in an AWS account, with full administrative access to all resources within the account, and in some cases cannot be constrained by security policies. Deactivating programmatic access to the root user, establishing appropriate controls for the root user, and avoiding routine use of the root user helps reduce the risk of inadvertent exposure of the root credentials and subsequent compromise of the cloud environment.

Desired outcome: Securing the root user helps reduce the chance that accidental or intentional damage can occur through the misuse of root user credentials. Establishing detective controls can also alert the appropriate personnel when actions are taken using the root user.

Common anti-patterns:

- Using the root user for tasks other than the few that require root user credentials.
- Neglecting to test contingency plans on a regular basis to verify the functioning of critical infrastructure, processes, and personnel during an emergency.
- Only considering the typical account login flow and neglecting to consider or test alternate account recovery methods.
- Not handling DNS, email servers, and telephone providers as part of the critical security perimeter, as these are used in the account recovery flow.

Benefits of establishing this best practice: Securing access to the root user builds confidence that actions in your account are controlled and audited.

Level of risk exposed if this best practice is not established: High

Implementation guidance

AWS offers many tools to help secure your account. However, because some of these measures are not turned on by default, you must take direct action to implement them. Consider these recommendations as foundational steps to securing your AWS account. As you implement these steps it's important that you build a process to continuously assess and monitor the security controls.

When you first create an AWS account, you begin with one identity that has complete access to all AWS services and resources in the account. This identity is called the AWS account root user. You can sign in as the root user using the email address and password that you used to create the account. Due to the elevated access granted to the AWS root user, you must limit use of the AWS root user to perform tasks that [specifically require it](#). The root user login credentials must be closely guarded, and multi-factor authentication (MFA) should always be used for the AWS account root user.

In addition to the normal authentication flow to log into your root user using a username, password, and multi-factor authentication (MFA) device, there are account recovery flows to log into your AWS account root user given access to the email address and phone number associated with your account. Therefore, it is equally important to secure the root user email account where the recovery email is sent and the

phone number associated with the account. Also consider potential circular dependencies where the email address associated with the root user is hosted on email servers or domain name service (DNS) resources from the same AWS account.

When using AWS Organizations, there are multiple AWS accounts each of which have a root user. One account is designated as the management account and several layers of member accounts can then be added underneath the management account. Prioritize securing your management account's root user, then address your member account root users. The strategy for securing your management account's root user can differ from your member account root users, and you can place preventative security controls on your member account root users.

Implementation steps

The following implementation steps are recommended to establish controls for the root user. Where applicable, recommendations are cross-referenced to [CIS AWS Foundations benchmark version 1.4.0](#). In addition to these steps, consult [AWS best practice guidelines](#) for securing your AWS account and resources.

Preventative controls

1. Set up accurate [contact information](#) for the account.
 - a. This information is used for the lost password recovery flow, lost MFA device account recovery flow, and for critical security-related communications with your team.
 - b. Use an email address hosted by your corporate domain, preferably a distribution list, as the root user's email address. Using a distribution list rather than an individual's email account provides additional redundancy and continuity for access to the root account over long periods of time.
 - c. The phone number listed on the contact information should be a dedicated, secure phone for this purpose. The phone number should not be listed or shared with anyone.
2. Do not create access keys for the root user. If access keys exist, remove them (CIS 1.4).
 - a. Eliminate any long-lived programmatic credentials (access and secret keys) for the root user.
 - b. If root user access keys already exist, you should transition processes using those keys to use temporary access keys from an AWS Identity and Access Management (IAM) role, then [delete the root user access keys](#).
3. Determine if you need to store credentials for the root user.
 - a. If you are using AWS Organizations to create new member accounts, the initial password for the root user on new member accounts is set to a random value that is not exposed to you. Consider using the password reset flow from your AWS Organization management account to [gain access to the member account](#) if needed.
 - b. For standalone AWS accounts or the management AWS Organization account, consider creating and securely storing credentials for the root user. Use MFA for the root user.
4. Use preventative controls for member account root users in AWS multi-account environments.
 - a. Consider using the [Disallow Creation of Root Access Keys for the Root User](#) preventative guard rail for member accounts.
 - b. Consider using the [Disallow Actions as a Root User](#) preventative guard rail for member accounts.
5. If you need credentials for the root user:
 - a. Use a complex password.
 - b. Turn on multi-factor authentication (MFA) for the root user, especially for AWS Organizations management (payer) accounts (CIS 1.5).
 - c. Consider hardware MFA devices for resiliency and security, as single use devices can reduce the chances that the devices containing your MFA codes might be reused for other purposes. Verify that hardware MFA devices powered by a battery are replaced regularly. (CIS 1.6)
 - To configure MFA for the root user, follow the instructions for creating either a [virtual MFA](#) or [hardware MFA device](#).
 - d. Consider enrolling multiple MFA devices for backup. [Up to 8 MFA devices are allowed per account](#).

- Note that enrolling more than one MFA device for the root user automatically turns off the [flow for recovering your account if the MFA device is lost](#).
- e. Store the password securely, and consider circular dependencies if storing the password electronically. Don't store the password in such a way that would require access to the same AWS account to obtain it.
- 6. Optional: Consider establishing a periodic password rotation schedule for the root user.
 - Credential management best practices depend on your regulatory and policy requirements. Root users protected by MFA are not reliant on the password as a single factor of authentication.
 - [Changing the root user password](#) on a periodic basis reduces the risk that an inadvertently exposed password can be misused.

Detective controls

- Create alarms to detect use of the root credentials (CIS 1.7). [Amazon GuardDuty](#) can monitor and alert on root user API credential usage through the [RootCredentialUsage](#) finding.
- Evaluate and implement the detective controls included in the [AWS Well-Architected Security Pillar conformance pack for AWS Config](#), or if using AWS Control Tower, the [strongly recommended controls](#) available inside Control Tower.

Operational guidance

- Determine who in the organization should have access to the root user credentials.
 - Use a two-person rule so that no one individual has access to all necessary credentials and MFA to obtain root user access.
 - Verify that the organization, and not a single individual, maintains control over the phone number and email alias associated with the account (which are used for password reset and MFA reset flow).
- Use root user only by exception (CIS 1.7).
 - The AWS root user must not be used for everyday tasks, even administrative ones. Only log in as the root user to perform [AWS tasks that require root user](#). All other actions should be performed by other users assuming appropriate roles.
- Periodically check that access to the root user is functioning so that procedures are tested prior to an emergency situation requiring the use of the root user credentials.
- Periodically check that the email address associated with the account and those listed under [Alternate Contacts](#) work. Monitor these email inboxes for security notifications you might receive from <abuse@amazon.com>. Also ensure any phone numbers associated with the account are working.
- Prepare incident response procedures to respond to root account misuse. Refer to the [AWS Security Incident Response Guide](#) and the best practices in the [Incident Response section of the Security Pillar whitepaper](#) for more information on building an incident response strategy for your AWS account.

Resources

Related best practices:

- [SEC01-BP01 Separate workloads using accounts \(p. 7\)](#)
- [SEC02-BP01 Use strong sign-in mechanisms \(p. 20\)](#)
- [SEC03-BP02 Grant least privilege access \(p. 35\)](#)
- [SEC03-BP03 Establish emergency access process \(p. 37\)](#)
- [SEC10-BP05 Pre-provision access \(p. 93\)](#)

Related documents:

- [AWS Control Tower](#)
- [AWS Security Audit Guidelines](#)
- [IAM Best Practices](#)
- [Amazon GuardDuty – root credential usage alert](#)
- [Step-by-step guidance on monitoring for root credential use through CloudTrail](#)
- [MFA tokens approved for use with AWS](#)
- Implementing [break glass access](#) on AWS
- [Top 10 security items to improve in your AWS account](#)
- [What do I do if I notice unauthorized activity in my AWS account?](#)

Related videos:

- [Enable AWS adoption at scale with automation and governance](#)
- [Security Best Practices the Well-Architected Way](#)
- [Limiting use of AWS root credentials](#) from AWS re:inforce 2022 – Security best practices with AWS IAM

Related examples and labs:

- [Lab: AWS account setup and root user](#)

Operating your workloads securely

Operating workloads securely covers the whole lifecycle of a workload from design, to build, to run, and to ongoing improvement. One of the ways to improve your ability to operate securely in the cloud is by taking an organizational approach to governance. Governance is the way that decisions are guided consistently without depending solely on the good judgment of the people involved. Your governance model and process are the way you answer the question “How do I know that the control objectives for a given workload are met and are appropriate for that workload?” Having a consistent approach to making decisions speeds up the deployment of workloads and helps raise the bar for the security capability in your organization.

To operate your workload securely, you must apply overarching best practices to every area of security. Take requirements and processes that you have defined in operational excellence at an organizational and workload level, and apply them to all areas. Staying up to date with AWS and industry recommendations and threat intelligence helps you evolve your threat model and control objectives. Automating security processes, testing, and validation help you scale your security operations.

Automation allows consistency and repeatability of processes. People are good at many things, but consistently doing the same thing repeatedly without mistakes is not one of them. Even with well-written runbooks, you run the risk that people won’t consistently carry out repetitive tasks. This is especially true when people have diverse responsibilities and then have to respond to unfamiliar alerts. Automation, however, responds the same way each time. The best way to deploy applications is through automation. The code that runs the deployment can be tested and then used to perform the deployment. This increases confidence in the change process and reduces the risk of a failed change.

To verify that the configuration meets your control objectives, test the automation and the deployed application in a non-production environment first. This way, you can test the automation to prove that it performed all the steps correctly. You also get early feedback in the development and deployment cycle, reducing rework. To reduce the chance of deployment errors, make configuration changes by code not by people. If you need to re-deploy an application, automation makes this much easier. As you define additional control objectives, you can easily add them to the automation for all workloads.

Instead of having individual workload owners invest in security specific to their workloads, save time by using common capabilities and shared components. Some examples of services that multiple teams can consume include the AWS account creation process, centralized identity for people, common logging configuration, and AMI and container base image creation. This approach can help builders improve workload cycle times and consistently meet security control objectives. When teams are more consistent, you can validate control objectives and better report your control posture and risk position to stakeholders.

Best practices

- [SEC01-BP03 Identify and validate control objectives \(p. 13\)](#)
- [SEC01-BP04 Keep up-to-date with security threats \(p. 13\)](#)
- [SEC01-BP05 Keep up-to-date with security recommendations \(p. 14\)](#)
- [SEC01-BP06 Automate testing and validation of security controls in pipelines \(p. 15\)](#)
- [SEC01-BP07 Identify threats and prioritize mitigations using a threat model \(p. 16\)](#)
- [SEC01-BP08 Evaluate and implement new security services and features regularly \(p. 18\)](#)

SEC01-BP03 Identify and validate control objectives

Based on your compliance requirements and risks identified from your threat model, derive and validate the control objectives and controls that you need to apply to your workload. Ongoing validation of control objectives and controls help you measure the effectiveness of risk mitigation.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Identify compliance requirements: Discover the organizational, legal, and compliance requirements that your workload must comply with.
- Identify AWS compliance resources: Identify resources that AWS has available to assist you with compliance.
 - <https://aws.amazon.com/compliance/>
 - <https://aws.amazon.com/artifact/>

Resources

Related documents:

- [AWS Security Audit Guidelines](#)
- [Security Bulletins](#)

Related videos:

- [AWS Security Hub: Manage Security Alerts and Automate Compliance](#)
- [Security Best Practices the Well-Architected Way](#)

SEC01-BP04 Keep up-to-date with security threats

To help you define and implement appropriate controls, recognize attack vectors by staying up to date with the latest security threats. Consume AWS Managed Services to make it easier to receive notification of unexpected or unusual behavior in your AWS accounts. Investigate using AWS Partner tools or third-

party threat information feeds as part of your security information flow. The [Common Vulnerabilities and Exposures \(CVE\) List](#) list contains publicly disclosed cyber security vulnerabilities that you can use to stay up to date.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Subscribe to threat intelligence sources: Regularly review threat intelligence information from multiple sources that are relevant to the technologies used in your workload.
 - [Common Vulnerabilities and Exposures List](#)
- Consider [AWS Shield Advanced](#) service: It provides near real-time visibility into intelligence sources, if your workload is internet accessible.

Resources

Related documents:

- [AWS Security Audit Guidelines](#)
- [AWS Shield](#)
- [Security Bulletins](#)

Related videos:

- [Security Best Practices the Well-Architected Way](#)

SEC01-BP05 Keep up-to-date with security recommendations

Stay up-to-date with both AWS and industry security recommendations to evolve the security posture of your workload. [AWS Security Bulletins](#) contain important information about security and privacy notifications.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Follow AWS updates: Subscribe or regularly check for new recommendations, tips and tricks.
 - [AWS Well-Architected Labs](#)
 - [AWS security blog](#)
 - [AWS service documentation](#)
- Subscribe to industry news: Regularly review news feeds from multiple sources that are relevant to the technologies that are used in your workload.
 - [Example: Common Vulnerabilities and Exposures List](#)

Resources

Related documents:

- [Security Bulletins](#)

Related videos:

- [Security Best Practices the Well-Architected Way](#)

SEC01-BP06 Automate testing and validation of security controls in pipelines

Establish secure baselines and templates for security mechanisms that are tested and validated as part of your build, pipelines, and processes. Use tools and automation to test and validate all security controls continuously. For example, scan items such as machine images and infrastructure-as-code templates for security vulnerabilities, irregularities, and drift from an established baseline at each stage. AWS CloudFormation Guard can help you verify that CloudFormation templates are safe, save you time, and reduce the risk of configuration error.

Reducing the number of security misconfigurations introduced into a production environment is critical—the more quality control and reduction of defects you can perform in the build process, the better. Design continuous integration and continuous deployment (CI/CD) pipelines to test for security issues whenever possible. CI/CD pipelines offer the opportunity to enhance security at each stage of build and delivery. CI/CD security tooling must also be kept updated to mitigate evolving threats.

Track changes to your workload configuration to help with compliance auditing, change management, and investigations that may apply to you. You can use AWS Config to record and evaluate your AWS and third-party resources. It allows you to continuously audit and assess the overall compliance with rules and conformance packs, which are collections of rules with remediation actions.

Change tracking should include planned changes, which are part of your organization's change control process (sometimes referred to as MACD—Move, Add, Change, Delete), unplanned changes, and unexpected changes, such as incidents. Changes might occur on the infrastructure, but they might also be related to other categories, such as changes in code repositories, machine images and application inventory changes, process and policy changes, or documentation changes.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- Automate configuration management: Enforce and validate secure configurations automatically by using a configuration management service or tool.
 - [AWS Systems Manager](#)
 - [AWS CloudFormation](#)
 - [Set Up a CI/CD Pipeline on AWS](#)

Resources

Related documents:

- [How to use service control policies to set permission guardrails across accounts in your AWS Organization](#)

Related videos:

- [Managing Multi-Account AWS Environments Using AWS Organizations](#)
- [Security Best Practices the Well-Architected Way](#)

SEC01-BP07 Identify threats and prioritize mitigations using a threat model

Perform threat modeling to identify and maintain an up-to-date register of potential threats and associated mitigations for your workload. Prioritize your threats and adapt your security control mitigations to prevent, detect, and respond. Revisit and maintain this in the context of your workload, and the evolving security landscape.

Level of risk exposed if this best practice is not established: High

Implementation guidance

What is threat modeling?

As a definition, “Threat modeling works to identify, communicate, and understand threats and mitigations within the context of protecting something of value.” – [The Open Web Application Security Project \(OWASP\) Application Threat Modeling](#)

Why should you threat model?

Systems are complex, and are becoming increasingly more complex and capable over time, delivering more business value and increased customer satisfaction and engagement. This means that IT design decisions need to account for an ever-increasing number of use cases. This complexity and number of use-case permutations typically makes unstructured approaches ineffective for finding and mitigating threats. Instead, you need a systematic approach to enumerate the potential threats to the system, and to devise mitigations and prioritize these mitigations to make sure that the limited resources of your organization have the maximum impact in improving the overall security posture of the system.

Threat modeling is designed to provide this systematic approach, with the aim of finding and addressing issues early in the design process, when the mitigations have a low relative cost and effort compared to later in the lifecycle. This approach aligns with the industry principle of [“shift-left” security](#). Ultimately, threat modeling integrates with an organization’s risk management process and helps drive decisions on which controls to implement by using a threat driven approach.

When should threat modeling be performed?

Start threat modeling as early as possible in the lifecycle of your workload, this gives you better flexibility on what to do with the threats you have identified. Much like software bugs, the earlier you identify threats, the more cost effective it is to address them. A threat model is a living document and should continue to evolve as your workloads change. Revisit your threat models over time, including when there is a major change, a change in the threat landscape, or when you adopt a new feature or service.

Implementation steps

How can we perform threat modeling?

There are many different ways to perform threat modeling. Much like programming languages, there are advantages and disadvantages to each, and you should choose the way that works best for you. One approach is to start with [Shostack’s 4 Question Frame for Threat Modeling](#), which poses open-ended questions to provide structure to your threat modeling exercise:

1. What are working on?

The purpose of this question is to help you understand and agree upon the system you are building and the details about that system that are relevant to security. Creating a model or diagram is the most popular way to answer this question, as it helps you to visualize what you are building, for

example, using a [data flow diagram](#). Writing down assumptions and important details about your system also helps you define what is in scope. This allows everyone contributing to the threat model to focus on the same thing, and avoid time-consuming detours into out-of-scope topics (including out of date versions of your system). For example, if you are building a web application, it is probably not worth your time threat modeling the operating system trusted boot sequence for browser clients, as you have no ability to affect this with your design.

2. What can go wrong?

This is where you identify threats to your system. Threats are accidental or intentional actions or events that have unwanted impacts and could affect the security of your system. Without a clear understanding of what could go wrong, you have no way of doing anything about it.

There is no canonical list of what can go wrong. Creating this list requires brainstorming and collaboration between all of the individuals within your team and [relevant personas involved](#) in the threat modeling exercise. You can aid your brainstorming by using a model for identifying threats, such as [STRIDE](#), which suggests different categories to evaluate: Spoofing, Tampering, Repudiation, Information Disclosure, Denial of Service, and Elevation of privilege. In addition, you might want to aid the brainstorming by reviewing existing lists and research for inspiration, including the [OWASP Top 10](#), [HiTrust Threat Catalog](#), and your organization's own threat catalog.

3. What are we going to do about it?

As was the case with the previous question, there is no canonical list of all possible mitigations. The inputs into this step are the identified threats, actors, and areas of improvement from the previous step.

Security and compliance is a [shared responsibility between you and AWS](#). It's important to understand that when you ask "What are we going to do about it?", that you are also asking "Who is responsible for doing something about it?". Understanding the balance of responsibilities between you and AWS helps you scope your threat modeling exercise to the mitigations that are under your control, which are typically a combination of AWS service configuration options and your own system-specific mitigations.

For the AWS portion of the shared responsibility, you will find that [AWS services are in-scope of many compliance programs](#). These programs help you to understand the robust controls in place at AWS to maintain security and compliance of the cloud. The audit reports from these programs are available for download for AWS customers from [AWS Artifact](#).

Regardless of which AWS services you are using, there's always an element of customer responsibility, and mitigations aligned to these responsibilities should be included in your threat model. For security control mitigations for the AWS services themselves, you want to consider implementing security controls across domains, including domains such as identity and access management (authentication and authorization), data protection (at rest and in transit), infrastructure security, logging, and monitoring. The documentation for each AWS service has a [dedicated security chapter](#) that provides guidance on the security controls to consider as mitigations. Importantly, consider the code that you are writing and its code dependencies, and think about the controls that you could put in place to address those threats. These controls could be things such as [input validation](#), [session handling](#), and [bounds handling](#). Often, the majority of vulnerabilities are introduced in custom code, so focus on this area.

4. Did we do a good job?

The aim is for your team and organization to improve both the quality of threat models and the velocity at which you are performing threat modeling over time. These improvements come from a combination of practice, learning, teaching, and reviewing. To go deeper and get hands on, it's recommended that you and your team complete the [Threat modeling the right way for builders training course](#) or [workshop](#). In addition, if you are looking for guidance on how to integrate threat modeling into your organization's application development lifecycle, see [How to approach threat modeling](#) post on the AWS Security Blog.

Resources

Related best practices:

- [SEC01-BP03 Identify and validate control objectives \(p. 13\)](#)
- [SEC01-BP04 Keep up-to-date with security threats \(p. 13\)](#)
- [SEC01-BP05 Keep up-to-date with security recommendations \(p. 14\)](#)
- [SEC01-BP08 Evaluate and implement new security services and features regularly \(p. 18\)](#)

Related documents:

- [How to approach threat modeling](#) (AWS Security Blog)
- [NIST: Guide to Data-Centric System Threat Modelling](#)

Related videos:

- [AWS Summit ANZ 2021 - How to approach threat modelling](#)
- [AWS Summit ANZ 2022 - Scaling security – Optimise for fast and secure delivery](#)

Related training:

- [Threat modeling the right way for builders – AWS Skill Builder virtual self-paced training](#)
- [Threat modeling the right way for builders – AWS Workshop](#)

SEC01-BP08 Evaluate and implement new security services and features regularly

Evaluate and implement security services and features from AWS and AWS Partners that allow you to evolve the security posture of your workload. The AWS Security Blog highlights new AWS services and features, implementation guides, and general security guidance. [What's New with AWS?](#) is a great way to stay up to date with all new AWS features, services, and announcements.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- Plan regular reviews: Create a calendar of review activities that includes compliance requirements, evaluation of new AWS security features and services, and staying up-to-date with industry news.
- Discover AWS services and features: Discover the security features that are available for the services that you are using, and review new features as they are released.
 - [AWS security blog](#)
 - [AWS security bulletins](#)
 - [AWS service documentation](#)
- Define AWS service on-boarding process: Define processes for onboarding of new AWS services. Include how you evaluate new AWS services for functionality, and the compliance requirements for your workload.
- Test new services and features: Test new services and features as they are released in a non-production environment that closely replicates your production one.
- Implement other defense mechanisms: Implement automated mechanisms to defend your workload, explore the options available.

- [Remediating non-compliant AWS resources by AWS Config Rules](#)

Resources

Related videos:

- [Security Best Practices the Well-Architected Way](#)

Identity and access management

To use AWS services, you must grant your users and applications access to resources in your AWS accounts. As you run more workloads on AWS, you need robust identity management and permissions in place to ensure that the right people have access to the right resources under the right conditions. AWS offers a large selection of capabilities to help you manage your human and machine identities and their permissions. The best practices for these capabilities fall into two main areas.

Topics

- [Identity management \(p. 20\)](#)
- [Permissions management \(p. 32\)](#)

Identity management

There are two types of identities you need to manage when approaching operating secure AWS workloads.

- **Human identities:** The administrators, developers, operators, and consumers of your applications require an identity to access your AWS environments and applications. These can be members of your organization, or external users with whom you collaborate, and who interact with your AWS resources via a web browser, client application, mobile app, or interactive command-line tools.
- **Machine identities:** Your workload applications, operational tools, and components require an identity to make requests to AWS services, for example, to read data. These identities include machines running in your AWS environment, such as Amazon EC2 instances or AWS Lambda functions. You can also manage machine identities for external parties who need access. Additionally, you might also have machines outside of AWS that need access to your AWS environment.

Best practices

- [SEC02-BP01 Use strong sign-in mechanisms \(p. 20\)](#)
- [SEC02-BP02 Use temporary credentials \(p. 22\)](#)
- [SEC02-BP03 Store and use secrets securely \(p. 24\)](#)
- [SEC02-BP04 Rely on a centralized identity provider \(p. 28\)](#)
- [SEC02-BP05 Audit and rotate credentials periodically \(p. 29\)](#)
- [SEC02-BP06 Leverage user groups and attributes \(p. 31\)](#)

SEC02-BP01 Use strong sign-in mechanisms

Sign-ins (authentication using sign-in credentials) can present risks when not using mechanisms like multi-factor authentication (MFA), especially in situations where sign-in credentials have been inadvertently disclosed or are easily guessed. Use strong sign-in mechanisms to reduce these risks by requiring MFA and strong password policies.

Desired outcome: Reduce the risks of unintended access to credentials in AWS by using strong sign-in mechanisms for [AWS Identity and Access Management \(IAM\)](#) users, the [AWS account root user](#), [AWS IAM Identity Center \(successor to AWS Single Sign-On\)](#) (successor to AWS Single Sign-On), and third-party identity providers. This means requiring MFA, enforcing strong password policies, and detecting anomalous login behavior.

Common anti-patterns:

- Not enforcing a strong password policy for your identities including complex passwords and MFA.
- Sharing the same credentials among different users.
- Not using detective controls for suspicious sign-ins.

Level of risk exposed if this best practice is not established: High

Implementation guidance

There are many ways for human identities to sign-in to AWS. It is an AWS best practice to rely on a centralized identity provider using federation (direct federation or using AWS IAM Identity Center (successor to AWS Single Sign-On)) when authenticating to AWS. In that case, you should establish a secure sign-in process with your identity provider or Microsoft Active Directory.

When you first open an AWS account, you begin with an AWS account root user. You should only use the account root user to set up access for your users (and for [tasks that require the root user](#)). It's important to turn on MFA for the account root user immediately after opening your AWS account and to secure the root user using the AWS [best practice guide](#).

If you create users in AWS IAM Identity Center (successor to AWS Single Sign-On), then secure the sign-in process in that service. For consumer identities, you can use [Amazon Cognito user pools](#) and secure the sign-in process in that service, or by using one of the identity providers that Amazon Cognito user pools supports.

If you are using [AWS Identity and Access Management \(IAM\)](#) users, you would secure the sign-in process using IAM.

Regardless of the sign-in method, it's critical to enforce a strong sign-in policy.

Implementation steps

The following are general strong sign-in recommendations. The actual settings you configure should be set by your company policy or use a standard like [NIST 800-63](#).

- Require MFA. It's an [IAM best practice to require MFA](#) for human identities and workloads. Turning on MFA provides an additional layer of security requiring that users provide sign-in credentials and a one-time password (OTP) or a cryptographically verified and generated string from a hardware device.
- Enforce a minimum password length, which is a primary factor in password strength.
- Enforce password complexity to make passwords more difficult to guess.
- Allow users to change their own passwords.
- Create individual identities instead of shared credentials. By creating individual identities, you can give each user a unique set of security credentials. Individual users provide the ability to audit each user's activity.

IAM Identity Center recommendations:

- IAM Identity Center provides a predefined [password policy](#) when using the default directory that establishes password length, complexity, and reuse requirements.
- [Turn on MFA](#) and configure the context-aware or always-on setting for MFA when the identity source is the default directory, AWS Managed Microsoft AD, or AD Connector.
- Allow users to [register their own MFA devices](#).

Amazon Cognito user pools directory recommendations:

- Configure the [Password strength](#) settings.
- [Require MFA](#) for users.
- Use the Amazon Cognito user pools [advanced security settings](#) for features like [adaptive authentication](#) which can block suspicious sign-ins.

IAM user recommendations:

- Ideally you are using IAM Identity Center or direct federation. However, you might have the need for IAM users. In that case, [set a password policy](#) for IAM users. You can use the password policy to define requirements such as minimum length or whether the password requires non-alphabetic characters.
- Create an IAM policy to [enforce MFA sign-in](#) so that users are allowed to manage their own passwords and MFA devices.

Resources

Related best practices:

- [SEC02-BP03 Store and use secrets securely \(p. 24\)](#)
- [SEC02-BP04 Rely on a centralized identity provider \(p. 28\)](#)
- [SEC03-BP08 Share resources securely within your organization \(p. 43\)](#)

Related documents:

- [AWS IAM Identity Center \(successor to AWS Single Sign-On\) Password Policy](#)
- [IAM user password policy](#)
- [Setting the AWS account root user password](#)
- [Amazon Cognito password policy](#)
- [AWS credentials](#)
- [IAM security best practices](#)

Related videos:

- [Managing user permissions at scale with AWS IAM Identity Center \(successor to AWS Single Sign-On\)](#)
- [Mastering identity at every layer of the cake](#)

SEC02-BP02 Use temporary credentials

When doing any type of authentication, it's best to use temporary credentials instead of long-term credentials to reduce or eliminate risks, such as credentials being inadvertently disclosed, shared, or stolen.

Desired outcome: To reduce the risk of long-term credentials, use temporary credentials wherever possible for both human and machine identities. Long-term credentials create many risks, for example, they can be uploaded in code to public GitHub repositories. By using temporary credentials, you significantly reduce the chances of credentials becoming compromised.

Common anti-patterns:

- Developers using long-term access keys from IAM users rather than obtaining temporary credentials from the CLI using federation.

- Developers embedding long-term access keys in their code and uploading that code to public Git repositories.
- Developers embedding long-term access keys in mobile apps that are then made available in app stores.
- Users sharing long-term access keys with other users, or employees leaving the company with long-term access keys still in their possession.
- Using long-term access keys for machine identities when temporary credentials could be used.

Level of risk exposed if this best practice is not established: High

Implementation guidance

Use temporary security credentials instead of long-term credentials for all AWS API and CLI requests. API and CLI requests to AWS services must, in nearly every case, be signed using [AWS access keys](#). These requests can be signed with either temporary or long-term credentials. The only time you should use long-term credentials, also known as long-term access keys, is if you are using an [IAM user](#) or the [AWS account root user](#). When you federate to AWS or assume an [IAM role](#) through other methods, temporary credentials are generated. Even when you access the AWS Management Console using sign-in credentials, temporary credentials are generated for you to make calls to AWS services. There are few situations where you need long-term credentials and you can accomplish nearly all tasks using temporary credentials.

Avoiding the use of long-term credentials in favor of temporary credentials should go hand in hand with a strategy of reducing the usage of IAM users in favor of federation and IAM roles. While IAM users have been used for both human and machine identities in the past, we now recommend not using them to avoid the risks in using long-term access keys.

Implementation steps

For human identities like employees, administrators, developers, operators, and customers:

- You should [rely on a centralized identity provider](#) and [require human users to use federation with an identity provider to access AWS using temporary credentials](#). Federation for your users can be done either with [direct federation to each AWS account](#) or using [AWS IAM Identity Center \(successor to AWS IAM Identity Center \(successor to AWS Single Sign-On\)\)](#) and the identity provider of your choice. Federation provides a number of advantages over using IAM users in addition to eliminating long-term credentials. Your users can also request temporary credentials from the command line for [direct federation](#) or by using [IAM Identity Center](#). This means that there are few uses cases that require IAM users or long-term credentials for your users.
- When granting third parties, such as software as a service (SaaS) providers, access to resources in your AWS account, you can use [cross-account roles](#) and [resource-based policies](#).
- If you need to grant applications for consumers or customers access to your AWS resources, you can use [Amazon Cognito identity pools](#) or [Amazon Cognito user pools](#) to provide temporary credentials. The permissions for the credentials are configured through IAM roles. You can also define a separate IAM role with limited permissions for guest users who are not authenticated.

For machine identities, you might need to use long-term credentials. In these cases, you should [require workloads to use temporary credentials with IAM roles to access AWS](#).

- For [Amazon Elastic Compute Cloud](#) (Amazon EC2), you can use [roles for Amazon EC2](#).
- [AWS Lambda](#) allows you to configure a [Lambda execution role to grant the service permissions](#) to perform AWS actions using temporary credentials. There are many other similar models for AWS services to grant temporary credentials using IAM roles.

- For IoT devices, you can use the [AWS IoT Core credential provider](#) to request temporary credentials.
- For on-premises systems or systems that run outside of AWS that need access to AWS resources, you can use [IAM Roles Anywhere](#).

There are scenarios where temporary credentials are not an option and you might need to use long-term credentials. In these situations, [audit and rotate credentials periodically](#) and [rotate access keys regularly for use cases that require long-term credentials](#). Some examples that might require long-term credentials include WordPress plugins and third-party AWS clients. In situations where you must use long-term credentials, or for credentials other than AWS access keys, such as database logins, you can use a service that is designed to handle the management of secrets, such as [AWS Secrets Manager](#). Secrets Manager makes it simple to manage, rotate, and securely store encrypted secrets using [supported services](#). For more information about rotating long-term credentials, see [rotating access keys](#).

Resources

Related best practices:

- [SEC02-BP03 Store and use secrets securely \(p. 24\)](#)
- [SEC02-BP04 Rely on a centralized identity provider \(p. 28\)](#)
- [SEC03-BP08 Share resources securely within your organization \(p. 43\)](#)

Related documents:

- [Temporary Security Credentials](#)
- [AWS Credentials](#)
- [IAM Security Best Practices](#)
- [IAM Roles](#)
- [IAM Identity Center](#)
- [Identity Providers and Federation](#)
- [Rotating Access Keys](#)
- [Security Partner Solutions: Access and Access Control](#)
- [The AWS Account Root User](#)

Related videos:

- [Managing user permissions at scale with AWS IAM Identity Center \(successor to AWS Single Sign-On\)](#)
- [Mastering identity at every layer of the cake](#)

SEC02-BP03 Store and use secrets securely

A workload requires an automated capability to prove its identity to databases, resources, and third-party services. This is accomplished using secret access credentials, such as API access keys, passwords, and OAuth tokens. Using a purpose-built service to store, manage, and rotate these credentials helps reduce the likelihood that those credentials become compromised.

Desired outcome: Implementing a mechanism for securely managing application credentials that achieves the following goals:

- Identifying what secrets are required for the workload.
- Reducing the number of long-term credentials required by replacing them with short-term credentials when possible.

- Establishing secure storage and automated rotation of remaining long-term credentials.
- Auditing access to secrets that exist in the workload.
- Continual monitoring to verify that no secrets are embedded in source code during the development process.
- Reduce the likelihood of credentials being inadvertently disclosed.

Common anti-patterns:

- Not rotating credentials.
- Storing long-term credentials in source code or configuration files.
- Storing credentials at rest unencrypted.

Benefits of establishing this best practice:

- Secrets are stored encrypted at rest and in transit.
- Access to credentials is gated through an API (think of it as a *credential vending machine*).
- Access to a credential (both read and write) is audited and logged.
- Separation of concerns: credential rotation is performed by a separate component, which can be segregated from the rest of the architecture.
- Secrets are automatically distributed on-demand to software components and rotation occurs in a central location.
- Access to credentials can be controlled in a fine-grained manner.

Level of risk exposed if this best practice is not established: High

Implementation guidance

In the past, credentials used to authenticate to databases, third-party APIs, tokens, and other secrets might have been embedded in source code or in environment files. AWS provides several mechanisms to store these credentials securely, automatically rotate them, and audit their usage.

The best way to approach secrets management is to follow the guidance of remove, replace, and rotate. The most secure credential is one that you do not have to store, manage, or handle. There might be credentials that are no longer necessary to the functioning of the workload that can be safely removed.

For credentials that are still required for the proper functioning of the workload, there might be an opportunity to replace a long-term credential with a temporary or short-term credential. For example, instead of hard-coding an AWS secret access key, consider replacing that long-term credential with a temporary credential using IAM roles.

Some long-lived secrets might not be able to be removed or replaced. These secrets can be stored in a service such as [AWS Secrets Manager](#), where they can be centrally stored, managed, and rotated on a regular basis.

An audit of the workload's source code and configuration files can reveal many types of credentials. The following table summarizes strategies for handling common types of credentials:

Credential type	Description	Suggested strategy
IAM access keys	AWS IAM access and secret keys used to assume IAM roles inside of a workload	Replace: Use IAM roles assigned to the compute instances (such as Amazon EC2 or AWS Lambda) instead. For interoperability

Credential type	Description	Suggested strategy
		with third parties that require access to resources in your AWS account, ask if they support AWS cross-account access . For mobile apps, consider using temporary credentials through Amazon Cognito identity pools (federated identities) . For workloads running outside of AWS, consider IAM Roles Anywhere or AWS Systems Manager Hybrid Activations .
SSH keys	Secure Shell private keys used to log into Linux EC2 instances, manually or as part of an automated process	Replace: Use AWS Systems Manager or EC2 Instance Connect to provide programmatic and human access to EC2 instances using IAM roles.
Application and database credentials	Passwords – plain text string	Rotate: Store credentials in AWS Secrets Manager and establish automated rotation if possible.
Amazon RDS and Aurora Admin Database credentials	Passwords – plain text string	Replace: Use the Secrets Manager integration with Amazon RDS or Amazon Aurora . In addition, some RDS database types can use IAM roles instead of passwords for some use cases (for more detail, see IAM database authentication).
OAuth tokens	Secret tokens – plain text string	Rotate: Store tokens in AWS Secrets Manager and configure automated rotation.
API tokens and keys	Secret tokens – plain text string	Rotate: Store in AWS Secrets Manager and establish automated rotation if possible.

A common anti-pattern is embedding IAM access keys inside source code, configuration files, or mobile apps. When an IAM access key is required to communicate with an AWS service, use [temporary \(short-term\) security credentials](#). These short-term credentials can be provided through [IAM roles for EC2 instances](#), [execution roles](#) for Lambda functions, [Cognito IAM roles](#) for mobile user access, and [IoT Core policies](#) for IoT devices. When interfacing with third parties, prefer [delegating access to an IAM role](#) with the necessary access to your account's resources rather than configuring an IAM user and sending the third party the secret access key for that user.

There are many cases where the workload requires the storage of secrets necessary to interoperate with other services and resources. [AWS Secrets Manager](#) is purpose built to securely manage these credentials, as well as the storage, use, and rotation of API tokens, passwords, and other credentials.

AWS Secrets Manager provides five key capabilities to ensure the secure storage and handling of sensitive credentials: [encryption at rest](#), [encryption in transit](#), [comprehensive auditing](#), [fine-grained access control](#), and [extensible credential rotation](#). Other secret management services from AWS Partners or locally developed solutions that provide similar capabilities and assurances are also acceptable.

Implementation steps

1. Identify code paths containing hard-coded credentials using automated tools such as [Amazon CodeGuru](#).
 - a. Use Amazon CodeGuru to scan your code repositories. Once the review is complete, filter on Type=Secrets in CodeGuru to find problematic lines of code.
2. Identify credentials that can be removed or replaced.
 - a. Identify credentials no longer needed and mark for removal.
 - b. For AWS Secret Keys that are embedded in source code, replace them with IAM roles associated with the necessary resources. If part of your workload is outside AWS but requires IAM credentials to access AWS resources, consider [IAM Roles Anywhere](#) or [AWS Systems Manager Hybrid Activations](#).
3. For other third-party, long-lived secrets that require the use of the rotate strategy, integrate Secrets Manager into your code to retrieve third-party secrets at runtime.
 - a. The CodeGuru console can automatically [create a secret in Secrets Manager](#) using the discovered credentials.
 - b. Integrate secret retrieval from Secrets Manager into your application code.
 - i. Serverless Lambda functions can use a language-agnostic [Lambda extension](#).
 - ii. For EC2 instances or containers, AWS provides example [client-side code for retrieving secrets from Secrets Manager](#) in several popular programming languages.
4. Periodically review your code base and re-scan to verify no new secrets have been added to the code.
 - a. Consider using a tool such as [git-secrets](#) to prevent committing new secrets to your source code repository.
5. [Monitor Secrets Manager activity](#) for indications of unexpected usage, inappropriate secret access, or attempts to delete secrets.
6. Reduce human exposure to credentials. Restrict access to read, write, and modify credentials to an IAM role dedicated for this purpose, and only provide access to assume the role to a small subset of operational users.

Resources

Related best practices:

- [SEC02-BP02 Use temporary credentials \(p. 22\)](#)
- [SEC02-BP05 Audit and rotate credentials periodically \(p. 29\)](#)

Related documents:

- [Getting Started with AWS Secrets Manager](#)
- [Identity Providers and Federation](#)
- [Amazon CodeGuru Introduces Secrets Detector](#)
- [How AWS Secrets Manager uses AWS Key Management Service](#)
- [Secret encryption and decryption in Secrets Manager](#)
- [Secrets Manager blog entries](#)
- [Amazon RDS announces integration with AWS Secrets Manager](#)

Related videos:

- [Best Practices for Managing, Retrieving, and Rotating Secrets at Scale](#)
- [Find Hard-Coded Secrets Using Amazon CodeGuru Secrets Detector](#)

- [Securing Secrets for Hybrid Workloads Using AWS Secrets Manager](#)

Related workshops:

- [Store, retrieve, and manage sensitive credentials in AWS Secrets Manager](#)
- [AWS Systems Manager Hybrid Activations](#)

SEC02-BP04 Rely on a centralized identity provider

For workforce identities, rely on an identity provider that allows you to manage identities in a centralized place. This makes it easier to manage access across multiple applications and services, because you are creating, managing, and revoking access from a single location. For example, if someone leaves your organization, you can revoke access for all applications and services (including AWS) from one location. This reduces the need for multiple credentials and provides an opportunity to integrate with existing human resources (HR) processes.

For federation with individual AWS accounts, you can use centralized identities for AWS with a SAML 2.0-based provider with AWS Identity and Access Management. You can use any provider— whether hosted by you in AWS, external to AWS, or supplied by the AWS Partner—that is compatible with the [SAML 2.0](#) protocol. You can use federation between your AWS account and your chosen provider to grant a user or application access to call AWS API operations by using a SAML assertion to get temporary security credentials. Web-based single sign-on is also supported, allowing users to sign in to the AWS Management Console from your sign in website.

For federation to multiple accounts in your AWS Organizations, you can configure your identity source in [AWS IAM Identity Center \(successor to AWS Single Sign-On\) \(IAM Identity Center\)](#), and specify where your users and groups are stored. Once configured, your identity provider is your source of truth, and information can be [synchronized](#) using the System for Cross-domain Identity Management (SCIM) v2.0 protocol. You can then look up users or groups and grant them IAM Identity Center access to AWS accounts, cloud applications, or both.

IAM Identity Center integrates with AWS Organizations, which allows you to configure your identity provider once and then [grant access to existing and new accounts](#) managed in your organization. IAM Identity Center provides you with a default store, which you can use to manage your users and groups. If you choose to use the IAM Identity Center store, create your users and groups and assign their level of access to your AWS accounts and applications, keeping in mind the best practice of least privilege. Alternatively, you can choose to [Connect to Your External Identity Provider](#) using SAML 2.0, or [Connect to Your Microsoft AD Directory](#) using AWS Directory Service. Once configured, you can sign into the AWS Management Console, or the AWS mobile app, by authenticating through your central identity provider.

For managing end-users or consumers of your workloads, such as a mobile app, you can use [Amazon Cognito](#). It provides authentication, authorization, and user management for your web and mobile apps. Your users can sign in directly with sign-in credentials, or through a third party, such as Amazon, Apple, Facebook, or Google.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Centralize administrative access: Create an Identity and Access Management (IAM) identity provider entity to establish a trusted relationship between your AWS account and your identity provider (IdP). IAM supports IdPs that are compatible with OpenID Connect (OIDC) or SAML 2.0 (Security Assertion Markup Language 2.0).
 - [Identity Providers and Federation](#)
- Centralize application access: Consider Amazon Cognito for centralizing application access. It lets you add user sign-up, sign-in, and access control to your web and mobile apps quickly and easily.

[Amazon Cognito](#) scales to millions of users and supports sign-in with social identity providers, such as Facebook, Google, and Amazon, and enterprise identity providers via SAML 2.0.

- Remove old users and groups: After you start using an identity provider (IdP), remove users and groups that are no longer required.
 - [Finding unused credentials](#)
 - [Deleting an IAM group](#)

Resources

Related documents:

- [IAM Best Practices](#)
- [Security Partner Solutions: Access and Access Control](#)
- [Temporary Security Credentials](#)
- [The AWS Account Root User](#)

Related videos:

- [Best Practices for Managing, Retrieving, and Rotating Secrets at Scale](#)
- [Managing user permissions at scale with AWS IAM Identity Center \(successor to AWS Single Sign-On\)](#)
- [Mastering identity at every layer of the cake](#)

SEC02-BP05 Audit and rotate credentials periodically

Audit and rotate credentials periodically to limit how long the credentials can be used to access your resources. Long-term credentials create many risks, and these risks can be reduced by rotating long-term credentials regularly.

Desired outcome: Implement credential rotation to help reduce the risks associated with long-term credential usage. Regularly audit and remediate non-compliance with credential rotation policies.

Common anti-patterns:

- Not auditing credential use.
- Using long-term credentials unnecessarily.
- Using long-term credentials and not rotating them regularly.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

When you cannot rely on temporary credentials and require long-term credentials, audit credentials to verify that defined controls like multi-factor authentication (MFA) are enforced, rotated regularly, and have the appropriate access level.

Periodic validation, preferably through an automated tool, is necessary to verify that the correct controls are enforced. For human identities, you should require users to change their passwords periodically and retire access keys in favor of temporary credentials. As you move from AWS Identity and Access Management (IAM) users to centralized identities, you can [generate a credential report](#) to audit your users.

We also recommend that you enforce and monitor MFA in your identity provider. You can set up [AWS Config Rules](#), or use [AWS Security Hub Security Standards](#), to monitor if users have configured MFA. Consider using IAM Roles Anywhere to provide temporary credentials for machine identities. In situations when using IAM roles and temporary credentials is not possible, frequent auditing and rotating access keys is necessary.

Implementation steps

- **Regularly audit credentials:** Auditing the identities that are configured in your identity provider and IAM helps verify that only authorized identities have access to your workload. Such identities can include, but are not limited to, IAM users, AWS IAM Identity Center (successor to AWS Single Sign-On) users, Active Directory users, or users in a different upstream identity provider. For example, remove people that leave the organization, and remove cross-account roles that are no longer required. Have a process in place to periodically audit permissions to the services accessed by an IAM entity. This helps you identify the policies you need to modify to remove any unused permissions. Use credential reports and [AWS Identity and Access Management Access Analyzer](#) to audit IAM credentials and permissions. You can use [Amazon CloudWatch to set up alarms for specific API calls](#) called within your AWS environment. [Amazon GuardDuty can also alert you to unexpected activity](#), which might indicate overly permissive access or unintended access to IAM credentials.
- **Rotate credentials regularly:** When you are unable to use temporary credentials, rotate long-term IAM access keys regularly (maximum every 90 days). If an access key is unintentionally disclosed without your knowledge, this limits how long the credentials can be used to access your resources. For information about rotating access keys for IAM users, see [Rotating access keys](#).
- **Review IAM permissions:** To improve the security of your AWS account, regularly review and monitor each of your IAM policies. Verify that policies adhere to the principle of least privilege.
- **Consider automating IAM resource creation and updates:** IAM Identity Center automates many IAM tasks, such as role and policy management. Alternatively, AWS CloudFormation can be used to automate the deployment of IAM resources, including roles and policies, to reduce the chance of human error because the templates can be verified and version controlled.
- **Use IAM Roles Anywhere to replace IAM users for machine identities:** IAM Roles Anywhere allows you to use roles in areas that you traditionally could not, such as on-premise servers. IAM Roles Anywhere uses a trusted X.509 certificate to authenticate to AWS and receive temporary credentials. Using IAM Roles Anywhere avoids the need to rotate these credentials, as long-term credentials are no longer stored in your on-premises environment. Please note that you will need to monitor and rotate the X.509 certificate as it approaches expiration.

Resources

Related best practices:

- [SEC02-BP02 Use temporary credentials \(p. 22\)](#)
- [SEC02-BP03 Store and use secrets securely \(p. 24\)](#)

Related documents:

- [Getting Started with AWS Secrets Manager](#)
- [IAM Best Practices](#)
- [Identity Providers and Federation](#)
- [Security Partner Solutions: Access and Access Control](#)
- [Temporary Security Credentials](#)
- [Getting credential reports for your AWS account](#)

Related videos:

- [Best Practices for Managing, Retrieving, and Rotating Secrets at Scale](#)
- [Managing user permissions at scale with AWS IAM Identity Center \(successor to AWS Single Sign-On\)](#)
- [Mastering identity at every layer of the cake](#)

Related examples:

- [Well-Architected Lab - Automated IAM User Cleanup](#)
- [Well-Architected Lab - Automated Deployment of IAM Groups and Roles](#)

SEC02-BP06 Leverage user groups and attributes

As the number of users you manage grows, you will need to determine ways to organize them so that you can manage them at scale. Place users with common security requirements in groups defined by your identity provider, and put mechanisms in place to ensure that user attributes that may be used for access control (for example, department or location) are correct and updated. Use these groups and attributes to control access, rather than individual users. This allows you to manage access centrally by changing a user's group membership or attributes once with a [permission set](#), rather than updating many individual policies when a user's access needs change.

You can use AWS IAM Identity Center (successor to AWS Single Sign-On) (IAM Identity Center) to manage user groups and attributes. IAM Identity Center supports most commonly used attributes whether they are entered manually during user creation or automatically provisioned using a synchronization engine, such as defined in the System for Cross-Domain Identity Management (SCIM) specification.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- If you are using AWS IAM Identity Center (successor to AWS Single Sign-On) (IAM Identity Center), configure groups: IAM Identity Center provides you with the ability to configure groups of users, and assign groups the desired level of permission.
 - [AWS Single Sign-On - Manage Identities](#)
- Learn about attribute-based access control (ABAC): ABAC is an authorization strategy that defines permissions based on attributes.
 - [What Is ABAC for AWS?](#)
 - [Lab: IAM Tag Based Access Control for EC2](#)

Resources

Related documents:

- [Getting Started with AWS Secrets Manager](#)
- [IAM Best Practices](#)
- [Identity Providers and Federation](#)
- [The AWS Account Root User](#)

Related videos:

- [Best Practices for Managing, Retrieving, and Rotating Secrets at Scale](#)
- [Managing user permissions at scale with AWS IAM Identity Center \(successor to AWS Single Sign-On\)](#)

- [Mastering identity at every layer of the cake](#)

Related examples:

- [Lab: IAM Tag Based Access Control for EC2](#)

Permissions management

Manage permissions to control access to human and machine identities that require access to AWS and your workloads. Permissions control who can access what, and under what conditions. Set permissions to specific human and machine identities to grant access to specific service actions on specific resources. Additionally, specify conditions that must be true for access to be granted. For example, you can allow developers to create new Lambda functions, but only in a specific Region. When managing your AWS environments at scale, adhere to the following best practices to ensure that identities only have the access they need and nothing more.

There are a number of ways to grant access to different types of resources. One way is by using different policy types.

[Identity-based policies](#) in IAM are *managed* or *inline*, and attach to IAM identities, including users, groups, or roles. These policies let you specify what that identity can do (its permissions). Identity-based policies can be further categorized.

Managed policies – Standalone identity-based policies that you can attach to multiple users, groups, and roles in your AWS account. There are two types of managed policies:

- **AWS-managed policies** – Managed policies that are created and managed by AWS.
- **Customer-managed policies** – Managed policies that you create and manage in your AWS account. Customer-managed policies provide more precise control over your policies than AWS-managed policies.

Managed policies are the preferred method for applying permissions. However, you also can use inline policies that you add directly to a single user, group, or role. Inline policies maintain a strict one-to-one relationship between a policy and an identity. Inline policies are deleted when you delete the identity.

In most cases, you should create your own customer-managed policies following the principle of [least privilege](#).

[Resource-based policies](#) are attached to a resource. For example, an S3 bucket policy is a resource-based policy. These policies grant permission to a principal that can be in the same account as the resource or in another account. For a list of services that support resource-based policies, see [AWS services that work with IAM](#).

[Permissions boundaries](#) use a managed policy to set the maximum permissions that an administrator can set. This allows you to delegate the ability to create and manage permissions to developers, such as the creation of an IAM role, but limit the permissions they can grant so that they cannot escalate their permission using what they have created.

[Attribute-based access control \(ABAC\)](#) allows you to grant permissions based on attributes. In AWS, these are called tags. Tags can be attached to IAM principals (users or roles) and to AWS resources. Using IAM policies, administrators can create a reusable policy that applies permissions based on the attributes of the IAM principal. For example, as an administrator you can use a single IAM policy that grants developers in your organization access to AWS resources that match the developers' project tags. As the team of developers adds resources to projects, permissions are automatically applied based on attributes. As a result, no policy update is required for each new resource.

[Organizations service control policies \(SCP\)](#) define the maximum permissions for account members of an organization or organizational unit (OU). SCPs *limit* permissions that identity-based policies or resource-based policies grant to entities (users or roles) within the account, but *do not grant* permissions.

[Session policies](#) assume a role or a federated user. Pass session policies when using the AWS CLI or AWS API. Session policies to limit the permissions that the role or user's identity-based policies grant to the session. These policies *limit* permissions for a created session, but *do not grant* permissions. For more information, see [Session Policies](#).

Best practices

- [SEC03-BP01 Define access requirements \(p. 33\)](#)
- [SEC03-BP02 Grant least privilege access \(p. 35\)](#)
- [SEC03-BP03 Establish emergency access process \(p. 37\)](#)
- [SEC03-BP04 Reduce permissions continuously \(p. 38\)](#)
- [SEC03-BP05 Define permission guardrails for your organization \(p. 40\)](#)
- [SEC03-BP06 Manage access based on lifecycle \(p. 41\)](#)
- [SEC03-BP07 Analyze public and cross-account access \(p. 41\)](#)
- [SEC03-BP08 Share resources securely within your organization \(p. 43\)](#)
- [SEC03-BP09 Share resources securely with a third party \(p. 46\)](#)

SEC03-BP01 Define access requirements

Each component or resource of your workload needs to be accessed by administrators, end users, or other components. Have a clear definition of who or what should have access to each component, choose the appropriate identity type and method of authentication and authorization.

Common anti-patterns:

- Hard-coding or storing secrets in your application.
- Granting custom permissions for each user.
- Using long-lived credentials.

Level of risk exposed if this best practice is not established: High

Implementation guidance

Each component or resource of your workload needs to be accessed by administrators, end users, or other components. Have a clear definition of who or what should have access to each component, choose the appropriate identity type and method of authentication and authorization.

Regular access to AWS accounts within the organization should be provided using [federated access](#) or a centralized identity provider. You should also centralize your identity management and ensure that there is an established practice to integrate AWS access to your employee access lifecycle. For example, when an employee changes to a job role with a different access level, their group membership should also change to reflect their new access requirements.

When defining access requirements for non-human identities, determine which applications and components need access and how permissions are granted. Using IAM roles built with the least privilege access model is a recommended approach. [AWS Managed policies](#) provide predefined IAM policies that cover most common use cases.

AWS services, such as [AWS Secrets Manager](#) and [AWS Systems Manager Parameter Store](#), can help decouple secrets from the application or workload securely in cases where it's not feasible to use IAM

roles. In Secrets Manager, you can establish automatic rotation for your credentials. You can use Systems Manager to reference parameters in your scripts, commands, SSM documents, configuration, and automation workflows by using the unique name that you specified when you created the parameter.

You can use AWS Identity and Access Management Roles Anywhere to obtain [temporary security credentials in IAM](#) for workloads that run outside of AWS. Your workloads can use the same [IAM policies](#) and [IAM roles](#) that you use with AWS applications to access AWS resources.

Where possible, prefer short-term temporary credentials over long-term static credentials. For scenarios in which you need users with programmatic access and long-term credentials, use [access key last used information](#) to rotate and remove access keys.

Users need programmatic access if they want to interact with AWS outside of the AWS Management Console. The way to grant programmatic access depends on the type of user that's accessing AWS.

To grant users programmatic access, choose one of the following options.

Which user needs programmatic access?	To	By
Workforce identity (Users managed in IAM Identity Center)	Use temporary credentials to sign programmatic requests to the AWS CLI, AWS SDKs, or AWS APIs.	Following the instructions for the interface that you want to use. <ul style="list-style-type: none"> For the AWS CLI, see Configuring the AWS CLI to use AWS IAM Identity Center (successor to AWS Single Sign-On) in the <i>AWS Command Line Interface User Guide</i>. For AWS SDKs, tools, and AWS APIs, see IAM Identity Center authentication in the <i>AWS SDKs and Tools Reference Guide</i>.
IAM	Use temporary credentials to sign programmatic requests to the AWS CLI, AWS SDKs, or AWS APIs.	Following the instructions in Using temporary credentials with AWS resources in the <i>IAM User Guide</i> .
IAM	(Not recommended) Use long-term credentials to sign programmatic requests to the AWS CLI, AWS SDKs, or AWS APIs.	Following the instructions for the interface that you want to use. <ul style="list-style-type: none"> For the AWS CLI, see Authenticating using IAM user credentials in the <i>AWS Command Line Interface User Guide</i>. For AWS SDKs and tools, see Authenticate using long-term credentials in the <i>AWS SDKs and Tools Reference Guide</i>. For AWS APIs, see Managing access keys for IAM users in the <i>IAM User Guide</i>.

Resources

Related documents:

- [Attribute-based access control \(ABAC\)](#)
- [AWS IAM Identity Center \(successor to AWS Single Sign-On\)](#)
- [IAM Roles Anywhere](#)
- [AWS Managed policies for IAM Identity Center](#)
- [AWS IAM policy conditions](#)
- [IAM use cases](#)
- [Remove unnecessary credentials](#)
- [Working with Policies](#)
- [How to control access to AWS resources based on AWS account, OU, or organization](#)
- [Identify, arrange, and manage secrets easily using enhanced search in AWS Secrets Manager](#)

Related videos:

- [Become an IAM Policy Master in 60 Minutes or Less](#)
- [Separation of Duties, Least Privilege, Delegation, and CI/CD](#)
- [Streamlining identity and access management for innovation](#)

SEC03-BP02 Grant least privilege access

It's a best practice to grant only the access that identities require to perform specific actions on specific resources under specific conditions. Use group and identity attributes to dynamically set permissions at scale, rather than defining permissions for individual users. For example, you can allow a group of developers access to manage only resources for their project. This way, if a developer leaves the project, the developer's access is automatically revoked without changing the underlying access policies.

Desired outcome: Users should only have the permissions required to do their job. Users should only be given access to production environments to perform a specific task within a limited time period, and access should be revoked once that task is complete. Permissions should be revoked when no longer needed, including when a user moves onto a different project or job function. Administrator privileges should be given only to a small group of trusted administrators. Permissions should be reviewed regularly to avoid permission creep. Machine or system accounts should be given the smallest set of permissions needed to complete their tasks.

Common anti-patterns:

- Defaulting to granting users administrator permissions.
- Using the root user for day-to-day activities.
- Creating policies that are overly permissive, but without full administrator privileges.
- Not reviewing permissions to understand whether they permit least privilege access.

Level of risk exposed if this best practice is not established: High

Implementation guidance

The principle of [least privilege](#) states that identities should only be permitted to perform the smallest set of actions necessary to fulfill a specific task. This balances usability, efficiency, and security. Operating under this principle helps limit unintended access and helps track who has access to what resources. IAM

users and roles have no permissions by default. The root user has full access by default and should be tightly controlled, monitored, and used only for [tasks that require root access](#).

IAM policies are used to explicitly grant permissions to IAM roles or specific resources. For example, identity-based policies can be attached to IAM groups, while S3 buckets can be controlled by resource-based policies.

When creating an IAM policy, you can specify the service actions, resources, and conditions that must be true for AWS to allow or deny access. AWS supports a variety of conditions to help you scope down access. For example, by using the PrincipalOrgID [condition key](#), you can deny actions if the requestor isn't a part of your AWS Organization.

You can also control requests that AWS services make on your behalf, such as AWS CloudFormation creating an AWS Lambda function, using the CalledVia condition key. You should layer different policy types to establish defense-in-depth and limit the overall permissions of your users. You can also restrict what permissions can be granted and under what conditions. For example, you can allow your application teams to create their own IAM policies for systems they build, but must also apply a [Permission Boundary](#) to limit the maximum permissions the system can receive.

Implementation steps

- **Implement least privilege policies:** Assign access policies with least privilege to IAM groups and roles to reflect the user's role or function that you have defined.
- **Base policies on API usage:** One way to determine the needed permissions is to review AWS CloudTrail logs. This review allows you to create permissions tailored to the actions that the user actually performs within AWS. [IAM Access Analyzer can automatically generate an IAM policy based on activity](#). You can use IAM Access Advisor at the organization or account level to [track the last accessed information for a particular policy](#).
- **Consider using [AWS managed policies for job functions](#).** When starting to create fine-grained permissions policies, it can be difficult to know where to start. AWS has managed policies for common job roles, for example billing, database administrators, and data scientists. These policies can help narrow the access that users have while determining how to implement the least privilege policies.
- **Remove unnecessary permissions:** Remove permissions that are not needed and trim back overly permissive policies. [IAM Access Analyzer policy generation](#) can help fine-tune permissions policies.
- **Ensure that users have limited access to production environments:** Users should only have access to production environments with a valid use case. After the user performs the specific tasks that required production access, access should be revoked. Limiting access to production environments helps prevent unintended production-impacting events and lowers the scope of impact of unintended access.
- **Consider permissions boundaries:** A permissions boundary is a feature for using a managed policy that sets the maximum permissions that an identity-based policy can grant to an IAM entity. An entity's permissions boundary allows it to perform only the actions that are allowed by both its identity-based policies and its permissions boundaries.
- **Consider [resource tags](#) for permissions:** An attribute-based access control model using resource tags allows you to grant access based on resource purpose, owner, environment, or other criteria. For example, you can use resource tags to differentiate between development and production environments. Using these tags, you can restrict developers to the development environment. By combining tagging and permissions policies, you can achieve fine-grained resource access without needing to define complicated, custom policies for every job function.
- **Use [service control policies](#) for AWS Organizations.** Service control policies centrally control the maximum available permissions for member accounts in your organization. Importantly, service control policies allow you to restrict root user permissions in member accounts. Also consider using AWS Control Tower, which provides prescriptive managed controls that enrich AWS Organizations. You can also define your own controls within Control Tower.
- **Establish a user lifecycle policy for your organization:** User lifecycle policies define tasks to perform when users are onboarded onto AWS, change job role or scope, or no longer need access to AWS.

Permission reviews should be done during each step of a user's lifecycle to verify that permissions are properly restrictive and to avoid permissions creep.

- **Establish a regular schedule to review permissions and remove any unneeded permissions:** You should regularly review user access to verify that users do not have overly permissive access. [AWS Config](#) and IAM Access Analyzer can help when auditing user permissions.
- **Establish a job role matrix:** A job role matrix visualizes the various roles and access levels required within your AWS footprint. Using a job role matrix, you can define and separate permissions based on user responsibilities within your organization. Use groups instead of applying permissions directly to individual users or roles.

Resources

Related documents:

- [Grant least privilege](#)
- [Permissions boundaries for IAM entities](#)
- [Techniques for writing least privilege IAM policies](#)
- [IAM Access Analyzer makes it easier to implement least privilege permissions by generating IAM policies based on access activity](#)
- [Delegate permission management to developers by using IAM permissions boundaries](#)
- [Refining Permissions using last accessed information](#)
- [IAM policy types and when to use them](#)
- [Testing IAM policies with the IAM policy simulator](#)
- [Guardrails in AWS Control Tower](#)
- [Zero Trust architectures: An AWS perspective](#)
- [How to implement the principle of least privilege with CloudFormation StackSets](#)
- [Attribute-based access control \(ABAC\)](#)
- [Reducing policy scope by viewing user activity](#)
- [View role access](#)
- [Use Tagging to Organize Your Environment and Drive Accountability](#)
- [AWS Tagging Strategies](#)
- [Tagging AWS resources](#)

Related videos:

- [Next-generation permissions management](#)
- [Zero Trust: An AWS perspective](#)
- [How can I use permissions boundaries to limit users and roles to prevent privilege escalation?](#)

Related examples:

- [Lab: IAM permissions boundaries delegating role creation](#)
- [Lab: IAM tag based access control for EC2](#)

SEC03-BP03 Establish emergency access process

A process that allows emergency access to your workload in the unlikely event of an automated process or pipeline issue. This will help you rely on least privilege access, but ensure users can obtain the right

level of access when they require it. For example, establish a process for administrators to verify and approve their request, such as an emergency AWS cross-account role for access, or a specific process for administrators to follow to validate and approve an emergency request.

Common anti-patterns:

- Not having an emergency process in place to recover from an outage with your existing identity configuration.
- Granting long term elevated permissions for troubleshooting or recovery purposes.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

Establishing emergency access can take several forms for which you should be prepared. The first is a failure of your primary identity provider. In this case, you should rely on a second method of access with the required permissions to recover. This method could be a backup identity provider or a user. This second method should be [tightly controlled, monitored, and notify](#) in the event it is used. The emergency access identity should source from an account specific for this purpose and only have permissions to assume a role specifically designed for recovery.

You should also be prepared for emergency access where temporary elevated administrative access is needed. A common scenario is to limit mutating permissions to an automated process used for deploying changes. In the event that this process has an issue, users might need to request elevated permissions to restore functionality. In this case, establish a process where users can request elevated access and administrators can validate and approve it. The implementation plans detailing the best practice guidance for pre-provisioning access and setting up emergency, *break-glass*, roles are provided as part of [SEC10-BP05 Pre-provision access \(p. 93\)](#).

Resources

Related documents:

- [Monitor and Notify on AWS](#)
- [Managing temporary elevated access](#)

Related video:

- [Become an IAM Policy Master in 60 Minutes or Less](#)

SEC03-BP04 Reduce permissions continuously

As your teams determine what access is required, remove unneeded permissions and establish review processes to achieve least privilege permissions. Continually monitor and remove unused identities and permissions for both human and machine access.

Desired outcome: Permission policies should adhere to the least privilege principle. As job duties and roles become better defined, your permission policies need to be reviewed to remove unnecessary permissions. This approach lessens the scope of impact should credentials be inadvertently exposed or otherwise accessed without authorization.

Common anti-patterns:

- Defaulting to granting users administrator permissions.

- Creating policies that are overly permissive, but without full administrator privileges.
- Keeping permission policies after they are no longer needed.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

As teams and projects are just getting started, permissive permission policies might be used to inspire innovation and agility. For example, in a development or test environment, developers can be given access to a broad set of AWS services. We recommend that you evaluate access continuously and restrict access to only those services and service actions that are necessary to complete the current job. We recommend this evaluation for both human and machine identities. Machine identities, sometimes called system or service accounts, are identities that give AWS access to applications or servers. This access is especially important in a production environment, where overly permissive permissions can have a broad impact and potentially expose customer data.

AWS provides multiple methods to help identify unused users, roles, permissions, and credentials. AWS can also help analyze access activity of IAM users and roles, including associated access keys, and access to AWS resources such as objects in Amazon S3 buckets. AWS Identity and Access Management Access Analyzer policy generation can assist you in creating restrictive permission policies based on the actual services and actions a principal interacts with. [Attribute-based access control \(ABAC\)](#) can help simplify permissions management, as you can provide permissions to users using their attributes instead of attaching permissions policies directly to each user.

Implementation steps

- Use [AWS Identity and Access Management Access Analyzer](#): IAM Access Analyzer helps identify resources in your organization and accounts, such as Amazon Simple Storage Service (Amazon S3) buckets or IAM roles that are [shared with an external entity](#).
- Use [IAM Access Analyzer policy generation](#): IAM Access Analyzer policy generation helps you [create fine-grained permission policies based on an IAM user or role's access activity](#).
- **Determine an acceptable timeframe and usage policy for IAM users and roles:** Use the [last accessed timestamp](#) to [identify unused users and roles](#) and remove them. Review service and action last accessed information to identify and [scope permissions for specific users and roles](#). For example, you can use last accessed information to identify the specific Amazon S3 actions that your application role requires and restrict the role's access to only those actions. Last accessed information features are available in the AWS Management Console and programmatically allow you to incorporate them into your infrastructure workflows and automated tools.
- **Consider [logging data events in AWS CloudTrail](#):** By default, CloudTrail does not log data events such as Amazon S3 object-level activity (for example, `GetObject` and `DeleteObject`) or Amazon DynamoDB table activities (for example, `PutItem` and `DeleteItem`). Consider using logging for these events to determine what users and roles need access to specific Amazon S3 objects or DynamoDB table items.

Resources

Related documents:

- [Grant least privilege](#)
- [Remove unnecessary credentials](#)
- [What is AWS CloudTrail?](#)
- [Working with Policies](#)
- [Logging and monitoring DynamoDB](#)

- [Using CloudTrail event logging for Amazon S3 buckets and objects](#)
- [Getting credential reports for your AWS account](#)

Related videos:

- [Become an IAM Policy Master in 60 Minutes or Less](#)
- [Separation of Duties, Least Privilege, Delegation, and CI/CD](#)
- [AWS re:Inforce 2022 - AWS Identity and Access Management \(IAM\) deep dive](#)

SEC03-BP05 Define permission guardrails for your organization

Establish common controls that restrict access to all identities in your organization. For example, you can restrict access to specific AWS Regions, or prevent your operators from deleting common resources, such as an IAM role used for your central security team.

Common anti-patterns:

- Running workloads in your Organizational administrator account.
- Running production and non-production workloads in the same account.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

As you grow and manage additional workloads in AWS, you should separate these workloads using accounts and manage those accounts using AWS Organizations. We recommend that you establish common permission guardrails that restrict access to all identities in your organization. For example, you can restrict access to specific AWS Regions, or prevent your team from deleting common resources, such as an IAM role used by your central security team.

You can get started by implementing example service control policies, such as preventing users from turning off key services. SCPs use the IAM policy language and allow you to establish controls that all IAM principals (users and roles) adhere to. You can restrict access to specific service actions, resources and based on specific condition to meet the access control needs of your organization. If necessary, you can define exceptions to your guardrails. For example, you can restrict service actions for all IAM entities in the account except for a specific administrator role.

We recommend you avoid running workloads in your management account. The management account should be used to govern and deploy security guardrails that will affect member accounts. Some AWS services support the use of a delegated administrator account. When available, you should use this delegated account instead of the management account. You should strongly limit access to the Organizational administrator account.

Using a multi-account strategy allows you to have greater flexibility in applying guardrails to your workloads. The AWS Security Reference Architecture gives prescriptive guidance on how to design your account structure. AWS services such as AWS Control Tower provide capabilities to centrally manage both preventative and detective controls across your organization. Define a clear purpose for each account or OU within your organization and limit controls in line with that purpose.

Resources

Related documents:

- [AWS Organizations](#)
- [Service control policies \(SCPs\)](#)
- [Get more out of service control policies in a multi-account environment](#)
- [AWS Security Reference Architecture \(AWS SRA\)](#)

Related videos:

- [Enforce Preventive Guardrails using Service Control Policies](#)
- [Building governance at scale with AWS Control Tower](#)
- [AWS Identity and Access Management deep dive](#)

SEC03-BP06 Manage access based on lifecycle

Integrate access controls with operator and application lifecycle and your centralized federation provider. For example, remove a user's access when they leave the organization or change roles.

As you manage workloads using separate accounts, there will be cases where you need to share resources between those accounts. We recommend that you share resources using [AWS Resource Access Manager \(AWS RAM\)](#). This service allows you to easily and securely share AWS resources within your AWS Organizations and Organizational Units. Using AWS RAM, access to shared resources is automatically granted or revoked as accounts are moved in and out of the Organization or Organization Unit with which they are shared. This helps ensure that resources are only shared with the accounts that you intend.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

Implement a user access lifecycle policy for new users joining, job function changes, and users leaving so that only current users have access.

Resources

Related documents:

- [Attribute-based access control \(ABAC\)](#)
- [Grant least privilege](#)
- [IAM Access Analyzer](#)
- [Remove unnecessary credentials](#)
- [Working with Policies](#)

Related videos:

- [Become an IAM Policy Master in 60 Minutes or Less](#)
- [Separation of Duties, Least Privilege, Delegation, and CI/CD](#)

SEC03-BP07 Analyze public and cross-account access

Continually monitor findings that highlight public and cross-account access. Reduce public access and cross-account access to only the specific resources that require this access.

Desired outcome: Know which of your AWS resources are shared and with whom. Continually monitor and audit your shared resources to verify they are shared with only authorized principals.

Common anti-patterns:

- Not keeping an inventory of shared resources.
- Not following a process for approval of cross-account or public access to resources.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

If your account is in AWS Organizations, you can grant access to resources to the entire organization, specific organizational units, or individual accounts. If your account is not a member of an organization, you can share resources with individual accounts. You can grant direct cross-account access using resource-based policies — for example, [Amazon Simple Storage Service \(Amazon S3\) bucket policies](#) — or by allowing a principal in another account to assume an IAM role in your account. When using resource policies, verify that access is only granted to authorized principals. Define a process to approve all resources which are required to be publicly available.

[AWS Identity and Access Management Access Analyzer](#) uses [provable security](#) to identify all access paths to a resource from outside of its account. It reviews resource policies continuously, and reports findings of public and cross-account access to make it simple for you to analyze potentially broad access. Consider configuring IAM Access Analyzer with AWS Organizations to verify that you have visibility to all your accounts. IAM Access Analyzer also allows you to [preview findings](#) before deploying resource permissions. This allows you to validate that your policy changes grant only the intended public and cross-account access to your resources. When designing for multi-account access, you can use [trust policies](#) to control in what cases a role can be assumed. For example, you could use the [PrincipalOrgId condition key to deny an attempt to assume a role from outside your AWS Organizations](#).

[AWS Config can report resources](#) that are misconfigured, and through AWS Config policy checks, can detect resources that have public access configured. Services such as [AWS Control Tower](#) and [AWS Security Hub](#) simplify deploying detective controls and guardrails across AWS Organizations to identify and remediate publicly exposed resources. For example, AWS Control Tower has a managed guardrail which can detect if any [Amazon EBS snapshots are restorable by AWS accounts](#).

Implementation steps

- **Consider using [AWS Config for AWS Organizations](#):** AWS Config allows you to aggregate findings from multiple accounts within an AWS Organizations to a delegated administrator account. This provides a comprehensive view, and allows you to [deploy AWS Config Rules across accounts to detect publicly accessible resources](#).
- **Configure AWS Identity and Access Management Access Analyzer** IAM Access Analyzer helps you identify resources in your organization and accounts, such as Amazon S3 buckets or IAM roles that are [shared with an external entity](#).
- **Use auto-remediation in AWS Config to respond to changes in public access configuration of Amazon S3 buckets:** [You can automatically turn on the block public access settings for Amazon S3 buckets](#).
- **Implement monitoring and alerting to identify if Amazon S3 buckets have become public:** You must have [monitoring and alerting](#) in place to identify when Amazon S3 Block Public Access is turned off, and if Amazon S3 buckets become public. Additionally, if you are using AWS Organizations, you can create a [service control policy](#) that prevents changes to Amazon S3 public access policies. AWS Trusted Advisor checks for Amazon S3 buckets that have open access permissions. Bucket permissions that grant, upload, or delete access to everyone create potential security issues by allowing anyone

to add, modify, or remove items in a bucket. The Trusted Advisor check examines explicit bucket permissions and associated bucket policies that might override the bucket permissions. You also can use AWS Config to monitor your Amazon S3 buckets for public access. For more information, see [How to Use AWS Config to Monitor for and Respond to Amazon S3 Buckets Allowing Public Access](#). While reviewing access, it's important to consider what types of data are contained in Amazon S3 buckets. [Amazon Macie](#) helps discover and protect sensitive data, such as PII, PHI, and credentials, such as private or AWS keys.

Resources

Related documents:

- [Using AWS Identity and Access Management Access Analyzer](#)
- [AWS Control Tower controls library](#)
- [AWS Foundational Security Best Practices standard](#)
- [AWS Config Managed Rules](#)
- [AWS Trusted Advisor check reference](#)
- [Monitoring AWS Trusted Advisor check results with Amazon EventBridge](#)
- [Managing AWS Config Rules Across All Accounts in Your Organization](#)
- [AWS Config and AWS Organizations](#)

Related videos:

- [Best Practices for securing your multi-account environment](#)
- [Dive Deep into IAM Access Analyzer](#)

SEC03-BP08 Share resources securely within your organization

As the number of workloads grows, you might need to share access to resources in those workloads or provision the resources multiple times across multiple accounts. You might have constructs to compartmentalize your environment, such as having development, testing, and production environments. However, having separation constructs does not limit you from being able to share securely. By sharing components that overlap, you can reduce operational overhead and allow for a consistent experience without guessing what you might have missed while creating the same resource multiple times.

Desired outcome: Minimize unintended access by using secure methods to share resources within your organization, and help with your data loss prevention initiative. Reduce your operational overhead compared to managing individual components, reduce errors from manually creating the same component multiple times, and increase your workloads' scalability. You can benefit from decreased time to resolution in multi-point failure scenarios, and increase your confidence in determining when a component is no longer needed. For prescriptive guidance on analyzing externally shared resources, see [SEC03-BP07 Analyze public and cross-account access \(p. 41\)](#).

Common anti-patterns:

- Lack of process to continually monitor and automatically alert on unexpected external share.
- Lack of baseline on what should be shared and what should not.
- Defaulting to a broadly open policy rather than sharing explicitly when required.

- Manually creating foundational resources that overlap when required.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

Architect your access controls and patterns to govern the consumption of shared resources securely and only with trusted entities. Monitor shared resources and review shared resource access continuously, and be alerted on inappropriate or unexpected sharing. Review [Analyze public and cross-account access](#) to help you establish governance to reduce the external access to only resources that require it, and to establish a process to monitor continuously and alert automatically.

Cross-account sharing within AWS Organizations is supported by [a number of AWS services](#), such as [AWS Security Hub](#), [Amazon GuardDuty](#), and [AWS Backup](#). These services allow for data to be shared to a central account, be accessible from a central account, or manage resources and data from a central account. For example, AWS Security Hub can transfer findings from individual accounts to a central account where you can view all the findings. AWS Backup can take a backup for a resource and share it across accounts. You can use [AWS Resource Access Manager](#) (AWS RAM) to share other common resources, such as [VPC subnets and Transit Gateway attachments](#), [AWS Network Firewall](#), or [Amazon SageMaker pipelines](#).

To restrict your account to only share resources within your organization, use [service control policies \(SCPs\)](#) to prevent access to external principals. When sharing resources, combine identity-based controls and network controls to [create a data perimeter for your organization](#) to help protect against unintended access. A data perimeter is a set of preventive guardrails to help verify that only your trusted identities are accessing trusted resources from expected networks. These controls place appropriate limits on what resources can be shared and prevent sharing or exposing resources that should not be allowed. For example, as a part of your data perimeter, you can use VPC endpoint policies and the `AWS:PrincipalOrgId` condition to ensure the identities accessing your Amazon S3 buckets belong to your organization. It is important to note that [SCPs do not apply to service-linked roles or AWS service principals](#).

When using Amazon S3, [turn off ACLs for your Amazon S3 bucket](#) and use IAM policies to define access control. For [restricting access to an Amazon S3 origin](#) from [Amazon CloudFront](#), migrate from origin access identity (OAI) to origin access control (OAC) which supports additional features including server-side encryption with [AWS Key Management Service](#).

In some cases, you might want to allow sharing resources outside of your organization or grant a third party access to your resources. For prescriptive guidance on managing permissions to share resources externally, see [Permissions management](#).

Implementation steps

1. Use AWS Organizations.

AWS Organizations is an account management service that allows you to consolidate multiple AWS accounts into an organization that you create and centrally manage. You can group your accounts into organizational units (OUs) and attach different policies to each OU to help you meet your budgetary, security, and compliance needs. You can also control how AWS artificial intelligence (AI) and machine learning (ML) services can collect and store data, and use the multi-account management of the AWS services integrated with Organizations.

2. Integrate AWS Organizations with AWS services.

When you use an AWS service to perform tasks on your behalf in the member accounts of your organization, AWS Organizations creates an IAM service-linked role (SLR) for that service in each member account. You should manage trusted access using the AWS Management Console, the AWS APIs, or the AWS CLI. For prescriptive guidance on turning on trusted access, see [Using AWS Organizations with other AWS services](#) and [AWS services that you can use with Organizations](#).

3. Establish a data perimeter.

The AWS perimeter is typically represented as an organization managed by AWS Organizations. Along with on-premises networks and systems, accessing AWS resources is what many consider as the perimeter of My AWS. The goal of the perimeter is to verify that access is allowed if the identity is trusted, the resource is trusted, and the network is expected.

a. Define and implement the perimeters.

Follow the steps described in [Perimeter implementation](#) in the Building a Perimeter on AWS whitepaper for each authorization condition. For prescriptive guidance on protecting network layer, see [Protecting networks](#).

b. Monitor and alert continually.

[AWS Identity and Access Management Access Analyzer](#) helps identify resources in your organization and accounts that are shared with external entities. You can integrate [IAM Access Analyzer with AWS Security Hub](#) to send and aggregate findings for a resource from IAM Access Analyzer to Security Hub to help analyze the security posture of your environment. To integrate, turn on both IAM Access Analyzer and Security Hub in each Region in each account. You can also use AWS Config Rules to audit configuration and alert the appropriate party using [AWS Chatbot with AWS Security Hub](#). You can then use [AWS Systems Manager Automation documents](#) to remediate noncompliant resources.

c. For prescriptive guidance on monitoring and alerting continuously on resources shared externally, see [Analyze public and cross-account access](#).

4. Use resource sharing in AWS services and restrict accordingly.

Many AWS services allow you to share resources with another account, or target a resource in another account, such as [Amazon Machine Images \(AMIs\)](#) and [AWS Resource Access Manager \(AWS RAM\)](#). Restrict the `ModifyImageAttribute` API to specify the trusted accounts to share the AMI with. Specify the `ram:RequestedAllowsExternalPrincipals` condition when using AWS RAM to constrain sharing to your organization only, to help prevent access from untrusted identities. For prescriptive guidance and considerations, see [Resource sharing and external targets](#).

5. Use AWS RAM to share securely in an account or with other AWS accounts.

[AWS RAM](#) helps you securely share the resources that you have created with roles and users in your account and with other AWS accounts. In a multi-account environment, AWS RAM allows you to create a resource once and share it with other accounts. This approach helps reduce your operational overhead while providing consistency, visibility, and auditability through integrations with Amazon CloudWatch and AWS CloudTrail, which you do not receive when using cross-account access.

If you have resources that you shared previously using a resource-based policy, you can use the [PromoteResourceShareCreatedFromPolicy API](#) or an equivalent to promote the resource share to a full AWS RAM resource share.

In some cases, you might need to take additional steps to share resources. For example, to share an encrypted snapshot, you need to [share a AWS KMS key](#).

Resources

Related best practices:

- [SEC03-BP07 Analyze public and cross-account access \(p. 41\)](#)
- [SEC03-BP09 Share resources securely with a third party \(p. 46\)](#)
- [SEC05-BP01 Create network layers \(p. 58\)](#)

Related documents:

- [Bucket owner granting cross-account permission to objects it does not own](#)
- [How to use Trust Policies with IAM](#)
- [Building Data Perimeter on AWS](#)
- [How to use an external ID when granting a third party access to your AWS resources](#)
- [AWS services you can use with AWS Organizations](#)
- [Establishing a data perimeter on AWS: Allow only trusted identities to access company data](#)

Related videos:

- [Granular Access with AWS Resource Access Manager](#)
- [Securing your data perimeter with VPC endpoints](#)
- [Establishing a data perimeter on AWS](#)

Related tools:

- [Data Perimeter Policy Examples](#)

SEC03-BP09 Share resources securely with a third party

The security of your cloud environment doesn't stop at your organization. Your organization might rely on a third party to manage a portion of your data. The permission management for the third-party managed system should follow the practice of just-in-time access using the principle of least privilege with temporary credentials. By working closely with a third party, you can reduce the scope of impact and risk of unintended access together.

Desired outcome: Long-term AWS Identity and Access Management (IAM) credentials, IAM access keys, and secret keys that are associated with a user can be used by anyone as long as the credentials are valid and active. Using an IAM role and temporary credentials helps you improve your overall security stance by reducing the effort to maintain long-term credentials, including the management and operational overhead of those sensitive details. By using a universally unique identifier (UUID) for the external ID in the IAM trust policy, and keeping the IAM policies attached to the IAM role under your control, you can audit and verify that the access granted to the third party is not too permissive. For prescriptive guidance on analyzing externally shared resources, see [SEC03-BP07 Analyze public and cross-account access \(p. 41\)](#).

Common anti-patterns:

- Using the default IAM trust policy without any conditions.
- Using long-term IAM credentials and access keys.
- Reusing external IDs.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

You might want to allow sharing resources outside of AWS Organizations or grant a third party access to your account. For example, a third party might provide a monitoring solution that needs to access resources within your account. In those cases, create an IAM cross-account role with only the privileges needed by the third party. Additionally, define a trust policy using the [external ID condition](#). When using an external ID, you or the third party can generate a unique ID for each customer, third party, or tenancy.

The unique ID should not be controlled by anyone but you after it's created. The third party must implement a process to relate the external ID to the customer in a secure, auditable, and reproduceable manner.

You can also use [IAM Roles Anywhere](#) to manage IAM roles for applications outside of AWS that use AWS APIs.

If the third party no longer requires access to your environment, remove the role. Avoid providing long-term credentials to a third party. Maintain awareness of other AWS services that support sharing. For example, the AWS Well-Architected Tool allows [sharing a workload](#) with other AWS accounts, and [AWS Resource Access Manager](#) helps you securely share an AWS resource you own with other accounts.

Implementation steps

1. Use cross-account roles to provide access to external accounts.

[Cross-account roles](#) reduce the amount of sensitive information that is stored by external accounts and third parties for servicing their customers. Cross-account roles allow you to grant access to AWS resources in your account securely to a third party, such as AWS Partners or other accounts in your organization, while maintaining the ability to manage and audit that access.

The third party might be providing service to you from a hybrid infrastructure or alternatively pulling data into an offsite location. [IAM Roles Anywhere](#) helps you allow third party workloads to securely interact with your AWS workloads and further reduce the need for long-term credentials.

You should not use long-term credentials, or access keys associated with users, to provide external account access. Instead, use cross-account roles to provide the cross-account access.

2. Use an external ID with third parties.

Using an [external ID](#) allows you to designate who can assume a role in an IAM trust policy. The trust policy can require that the user assuming the role assert the condition and target in which they are operating. It also provides a way for the account owner to permit the role to be assumed only under specific circumstances. The primary function of the external ID is to address and prevent the [confused deputy](#) problem.

Use an external ID if you are an AWS account owner and you have configured a role for a third party that accesses other AWS accounts in addition to yours, or when you are in the position of assuming roles on behalf of different customers. Work with your third party or AWS Partner to establish an external ID condition to include in IAM trust policy.

3. Use universally unique external IDs.

Implement a process that generates random unique value for an external ID, such as a universally unique identifier (UUID). A third party reusing external IDs across different customers does not address the confused deputy problem, because customer A might be able to view data of customer B by using the role ARN of customer B along with the duplicated external ID. In a multi-tenant environment, where a third party supports multiple customers with different AWS accounts, the third party must use a different unique ID as the external ID for each AWS account. The third party is responsible for detecting duplicate external IDs and securely mapping each customer to their respective external ID. The third party should test to verify that they can only assume the role when specifying the external ID. The third party should refrain from storing the customer role ARN and the external ID until the external ID is required.

The external ID is not treated as a secret, but the external ID must not be an easily guessable value, such as a phone number, name, or account ID. Make the external ID a read-only field so that the external ID cannot be changed for the purpose of impersonating the setup.

You or the third party can generate the external ID. Define a process to determine who is responsible for generating the ID. Regardless of the entity creating the external ID, the third party enforces uniqueness and formats consistently across customers.

4. Deprecate customer-provided long-term credentials.

Deprecate the use of long-term credentials and use cross-account roles or IAM Roles Anywhere. If you must use long-term credentials, establish a plan to migrate to role-based access. For details on managing keys, see [Identity Management](#). Also work with your AWS account team and the third party to establish risk mitigation runbook. For prescriptive guidance on responding to and mitigating the potential impact of security incident, see [Incident response](#).

5. Verify that setup has prescriptive guidance or is automated.

The policy created for cross-account access in your accounts must follow the [least-privilege principle](#). The third party must provide a role policy document or automated setup mechanism that uses an AWS CloudFormation template or an equivalent for you. This reduces the chance of errors associated with manual policy creation and offers an auditable trail. For more information on using a AWS CloudFormation template to create cross-account roles, see [Cross-Account Roles](#).

The third party should provide an automated, auditable setup mechanism. However, by using the role policy document outlining the access needed, you should automate the setup of the role. Using a AWS CloudFormation template or equivalent, you should monitor for changes with drift detection as part of the audit practice.

6. Account for changes.

Your account structure, your need for the third party, or their service offering being provided might change. You should anticipate changes and failures, and plan accordingly with the right people, process, and technology. Audit the level of access you provide on a periodic basis, and implement detection methods to alert you to unexpected changes. Monitor and audit the use of the role and the datastore of the external IDs. You should be prepared to revoke third-party access, either temporarily or permanently, as a result of unexpected changes or access patterns. Also, measure the impact to your revocation operation, including the time it takes to perform, the people involved, the cost, and the impact to other resources.

For prescriptive guidance on detection methods, see the [Detection best practices](#).

Resources

Related best practices:

- [SEC02-BP02 Use temporary credentials \(p. 22\)](#)
- [SEC03-BP05 Define permission guardrails for your organization \(p. 40\)](#)
- [SEC03-BP06 Manage access based on lifecycle \(p. 41\)](#)
- [SEC03-BP07 Analyze public and cross-account access \(p. 41\)](#)
- [SEC04 Detection](#)

Related documents:

- [Bucket owner granting cross-account permission to objects it does not own](#)
- [How to use trust policies with IAM roles](#)
- [Delegate access across AWS accounts using IAM roles](#)
- [How do I access resources in another AWS account using IAM?](#)
- [Security best practices in IAM](#)
- [Cross-account policy evaluation logic](#)
- [How to use an external ID when granting access to your AWS resources to a third party](#)
- [Collecting Information from AWS CloudFormation Resources Created in External Accounts with Custom Resources](#)

- [Securely Using External ID for Accessing AWS Accounts Owned by Others](#)
- [Extend IAM roles to workloads outside of IAM with IAM Roles Anywhere](#)

Related videos:

- [How do I allow users or roles in a separate AWS account access to my AWS account?](#)
- [AWS re:Invent 2018: Become an IAM Policy Master in 60 Minutes or Less](#)
- [AWS Knowledge Center Live: IAM Best Practices and Design Decisions](#)

Related examples:

- [Well-Architected Lab - Lambda cross account IAM role assumption \(Level 300\)](#)
- [Configure cross-account access to Amazon DynamoDB](#)
- [AWS STS Network Query Tool](#)

Detection

Detection consists of two parts: detection of unexpected or unwanted configuration changes, and the detection of unexpected behavior. The first can take place at multiple places in an application delivery lifecycle. Using infrastructure as code (for example, a CloudFormation template), you can check for unwanted configuration before a workload is deployed by implementing checks in the CI/CD pipelines or source control. Then, as you deploy a workload into non-production and production environments, you can check configuration using native AWS, open source, or AWS Partner tools. These checks can be for configuration that does not meet security principles or best practices, or for changes that were made between a tested and deployed configuration. For a running application, you can check whether the configuration has been changed in an unexpected fashion, including outside of a known deployment or automated scaling event.

For the second part of detection, unexpected behavior, you can use tools or by alerting on an increase in a particular type of API call. Using Amazon GuardDuty, you can be alerted when unexpected and potentially unauthorized or malicious activity occurs within your AWS accounts. You should also explicitly monitor for mutating API calls that you would not expect to be used in your workload, and API calls that change the security posture.

Detection allows you to identify a potential security misconfiguration, threat, or unexpected behavior. It's an essential part of the security lifecycle and can be used to support a quality process, a legal or compliance obligation, and for threat identification and response efforts. There are different types of detection mechanisms. For example, logs from your workload can be analyzed for exploits that are being used. You should regularly review the detection mechanisms related to your workload to ensure that you are meeting internal and external policies and requirements. Automated alerting and notifications should be based on defined conditions to allow your teams or tools to investigate. These mechanisms are important reactive factors that can help your organization identify and understand the scope of anomalous activity.

In AWS, there are a number of approaches you can use when addressing detective mechanisms. The following sections describe how to use these approaches:

Best practices

- [SEC04-BP01 Configure service and application logging \(p. 50\)](#)
- [SEC04-BP02 Analyze logs, findings, and metrics centrally \(p. 53\)](#)
- [SEC04-BP03 Automate response to events \(p. 55\)](#)
- [SEC04-BP04 Implement actionable security events \(p. 56\)](#)

SEC04-BP01 Configure service and application logging

Retain security event logs from services and applications. This is a fundamental principle of security for audit, investigations, and operational use cases, and a common security requirement driven by governance, risk, and compliance (GRC) standards, policies, and procedures.

Desired outcome: An organization should be able to reliably and consistently retrieve security event logs from AWS services and applications in a timely manner when required to fulfill an internal process or obligation, such as a security incident response. Consider centralizing logs for better operational results.

Common anti-patterns:

- Logs are stored in perpetuity or deleted too soon.
- Everybody can access logs.
- Relying entirely on manual processes for log governance and use.
- Storing every single type of log just in case it is needed.
- Checking log integrity only when necessary.

Benefits of establishing this best practice: Implement a root cause analysis (RCA) mechanism for security incidents and a source of evidence for your governance, risk, and compliance obligations.

Level of risk exposed if this best practice is not established: High

Implementation guidance

During a security investigation or other use cases based on your requirements, you need to be able to review relevant logs to record and understand the full scope and timeline of the incident. Logs are also required for alert generation, indicating that certain actions of interest have happened. It is critical to select, turn on, store, and set up querying and retrieval mechanisms and alerting.

Implementation steps

- **Select and use log sources.** Ahead of a security investigation, you need to capture relevant logs to retroactively reconstruct activity in an AWS account. Select log sources relevant to your workloads.

The log source selection criteria should be based on the use cases required by your business. Establish a trail for each AWS account using AWS CloudTrail or an AWS Organizations trail, and configure an Amazon S3 bucket for it.

AWS CloudTrail is a logging service that tracks API calls made against an AWS account capturing AWS service activity. It's turned on by default with a 90-day retention of management events that can be [retrieved through CloudTrail Event history](#) using the AWS Management Console, the AWS CLI, or an AWS SDK. For longer retention and visibility of data events, [create a CloudTrail trail](#) and associate it with an Amazon S3 bucket, and optionally with a Amazon CloudWatch log group. Alternatively, you can create a [CloudTrail Lake](#), which retains CloudTrail logs for up to seven years and provides a SQL-based querying facility

AWS recommends that customers using a VPC turn on network traffic and DNS logs using [VPC Flow Logs](#) and [Amazon Route 53 resolver query logs](#), respectively, and streaming them to either an Amazon S3 bucket or a CloudWatch log group. You can create a VPC flow log for a VPC, a subnet, or a network interface. For VPC Flow Logs, you can be selective on how and where you use Flow Logs to reduce cost.

AWS CloudTrail Logs, VPC Flow Logs, and Route 53 resolver query logs are the basic logging sources to support security investigations in AWS. You can also use [Amazon Security Lake](#) to collect, normalize, and store this log data in Apache Parquet format and Open Cybersecurity Schema Framework (OCSF), which is ready for querying. Security Lake also supports other AWS logs and logs from third-party sources.

AWS services can generate logs not captured by the basic log sources, such as Elastic Load Balancing logs, AWS WAF logs, AWS Config recorder logs, Amazon GuardDuty findings, Amazon Elastic Kubernetes Service (Amazon EKS) audit logs, and Amazon EC2 instance operating system and application logs. For a full list of logging and monitoring options, see [Appendix A: Cloud capability definitions – Logging and Events](#) of the [AWS Security Incident Response Guide](#).

- **Research logging capabilities for each AWS service and application:** Each AWS service and application provides you with options for log storage, each of which with its own retention and life-cycle capabilities. The two most common log storage services are Amazon Simple Storage Service

(Amazon S3) and Amazon CloudWatch. For long retention periods, it is recommended to use Amazon S3 for its cost effectiveness and flexible lifecycle capabilities. If the primary logging option is Amazon CloudWatch Logs, as an option, you should consider archiving less frequently accessed logs to Amazon S3.

- **Select log storage:** The choice of log storage is generally related to which querying tool you use, retention capabilities, familiarity, and cost. The main options for log storage are an Amazon S3 bucket or a CloudWatch Log group.

An Amazon S3 bucket provides cost-effective, durable storage with an optional lifecycle policy. Logs stored in Amazon S3 buckets can be queried using services such as Amazon Athena.

A CloudWatch log group provides durable storage and a built-in query facility through CloudWatch Logs Insights.

- **Identify appropriate log retention:** When you use an Amazon S3 bucket or CloudWatch log group to store logs, you must establish adequate lifecycles for each log source to optimize storage and retrieval costs. Customers generally have between three months to one year of logs readily available for querying, with retention of up to seven years. The choice of availability and retention should align with your security requirements and a composite of statutory, regulatory, and business mandates.
- **Use logging for each AWS service and application with proper retention and lifecycle policies:** For each AWS service or application in your organization, look for the specific logging configuration guidance:
 - [Configure AWS CloudTrail Trail](#)
 - [Configure VPC Flow Logs](#)
 - [Configure Amazon GuardDuty Finding Export](#)
 - [Configure AWS Config recording](#)
 - [Configure AWS WAF web ACL traffic](#)
 - [Configure AWS Network Firewall network traffic logs](#)
 - [Configure Elastic Load Balancing access logs](#)
 - [Configure Amazon Route 53 resolver query logs](#)
 - [Configure Amazon RDS logs](#)
 - [Configure Amazon EKS Control Plane logs](#)
 - [Configure Amazon CloudWatch agent for Amazon EC2 instances and on-premises servers](#)
- **Select and implement querying mechanisms for logs:** For log queries, you can use [CloudWatch Logs Insights](#) for data stored in CloudWatch log groups, and [Amazon Athena](#) and [Amazon OpenSearch Service](#) for data stored in Amazon S3. You can also use third-party querying tools such as a security information and event management (SIEM) service.

The process for selecting a log querying tool should consider the people, process, and technology aspects of your security operations. Select a tool that fulfills operational, business, and security requirements, and is both accessible and maintainable in the long term. Keep in mind that log querying tools work optimally when the number of logs to be scanned is kept within the tool's limits. It is not uncommon to have multiple querying tools because of cost or technical constraints.

For example, you might use a third-party security information and event management (SIEM) tool to perform queries for the last 90 days of data, but use Athena to perform queries beyond 90 days because of the log ingestion cost of a SIEM. Regardless of the implementation, verify that your approach minimizes the number of tools required to maximize operational efficiency, especially during a security event investigation.

- **Use logs for alerting:** AWS provides alerting through several security services:
 - [AWS Config](#) monitors and records your AWS resource configurations and allows you to automate the evaluation and remediation against desired configurations.
 - [Amazon GuardDuty](#) is a threat detection service that continually monitors for malicious activity and unauthorized behavior to protect your AWS accounts and workloads. GuardDuty ingests,

aggregates, and analyzes information from sources, such as AWS CloudTrail management and data events, DNS logs, VPC Flow Logs, and Amazon EKS Audit logs. GuardDuty pulls independent data streams directly from CloudTrail, VPC Flow Logs, DNS query logs, and Amazon EKS. You don't have to manage Amazon S3 bucket policies or modify the way you collect and store logs. It is still recommended to retain these logs for your own investigation and compliance purposes.

- [AWS Security Hub](#) provides a single place that aggregates, organizes, and prioritizes your security alerts or findings from multiple AWS services and optional third-party products to give you a comprehensive view of security alerts and compliance status.

You can also use custom alert generation engines for security alerts not covered by these services or for specific alerts relevant to your environment. For information on building these alerts and detections, see [Detection in the AWS Security Incident Response Guide](#).

Resources

Related best practices:

- [SEC04-BP02 Analyze logs, findings, and metrics centrally \(p. 53\)](#)
- [SEC07-BP04 Define data lifecycle management \(p. 76\)](#)
- [SEC10-BP06 Pre-deploy tools \(p. 95\)](#)

Related documents:

- [AWS Security Incident Response Guide](#)
- [Getting Started with Amazon Security Lake](#)
- [Getting started: Amazon CloudWatch Logs](#)
- [Security Partner Solutions: Logging and Monitoring](#)

Related videos:

- [AWS re:Invent 2022 - Introducing Amazon Security Lake](#)

Related examples:

- [Assisted Log Enabler for AWS](#)
- [AWS Security Hub Findings Historical Export](#)

Related tools:

- [Snowflake for Cybersecurity](#)

SEC04-BP02 Analyze logs, findings, and metrics centrally

Security operations teams rely on the collection of logs and the use of search tools to discover potential events of interest, which might indicate unauthorized activity or unintentional change. However, simply analyzing collected data and manually processing information is insufficient to keep up with the volume of information flowing from complex architectures. Analysis and reporting alone don't facilitate the assignment of the right resources to work an event in a timely fashion.

A best practice for building a mature security operations team is to deeply integrate the flow of security events and findings into a notification and workflow system such as a ticketing system, a bug or issue system, or other security information and event management (SIEM) system. This takes the workflow out of email and static reports, and allows you to route, escalate, and manage events or findings. Many organizations are also integrating security alerts into their chat or collaboration, and developer productivity platforms. For organizations embarking on automation, an API-driven, low-latency ticketing system offers considerable flexibility when planning what to automate first.

This best practice applies not only to security events generated from log messages depicting user activity or network events, but also from changes detected in the infrastructure itself. The ability to detect change, determine whether a change was appropriate, and then route that information to the correct remediation workflow is essential in maintaining and validating a secure architecture, in the context of changes where the nature of their undesirability is sufficiently subtle that they cannot currently be prevented with a combination of AWS Identity and Access Management (IAM) and AWS Organizations configuration.

Amazon GuardDuty and AWS Security Hub provide aggregation, deduplication, and analysis mechanisms for log records that are also made available to you via other AWS services. GuardDuty ingests, aggregates, and analyzes information from sources such as AWS CloudTrail management and data events, VPC DNS logs, and VPC Flow Logs. Security Hub can ingest, aggregate, and analyze output from GuardDuty, AWS Config, Amazon Inspector, Amazon Macie, AWS Firewall Manager, and a significant number of third-party security products available in the AWS Marketplace, and if built accordingly, your own code. Both GuardDuty and Security Hub have an Administrator-Member model that can aggregate findings and insights across multiple accounts, and Security Hub is often used by customers who have an on-premises SIEM as an AWS-side log and alert preprocessor and aggregator from which they can then ingest Amazon EventBridge through a AWS Lambda-based processor and forwarder.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Evaluate log processing capabilities: Evaluate the options that are available for processing logs.
 - [Find an AWS Partner that specializes in logging and monitoring solutions](#)
- As a start for analyzing CloudTrail logs, test Amazon Athena.
 - [Configuring Athena to analyze CloudTrail logs](#)
- Implement centralized logging in AWS: See the following AWS example solution to centralize logging from multiple sources.
 - [Centralize logging solution](#)
- Implement centralized logging with partner: APN Partners have solutions to help you analyze logs centrally.
 - [Logging and Monitoring](#)

Resources

Related documents:

- [AWS Answers: Centralized Logging](#)
- [AWS Security Hub](#)
- [Amazon CloudWatch](#)
- [Amazon EventBridge](#)
- [Getting started: Amazon CloudWatch Logs](#)
- [Security Partner Solutions: Logging and Monitoring](#)

Related videos:

- [Centrally Monitoring Resource Configuration and Compliance](#)
- [Remediating Amazon GuardDuty and AWS Security Hub Findings](#)
- [Threat management in the cloud: Amazon GuardDuty and AWS Security Hub](#)

SEC04-BP03 Automate response to events

Using automation to investigate and remediate events reduces human effort and error, and allows you to scale investigation capabilities. Regular reviews will help you tune automation tools, and continuously iterate.

In AWS, investigating events of interest and information on potentially unexpected changes into an automated workflow can be achieved using Amazon EventBridge. This service provides a scalable rules engine designed to broker both native AWS event formats (such as AWS CloudTrail events), as well as custom events you can generate from your application. Amazon GuardDuty also allows you to route events to a workflow system for those building incident response systems (AWS Step Functions), or to a central Security Account, or to a bucket for further analysis.

Detecting change and routing this information to the correct workflow can also be accomplished using AWS Config Rules and [Conformance Packs](#). AWS Config detects changes to in-scope services (though with higher latency than EventBridge) and generates events that can be parsed using AWS Config Rules for rollback, enforcement of compliance policy, and forwarding of information to systems, such as change management platforms and operational ticketing systems. As well as writing your own Lambda functions to respond to AWS Config events, you can also take advantage of the [AWS Config Rules Development Kit](#), and a [library of open source](#) AWS Config Rules. Conformance packs are a collection of AWS Config Rules and remediation actions you deploy as a single entity authored as a YAML template. A [sample conformance pack template](#) is available for the Well-Architected Security Pillar.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- Implement automated alerting with GuardDuty: GuardDuty is a threat detection service that continuously monitors for malicious activity and unauthorized behavior to protect your AWS accounts and workloads. Turn on GuardDuty and configure automated alerts.
- Automate investigation processes: Develop automated processes that investigate an event and report information to an administrator to save time.
 - [Lab: Amazon GuardDuty hands on](#)

Resources

Related documents:

- [AWS Answers: Centralized Logging](#)
- [AWS Security Hub](#)
- [Amazon CloudWatch](#)
- [Amazon EventBridge](#)
- [Getting started: Amazon CloudWatch Logs](#)
- [Security Partner Solutions: Logging and Monitoring](#)
- [Setting up Amazon GuardDuty](#)

Related videos:

- [Centrally Monitoring Resource Configuration and Compliance](#)
- [Remediating Amazon GuardDuty and AWS Security Hub Findings](#)
- [Threat management in the cloud: Amazon GuardDuty and AWS Security Hub](#)

Related examples:

- [Lab: Automated Deployment of Detective Controls](#)

SEC04-BP04 Implement actionable security events

Create alerts that are sent to and can be actioned by your team. Ensure that alerts include relevant information for the team to take action. For each detective mechanism you have, you should also have a process, in the form of a [runbook](#) or [playbook](#), to investigate. For example, when you use [Amazon GuardDuty](#), it generates different [findings](#). You should have a runbook entry for each finding type, for example, if a [trojan](#) is discovered, your runbook has simple instructions that instruct someone to investigate and remediate.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- Discover metrics available for AWS services: Discover the metrics that are available through Amazon CloudWatch for the services that you are using.
 - [AWS service documentation](#)
 - [Using Amazon CloudWatch Metrics](#)
- Configure Amazon CloudWatch alarms.
 - [Using Amazon CloudWatch Alarms](#)

Resources

Related documents:

- [Amazon CloudWatch](#)
- [Amazon EventBridge](#)
- [Security Partner Solutions: Logging and Monitoring](#)

Related videos:

- [Centrally Monitoring Resource Configuration and Compliance](#)
- [Remediating Amazon GuardDuty and AWS Security Hub Findings](#)
- [Threat management in the cloud: Amazon GuardDuty and AWS Security Hub](#)

Infrastructure protection

Infrastructure protection encompasses control methodologies, such as defense in depth, that are necessary to meet best practices and organizational or regulatory obligations. Use of these methodologies is critical for successful, ongoing operations in the cloud.

Infrastructure protection is a key part of an information security program. It ensures that systems and services within your workload are protected against unintended and unauthorized access, and potential vulnerabilities. For example, you'll define trust boundaries (for example, network and account boundaries), system security configuration and maintenance (for example, hardening, minimization and patching), operating system authentication and authorizations (for example, users, keys, and access levels), and other appropriate policy-enforcement points (for example, web application firewalls and/or API gateways).

Regions, Availability Zones, AWS Local Zones, and AWS Outposts

Make sure you are familiar with Regions, Availability Zones, [AWS Local Zones](#), and [AWS Outposts](#), which are components of the AWS secure global infrastructure.

AWS has the concept of a Region, which is a physical location around the world where we cluster data centers. We call each group of logical data centers an Availability Zone (AZ). Each AWS Region consists of multiple, isolated, and physically separate AZs within a geographic area. If you have data residency requirements, you can choose the AWS Region that is close to your desired location. You retain complete control and ownership over the Region in which your data is physically located, which can be helpful for meeting your regional compliance and data residency requirements. Each AZ has independent power, cooling, and physical security. If an application is partitioned across AZs, you are better isolated and protected from issues such as power outages, lightning strikes, tornadoes, earthquakes, and more. AZs are physically separated by a meaningful distance, many kilometers, from any other AZ, although all are within 100 km (60 miles) of each other. All AZs in an AWS Region are interconnected with high-bandwidth, low-latency networking, using fully redundant, dedicated metro fiber providing high-throughput, low-latency networking between AZs. All traffic between AZs is encrypted. AWS customers focused on high availability can design their applications to run in multiple AZs to achieve even greater fault-tolerance. AWS Regions meet the highest levels of security, compliance, and data protection.

AWS Local Zones place compute, storage, database, and other select AWS services closer to end users. With AWS Local Zones, you can easily run highly demanding applications that require single-digit millisecond latencies to your end users, such as media and entertainment content creation, real-time gaming, reservoir simulations, electronic design automation, and machine learning. Each AWS Local Zone location is an extension of an AWS Region where you can run your latency-sensitive applications, using AWS services such as Amazon EC2, Amazon VPC, Amazon EBS, Amazon File Storage, and Elastic Load Balancing in geographic proximity to end users. AWS Local Zones provide a high-bandwidth, secure connection between local workloads and those running in the AWS Region, allowing you to seamlessly connect to the full range of in-region services through the same APIs and tool sets.

AWS Outposts bring native AWS services, infrastructure, and operating models to virtually any data center, co-location space, or on-premises facility. You can use the same AWS APIs, tools, and infrastructure across on-premises facilities and the AWS Cloud to deliver a truly consistent hybrid experience. AWS Outposts is designed for connected environments and can be used to support workloads that must remain on premises due to low latency or local data processing needs.

In AWS, there are a number of approaches to infrastructure protection. The following sections describe how to use these approaches.

Topics

- [Protecting networks \(p. 58\)](#)
- [Protecting compute \(p. 63\)](#)

Protecting networks

Users, both in your workforce and your customers, can be located anywhere. You need to pivot from traditional models of trusting anyone and anything that has access to your network. When you follow the principle of applying security at all layers, you employ a [Zero Trust](#) approach. Zero Trust security is a model where application components or microservices are considered discrete from each other and no component or microservice trusts any other.

The careful planning and management of your network design forms the foundation of how you provide isolation and boundaries for resources within your workload. Because many resources in your workload operate in a VPC and inherit the security properties, it's critical that the design is supported with inspection and protection mechanisms backed by automation. Likewise, for workloads that operate outside a VPC, using purely edge services and/or serverless, the best practices apply in a more simplified approach. Refer to the [AWS Well-Architected Serverless Applications Lens](#) for specific guidance on serverless security.

Best practices

- [SEC05-BP01 Create network layers \(p. 58\)](#)
- [SEC05-BP02 Control traffic at all layers \(p. 60\)](#)
- [SEC05-BP03 Automate network protection \(p. 61\)](#)
- [SEC05-BP04 Implement inspection and protection \(p. 62\)](#)

SEC05-BP01 Create network layers

Group components that share sensitivity requirements into layers to minimize the potential scope of impact of unauthorized access. For example, a database cluster in a virtual private cloud (VPC) with no need for internet access should be placed in subnets with no route to or from the internet. Traffic should only flow from the adjacent next least sensitive resource. Consider a web application sitting behind a load balancer. Your database should not be accessible directly from the load balancer. Only the business logic or web server should have direct access to your database.

Desired outcome: Create a layered network. Layered networks help logically group similar networking components. They also shrink the potential scope of impact of unauthorized network access. A properly layered network makes it harder for unauthorized users to pivot to additional resources within your AWS environment. In addition to securing internal network paths, you should also protect your network edge, such as web applications and API endpoints.

Common anti-patterns:

- Creating all resources in a single VPC or subnet.
- Using overly permissive security groups.
- Failing to use subnets.
- Allowing direct access to data stores such as databases.

Level of risk exposed if this best practice is not established: High

Implementation guidance

Components such as Amazon Elastic Compute Cloud (Amazon EC2) instances, Amazon Relational Database Service (Amazon RDS) database clusters, and AWS Lambda functions that share reachability requirements can be segmented into layers formed by subnets. Consider deploying serverless workloads, such as [Lambda](#) functions, within a VPC or behind an [Amazon API Gateway](#). [AWS Fargate \(Fargate\)](#) tasks that have no need for internet access should be placed in subnets with no route to or from the

internet. This layered approach mitigates the impact of a single layer misconfiguration, which could allow unintended access. For AWS Lambda, you can run your functions in your VPC to take advantage of VPC-based controls.

For network connectivity that can include thousands of VPCs, AWS accounts, and on-premises networks, you should use [AWS Transit Gateway](#). Transit Gateway acts as a hub that controls how traffic is routed among all the connected networks, which act like spokes. Traffic between Amazon Virtual Private Cloud (Amazon VPC) and Transit Gateway remains on the AWS private network, which reduces external exposure to unauthorized users and potential security issues. Transit Gateway Inter-Region peering also encrypts inter-Region traffic with no single point of failure or bandwidth bottleneck.

Implementation steps

- **Use [Reachability Analyzer](#) to analyze the path between a source and destination based on configuration:** Reachability Analyzer allows you to automate verification of connectivity to and from VPC connected resources. Note that this analysis is done by reviewing configuration (no network packets are sent in conducting the analysis).
- **Use [Amazon VPC Network Access Analyzer](#) to identify unintended network access to resources:** Amazon VPC Network Access Analyzer allows you to specify your network access requirements and identify potential network paths.
- **Consider whether resources need to be in a public subnet:** Do not place resources in public subnets of your VPC unless they absolutely must receive inbound network traffic from public sources.
- **Create [subnets in your VPCs](#):** Create subnets for each network layer (in groups that include multiple Availability Zones) to enhance micro-segmentation. Also verify that you have associated the correct [route tables](#) with your subnets to control routing and internet connectivity.
- **Use [AWS Firewall Manager](#) to manage your VPC security groups:** AWS Firewall Manager helps lessen the management burden of using multiple security groups.
- **Use [AWS WAF](#) to protect against common web vulnerabilities:** AWS WAF can help enhance edge security by inspecting traffic for common web vulnerabilities, such as SQL injection. It also allows you to restrict traffic from IP addresses originating from certain countries or geographical locations.
- **Use [Amazon CloudFront](#) as a content distribution network (CDN):** Amazon CloudFront can help speed up your web application by storing data closer to your users. It can also improve edge security by enforcing HTTPS, restricting access to geographic areas, and ensuring that network traffic can only access resources when routed through CloudFront.
- **Use [Amazon API Gateway](#) when creating application programming interfaces (APIs):** Amazon API Gateway helps publish, monitor, and secure REST, HTTPS, and WebSocket APIs.

Resources

Related documents:

- [AWS Firewall Manager](#)
- [Amazon Inspector](#)
- [Amazon VPC Security](#)
- [Reachability Analyzer](#)
- [Amazon VPC Network Access Analyzer](#)

Related videos:

- [AWS Transit Gateway reference architectures for many VPCs](#)
- [Application Acceleration and Protection with Amazon CloudFront, AWS WAF, and AWS Shield](#)
- [AWS re:Inforce 2022 - Validate effective network access controls on AWS](#)
- [AWS re:Inforce 2022 - Advanced protections against bots using AWS WAF](#)

Related examples:

- [Well-Architected Lab - Automated Deployment of VPC](#)
- [Workshop: Amazon VPC Network Access Analyzer](#)

SEC05-BP02 Control traffic at all layers

When architecting your network topology, you should examine the connectivity requirements of each component. For example, if a component requires internet accessibility (inbound and outbound), connectivity to VPCs, edge services, and external data centers.

A VPC allows you to define your network topology that spans an AWS Region with a private IPv4 address range that you set, or an IPv6 address range AWS selects. You should apply multiple controls with a defense in depth approach for both inbound and outbound traffic, including the use of security groups (stateful inspection firewall), Network ACLs, subnets, and route tables. Within a VPC, you can create subnets in an Availability Zone. Each subnet can have an associated route table that defines routing rules for managing the paths that traffic takes within the subnet. You can define an internet routable subnet by having a route that goes to an internet or NAT gateway attached to the VPC, or through another VPC.

When an instance, Amazon Relational Database Service(Amazon RDS) database, or other service is launched within a VPC, it has its own security group per network interface. This firewall is outside the operating system layer and can be used to define rules for allowed inbound and outbound traffic. You can also define relationships between security groups. For example, instances within a database tier security group only accept traffic from instances within the application tier, by reference to the security groups applied to the instances involved. Unless you are using non-TCP protocols, it shouldn't be necessary to have an Amazon Elastic Compute Cloud(Amazon EC2) instance directly accessible by the internet (even with ports restricted by security groups) without a load balancer, or [CloudFront](#). This helps protect it from unintended access through an operating system or application issue. A subnet can also have a network ACL attached to it, which acts as a stateless firewall. You should configure the network ACL to narrow the scope of traffic allowed between layers, note that you need to define both inbound and outbound rules.

Some AWS services require components to access the internet for making API calls, where [AWS API endpoints](#) are located. Other AWS services use [VPC endpoints](#) within your Amazon VPCs. Many AWS services, including Amazon S3 and Amazon DynamoDB, support VPC endpoints, and this technology has been generalized in [AWS PrivateLink](#). We recommend you use this approach to access AWS services, third-party services, and your own services hosted in other VPCs securely. All network traffic on AWS PrivateLink stays on the global AWS backbone and never traverses the internet. Connectivity can only be initiated by the consumer of the service, and not by the provider of the service. Using AWS PrivateLink for external service access allows you to create air-gapped VPCs with no internet access and helps protect your VPCs from external threat vectors. Third-party services can use AWS PrivateLink to allow their customers to connect to the services from their VPCs over private IP addresses. For VPC assets that need to make outbound connections to the internet, these can be made outbound only (one-way) through an AWS managed NAT gateway, outbound only internet gateway, or web proxies that you create and manage.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Control network traffic in a VPC: Implement VPC best practices to control traffic.
 - [Amazon VPC security](#)
 - [VPC endpoints](#)
 - [Amazon VPC security group](#)
 - [Network ACLs](#)

- Control traffic at the edge: Implement edge services, such as Amazon CloudFront, to provide an additional layer of protection and other features.
 - [Amazon CloudFront use cases](#)
 - [AWS Global Accelerator](#)
 - [AWS Web Application Firewall \(AWS WAF\)](#)
 - [Amazon Route 53](#)
 - [Amazon VPC Ingress Routing](#)
- Control private network traffic: Implement services that protect your private traffic for your workload.
 - [Amazon VPC Peering](#)
 - [Amazon VPC Endpoint Services \(AWS PrivateLink\)](#)
 - [Amazon VPC Transit Gateway](#)
 - [AWS Direct Connect](#)
 - [AWS Site-to-Site VPN](#)
 - [AWS Client VPN](#)
 - [Amazon S3 Access Points](#)

Resources

Related documents:

- [AWS Firewall Manager](#)
- [Amazon Inspector](#)
- [Getting started with AWS WAF](#)

Related videos:

- [AWS Transit Gateway reference architectures for many VPCs](#)
- [Application Acceleration and Protection with Amazon CloudFront, AWS WAF, and AWS Shield](#)

Related examples:

- [Lab: Automated Deployment of VPC](#)

SEC05-BP03 Automate network protection

Automate protection mechanisms to provide a self-defending network based on threat intelligence and anomaly detection. For example, intrusion detection and prevention tools that can adapt to current threats and reduce their impact. A web application firewall is an example of where you can automate network protection, for example, by using the AWS WAF Security Automations solution (<https://github.com/aws-labs/aws-waf-security-automations>) to automatically block requests originating from IP addresses associated with known threat actors.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- Automate protection for web-based traffic: AWS offers a solution that uses AWS CloudFormation to automatically deploy a set of AWS WAF rules designed to filter common web-based attacks. Users can select from preconfigured protective features that define the rules included in an AWS WAF web access control list (web ACL).

- [AWS WAF security automations](#)
- Consider AWS Partner solutions: AWS Partners offer hundreds of industry-leading products that are equivalent, identical to, or integrate with existing controls in your on-premises environments. These products complement the existing AWS services to allow you to deploy a comprehensive security architecture and a more seamless experience across your cloud and on-premises environments.
- [Infrastructure security](#)

Resources

Related documents:

- [AWS Firewall Manager](#)
- [Amazon Inspector](#)
- [Amazon VPC Security](#)
- [Getting started with AWS WAF](#)

Related videos:

- [AWS Transit Gateway reference architectures for many VPCs](#)
- [Application Acceleration and Protection with Amazon CloudFront, AWS WAF, and AWS Shield](#)

Related examples:

- [Lab: Automated Deployment of VPC](#)

SEC05-BP04 Implement inspection and protection

Inspect and filter your traffic at each layer. You can inspect your VPC configurations for potential unintended access using [VPC Network Access Analyzer](#). You can specify your network access requirements and identify potential network paths that do not meet them. For components transacting over HTTP-based protocols, a web application firewall can help protect from common attacks. [AWS WAF](#) is a web application firewall that lets you monitor and block HTTP(s) requests that match your configurable rules that are forwarded to an Amazon API Gateway API, Amazon CloudFront, or an Application Load Balancer. To get started with AWS WAF, you can use [AWS Managed Rules](#) in combination with your own, or use existing [partner integrations](#).

For managing AWS WAF, AWS Shield Advanced protections, and Amazon VPC security groups across AWS Organizations, you can use AWS Firewall Manager. It allows you to centrally configure and manage firewall rules across your accounts and applications, making it easier to scale enforcement of common rules. It also allows you to rapidly respond to attacks, using [AWS Shield Advanced](#), or [solutions](#) that can automatically block unwanted requests to your web applications. Firewall Manager also works with [AWS Network Firewall](#). AWS Network Firewall is a managed service that uses a rules engine to give you fine-grained control over both stateful and stateless network traffic. It supports the [Suricata compatible](#) open source intrusion prevention system (IPS) specifications for rules to help protect your workload.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- Configure Amazon GuardDuty: GuardDuty is a threat detection service that continuously monitors for malicious activity and unauthorized behavior to protect your AWS accounts and workloads. Use GuardDuty and configure automated alerts.

- [Amazon GuardDuty](#)
- [Lab: Automated Deployment of Detective Controls](#)
- Configure virtual private cloud (VPC) Flow Logs: VPC Flow Logs is a feature that allows you to capture information about the IP traffic going to and from network interfaces in your VPC. Flow log data can be published to Amazon CloudWatch Logs and Amazon Simple Storage Service (Amazon S3). After you've created a flow log, you can retrieve and view its data in the chosen destination.
- Consider VPC traffic mirroring: Traffic mirroring is an Amazon VPC feature that you can use to copy network traffic from an elastic network interface of Amazon Elastic Compute Cloud (Amazon EC2) instances and then send it to out-of-band security and monitoring appliances for content inspection, threat monitoring, and troubleshooting.
- [VPC traffic mirroring](#)

Resources

Related documents:

- [AWS Firewall Manager](#)
- [Amazon Inspector](#)
- [Amazon VPC Security](#)
- [Getting started with AWS WAF](#)

Related videos:

- [AWS Transit Gateway reference architectures for many VPCs](#)
- [Application Acceleration and Protection with Amazon CloudFront, AWS WAF, and AWS Shield](#)

Related examples:

- [Lab: Automated Deployment of VPC](#)

Protecting compute

Compute resources include EC2 instances, containers, AWS Lambda functions, database services, IoT devices, and more. Each of these compute resource types require different approaches to secure them. However, they do share common strategies that you need to consider: defense in depth, vulnerability management, reduction in attack surface, automation of configuration and operation, and performing actions at a distance. In this section, you will find general guidance for protecting your compute resources for key services. For each AWS service used, it's important for you to check the specific security recommendations in the service documentation.

Best practices

- [SEC06-BP01 Perform vulnerability management \(p. 64\)](#)
- [SEC06-BP02 Reduce attack surface \(p. 66\)](#)
- [SEC06-BP03 Implement managed services \(p. 67\)](#)
- [SEC06-BP04 Automate compute protection \(p. 68\)](#)
- [SEC06-BP05 Enable people to perform actions at a distance \(p. 69\)](#)
- [SEC06-BP06 Validate software integrity \(p. 70\)](#)

SEC06-BP01 Perform vulnerability management

Frequently scan and patch for vulnerabilities in your code, dependencies, and in your infrastructure to help protect against new threats.

Desired outcome: Create and maintain a vulnerability management program. Regularly scan and patch resources such as Amazon EC2 instances, Amazon Elastic Container Service (Amazon ECS) containers, and Amazon Elastic Kubernetes Service (Amazon EKS) workloads. Configure maintenance windows for AWS managed resources, such as Amazon Relational Database Service (Amazon RDS) databases. Use static code scanning to inspect application source code for common issues. Consider web application penetration testing if your organization has the requisite skills or can hire outside assistance.

Common anti-patterns:

- Not having a vulnerability management program.
- Performing system patching without considering severity or risk avoidance.
- Using software that has passed its vendor-provided end of life (EOL) date.
- Deploying code into production before analyzing it for security issues.

Level of risk exposed if this best practice is not established: High

Implementation guidance

A vulnerability management program includes security assessment, identifying issues, prioritizing, and performing patch operations as part of resolving the issues. Automation is the key to continually scanning workloads for issues and unintended network exposure and performing remediation. Automating the creation and updating of resources saves time and reduces the risk of configuration errors creating further issues. A well-designed vulnerability management program should also consider vulnerability testing during the development and deployment stages of the software life cycle. Implementing vulnerability management during development and deployment helps lessen the chance that a vulnerability can make its way into your production environment.

Implementing a vulnerability management program requires a good understanding of the [AWS Shared Responsibility model](#) and how it relates to your specific workloads. Under the Shared Responsibility Model, AWS is responsible for protecting the infrastructure of the AWS Cloud. This infrastructure is composed of the hardware, software, networking, and facilities that run AWS Cloud services. You are responsible for security in the cloud, for example, the actual data, security configuration, and management tasks of Amazon EC2 instances, and verifying that your Amazon S3 objects are properly classified and configured. Your approach to vulnerability management also can vary depending on the services you consume. For example, AWS manages the patching for our managed relational database service, Amazon RDS, but you would be responsible for patching self-hosted databases.

AWS has a range of services to help with your vulnerability management program. [Amazon Inspector](#) continually scans AWS workloads for software issues and unintended network access. [AWS Systems Manager Patch Manager](#) helps manage patching across your Amazon EC2 instances. Amazon Inspector and Systems Manager can be viewed in [AWS Security Hub](#), a cloud security posture management service that helps automate AWS security checks and centralize security alerts.

[Amazon CodeGuru](#) can help identify potential issues in Java and Python applications using static code analysis.

Implementation steps

- **Configure [Amazon Inspector](#):** Amazon Inspector automatically detects newly launched Amazon EC2 instances, Lambda functions, and eligible container images pushed to Amazon ECR and immediately scans them for software issues, potential defects, and unintended network exposure.

- **Scan source code:** Scan libraries and dependencies for issues and defects. [Amazon CodeGuru](#) can scan and provide recommendations to remediating [common security issues](#) for both Java and Python applications. [The OWASP Foundation](#) publishes a list of Source Code Analysis Tools (also known as SAST tools).
- **Implement a mechanism to scan and patch your existing environment, as well as scanning as part of a CI/CD pipeline build process:** Implement a mechanism to scan and patch for issues in your dependencies and operating systems to help protect against new threats. Have that mechanism run on a regular basis. Software vulnerability management is essential to understanding where you need to apply patches or address software issues. Prioritize remediation of potential security issues by embedding vulnerability assessments early into your continuous integration/continuous delivery (CI/CD) pipeline. Your approach can vary based on the AWS services that you are consuming. To check for potential issues in software running in Amazon EC2 instances, add [Amazon Inspector](#) to your pipeline to alert you and stop the build process if issues or potential defects are detected. Amazon Inspector continually monitors resources. You can also use open source products such as [OWASP Dependency-Check](#), [Snyk](#), [OpenVAS](#), package managers, and AWS Partner tools for vulnerability management.
- **Use [AWS Systems Manager](#):** You are responsible for patch management for your AWS resources, including Amazon Elastic Compute Cloud (Amazon EC2) instances, Amazon Machine Images (AMIs), and other compute resources. [AWS Systems Manager Patch Manager](#) automates the process of patching managed instances with both security related and other types of updates. Patch Manager can be used to apply patches on Amazon EC2 instances for both operating systems and applications, including Microsoft applications, Windows service packs, and minor version upgrades for Linux based instances. In addition to Amazon EC2, Patch Manager can also be used to patch on-premises servers.

For a list of supported operating systems, see [Supported operating systems](#) in the Systems Manager User Guide. You can scan instances to see only a report of missing patches, or you can scan and automatically install all missing patches.

- **Use [AWS Security Hub](#):** Security Hub provides a comprehensive view of your security state in AWS. It collects security data across [multiple AWS services](#) and provides those findings in a standardized format, allowing you to prioritize security findings across AWS services.
- **Use [AWS CloudFormation](#):** [AWS CloudFormation](#) is an infrastructure as code (IaC) service that can help with vulnerability management by automating resource deployment and standardizing resource architecture across multiple accounts and environments.

Resources

Related documents:

- [AWS Systems Manager](#)
- [Security Overview of AWS Lambda](#)
- [Amazon CodeGuru](#)
- [Improved, Automated Vulnerability Management for Cloud Workloads with a New Amazon Inspector](#)
- [Automate vulnerability management and remediation in AWS using Amazon Inspector and AWS Systems Manager – Part 1](#)

Related videos:

- [Securing Serverless and Container Services](#)
- [Security best practices for the Amazon EC2 instance metadata service](#)

SEC06-BP02 Reduce attack surface

Reduce your exposure to unintended access by hardening operating systems and minimizing the components, libraries, and externally consumable services in use. Start by reducing unused components, whether they are operating system packages or applications, for Amazon Elastic Compute Cloud (Amazon EC2)-based workloads, or external software modules in your code, for all workloads. You can find many hardening and security configuration guides for common operating systems and server software. For example, you can start with the [Center for Internet Security](#) and iterate.

In Amazon EC2, you can create your own Amazon Machine Images (AMIs), which you have patched and hardened, to help you meet the specific security requirements for your organization. The patches and other security controls you apply on the AMI are effective at the point in time in which they were created—they are not dynamic unless you modify after launching, for example, with AWS Systems Manager.

You can simplify the process of building secure AMIs with EC2 Image Builder. EC2 Image Builder significantly reduces the effort required to create and maintain golden images without writing and maintaining automation. When software updates become available, Image Builder automatically produces a new image without requiring users to manually initiate image builds. EC2 Image Builder allows you to easily validate the functionality and security of your images before using them in production with AWS-provided tests and your own tests. You can also apply AWS-provided security settings to further secure your images to meet internal security criteria. For example, you can produce images that conform to the Security Technical Implementation Guide (STIG) standard using AWS-provided templates.

Using third-party static code analysis tools, you can identify common security issues such as unchecked function input bounds, as well as applicable common vulnerabilities and exposures (CVEs). You can use [Amazon CodeGuru](#) for supported languages. Dependency checking tools can also be used to determine whether libraries your code links against are the latest versions, are themselves free of CVEs, and have licensing conditions that meet your software policy requirements.

Using Amazon Inspector, you can perform configuration assessments against your instances for known CVEs, assess against security benchmarks, and automate the notification of defects. Amazon Inspector runs on production instances or in a build pipeline, and it notifies developers and engineers when findings are present. You can access findings programmatically and direct your team to backlogs and bug-tracking systems. [EC2 Image Builder](#) can be used to maintain server images (AMIs) with automated patching, AWS-provided security policy enforcement, and other customizations. When using containers implement [ECR Image Scanning](#) in your build pipeline and on a regular basis against your image repository to look for CVEs in your containers.

While Amazon Inspector and other tools are effective at identifying configurations and any CVEs that are present, other methods are required to test your workload at the application level. [Fuzzing](#) is a well-known method of finding bugs using automation to inject malformed data into input fields and other areas of your application.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Harden operating system: Configure operating systems to meet best practices.
 - [Securing Amazon Linux](#)
 - [Securing Microsoft Windows Server](#)
- Harden containerized resources: Configure containerized resources to meet security best practices.
- Implement AWS Lambda best practices.
 - [AWS Lambda best practices](#)

Resources

Related documents:

- [AWS Systems Manager](#)
- [Replacing a Bastion Host with Amazon EC2 Systems Manager](#)
- [Security Overview of AWS Lambda](#)

Related videos:

- [Running high-security workloads on Amazon EKS](#)
- [Securing Serverless and Container Services](#)
- [Security best practices for the Amazon EC2 instance metadata service](#)

Related examples:

- [Lab: Automated Deployment of Web Application Firewall](#)

SEC06-BP03 Implement managed services

Implement services that manage resources, such as Amazon Relational Database Service (Amazon RDS), AWS Lambda, and Amazon Elastic Container Service (Amazon ECS), to reduce your security maintenance tasks as part of the shared responsibility model. For example, Amazon RDS helps you set up, operate, and scale a relational database, automates administration tasks such as hardware provisioning, database setup, patching, and backups. This means you have more free time to focus on securing your application in other ways described in the AWS Well-Architected Framework. Lambda lets you run code without provisioning or managing servers, so you only need to focus on the connectivity, invocation, and security at the code level—not the infrastructure or operating system.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- Explore available services: Explore, test, and implement services that manage resources, such as Amazon RDS, AWS Lambda, and Amazon ECS.

Resources

Related documents:

- [AWS Website](#)
- [AWS Systems Manager](#)
- [Replacing a Bastion Host with Amazon EC2 Systems Manager](#)
- [Security Overview of AWS Lambda](#)

Related videos:

- [Running high-security workloads on Amazon EKS](#)
- [Securing Serverless and Container Services](#)
- [Security best practices for the Amazon EC2 instance metadata service](#)

Related examples:

- [Lab: AWS Certificate Manager Request Public Certificate](#)

SEC06-BP04 Automate compute protection

Automate your protective compute mechanisms including vulnerability management, reduction in attack surface, and management of resources. The automation will help you invest time in securing other aspects of your workload, and reduce the risk of human error.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- Automate configuration management: Enforce and validate secure configurations automatically by using a configuration management service or tool.
 - [AWS Systems Manager](#)
 - [AWS CloudFormation](#)
 - [Lab: Automated deployment of VPC](#)
 - [Lab: Automated deployment of EC2 web application](#)
- Automate patching of Amazon Elastic Compute Cloud (Amazon EC2) instances: AWS Systems Manager Patch Manager automates the process of patching managed instances with both security-related and other types of updates. You can use Patch Manager to apply patches for both operating systems and applications.
 - [AWS Systems Manager Patch Manager](#)
 - [Centralized multi-account and multi-Region patching with AWS Systems Manager Automation](#)
- Implement intrusion detection and prevention: Implement an intrusion detection and prevention tool to monitor and stop malicious activity on instances.
- Consider AWS Partner solutions: AWS Partners offer hundreds of industry-leading products that are equivalent, identical to, or integrate with existing controls in your on-premises environments. These products complement the existing AWS services to allow you to deploy a comprehensive security architecture and a more seamless experience across your cloud and on-premises environments.
 - [Infrastructure security](#)

Resources

Related documents:

- [AWS CloudFormation](#)
- [AWS Systems Manager](#)
- [AWS Systems Manager Patch Manager](#)
- [Centralized multi-account and multi-region patching with AWS Systems Manager Automation](#)
- [Infrastructure security](#)
- [Replacing a Bastion Host with Amazon EC2 Systems Manager](#)
- [Security Overview of AWS Lambda](#)

Related videos:

- [Running high-security workloads on Amazon EKS](#)
- [Securing Serverless and Container Services](#)
- [Security best practices for the Amazon EC2 instance metadata service](#)

Related examples:

- [Lab: Automated Deployment of Web Application Firewall](#)
- [Lab: Automated deployment of Amazon EC2 web application](#)

SEC06-BP05 Enable people to perform actions at a distance

Removing the ability for interactive access reduces the risk of human error, and the potential for manual configuration or management. For example, use a change management workflow to deploy Amazon Elastic Compute Cloud (Amazon EC2) instances using infrastructure-as-code, then manage Amazon EC2 instances using tools such as AWS Systems Manager instead of allowing direct access or through a bastion host. AWS Systems Manager can automate a variety of maintenance and deployment tasks, using features including [automation workflows](#), [documents](#) (playbooks), and the [run command](#). AWS CloudFormation stacks build from pipelines and can automate your infrastructure deployment and management tasks without using the AWS Management Console or APIs directly.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- Replace console access: Replace console access (SSH or RDP) to instances with AWS Systems Manager Run Command to automate management tasks.
- [AWS Systems Manager Run Command](#)

Resources

Related documents:

- [AWS Systems Manager](#)
- [AWS Systems Manager Run Command](#)
- [Replacing a Bastion Host with Amazon EC2 Systems Manager](#)
- [Security Overview of AWS Lambda](#)

Related videos:

- [Running high-security workloads on Amazon EKS](#)
- [Securing Serverless and Container Services](#)
- [Security best practices for the Amazon EC2 instance metadata service](#)

Related examples:

- [Lab: Automated Deployment of Web Application Firewall](#)

SEC06-BP06 Validate software integrity

Implement mechanisms (for example, code signing) to validate that the software, code and libraries used in the workload are from trusted sources and have not been tampered with. For example, you should verify the code signing certificate of binaries and scripts to confirm the author, and ensure it has not been tampered with since created by the author. [AWS Signer](#) can help ensure the trust and integrity of your code by centrally managing the code- signing lifecycle, including signing certification and public and private keys. You can learn how to use advanced patterns and best practices for code signing with [AWS Lambda](#). Additionally, a checksum of software that you download, compared to that of the checksum from the provider, can help ensure it has not been tampered with.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- Investigate mechanisms: Code signing is one mechanism that can be used to validate software integrity.
 - [NIST: Security Considerations for Code Signing](#)

Resources

Related documents:

- [AWS Signer](#)
- [New – Code Signing, a Trust and Integrity Control for AWS Lambda](#)

Data protection

Before architecting any workload, foundational practices that influence security should be in place. For example, data classification provides a way to categorize data based on levels of sensitivity, and encryption protects data by way of rendering it unintelligible to unauthorized access. These methods are important because they support objectives such as preventing mishandling or complying with regulatory obligations.

In AWS, there are a number of different approaches you can use when addressing data protection. The following section describes how to use these approaches.

Topics

- [Data classification \(p. 71\)](#)
- [Protecting data at rest \(p. 76\)](#)
- [Protecting data in transit \(p. 83\)](#)

Data classification

Data classification provides a way to categorize organizational data based on criticality and sensitivity in order to help you determine appropriate protection and retention controls.

Best practices

- [SEC07-BP01 Identify the data within your workload \(p. 71\)](#)
- [SEC07-BP02 Define data protection controls \(p. 74\)](#)
- [SEC07-BP03 Automate identification and classification \(p. 75\)](#)
- [SEC07-BP04 Define data lifecycle management \(p. 76\)](#)

SEC07-BP01 Identify the data within your workload

It's critical to understand the type and classification of data your workload is processing, the associated business processes, where the data is stored, and who is the data owner. You should also have an understanding of the applicable legal and compliance requirements of your workload, and what data controls need to be enforced. Identifying data is the first step in the data classification journey.

Benefits of establishing this best practice:

Data classification allows workload owners to identify locations that store sensitive data and determine how that data should be accessed and shared.

Data classification aims to answer the following questions:

- **What type of data do you have?**

This could be data such as:

- Intellectual property (IP) such as trade secrets, patents, or contract agreements.

- Protected health information (PHI) such as medical records that contain medical history information connected to an individual.
- Personally identifiable information (PII), such as name, address, date of birth, and national ID or registration number.
- Credit card data, such as the Primary Account Number (PAN), cardholder name, expiration date, and service code number.
- Where is the sensitive data is stored?
- Who can access, modify, and delete data?
- Understanding user permissions is essential in guarding against potential data mishandling.
- **Who can perform create, read, update, and delete (CRUD) operations?**
 - Account for potential escalation of privileges by understanding who can manage permissions to the data.
- **What business impact might occur if the data is disclosed unintentionally, altered, or deleted?**
 - Understand the risk consequence if data is modified, deleted, or inadvertently disclosed.

By knowing the answers to these questions, you can take the following actions:

- Decrease sensitive data scope (such as the number of sensitive data locations) and limit access to sensitive data to only approved users.
- Gain an understanding of different data types so that you can implement appropriate data protection mechanisms and techniques, such as encryption, data loss prevention, and identity and access management.
- Optimize costs by delivering the right control objectives for the data.
- Confidently answer questions from regulators and auditors regarding the types and amount of data, and how data of different sensitivities are isolated from each other.

Level of risk exposed if this best practice is not established: High

Implementation guidance

Data classification is the act of identifying the sensitivity of data. It might involve tagging to make the data easily searchable and trackable. Data classification also reduces the duplication of data, which can help reduce storage and backup costs while speeding up the search process.

Use services such as Amazon Macie to automate at scale both the discovery and classification of sensitive data. Other services, such as Amazon EventBridge and AWS Config, can be used to automate remediation for data security issues such as unencrypted Amazon Simple Storage Service (Amazon S3) buckets and Amazon EC2 EBS volumes or untagged data resources. For a complete list of AWS service integrations, see the [EventBridge documentation](#).

[Detecting PII](#) in unstructured data such as customer emails, support tickets, product reviews, and social media, is possible by [using Amazon Comprehend](#), which is a natural language processing (NLP) service that uses machine learning (ML) to find insights and relationships like people, places, sentiments, and topics in unstructured text. For a list of AWS services that can assist with data identification, see [Common techniques to detect PHI and PII data using AWS services](#).

Another method that supports data classification and protection is [AWS resource tagging](#). Tagging allows you to assign metadata to your AWS resources that you can use to manage, identify, organize, search for, and filter resources.

In some cases, you might choose to tag entire resources (such as an S3 bucket), especially when a specific workload or service is expected to store processes or transmissions of already known data classification.

Where appropriate, you can tag an S3 bucket instead of individual objects for ease of administration and security maintenance.

Implementation steps

Detect sensitive data within Amazon S3:

1. Before starting, make sure you have the appropriate permissions to access the Amazon Macie console and API operations. For additional details, see [Getting started with Amazon Macie](#).
2. Use Amazon Macie to perform automated data discovery when your sensitive data resides in [Amazon S3](#).
 - Use the [Getting Started with Amazon Macie](#) guide to configure a repository for sensitive data discovery results and create a discovery job for sensitive data.
 - [How to use Amazon Macie to preview sensitive data in S3 buckets](#).

By default, Macie analyzes objects by using the set of managed data identifiers that we recommend for automated sensitive data discovery. You can tailor the analysis by configuring Macie to use specific managed data identifiers, custom data identifiers, and allow lists when it performs automated sensitive data discovery for your account or organization. You can adjust the scope of the analysis by excluding specific buckets (for example, S3 buckets that typically store AWS logging data).

3. To configure and use automated sensitive data discovery, see [Performing automated sensitive data discovery with Amazon Macie](#).
4. You might also consider [Automated Data Discovery for Amazon Macie](#).

Detect sensitive data within Amazon RDS:

For more information on data discovery in [Amazon Relational Database Service \(Amazon RDS\)](#) databases, see [Enabling data classification for Amazon RDS database with Macie](#).

Detect sensitive data within DynamoDB:

- [Detecting sensitive data in DynamoDB with Macie](#) explains how to use Amazon Macie to detect sensitive data in [Amazon DynamoDB](#) tables by exporting the data to Amazon S3 for scanning.

AWS Partner solutions:

- Consider using our extensive AWS Partner Network. AWS Partners have extensive tools and compliance frameworks that directly integrate with AWS services. Partners can provide you with a tailored governance and compliance solution to help you meet your organizational needs.
- For customized solutions in data classification, see [Data governance in the age of regulation and compliance requirements](#).

You can automatically enforce the tagging standards that your organization adopts by creating and deploying policies using AWS Organizations. Tag policies let you specify rules that define valid key names and what values are valid for each key. You can choose to monitor only, which gives you an opportunity to evaluate and clean up your existing tags. After your tags are in compliance with your chosen standards, you can turn on enforcement in the tag policies to prevent non-compliant tags from being created. For more details, see [Securing resource tags used for authorization using a service control policy in AWS Organizations](#) and the example policy on [preventing tags from being modified except by authorized principals](#).

- To begin using tag policies in [AWS Organizations](#), it's strongly recommended that you follow the workflow in [Getting started with tag policies](#) before moving on to more advanced tag policies. Understanding the effects of attaching a simple tag policy to a single account before expanding to

an entire organizational unit (OU) or organization allows you to see a tag policy's effects before you enforce compliance with the tag policy. [Getting started with tag policies](#) provides links to instructions for more advanced policy-related tasks.

- Consider evaluating other [AWS services and features](#) that support data classification, which are listed in the [Data Classification](#) whitepaper.

Resources

Related documents:

- [Getting Started with Amazon Macie](#)
- [Automated data discovery with Amazon Macie](#)
- [Getting started with tag policies](#)
- [Detecting PII entities](#)

Related blogs:

- [How to use Amazon Macie to preview sensitive data in S3 buckets.](#)
- [Performing automated sensitive data discovery with Amazon Macie.](#)
- [Common techniques to detect PHI and PII data using AWS Services](#)
- [Detecting and redacting PII using Amazon Comprehend](#)
- [Securing resource tags used for authorization using a service control policy in AWS Organizations](#)
- [Enabling data classification for Amazon RDS database with Macie](#)
- [Detecting sensitive data in DynamoDB with Macie](#)
-

Related videos:

- [Event-driven data security using Amazon Macie](#)
- [Amazon Macie for data protection and governance](#)
- [Fine-tune sensitive data findings with allow lists](#)

SEC07-BP02 Define data protection controls

Protect data according to its classification level. For example, secure data classified as public by using relevant recommendations while protecting sensitive data with additional controls.

By using resource tags, separate AWS accounts per sensitivity (and potentially also for each caveat, enclave, or community of interest), IAM policies, AWS Organizations SCPs, AWS Key Management Service (AWS KMS), and AWS CloudHSM, you can define and implement your policies for data classification and protection with encryption. For example, if you have a project with S3 buckets that contain highly critical data or Amazon Elastic Compute Cloud (Amazon EC2) instances that process confidential data, they can be tagged with a Project=ABC tag. Only your immediate team knows what the project code means, and it provides a way to use attribute-based access control. You can define levels of access to the AWS KMS encryption keys through key policies and grants to ensure that only appropriate services have access to the sensitive content through a secure mechanism. If you are making authorization decisions based on tags you should make sure that the permissions on the tags are defined appropriately using tag policies in AWS Organizations.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Define your data identification and classification schema: Identification and classification of your data is performed to assess the potential impact and type of data you store, and who can access it.
 - [AWS Documentation](#)
- Discover available AWS controls: For the AWS services you are or plan to use, discover the security controls. Many services have a security section in their documentation.
 - [AWS Documentation](#)
- Identify AWS compliance resources: Identify resources that AWS has available to assist.
 - <https://aws.amazon.com/compliance/>

Resources

Related documents:

- [AWS Documentation](#)
- [Data Classification whitepaper](#)
- [Getting started with Amazon Macie](#)
- [AWS Compliance](#)

Related videos:

- [Introducing the New Amazon Macie](#)

SEC07-BP03 Automate identification and classification

Automating the identification and classification of data can help you implement the correct controls. Using automation for this instead of direct access from a person reduces the risk of human error and exposure. You should evaluate using a tool, such as [Amazon Macie](#), that uses machine learning to automatically discover, classify, and protect sensitive data in AWS. Amazon Macie recognizes sensitive data, such as personally identifiable information (PII) or intellectual property, and provides you with dashboards and alerts that give visibility into how this data is being accessed or moved.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- Use Amazon Simple Storage Service (Amazon S3) Inventory: Amazon S3 inventory is one of the tools you can use to audit and report on the replication and encryption status of your objects.
 - [Amazon S3 Inventory](#)
- Consider Amazon Macie: Amazon Macie uses machine learning to automatically discover and classify data stored in Amazon S3.
 - [Amazon Macie](#)

Resources

Related documents:

- [Amazon Macie](#)
- [Amazon S3 Inventory](#)
- [Data Classification Whitepaper](#)
- [Getting started with Amazon Macie](#)

Related videos:

- [Introducing the New Amazon Macie](#)

SEC07-BP04 Define data lifecycle management

Your defined lifecycle strategy should be based on sensitivity level as well as legal and organization requirements. Aspects including the duration for which you retain data, data destruction processes, data access management, data transformation, and data sharing should be considered. When choosing a data classification methodology, balance usability versus access. You should also accommodate the multiple levels of access and nuances for implementing a secure, but still usable, approach for each level. Always use a defense in depth approach and reduce human access to data and mechanisms for transforming, deleting, or copying data. For example, require users to strongly authenticate to an application, and give the application, rather than the users, the requisite access permission to perform action at a distance. In addition, ensure that users come from a trusted network path and require access to the decryption keys. Use tools, such as dashboards and automated reporting, to give users information from the data rather than giving them direct access to the data.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- **Identify data types:** Identify the types of data that you are storing or processing in your workload. That data could be text, images, binary databases, and so forth.

Resources

Related documents:

- [Data Classification Whitepaper](#)
- [Getting started with Amazon Macie](#)

Related videos:

- [Introducing the New Amazon Macie](#)

Protecting data at rest

Data at rest represents any data that you persist in non-volatile storage for any duration in your workload. This includes block storage, object storage, databases, archives, IoT devices, and any other storage medium on which data is persisted. Protecting your data at rest reduces the risk of unauthorized access, when encryption and appropriate access controls are implemented.

Encryption and tokenization are two important but distinct data protection schemes.

Tokenization is a process that allows you to define a token to represent an otherwise sensitive piece of information (for example, a token to represent a customer's credit card number). A token must

be meaningless on its own, and must not be derived from the data it is tokenizing—therefore, a cryptographic digest is not usable as a token. By carefully planning your tokenization approach, you can provide additional protection for your content, and you can ensure that you meet your compliance requirements. For example, you can reduce the compliance scope of a credit card processing system if you leverage a token instead of a credit card number.

Encryption is a way of transforming content in a manner that makes it unreadable without a secret key necessary to decrypt the content back into plaintext. Both tokenization and encryption can be used to secure and protect information as appropriate. Further, masking is a technique that allows part of a piece of data to be redacted to a point where the remaining data is not considered sensitive. For example, PCI-DSS allows the last four digits of a card number to be retained outside the compliance scope boundary for indexing.

Audit the use of encryption keys: Ensure that you understand and audit the use of encryption keys to validate that the access control mechanisms on the keys are appropriately implemented. For example, any AWS service using an AWS KMS key logs each use in AWS CloudTrail. You can then query AWS CloudTrail, by using a tool such as Amazon CloudWatch Insights, to ensure that all uses of your keys are valid.

Best practices

- [SEC08-BP01 Implement secure key management \(p. 77\)](#)
- [SEC08-BP02 Enforce encryption at rest \(p. 78\)](#)
- [SEC08-BP03 Automate data at rest protection \(p. 80\)](#)
- [SEC08-BP04 Enforce access control \(p. 80\)](#)
- [SEC08-BP05 Use mechanisms to keep people away from data \(p. 82\)](#)

SEC08-BP01 Implement secure key management

By defining an encryption approach that includes the storage, rotation, and access control of keys, you can help provide protection for your content against unauthorized users and against unnecessary exposure to authorized users. AWS Key Management Service (AWS KMS) helps you manage encryption keys and [integrates with many AWS services](#). This service provides durable, secure, and redundant storage for your AWS KMS keys. You can define your key aliases as well as key-level policies. The policies help you define key administrators as well as key users. Additionally, AWS CloudHSM is a cloud-based hardware security module (HSM) that allows you to easily generate and use your own encryption keys in the AWS Cloud. It helps you meet corporate, contractual, and regulatory compliance requirements for data security by using FIPS 140-2 Level 3 validated HSMs.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Implement AWS KMS: AWS KMS makes it easy for you to create and manage keys and control the use of encryption across a wide range of AWS services and in your applications. AWS KMS is a secure and resilient service that uses FIPS 140-2 validated hardware security modules to protect your keys.
 - [Getting started: AWS Key Management Service \(AWS KMS\)](#)
- Consider AWS Encryption SDK: Use the AWS Encryption SDK with AWS KMS integration when your application needs to encrypt data client-side.
 - [AWS Encryption SDK](#)

Resources

Related documents:

- [AWS Key Management Service](#)
- [AWS cryptographic services and tools](#)
- [Getting started: AWS Key Management Service \(AWS KMS\)](#)
- [Protecting Amazon S3 Data Using Encryption](#)

Related videos:

- [How Encryption Works in AWS](#)
- [Securing Your Block Storage on AWS](#)

SEC08-BP02 Enforce encryption at rest

You should enforce the use of encryption for data at rest. Encryption maintains the confidentiality of sensitive data in the event of unauthorized access or accidental disclosure.

Desired outcome: Private data should be encrypted by default when at rest. Encryption helps maintain confidentiality of the data and provides an additional layer of protection against intentional or inadvertent data disclosure or exfiltration. Data that is encrypted cannot be read or accessed without first unencrypting the data. Any data stored unencrypted should be inventoried and controlled.

Common anti-patterns:

- Not using encrypt-by-default configurations.
- Providing overly permissive access to decryption keys.
- Not monitoring the use of encryption and decryption keys.
- Storing data unencrypted.
- Using the same encryption key for all data regardless of data usage, types, and classification.

Level of risk exposed if this best practice is not established: High

Implementation guidance

Map encryption keys to data classifications within your workloads. This approach helps protect against overly permissive access when using either a single, or very small number of encryption keys for your data (see [SEC07-BP01 Identify the data within your workload \(p. 71\)](#)).

AWS Key Management Service (AWS KMS) integrates with many AWS services to make it easier to encrypt your data at rest. For example, in Amazon Simple Storage Service (Amazon S3), you can set [default encryption](#) on a bucket so that new objects are automatically encrypted. When using AWS KMS, consider how tightly the data needs to be restricted. Default and service-controlled AWS KMS keys are managed and used on your behalf by AWS. For sensitive data that requires fine-grained access to the underlying encryption key, consider customer managed keys (CMKs). You have full control over CMKs, including rotation and access management through the use of key policies.

Additionally, [Amazon Elastic Compute Cloud \(Amazon EC2\)](#) and [Amazon S3](#) support the enforcement of encryption by setting default encryption. You can use [AWS Config Rules](#) to check automatically that you are using encryption, for example, for [Amazon Elastic Block Store \(Amazon EBS\) volumes](#), [Amazon Relational Database Service \(Amazon RDS\) instances](#), and [Amazon S3 buckets](#).

AWS also provides options for client-side encryption, allowing you to encrypt data prior to uploading it to the cloud. The AWS Encryption SDK provides a way to encrypt your data using [envelope encryption](#). You provide the wrapping key, and the AWS Encryption SDK generates a unique data key for each data

object it encrypts. Consider AWS CloudHSM if you need a managed single-tenant hardware security module (HSM). AWS CloudHSM allows you to generate, import, and manage cryptographic keys on a FIPS 140-2 level 3 validated HSM. Some use cases for AWS CloudHSM include protecting private keys for issuing a certificate authority (CA), and turning on transparent data encryption (TDE) for Oracle databases. The AWS CloudHSM Client SDK provides software that allows you to encrypt data client side using keys stored inside AWS CloudHSM prior to uploading your data into AWS. The Amazon DynamoDB Encryption Client also allows you to encrypt and sign items prior to upload into a DynamoDB table.

Implementation steps

- **Enforce encryption at rest for Amazon S3:** Implement [Amazon S3 bucket default encryption](#).

Configure [default encryption for new Amazon EBS volumes](#): Specify that you want all newly created Amazon EBS volumes to be created in encrypted form, with the option of using the default key provided by AWS or a key that you create.

Configure encrypted Amazon Machine Images (AMIs): Copying an existing AMI with encryption configured will automatically encrypt root volumes and snapshots.

Configure [Amazon RDS encryption](#): Configure encryption for your Amazon RDS database clusters and snapshots at rest by using the encryption option.

Create and configure AWS KMS keys with policies that limit access to the appropriate principals for each classification of data: For example, create one AWS KMS key for encrypting production data and a different key for encrypting development or test data. You can also provide key access to other AWS accounts. Consider having different accounts for your development and production environments. If your production environment needs to decrypt artifacts in the development account, you can edit the CMK policy used to encrypt the development artifacts to give the production account the ability to decrypt those artifacts. The production environment can then ingest the decrypted data for use in production.

Configure encryption in additional AWS services: For other AWS services you use, review the [security documentation](#) for that service to determine the service's encryption options.

Resources

Related documents:

- [AWS Crypto Tools](#)
- [AWS Encryption SDK](#)
- [AWS KMS Cryptographic Details Whitepaper](#)
- [AWS Key Management Service](#)
- [AWS cryptographic services and tools](#)
- [Amazon EBS Encryption](#)
- [Default encryption for Amazon EBS volumes](#)
- [Encrypting Amazon RDS Resources](#)
- [How do I enable default encryption for an Amazon S3 bucket?](#)
- [Protecting Amazon S3 Data Using Encryption](#)

Related videos:

- [How Encryption Works in AWS](#)
- [Securing Your Block Storage on AWS](#)

SEC08-BP03 Automate data at rest protection

Use automated tools to validate and enforce data at rest controls continuously, for example, verify that there are only encrypted storage resources. You can [automate validation that all EBS volumes are encrypted](#) using [AWS Config Rules](#). [AWS Security Hub](#) can also verify several different controls through automated checks against security standards. Additionally, your AWS Config Rules can automatically [remediate noncompliant resources](#).

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

Data at rest represents any data that you persist in non-volatile storage for any duration in your workload. This includes block storage, object storage, databases, archives, IoT devices, and any other storage medium on which data is persisted. Protecting your data at rest reduces the risk of unauthorized access, when encryption and appropriate access controls are implemented.

Enforce encryption at rest: You should ensure that the only way to store data is by using encryption. AWS KMS integrates seamlessly with many AWS services to make it easier for you to encrypt all your data at rest. For example, in Amazon Simple Storage Service (Amazon S3) you can set [default encryption](#) on a bucket so that all new objects are automatically encrypted. Additionally, [Amazon EC2](#) and [Amazon S3](#) support the enforcement of encryption by setting default encryption. You can use [AWS Managed Config Rules](#) to check automatically that you are using encryption, for example, for [EBS volumes](#), [Amazon Relational Database Service \(Amazon RDS\) instances](#), and [Amazon S3 buckets](#).

Resources

Related documents:

- [AWS Crypto Tools](#)
- [AWS Encryption SDK](#)

Related videos:

- [How Encryption Works in AWS](#)
- [Securing Your Block Storage on AWS](#)

SEC08-BP04 Enforce access control

To help protect your data at rest, enforce access control using mechanisms, such as isolation and versioning, and apply the principle of least privilege. Prevent the granting of public access to your data.

Desired outcome: Verify that only authorized users can access data on a need-to-know basis. Protect your data with regular backups and versioning to prevent against intentional or inadvertent modification or deletion of data. Isolate critical data from other data to protect its confidentiality and data integrity.

Common anti-patterns:

- Storing data with different sensitivity requirements or classification together.
- Using overly permissive permissions on decryption keys.
- Improperly classifying data.
- Not retaining detailed backups of important data.
- Providing persistent access to production data.
- Not auditing data access or regularly reviewing permissions.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

Multiple controls can help protect your data at rest, including access (using least privilege), isolation, and versioning. Access to your data should be audited using detective mechanisms, such as AWS CloudTrail, and service level logs, such as Amazon Simple Storage Service (Amazon S3) access logs. You should inventory what data is publicly accessible, and create a plan to reduce the amount of publicly available data over time.

Amazon S3 Glacier Vault Lock and Amazon S3 Object Lock provide mandatory access control for objects in Amazon S3—once a vault policy is locked with the compliance option, not even the root user can change it until the lock expires.

Implementation steps

- **Enforce access control:** Enforce access control with least privileges, including access to encryption keys.
- **Separate data based on different classification levels:** Use different AWS accounts for data classification levels, and manage those accounts using [AWS Organizations](#).
- **Review AWS Key Management Service (AWS KMS) policies:** [Review the level of access](#) granted in AWS KMS policies.
- **Review Amazon S3 bucket and object permissions:** Regularly review the level of access granted in S3 bucket policies. Best practice is to avoid using publicly readable or writeable buckets. Consider using [AWS Config](#) to detect buckets that are publicly available, and Amazon CloudFront to serve content from Amazon S3. Verify that buckets that should not allow public access are properly configured to prevent public access. By default, all S3 buckets are private, and can only be accessed by users that have been explicitly granted access.
- **Use [AWS IAM Access Analyzer](#):** IAM Access Analyzer analyzes Amazon S3 buckets and generates a finding when [an S3 policy grants access to an external entity](#).
- **Use [Amazon S3 versioning](#) and [object lock](#) when appropriate.**
- **Use [Amazon S3 Inventory](#):** Amazon S3 Inventory can be used to audit and report on the replication and encryption status of your S3 objects.
- **Review [Amazon EBS](#) and [AMI sharing](#) permissions:** Sharing permissions can allow images and volumes to be shared with AWS accounts that are external to your workload.
- **Review [AWS Resource Access Manager](#) Shares periodically to determine whether resources should continue to be shared.** Resource Access Manager allows you to share resources, such as AWS Network Firewall policies, Amazon Route 53 resolver rules, and subnets, within your Amazon VPCs. Audit shared resources regularly and stop sharing resources which no longer need to be shared.

Resources

Related best practices:

- [SEC03-BP01 Define access requirements \(p. 33\)](#)
- [SEC03-BP02 Grant least privilege access \(p. 35\)](#)

Related documents:

- [AWS KMS Cryptographic Details Whitepaper](#)
- [Introduction to Managing Access Permissions to Your Amazon S3 Resources](#)
- [Overview of managing access to your AWS KMS resources](#)

- [AWS Config Rules](#)
- [Amazon S3 + Amazon CloudFront: A Match Made in the Cloud](#)
- [Using versioning](#)
- [Locking Objects Using Amazon S3 Object Lock](#)
- [Sharing an Amazon EBS Snapshot](#)
- [Shared AMIs](#)
- [Hosting a single-page application on Amazon S3](#)

Related videos:

- [Securing Your Block Storage on AWS](#)

SEC08-BP05 Use mechanisms to keep people away from data

Keep all users away from directly accessing sensitive data and systems under normal operational circumstances. For example, use a change management workflow to manage Amazon Elastic Compute Cloud (Amazon EC2) instances using tools instead of allowing direct access or a bastion host. This can be achieved using [AWS Systems Manager Automation](#), which uses [automation documents](#) that contain steps you use to perform tasks. These documents can be stored in source control, be peer reviewed before running, and tested thoroughly to minimize risk compared to shell access. Business users could have a dashboard instead of direct access to a data store to run queries. Where CI/CD pipelines are not used, determine which controls and processes are required to adequately provide a normally deactivated break-glass access mechanism.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- Implement mechanisms to keep people away from data: Mechanisms include using dashboards, such as Amazon QuickSight, to display data to users instead of directly querying.
 - [Amazon QuickSight](#)
- Automate configuration management: Perform actions at a distance, enforce and validate secure configurations automatically by using a configuration management service or tool. Avoid use of bastion hosts or directly accessing EC2 instances.
 - [AWS Systems Manager](#)
 - [AWS CloudFormation](#)
 - [CI/CD Pipeline for AWS CloudFormation templates on AWS](#)

Resources

Related documents:

- [AWS KMS Cryptographic Details Whitepaper](#)

Related videos:

- [How Encryption Works in AWS](#)
- [Securing Your Block Storage on AWS](#)

Protecting data in transit

Data in transit is any data that is sent from one system to another. This includes communication between resources within your workload as well as communication between other services and your end users. By providing the appropriate level of protection for your data in transit, you protect the confidentiality and integrity of your workload's data.

Secure data from between VPC or on-premises locations: You can use [AWS PrivateLink](#) to create a secure and private network connection between Amazon Virtual Private Cloud (Amazon VPC) or on-premises connectivity to services hosted in AWS. You can access AWS services, third-party services, and services in other AWS accounts as if they were on your private network. With AWS PrivateLink, you can access services across accounts with overlapping IP CIDRs without needing an Internet Gateway or NAT. You also do not have to configure firewall rules, path definitions, or route tables. Traffic stays on the Amazon backbone and doesn't traverse the internet, therefore your data is protected. You can maintain compliance with industry-specific compliance regulations, such as HIPAA and EU/US Privacy Shield. AWS PrivateLink seamlessly works with third-party solutions to create a simplified global network, allowing you to accelerate your migration to the cloud and take advantage of available AWS services.

Best practices

- [SEC09-BP01 Implement secure key and certificate management \(p. 83\)](#)
- [SEC09-BP02 Enforce encryption in transit \(p. 84\)](#)
- [SEC09-BP03 Automate detection of unintended data access \(p. 85\)](#)
- [SEC09-BP04 Authenticate network communications \(p. 86\)](#)

SEC09-BP01 Implement secure key and certificate management

Store encryption keys and certificates securely and rotate them at appropriate time intervals with strict access control. The best way to accomplish this is to use a managed service, such as [AWS Certificate Manager \(ACM\)](#). It lets you easily provision, manage, and deploy public and private Transport Layer Security (TLS) certificates for use with AWS services and your internal connected resources. TLS certificates are used to secure network communications and establish the identity of websites over the internet as well as resources on private networks. ACM integrates with AWS resources, such as Elastic Load Balancers (ELBs), AWS distributions, and APIs on API Gateway, also handling automatic certificate renewals. If you use ACM to deploy a private root CA, both certificates and private keys can be provided by it for use in Amazon Elastic Compute Cloud (Amazon EC2) instances, containers, and so on.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Implement secure key and certificate management: Implement your defined secure key and certificate management solution.
 - [AWS Certificate Manager](#)
 - [How to host and manage an entire private certificate infrastructure in AWS](#)
- Implement secure protocols: Use secure protocols that offer authentication and confidentiality, such as Transport Layer Security (TLS) or IPsec, to reduce the risk of data tampering or loss. Check the AWS documentation for the protocols and security relevant to the services that you are using.

Resources

Related documents:

- [AWS Documentation](#)

SEC09-BP02 Enforce encryption in transit

Enforce your defined encryption requirements based on your organization's policies, regulatory obligations and standards to help meet organizational, legal, and compliance requirements. Only use protocols with encryption when transmitting sensitive data outside of your virtual private cloud (VPC). Encryption helps maintain data confidentiality even when the data transits untrusted networks.

Desired outcome: All data should be encrypted in transit using secure TLS protocols and cipher suites. Network traffic between your resources and the internet must be encrypted to mitigate unauthorized access to the data. Network traffic solely within your internal AWS environment should be encrypted using TLS wherever possible. The AWS internal network is encrypted by default and network traffic within a VPC cannot be spoofed or sniffed unless an unauthorized party has gained access to whatever resource is generating traffic (such as Amazon EC2 instances, and Amazon ECS containers). Consider protecting network-to-network traffic with an IPsec virtual private network (VPN).

Common anti-patterns:

- Using deprecated versions of SSL, TLS, and cipher suite components (for example, SSL v3.0, 1024-bit RSA keys, and RC4 cipher).
- Allowing unencrypted (HTTP) traffic to or from public-facing resources.
- Not monitoring and replacing X.509 certificates prior to expiration.
- Using self-signed X.509 certificates for TLS.

Level of risk exposed if this best practice is not established: High

Implementation guidance

AWS services provide HTTPS endpoints using TLS for communication, providing encryption in transit when communicating with the AWS APIs. Insecure protocols like HTTP can be audited and blocked in a VPC through the use of security groups. HTTP requests can also be [automatically redirected to HTTPS](#) in Amazon CloudFront or on an [Application Load Balancer](#). You have full control over your computing resources to implement encryption in transit across your services. Additionally, you can use VPN connectivity into your VPC from an external network or [AWS Direct Connect](#) to facilitate encryption of traffic. Verify that your clients are making calls to AWS APIs using at least TLS 1.2, as [AWS is deprecating the use of earlier versions of TLS in June 2023](#). AWS recommends using TLS 1.3. Third-party solutions are available in the AWS Marketplace if you have special requirements.

Implementation steps

- **Enforce encryption in transit:** Your defined encryption requirements should be based on the latest standards and best practices and only allow secure protocols. For example, configure a security group to only allow the HTTPS protocol to an application load balancer or Amazon EC2 instance.
- **Configure secure protocols in edge services:** [Configure HTTPS with Amazon CloudFront](#) and use a [security profile appropriate for your security posture and use case](#).
- **Use a VPN for external connectivity:** Consider using an IPsec VPN for securing point-to-point or network-to-network connections to help provide both data privacy and integrity.
- **Configure secure protocols in load balancers:** Select a security policy that provides the strongest cipher suites supported by the clients that will be connecting to the listener. [Create an HTTPS listener for your Application Load Balancer](#).
- **Configure secure protocols in Amazon Redshift:** Configure your cluster to require a [secure socket layer \(SSL\) or transport layer security \(TLS\) connection](#).

- **Configure secure protocols:** Review AWS service documentation to determine encryption-in-transit capabilities.
- **Configure secure access when uploading to Amazon S3 buckets:** Use Amazon S3 bucket policy controls to [enforce secure access](#) to data.
- **Consider using [AWS Certificate Manager](#):** ACM allows you to provision, manage, and deploy public TLS certificates for use with AWS services.
- **Consider using [AWS Private Certificate Authority](#) for private PKI needs:** AWS Private CA allows you to create private certificate authority (CA) hierarchies to issue end-entity X.509 certificates that can be used to create encrypted TLS channels.

Resources

Related documents:

- [Using HTTPS with CloudFront](#)
- [Connect your VPC to remote networks using AWS Virtual Private Network](#)
- [Create an HTTPS listener for your Application Load Balancer](#)
- [Tutorial: Configure SSL/TLS on Amazon Linux 2](#)
- [Using SSL/TLS to encrypt a connection to a DB instance](#)
- [Configuring security options for connections](#)

SEC09-BP03 Automate detection of unintended data access

Use tools such as Amazon GuardDuty to automatically detect suspicious activity or attempts to move data outside of defined boundaries. For example, GuardDuty can detect Amazon Simple Storage Service (Amazon S3) read activity that is unusual with the [Exfiltration:S3/AnomalousBehavior finding](#). In addition to GuardDuty, [Amazon VPC Flow Logs](#), which capture network traffic information, can be used with Amazon EventBridge to detect connections, both successful and denied. [Amazon S3 Access Analyzer](#) can help assess what data is accessible to who in your Amazon S3 buckets.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- Automate detection of unintended data access: Use a tool or detection mechanism to automatically detect attempts to move data outside of defined boundaries, for example, to detect a database system that is copying data to an unrecognized host.
 - [VPC Flow Logs](#)
- Consider Amazon Macie: Amazon Macie is a fully managed data security and data privacy service that uses machine learning and pattern matching to discover and protect your sensitive data in AWS.
 - [Amazon Macie](#)

Resources

Related documents:

- [VPC Flow Logs](#)
- [Amazon Macie](#)

SEC09-BP04 Authenticate network communications

Verify the identity of communications by using protocols that support authentication, such as Transport Layer Security (TLS) or IPsec.

Using network protocols that support authentication, allows for trust to be established between the parties. This adds to the encryption used in the protocol to reduce the risk of communications being altered or intercepted. Common protocols that implement authentication include Transport Layer Security (TLS), which is used in many AWS services, and IPsec, which is used in [AWS Virtual Private Network \(AWS VPN\)](#).

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- Implement secure protocols: Use secure protocols that offer authentication and confidentiality, such as TLS or IPsec, to reduce the risk of data tampering or loss. Check the [AWS documentation](#) for the protocols and security relevant to the services you are using.

Resources

Related documents:

- [AWS Documentation](#)

Incident response

Even with mature preventive and detective controls, your organization should implement mechanisms to respond to and mitigate the potential impact of security incidents. Your preparation strongly affects the ability of your teams to operate effectively during an incident, to isolate, contain and perform forensics on issues, and to restore operations to a known good state. Putting in place the tools and access ahead of a security incident, then routinely practicing incident response through game days, helps ensure that you can recover while minimizing business disruption.

Topics

- [Design goals of cloud response \(p. 87\)](#)
- [Educate \(p. 88\)](#)
- [Prepare \(p. 88\)](#)
- [Simulate \(p. 96\)](#)
- [Iterate \(p. 98\)](#)

Design goals of cloud response

Although the general processes and mechanisms of incident response, such as those defined in the [NIST SP 800-61 Computer Security Incident Handling Guide](#), remain true, we encourage you to evaluate these specific design goals that are relevant to responding to security incidents in a cloud environment:

- **Establish response objectives:** Work with your stakeholders, legal counsel, and organizational leadership to determine the goal of responding to an incident. Some common goals include containing and mitigating the issue, recovering the affected resources, preserving data for forensics, and attribution.
- **Document plans:** Create plans to help you respond to, communicate during, and recover from an incident.
- **Respond using the cloud:** Implement your response patterns where the event and data occurs.
- **Know what you have and what you need:** Preserve logs, snapshots, and other evidence by copying them to a centralized security cloud account. Use tags, metadata, and mechanisms that enforce retention policies. For example, you might choose to use the Linux `dd` command or a Windows equivalent to make a complete copy of the data for investigative purposes.
- **Use redeployment mechanisms:** If a security anomaly can be attributed to a misconfiguration, the remediation might be as simple as removing the variance by redeploying the resources with the proper configuration. When possible, make your response mechanisms safe to run more than once and in environments in an unknown state.
- **Automate where possible:** As you see issues or incidents repeat, build mechanisms that programmatically triage and respond to common situations. Use human responses for unique, new, and sensitive incidents.
- **Choose scalable solutions:** Strive to match the scalability of your organization's approach to cloud computing, and reduce the time between detection and response.
- **Learn and improve your process:** When you identify gaps in your process, tools, or people, implement plans to fix them. Simulations are safe methods to find gaps and improve processes.

In AWS, there are a number of different approaches you can use when addressing incident response. The following section describes how to use these approaches:

- **Educate** your security operations and incident response staff about cloud technologies and how your organization intends to use them.
- **Prepare** your incident response team to detect and respond to incidents in the cloud, use detective capabilities, and maintain appropriate access to the necessary tools and cloud services. Additionally, prepare the necessary runbooks, both manual and automated, to ensure reliable and consistent responses. Work with other teams to establish expected baseline operations, and use that knowledge to identify deviations from those normal operations.
- **Simulate** both expected and unexpected security events within your cloud environment to understand the effectiveness of your preparation.
- **Iterate** on the outcome of your simulation to improve the scale of your response posture, reduce time to value, and further reduce risk.

Educate

Automated processes allow organizations to spend more time focusing on measures to increase the security of their workloads. Automated incident response also makes humans available to correlate events, practice simulations, devise new response procedures, perform research, develop new skills, and test or build new tools. Despite increased automation, your team, specialists, and responders within a security organization still require continuous education. We encourage you to review and incorporate the following areas when thinking about educating your security teams:

Development Skills: Equipping security professionals with programming skills will accelerate your organization's automation efforts. This includes not only ensuring education around programming languages, such as Python, but also ensuring familiarity with source control system, version control, and CI/CD processes. When developers have this understanding, they'll increase efficiency and reduce errors when automating.

AWS Services: It's important for your security team to be proficient with the security services offered by AWS. Understanding how to use cloud native tools will reduce response time and build team confidence. In addition, establish a cadence of education about new services and capabilities in order to continually iterate your capabilities. Just as the threat landscape changes, so do the tools.

Application Awareness: Train your incident response team on the specifics of the workloads and environments that they own. This includes understanding what logs are emitted, what information the logs contain, the traffic flow of the application, and what authentication and authorization mechanisms are in use. This is a critical component as deep understanding of your organization's infrastructure and applications provides an advantage to protecting them.

The best way to learn is hands-on, through running incident response game days. This allows for experts in your team to hone the tools and techniques while teaching others. This is covered in more detail in the Simulate section.

Finally, don't forget to maintain required education for your entire organization. Security awareness is an important line of defense. Users should be trained to report suspicious behavior to your security team for further investigation.

Prepare

During an incident, your incident response teams must have access to various tools and the workload resources involved in the incident. Make sure that your teams have appropriate pre-provisioned access to perform their duties before an event occurs. All tools, access, and plans should be documented and tested before an event occurs to make sure that they can provide a timely response.

Best practices

- [SEC10-BP01 Identify key personnel and external resources \(p. 89\)](#)
- [SEC10-BP02 Develop incident management plans \(p. 89\)](#)
- [SEC10-BP03 Prepare forensic capabilities \(p. 92\)](#)
- [SEC10-BP05 Pre-provision access \(p. 93\)](#)
- [SEC10-BP06 Pre-deploy tools \(p. 95\)](#)

SEC10-BP01 Identify key personnel and external resources

Identify internal and external personnel, resources, and legal obligations that would help your organization respond to an incident.

When you define your approach to incident response in the cloud, in unison with other teams (such as your legal counsel, leadership, business stakeholders, AWS Support Services, and others), you must identify key personnel, stakeholders, and relevant contacts. To reduce dependency and decrease response time, make sure that your team, specialist security teams, and responders are educated about the services that you use and have opportunities to practice hands-on.

We encourage you to identify external AWS security partners that can provide you with outside expertise and a different perspective to augment your response capabilities. Your trusted security partners can help you identify potential risks or threats that you might not be familiar with.

Level of risk exposed if this best practice is not established: High

Implementation guidance

- Identify key personnel in your organization: Maintain a contact list of personnel within your organization that you would need to involve to respond to and recover from an incident.
- Identify external partners: Engage with external partners if necessary that can help you respond to and recover from an incident.

Resources

Related documents:

- [AWS Incident Response Guide](#)

Related videos:

- [Prepare for and respond to security incidents in your AWS environment](#)

Related examples:

SEC10-BP02 Develop incident management plans

Create plans to help you respond to, communicate during, and recover from an incident. For example, you can start an incident response plan with the most likely scenarios for your workload and organization. Include how you would communicate and escalate both internally and externally.

Level of risk exposed if this best practice is not established: High

Implementation guidance

An incident management plan is critical to respond, mitigate, and recover from the potential impact of security incidents. An incident management plan is a structured process for identifying, remediating, and responding in a timely matter to security incidents.

The cloud has many of the same operational roles and requirements found in an on-premises environment. When creating an incident management plan, it is important to factor response and recovery strategies that best align with your business outcome and compliance requirements. For example, if you are operating workloads in AWS that are FedRAMP compliant in the United States, it's useful to adhere to [NIST SP 800-61 Computer Security Handling Guide](#). Similarly, when operating workloads with European PII (personally identifiable information) data, consider scenarios like how you might protect and respond to issues related to data residency as mandated by [EU General Data Protection Regulation \(GDPR\) Regulations](#).

When building an incident management plan for your workloads operating in AWS, start with the [AWS Shared Responsibility Model](#), for building a defense-in-depth approach towards incident response. In this model, AWS manages security of the cloud, and you are responsible for security in the cloud. This means that you retain control and are responsible for the security controls you choose to implement. The [AWS Security Incident Response Guide](#) details key concepts and foundational guidance for building a cloud-centric incident management plan.

An effective incident management plan must be continually iterated upon, remaining current with your cloud operations goal. Consider using the implementation plans detailed below as you create and evolve your incident management plan.

- **Educate and train for incident response:** When a deviation from your defined baseline occurs (for example, an erroneous deployment or misconfiguration), you might need to respond and investigate. To successfully do so, you must understand which controls and capabilities you can use for security incident response within your AWS environment, as well as processes you need to consider to prepare, educate, and train your cloud teams participating in an incident response.
 - [Playbooks](#) and [runbooks](#) are effective mechanisms for building consistency in training how to respond to incidents. Start with building an initial list of frequently run procedures during an incident response, and continue to iterate as you learn or use new procedures.
 - Socialize the playbooks and runbooks through scheduled [game days](#). During game days, simulate the incident response in a controlled environment so that your team can recall how to respond, and to verify that the teams involved in incident response are well-versed with the workflows. Review the outcomes of the simulated event to identify improvements and determine the need for further training or additional tools.
 - Security should be considered everyone's job. Build collective knowledge of the incident management process by involving all personnel that normally operate your workloads. This includes all aspects of your business: operations, test, development, security, business operations, and business leaders.
- **Document the incident management plan:** Document the tools and process to record, act on, communicate the progress of, and provide notifications about active incidents. The goal of the incident management plan is to verify that normal operation is restored as quickly as possible, business impact is minimized, and all concerned parties are kept informed. Examples of incidents include (but are not restricted to) loss or degradation of network connectivity, a non-responsive process or API, a scheduled task not being performed (for example, failed patching), unavailability of application data or service, unplanned service disruption due to security events, credential leakage, or misconfiguration errors.
 - Identify the primary owner responsible for incident resolution, such as the workload owner. Have clear guidance on who will run the incident and how communication will be handled. When you have more than one party participating in the incident resolution process, such as an external vendor, consider building a *responsibility (RACI) matrix*, detailing the roles and responsibilities of various teams or people required for incident resolution.

A RACI matrix details the following:

- **R:** *Responsible* party that does the work to complete the task.
- **A:** *Accountable* party or stakeholder with final authority over the successful completion of the specific task.
- **C:** *Consulted* party whose opinions are sought, typically as subject matter experts.
- **I:** *Informed* party that is notified of progress, often only on completion of the task or deliverable.
- **Categorize incidents:** Defining and categorizing incidents based on severity and impact score allows for a structured approach to triaging and resolving incidents. The following recommendations illustrate an *impact-to-resolution urgency matrix* to quantify an incident. For example, a low-impact, low-urgency incident is considered a low-severity incident.
 - **High (H):** Your business is significantly impacted. Critical functions of your application related to AWS resources are unavailable. Reserved for the most critical events affecting production systems. The impact of the incident increases rapidly with remediation being time sensitive.
 - **Medium (M):** A business service or application related to AWS resources is moderately impacted and is functioning in a degraded state. Applications that contribute to service level objectives (SLOs) are affected within the service level agreement (SLA) limits. Systems can perform with reduced capability without much financial and reputational impact.
 - **Low (L):** Non-critical functions of your business service or application related to AWS resources are impacted. Systems can perform with reduced capability with minimal financial and reputational impact.
- **Standardize security controls:** The goal of standardizing security controls is to achieve consistency, traceability, and repeatability regarding operational outcomes. Drive standardization across key activities that are critical for incident response, such as:
 - **Identity and access management:** Establish mechanisms for controlling access to your data and managing privileges for both human and machine identities. Extend your own identity and access management to the cloud, using federated security with single sign-on and roles-based privileges to optimize access management. For best practice recommendations and improvement plans to standardize access management, refer to the [identity and access management section](#) of the Security Pillar whitepaper.
 - **Vulnerability management:** Establish mechanisms to identify vulnerabilities in your AWS environment that are likely to be used by attackers to compromise and misuse your system. Implement both preventive and detective controls as security mechanisms to respond to and mitigate the potential impact of security incidents. Standardize processes such as threat modeling as part of your infrastructure build and application delivery lifecycle.
 - **Configuration management:** Define standard configurations and automate procedures for deploying resources in the AWS Cloud. Standardizing both infrastructure and resource provisioning helps mitigate the risk of misconfiguration through erroneous deployments or accidental human misconfigurations. Refer to the [design principles section](#) of the Operational Excellence Pillar whitepaper for guidance and improvement plans for implementing this control.
 - **Logging and monitoring for audit control:** Implement mechanisms to monitor your resources for failures, performance degradation, and security issues. Standardizing these controls also provides audit trails of activities that occur in your system, helping timely triage and remediation of issues. Best practices under [SEC04 \("How do you detect and investigate security events?"\)](#) provide guidance for implementing this control.
- **Use automation:** Automation allows timely incident resolution at scale. AWS provides several services to automate within the context of the incident response strategy. Focus on finding an appropriate balance between automation and manual intervention. As you build your incident response in playbooks and runbooks, automate repeatable steps. Use AWS services such as AWS Systems Manager Incident Manager to [resolve IT incidents faster](#). Use [developer tools](#) to provide version control and automate [Amazon Machine Images \(AMI\)](#) and Infrastructure as Code (IaC) deployments without human intervention. Where applicable, automate detection and compliance assessment using managed services like Amazon GuardDuty, Amazon Inspector, AWS Security Hub, AWS Config, and Amazon Macie. Optimize detection capabilities with machine learning like Amazon DevOps Guru to detect abnormal operating patterns issues before they occur.

- **Conduct root cause analysis and action lessons learned:** Implement mechanisms to capture lessons learned as part of a post-incident response review. When the root cause of an incident reveals a larger defect, design flaw, misconfiguration, or possibility of recurrence, it is classified as a problem. In such cases, analyze and resolve the problem to minimize disruption of normal operations.

Resources

Related documents:

- [AWS Security Incident Response Guide](#)
- [NIST: Computer Security Incident Handling Guide](#)

Related videos:

- [Automating Incident Response and Forensics in AWS](#)
- [DIY guide to runbooks, incident reports, and incident response](#)
- [Prepare for and respond to security incidents in your AWS environment](#)

Related examples:

- [Lab: Incident Response Playbook with Jupyter - AWS IAM](#)
- [Lab: Incident Response with AWS Console and CLI](#)

SEC10-BP03 Prepare forensic capabilities

It's important for your incident responders to understand when and how the forensic investigation fits into your response plan. Your organization should define what evidence is collected and what tools are used in the process. Identify and prepare forensic investigation capabilities that are suitable, including external specialists, tools, and automation. A key decision that you should make upfront is if you will collect data from a live system. Some data, such as the contents of volatile memory or active network connections, will be lost if the system is powered off or rebooted.

Your response team can combine tools, such as AWS Systems Manager, Amazon EventBridge, and AWS Lambda, to automatically run forensic tools within an operating system and VPC traffic mirroring to obtain a network packet capture, to gather non-persistent evidence. Conduct other activities, such as log analysis or analyzing disk images, in a dedicated security account with customized forensic workstations and tools accessible to your responders.

Routinely ship relevant logs to a data store that provides high durability and integrity. Responders should have access to those logs. AWS offers several tools that can make log investigation easier, such as Amazon Athena, Amazon OpenSearch Service (OpenSearch Service), and Amazon CloudWatch Logs Insights. Additionally, preserve evidence securely using Amazon Simple Storage Service (Amazon S3) Object Lock. This service follows the WORM (write-once- read-many) model and prevents objects from being deleted or overwritten for a defined period. As forensic investigation techniques require specialist training, you might need to engage external specialists.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- **Identify forensic capabilities:** Research your organization's forensic investigation capabilities, available tools, and external specialists.

- [Automating Incident Response and Forensics](#)

Resources

Related documents:

- [How to automate forensic disk collection in AWS](#)

SEC10-BP05 Pre-provision access

Verify that incident responders have the correct access pre-provisioned in AWS to reduce the time needed for investigation through to recovery.

Common anti-patterns:

- Using the root account for incident response.
- Altering existing accounts.
- Manipulating IAM permissions directly when providing just-in-time privilege elevation.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

AWS recommends reducing or eliminating reliance on long-lived credentials wherever possible, in favor of temporary credentials and *just-in-time* privilege escalation mechanisms. Long-lived credentials are prone to security risk and increase operational overhead. For most management tasks, as well as incident response tasks, we recommend you implement [identity federation](#) alongside [temporary escalation for administrative access](#). In this model, a user requests elevation to a higher level of privilege (such as an incident response role) and, provided the user is eligible for elevation, a request is sent to an approver. If the request is approved, the user receives a set of temporary [AWS credentials](#) which can be used to complete their tasks. After these credentials expire, the user must submit a new elevation request.

We recommend the use of temporary privilege escalation in the majority of incident response scenarios. The correct way to do this is to use the [AWS Security Token Service](#) and [session policies](#) to scope access.

There are scenarios where federated identities are unavailable, such as:

- Outage related to a compromised identity provider (IdP).
- Misconfiguration or human error causing broken federated access management system.
- Malicious activity such as a distributed denial of service (DDoS) event or rendering unavailability of the system.

In the preceding cases, there should be emergency *break glass* access configured to allow investigation and timely remediation of incidents. We recommend that you use a [user, group, or role with appropriate permissions](#) to perform tasks and access AWS resources. Use the root user only for [tasks that require root user credentials](#). To verify that incident responders have the correct level of access to AWS and other relevant systems, we recommend the pre-provisioning of dedicated accounts. The accounts require privileged access, and must be tightly controlled and monitored. The accounts must be built with the fewest privileges required to perform the necessary tasks, and the level of access should be based on the playbooks created as part of the incident management plan.

Use purpose-built and dedicated users and roles as a best practice. Temporarily escalating user or role access through the addition of IAM policies both makes it unclear what access users had during the incident, and risks the escalated privileges not being revoked.

It is important to remove as many dependencies as possible to verify that access can be gained under the widest possible number of failure scenarios. To support this, create a playbook to verify that incident response users are created as users in a dedicated security account, and not managed through any existing Federation or single sign-on (SSO) solution. Each individual responder must have their own named account. The account configuration must enforce [strong password policy](#) and multi-factor authentication (MFA). If the incident response playbooks only require access to the AWS Management Console, the user should not have access keys configured and should be explicitly disallowed from creating access keys. This can be configured with IAM policies or service control policies (SCPs) as mentioned in the AWS Security Best Practices for [AWS Organizations SCPs](#). The users should have no privileges other than the ability to assume incident response roles in other accounts.

During an incident it might be necessary to grant access to other internal or external individuals to support investigation, remediation, or recovery activities. In this case, use the playbook mechanism mentioned previously, and there must be a process to verify that any additional access is revoked immediately after the incident is complete.

To verify that the use of incident response roles can be properly monitored and audited, it is essential that the IAM accounts created for this purpose are not shared between individuals, and that the AWS account root user is not used unless [required for a specific task](#). If the root user is required (for example, IAM access to a specific account is unavailable), use a separate process with a playbook available to verify availability of the root user sign-in credentials and MFA token.

To configure the IAM policies for the incident response roles, consider using [IAM Access Analyzer](#) to generate policies based on AWS CloudTrail logs. To do this, grant administrator access to the incident response role on a non-production account and run through your playbooks. Once complete, a policy can be created that allows only the actions taken. This policy can then be applied to all the incident response roles across all accounts. You might wish to create a separate IAM policy for each playbook to allow easier management and auditing. Example playbooks could include response plans for ransomware, data breaches, loss of production access, and other scenarios.

Use the incident response accounts to assume dedicated incident response [IAM roles in other AWS accounts](#). These roles must be configured to only be assumable by users in the security account, and the trust relationship must require that the calling principal has authenticated using MFA. The roles must use tightly-scoped IAM policies to control access. Ensure that all AssumeRole requests for these roles are logged in CloudTrail and alerted on, and that any actions taken using these roles are logged.

It is strongly recommended that both the IAM accounts and the IAM roles are clearly named to allow them to be easily found in CloudTrail logs. An example of this would be to name the IAM accounts `<USER_ID>-BREAK-GLASS` and the IAM roles `BREAK-GLASS-ROLE`.

[CloudTrail](#) is used to log API activity in your AWS accounts and should be used to [configure alerts on usage of the incident response roles](#). Refer to the blog post on configuring alerts when root keys are used. The instructions can be modified to configure the [Amazon CloudWatch](#) metric filter-to-filter on AssumeRole events related to the incident response IAM role:

```
{ $.eventName = "AssumeRole" && $.requestParameters.roleArn =  
  "<INCIDENT_RESPONSE_ROLE_ARN>" && $.userIdentity.invokedBy NOT EXISTS && $.eventType !=  
  "AwsServiceEvent" }
```

As the incident response roles are likely to have a high level of access, it is important that these alerts go to a wide group and are acted upon promptly.

During an incident, it is possible that a responder might require access to systems which are not directly secured by IAM. These could include Amazon Elastic Compute Cloud instances, Amazon Relational Database Service databases, or software-as-a-service (SaaS) platforms. It is strongly recommended that rather than using native protocols such as SSH or RDP, [AWS Systems Manager Session Manager](#) is used for all administrative access to Amazon EC2 instances. This access can be controlled using IAM, which is secure and audited. It might also be possible to automate parts of your playbooks using [AWS](#)

[Systems Manager Run Command documents](#), which can reduce user error and improve time to recovery. For access to databases and third-party tools, we recommend storing access credentials in AWS Secrets Manager and granting access to the incident responder roles.

Finally, the management of the incident response IAM accounts should be added to your [Joiners, Movers, and Leavers processes](#) and reviewed and tested periodically to verify that only the intended access is allowed.

Resources

Related documents:

- [Managing temporary elevated access to your AWS environment](#)
- [AWS Security Incident Response Guide](#)
- [AWS Elastic Disaster Recovery](#)
- [AWS Systems Manager Incident Manager](#)
- [Setting an account password policy for IAM users](#)
- [Using multi-factor authentication \(MFA\) in AWS](#)
- [Configuring Cross-Account Access with MFA](#)
- [Using IAM Access Analyzer to generate IAM policies](#)
- [Best Practices for AWS Organizations Service Control Policies in a Multi-Account Environment](#)
- [How to Receive Notifications When Your AWS Account's Root Access Keys Are Used](#)
- [Create fine-grained session permissions using IAM managed policies](#)

Related videos:

- [Automating Incident Response and Forensics in AWS](#)
- [DIY guide to runbooks, incident reports, and incident response](#)
- [Prepare for and respond to security incidents in your AWS environment](#)

Related examples:

- [Lab: AWS Account Setup and Root User](#)
- [Lab: Incident Response with AWS Console and CLI](#)

SEC10-BP06 Pre-deploy tools

Ensure that security personnel have the right tools pre-deployed into AWS to reduce the time for investigation through to recovery.

To automate security engineering and operations functions, you can use a comprehensive set of APIs and tools from AWS. You can fully automate identity management, network security, data protection, and monitoring capabilities and deliver them using popular software development methods that you already have in place. When you build security automation, your system can monitor, review, and initiate a response, rather than having people monitor your security position and manually react to events. An effective way to automatically provide searchable and relevant log data across AWS services to your incident responders is to turn on [Amazon Detective](#).

If your incident response teams continue to respond to alerts in the same way, they risk alert fatigue. Over time, the team can become desensitized to alerts and can either make mistakes handling ordinary situations or miss unusual alerts. Automation helps avoid alert fatigue by using functions that process the repetitive and ordinary alerts, leaving humans to handle the sensitive and unique incidents.

Integrating anomaly detection systems, such as Amazon GuardDuty, AWS CloudTrail Insights, and Amazon CloudWatch Anomaly Detection, can reduce the burden of common threshold-based alerts.

You can improve manual processes by programmatically automating steps in the process. After you define the remediation pattern to an event, you can decompose that pattern into actionable logic, and write the code to perform that logic. Responders can then run that code to remediate the issue. Over time, you can automate more and more steps, and ultimately automatically handle whole classes of common incidents.

For tools that run within the operating system of your Amazon Elastic Compute Cloud (Amazon EC2) instance, you should evaluate using the AWS Systems Manager Run Command, which allows you to remotely and securely administrate instances using an agent that you install on your Amazon EC2 instance operating system. It requires the Systems Manager Agent (SSM Agent), which is installed by default on many Amazon Machine Images (AMIs). Be aware, though, that once an instance has been compromised, no responses from tools or agents running on it should be considered trustworthy.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

- Pre-deploy tools: Ensure that security personnel have the right tools pre-deployed in AWS so that an appropriate response can be made to an incident.
 - [Lab: Incident response with AWS Management Console and CLI](#)
 - [Incident Response Playbook with Jupyter - AWS IAM](#)
 - [AWS Security Automation](#)
- Implement resource tagging: Tag resources with information, such as a code for the resource under investigation, so that you can identify resources during an incident.
 - [AWS Tagging Strategies](#)

Resources

Related documents:

- [AWS Incident Response Guide](#)

Related videos:

- [DIY guide to runbooks, incident reports, and incident response](#)

Simulate

Recover from the incident: After teams have implemented best practices, they can now focus on ensuring the complete removal of the compromise. They can do this by restoring files or pieces of data that were compromised during the incident from backups or previous versions. Also, they must ensure that all suspicious activity has ceased and continue to monitor to ensure a stable state.

Post-incident debrief: This session allows teams to share learnings and increase the overall effectiveness of the organization's incident response plan. Here the teams should review handling of the incident in detail, document lessons learned, update runbooks based on learnings, and determine if new risk assessments are required.

Best practices

- [SEC10-BP07 Run game days \(p. 97\)](#)

SEC10-BP07 Run game days

Game days, also known as simulations or exercises, are internal events that provide a structured opportunity to practice your incident management plans and procedures during a realistic scenario. These events should exercise responders using the same tools and techniques that would be used in a real-world scenario - even mimicking real-world environments. Game days are fundamentally about being prepared and iteratively improving your response capabilities. Some of the reasons you might find value in performing game day activities include:

- Validating readiness
- Developing confidence – learning from simulations and training staff
- Following compliance or contractual obligations
- Generating artifacts for accreditation
- Being agile – incremental improvement
- Becoming faster and improving tools
- Refining communication and escalation
- Developing comfort with the rare and the unexpected

For these reasons, the value derived from participating in a simulation activity increases an organization's effectiveness during stressful events. Developing a simulation activity that is both realistic and beneficial can be a difficult exercise. Although testing your procedures or automation that handles well-understood events has certain advantages, it is just as valuable to participate in creative [Security Incident Response Simulations \(SIRS\)](#) activities to test yourself against the unexpected and continuously improve.

Create custom simulations tailored to your environment, team, and tools. Find an issue and design your simulation around it. This could be something like a leaked credential, a server communicating with unwanted systems, or a misconfiguration that results in unauthorized exposure. Identify engineers who are familiar with your organization to create the scenario and another group to participate. The scenario should be realistic and challenging enough to be valuable. It should include the opportunity to get hands on with logging, notifications, escalations, and initiating runbooks or automation. During the simulation, your responders should exercise their technical and organizational skills, and leaders should be involved to build their incident management skills. At the end of the simulation, celebrate the efforts of the team and look for ways to iterate, repeat, and expand into further simulations.

[AWS has created Incident Response Runbook templates](#) that you can use not only to prepare your response efforts, but also as a basis for a simulation. When planning, a simulation can be broken into five phases.

Evidence gathering: In this phase, a team will get alerts through various means, such as an internal ticketing system, alerts from monitoring tooling, anonymous tips, or even public news. Teams then start to review infrastructure and application logs to determine the source of the compromise. This step should also involve internal escalations and incident leadership. Once identified, teams move on to containing the incident

Contain the incident: Teams will have determined there has been an incident and established the source of the compromise. Teams now should take action to contain it, for example, by deactivating compromised credentials, isolating a compute resource, or revoking a role's permission.

Eradicate the incident: Now that they've contained the incident, teams will work towards mitigating any vulnerabilities in applications or infrastructure configurations that were susceptible to the compromise. This could include rotating all credentials used for a workload, modifying Access Control Lists (ACLs) or changing network configurations.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

- Run [game days](#): Run simulated [incident](#) response [events \(game days\)](#) for different threats that involve key staff and management.
- Capture lessons learned: Lessons learned from running [game days](#) should be part of a feedback loop to improve your processes.

Resources

Related documents:

- [AWS Incident Response Guide](#)
- [AWS Elastic Disaster Recovery](#)

Related videos:

- [DIY guide to runbooks, incident reports, and incident response](#)

Iterate

Best practices

- [SEC10-BP04 Automate containment capability \(p. 98\)](#)

SEC10-BP04 Automate containment capability

Automate containment and recovery of an incident to reduce response times and organizational impact.

Once you create and practice the processes and tools from your playbooks, you can deconstruct the logic into a code-based solution, which can be used as a tool by many responders to automate the response and remove variance or guess-work by your responders. This can speed up the lifecycle of a response. The next goal is to allow this code to be fully automated by being invoked by the alerts or events themselves, rather than by a human responder, to create an event-driven response. These processes should also automatically add relevant data to your security systems. For example, an incident involving traffic from an unwanted IP address can automatically populate an AWS WAF block list or Network Firewall rule group to prevent further activity.

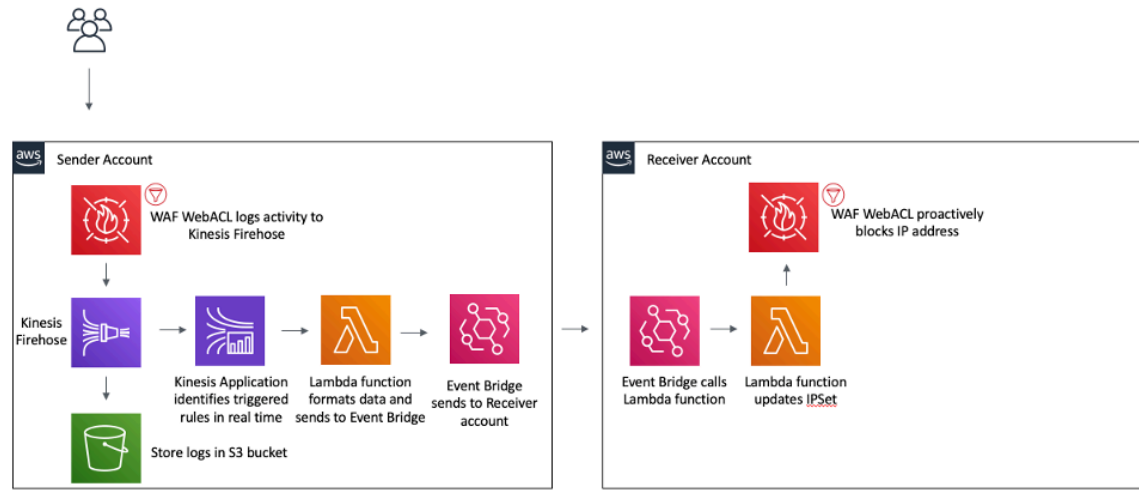


Figure 3: AWS WAF automate blocking of known malicious IP addresses.

With an event-driven response system, a detective mechanism initiates a responsive mechanism to automatically remediate the event. You can use event-driven response capabilities to reduce the time-to-value between detective mechanisms and responsive mechanisms. To create this event-driven architecture, you can use AWS Lambda, which is a serverless compute service that runs your code in response to events and automatically manages the underlying compute resources for you. For example, assume that you have an AWS account using the AWS CloudTrail service. If CloudTrail is ever turned off (through the `cloudtrail:StopLogging` API call), you can use Amazon EventBridge to monitor for the specific `cloudtrail:StopLogging` event, and invoke a Lambda function to call `cloudtrail:StartLogging` to restart logging.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

Automate containment capability.

Resources

Related documents:

- [AWS Incident Response Guide](#)

Related videos:

- [Prepare for and respond to security incidents in your AWS environment](#)

Application security

Application security (AppSec) describes the overall process of how you design, build, and test the security properties of the workloads you develop. You should have appropriately trained people in your organization, understand the security properties of your build and release infrastructure, and use automation to identify security issues.

Adopting application security testing as a regular part of your software development lifecycle (SDLC) and post release processes help ensure that you have a structured mechanism to identify, fix, and prevent application security issues entering your production environment.

Your application development methodology should include security controls as you design, build, deploy, and operate your workloads. While doing so, align the process for continuous defect reduction and minimizing technical debt. For example, using threat modeling in the design phase helps you uncover design flaws early, which makes them easier and less costly to fix as opposed to waiting and mitigating them later.

The cost and complexity to resolve defects is typically lower the earlier you are in the SDLC. The easiest way to resolve issues is to not have them in the first place, which is why starting with a threat model helps you focus on the right outcomes from the design phase. As your AppSec program matures, you can increase the amount of testing that is performed using automation, improve the fidelity of feedback to builders, and reduce the time needed for security reviews. All of these actions improve the quality of the software you build, and increase the speed of delivering features into production.

These implementation guidelines focus on four areas: organization and culture, security of the pipeline, security *in* the pipeline, and dependency management. Each area provides a set of principles that you can implement. and provides an end-to-end view of how you design, develop, build, deploy, and operate workloads.

In AWS, there are a number of approaches you can use when addressing your application security program. Some of these approaches rely on technology while others focus on the people and organizational aspects of your application security program.

Best practices

- [SEC11-BP01 Train for application security \(p. 100\)](#)
- [SEC11-BP02 Automate testing throughout the development and release lifecycle \(p. 102\)](#)
- [SEC11-BP03 Perform regular penetration testing \(p. 104\)](#)
- [SEC11-BP04 Manual code reviews \(p. 106\)](#)
- [SEC11-BP05 Centralize services for packages and dependencies \(p. 107\)](#)
- [SEC11-BP06 Deploy software programmatically \(p. 109\)](#)
- [SEC11-BP07 Regularly assess security properties of the pipelines \(p. 110\)](#)
- [SEC11-BP08 Build a program that embeds security ownership in workload teams \(p. 111\)](#)

SEC11-BP01 Train for application security

Provide training to the builders in your organization on common practices for the secure development and operation of applications. Adopting security focused development practices helps reduce the likelihood of issues that are only detected at the security review stage.

Desired outcome: Software should be designed and built with security in mind. When the builders in an organization are trained on secure development practices that start with a threat model, it improves the overall quality and security of the software produced. This approach can reduce the time to ship software or features because less rework is needed after the security review stage.

For the purposes of this best practice, *secure development* refers to the software that is being written and the tools or systems that support the software development lifecycle (SDLC).

Common anti-patterns:

- Waiting until a security review, and then considering the security properties of a system.
- Leaving all security decisions to the security team.
- Failing to communicate how the decisions taken in the SDLC relate to the overall security expectations or policies of the organization.
- Engaging in the security review process too late.

Benefits of establishing this best practice:

- Better knowledge of the organizational requirements for security early in the development cycle.
- Being able to identify and remediate potential security issues faster, resulting in a quicker delivery of features.
- Improved quality of software and systems.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

Provide training to the builders in your organization. Starting off with a course on [threat modeling](#) is a good foundation for helping train for security. Ideally, builders should be able to self-serve access to information relevant to their workloads. This access helps them make informed decisions about the security properties of the systems they build without needing to ask another team. The process for engaging the security team for reviews should be clearly defined and simple to follow. The steps in the review process should be included in the security training. Where known implementation patterns or templates are available, they should be simple to find and link to the overall security requirements. Consider using [AWS CloudFormation](#), [AWS Cloud Development Kit \(AWS CDK\) Constructs](#), [Service Catalog](#), or other templating tools to reduce the need for custom configuration.

Implementation steps

- Start builders with a course on [threat modeling](#) to build a good foundation, and help train them on how to think about security.
- Provide access to [AWS Training and Certification](#), industry, or AWS Partner training.
- Provide training on your organization's security review process, which clarifies the division of responsibilities between the security team, workload teams, and other stakeholders.
- Publish self-service guidance on how to meet your security requirements, including code examples and templates, if available.
- Regularly obtain feedback from builder teams on their experience with the security review process and training, and use that feedback to improve.
- Use game days or bug bash campaigns to help reduce the number of issues, and increase the skills of your builders.

Resources

Related best practices:

- [SEC11-BP08 Build a program that embeds security ownership in workload teams \(p. 111\)](#)

Related documents:

- [AWS Training and Certification](#)
- [How to think about cloud security governance](#)
- [How to approach threat modeling](#)
- [Accelerating training – The AWS Skills Guild](#)

Related videos:

- [Proactive security: Considerations and approaches](#)

Related examples:

- [Workshop on threat modeling](#)
- [Industry awareness for developers](#)

Related services:

- [AWS CloudFormation](#)
- [AWS Cloud Development Kit \(AWS CDK\) \(AWS CDK\) Constructs](#)
- [Service Catalog](#)
- [AWS BugBust](#)

SEC11-BP02 Automate testing throughout the development and release lifecycle

Automate the testing for security properties throughout the development and release lifecycle. Automation makes it easier to consistently and repeatably identify potential issues in software prior to release, which reduces the risk of security issues in the software being provided.

Desired outcome: The goal of automated testing is to provide a programmatic way of detecting potential issues early and often throughout the development lifecycle. When you automate regression testing, you can rerun functional and non-functional tests to verify that previously tested software still performs as expected after a change. When you define security unit tests to check for common misconfigurations, such as broken or missing authentication, you can identify and fix these issues early in the development process.

Test automation uses purpose-built test cases for application validation, based on the application's requirements and desired functionality. The result of the automated testing is based on comparing the generated test output to its respective expected output, which expedites the overall testing lifecycle. Testing methodologies such as regression testing and unit test suites are best suited for automation. Automating the testing of security properties allows builders to receive automated feedback without having to wait for a security review. Automated tests in the form of static or dynamic code analysis can increase code quality and help detect potential software issues early in the development lifecycle.

Common anti-patterns:

- Not communicating the test cases and test results of the automated testing.
- Performing the automated testing only immediately prior to a release.
- Automating test cases with frequently changing requirements.
- Failing to provide guidance on how to address the results of security tests.

Benefits of establishing this best practice:

- Reduced dependency on people evaluating the security properties of systems.
- Having consistent findings across multiple workstreams improves consistency.
- Reduced likelihood of introducing security issues into production software.
- Shorter window of time between detection and remediation due to catching software issues earlier.
- Increased visibility of systemic or repeated behavior across multiple workstreams, which can be used to drive organization-wide improvements.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

As you build your software, adopt various mechanisms for software testing to ensure that you are testing your application for both functional requirements, based on your application's business logic, and non-functional requirements, which are focused on application reliability, performance, and security.

Static application security testing (SAST) analyzes your source code for anomalous security patterns, and provides indications for defect prone code. SAST relies on static inputs, such as documentation (requirements specification, design documentation, and design specifications) and application source code to test for a range of known security issues. Static code analyzers can help expedite the analysis of large volumes of code. The [NIST Quality Group](#) provides a comparison of [Source Code Security Analyzers](#), which includes open source tools for [Byte Code Scanners](#) and [Binary Code Scanners](#).

Complement your static testing with dynamic analysis security testing (DAST) methodologies, which performs tests against the running application to identify potentially unexpected behavior. Dynamic testing can be used to detect potential issues that are not detectable via static analysis. Testing at the code repository, build, and pipeline stages allows you to check for different types of potential issues from entering into your code. [Amazon CodeWhisperer](#) provides code recommendations, including security scanning, in the builder's IDE. [Amazon CodeGuru Reviewer](#) can identify critical issues, security issues, and hard-to-find bugs during application development, and provides recommendations to improve code quality.

The [Security for Developers workshop](#) uses AWS developer tools, such as [AWS CodeBuild](#), [AWS CodeCommit](#), and [AWS CodePipeline](#), for release pipeline automation that includes SAST and DAST testing methodologies.

As you progress through your SDLC, establish an iterative process that includes periodic application reviews with your security team. Feedback gathered from these security reviews should be addressed and validated as part of your release readiness review. These reviews establish a robust application security posture, and provide builders with actionable feedback to address potential issues.

Implementation steps

- Implement consistent IDE, code review, and CI/CD tools that include security testing.
- Consider where in the SDLC it is appropriate to block pipelines instead of just notifying builders that issues need to be remediated.
- The [Security for Developers workshop](#) provides an example of integrating static and dynamic testing into a release pipeline.
- Performing testing or code analysis using automated tools, such as [Amazon CodeWhisperer](#) integrated with developer IDEs, and [Amazon CodeGuru Reviewer](#) for scanning code on commit, helps builders get feedback at the right time.
- When building using AWS Lambda, you can use [Amazon Inspector](#) to scan the application code in your functions.

- When automated testing is included in CI/CD pipelines, you should use a ticketing system to track the notification and remediation of software issues.
- For security tests that might generate findings, linking to guidance for remediation helps builders improve code quality.
- Regularly analyze the findings from automated tools to prioritize the next automation, builder training, or awareness campaign.

Resources

Related documents:

- [Continuous Delivery and Continuous Deployment](#)
- [AWS DevOps Competency Partners](#)
- [AWS Security Competency Partners](#) for Application Security
- [Choosing a Well-Architected CI/CD approach](#)
- [Monitoring CodeCommit events in Amazon EventBridge and Amazon CloudWatch Events](#)
- [Secrets detection in Amazon CodeGuru Review](#)
- [Accelerate deployments on AWS with effective governance](#)
- [How AWS approaches automating safe, hands-off deployments](#)

Related videos:

- [Hands-off: Automating continuous delivery pipelines at Amazon](#)
- [Automating cross-account CI/CD pipelines](#)

Related examples:

- [Industry awareness for developers](#)
- [AWS CodePipeline Governance](#) (GitHub)
- [Security for Developers workshop](#)

SEC11-BP03 Perform regular penetration testing

Perform regular penetration testing of your software. This mechanism helps identify potential software issues that cannot be detected by automated testing or a manual code review. It can also help you understand the efficacy of your detective controls. Penetration testing should try to determine if the software can be made to perform in unexpected ways, such as exposing data that should be protected, or granting broader permissions than expected.

Desired outcome: Penetration testing is used to detect, remediate, and validate your application's security properties. Regular and scheduled penetration testing should be performed as part of the software development lifecycle (SDLC). The findings from penetration tests should be addressed prior to the software being released. You should analyze the findings from penetration tests to identify if there are issues that could be found using automation. Having a regular and repeatable penetration testing process that includes an active feedback mechanism helps inform the guidance to builders and improves software quality.

Common anti-patterns:

- Only penetration testing for known or prevalent security issues.
- Penetration testing applications without dependent third-party tools and libraries.
- Only penetration testing for package security issues, and not evaluating implemented business logic.

Benefits of establishing this best practice:

- Increased confidence in the security properties of the software prior to release.
- Opportunity to identify preferred application patterns, which leads to greater software quality.
- A feedback loop that identifies earlier in the development cycle where automation or additional training can improve the security properties of software.

Level of risk exposed if this best practice is not established: High

Implementation guidance

Penetration testing is a structured security testing exercise where you run planned security breach scenarios to detect, remediate, and validate security controls. Penetration tests start with reconnaissance, during which data is gathered based on the current design of the application and its dependencies. A curated list of security-specific testing scenarios are built and run. The key purpose of these tests is to uncover security issues in your application, which could be exploited for gaining unintended access to your environment, or unauthorized access to data. You should perform penetration testing when you launch new features, or whenever your application has undergone major changes in function or technical implementation.

You should identify the most appropriate stage in the development lifecycle to perform penetration testing. This testing should happen late enough that the functionality of the system is close to the intended release state, but with enough time remaining for any issues to be remediated.

Implementation steps

- Have a structured process for how penetration testing is scoped, basing this process on the [threat model](#) is a good way of maintaining context.
- Identify the appropriate place in the development cycle to perform penetration testing. This should be when there is minimal change expected in the application, but with enough time to perform remediation.
- Train your builders on what to expect from penetration testing findings, and how to get information on remediation.
- Use tools to speed up the penetration testing process by automating common or repeatable tests.
- Analyze penetration testing findings to identify systemic security issues, and use this data to inform additional automated testing and ongoing builder education.

Resources

Related best practices:

- [SEC11-BP01 Train for application security \(p. 100\)](#)
- [SEC11-BP02 Automate testing throughout the development and release lifecycle \(p. 102\)](#)

Related documents:

- [AWS Penetration Testing](#) provides detailed guidance for penetration testing on AWS

- [Accelerate deployments on AWS with effective governance](#)
- [AWS Security Competency Partners](#)
- [Modernize your penetration testing architecture on AWS Fargate](#)
- [AWS Fault injection Simulator](#)

Related examples:

- [Automate API testing with AWS CodePipeline](#) (GitHub)
- [Automated security helper](#) (GitHub)

SEC11-BP04 Manual code reviews

Perform a manual code review of the software that you produce. This process helps verify that the person who wrote the code is not the only one checking the code quality.

Desired outcome: Including a manual code review step during development increases the quality of the software being written, helps upskill less experienced members of the team, and provides an opportunity to identify places where automation can be used. Manual code reviews can be supported by automated tools and testing.

Common anti-patterns:

- Not performing reviews of code before deployment.
- Having the same person write and review the code.
- Not using automation to assist or orchestrate code reviews.
- Not training builders on application security before they review code.

Benefits of establishing this best practice:

- Increased code quality.
- Increased consistency of code development through reuse of common approaches.
- Reduction in the number of issues discovered during penetration testing and later stages.
- Improved knowledge transfer within the team.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

The review step should be implemented as part of the overall code management flow. The specifics depend on the approach used for branching, pull-requests, and merging. You might be using AWS CodeCommit or third-party solutions such as GitHub, GitLab, or Bitbucket. Whatever method you use, it's important to verify that your processes require the review of code before it's deployed in a production environment. Using tools such as [Amazon CodeGuru Reviewer](#) can make it easier to orchestrate the code review process.

Implementation steps

- Implement a manual review step as part of your code management flow and perform this review before proceeding.
- Consider [Amazon CodeGuru Reviewer](#) for managing and assisting in code reviews.

- Implement an approval flow that requires a code review being completed before code can progress to the next stage.
- Verify there is a process to identify issues being found during manual code reviews that could be detected automatically.
- Integrate the manual code review step in a way that aligns with your code development practices.

Resources

Related best practices:

- [SEC11-BP02 Automate testing throughout the development and release lifecycle \(p. 102\)](#)

Related documents:

- [Working with pull requests in AWS CodeCommit repositories](#)
- [Working with approval rule templates in AWS CodeCommit](#)
- [About pull requests in GitHub](#)
- [Automate code reviews with Amazon CodeGuru Reviewer](#)
- [Automating detection of security vulnerabilities and bugs in CI/CD pipelines using Amazon CodeGuru Reviewer CLI](#)

Related videos:

- [Continuous improvement of code quality with Amazon CodeGuru](#)

Related examples:

- [Security for Developers workshop](#)

SEC11-BP05 Centralize services for packages and dependencies

Provide centralized services for builder teams to obtain software packages and other dependencies. This allows the validation of packages before they are included in the software that you write, and provides a source of data for the analysis of the software being used in your organization.

Desired outcome: Software is comprised of a set of other software packages in addition to the code that is being written. This makes it simple to consume implementations of functionality that are repeatedly used, such as a JSON parser or an encryption library. Logically centralizing the sources for these packages and dependencies provides a mechanism for security teams to validate the properties of the packages before they are used. This approach also reduces the risk of an unexpected issue being caused by a change in an existing package, or by builder teams including arbitrary packages directly from the internet. Use this approach in conjunction with the manual and automated testing flows to increase the confidence in the quality of the software that is being developed.

Common anti-patterns:

- Pulling packages from arbitrary repositories on the internet.
- Not testing new packages before making them available to builders.

Benefits of establishing this best practice:

- Better understanding of what packages are being used in the software being built.
- Being able to notify workload teams when a package needs to be updated based on the understanding of who is using what.
- Reducing the risk of a package with issues being included in your software.

Level of risk exposed if this best practice is not established: Medium

Implementation guidance

Provide centralized services for packages and dependencies in a way that is simple for builders to consume. Centralized services can be logically central rather than implemented as a monolithic system. This approach allows you to provide services in a way that meets the needs of your builders. You should implement an efficient way of adding packages to the repository when updates happen or new requirements emerge. AWS services such as [AWS CodeArtifact](#) or similar AWS partner solutions provide a way of delivering this capability.

Implementation steps:

- Implement a logically centralized repository service that is available in all of the environments where software is developed.
- Include access to the repository as part of the AWS account vending process.
- Build automation to test packages before they are published in a repository.
- Maintain metrics of the most commonly used packages, languages, and teams with the highest amount of change.
- Provide an automated mechanism for builder teams to request new packages and provide feedback.
- Regularly scan packages in your repository to identify the potential impact of newly discovered issues.

Resources

Related best practices:

- [SEC11-BP02 Automate testing throughout the development and release lifecycle \(p. 102\)](#)

Related documents:

- [Accelerate deployments on AWS with effective governance](#)
- [Tighten your package security with CodeArtifact Package Origin Control toolkit](#)
- [Detecting security issues in logging with Amazon CodeGuru Reviewer](#)
- [Supply chain Levels for Software Artifacts \(SLSA\)](#)

Related videos:

- [Proactive security: Considerations and approaches](#)
- [The AWS Philosophy of Security \(re:Invent 2017\)](#)
- [When security, safety, and urgency all matter: Handling Log4Shell](#)

Related examples:

- [Multi Region Package Publishing Pipeline](#) (GitHub)
- [Publishing Node.js Modules on AWS CodeArtifact using AWS CodePipeline](#) (GitHub)
- [AWS CDK Java CodeArtifact Pipeline Sample](#) (GitHub)
- [Distribute private .NET NuGet packages with AWS CodeArtifact](#) (GitHub)

SEC11-BP06 Deploy software programmatically

Perform software deployments programmatically where possible. This approach reduces the likelihood that a deployment fails or an unexpected issue is introduced due to human error.

Desired outcome: Keeping people away from data is a key principle of building securely in the AWS Cloud. This principle includes how you deploy your software.

The benefits of not relying on people to deploy software is the greater confidence that what you tested is what gets deployed, and that the deployment is performed consistently every time. The software should not need to be changed to function in different environments. Using the principles of twelve-factor application development, specifically the externalizing of configuration, allows you to deploy the same code to multiple environments without requiring changes. Cryptographically signing software packages is a good way to verify that nothing has changed between environments. The overall outcome of this approach is to reduce risk in your change process and improve the consistency of software releases.

Common anti-patterns:

- Manually deploying software into production.
- Manually performing changes to software to cater to different environments.

Benefits of establishing this best practice:

- Increased confidence in the software release process.
- Reduced risk of a failed change impacting business functionality.
- Increased release cadence due to lower change risk.
- Automatic rollback capability for unexpected events during deployment.
- Ability to cryptographically prove that the software that was tested is the software deployed.

Level of risk exposed if this best practice is not established: High

Implementation guidance

Build your AWS account structure to remove persistent human access from environments and use CI/CD tools to perform deployments. Architect your applications so that environment-specific configuration data is obtained from an external source, such as [AWS Systems Manager Parameter Store](#). Sign packages after they have been tested, and validate these signatures during deployment. Configure your CI/CD pipelines to push application code and use canaries to confirm successful deployment. Use tools such as [AWS CloudFormation](#) or [AWS CDK](#) to define your infrastructure, then use [AWS CodeBuild](#) and [AWS CodePipeline](#) to perform CI/CD operations.

Implementation steps

- Build well-defined CI/CD pipelines to streamline the deployment process.
- Using [AWS CodeBuild](#) and [AWS Code Pipeline](#) to provide CI/CD capability makes it simple to integrate security testing into your pipelines.

- Follow the guidance on separation of environments in the [Organizing Your AWS Environment Using Multiple Accounts](#) whitepaper.
- Verify no persistent human access to environments where production workloads are running.
- Architect your applications to support the externalization of configuration data.
- Consider deploying using a blue/green deployment model.
- Implement canaries to validate the successful deployment of software.
- Use cryptographic tools such as [AWS Signer](#) or [AWS Key Management Service \(AWS KMS\)](#) to sign and verify the software packages that you are deploying.

Resources

Related best practices:

- [SEC11-BP02 Automate testing throughout the development and release lifecycle \(p. 102\)](#)

Related documents:

- [AWS CI/CD Workshop](#)
- [Accelerate deployments on AWS with effective governance](#)
- [Automating safe, hands-off deployments](#)
- [Code signing using AWS Certificate Manager Private CA and AWS Key Management Service asymmetric keys](#)
- [Code Signing, a Trust and Integrity Control for AWS Lambda](#)

Related videos:

- [Hands-off: Automating continuous delivery pipelines at Amazon](#)

Related examples:

- [Blue/Green deployments with AWS Fargate](#)

SEC11-BP07 Regularly assess security properties of the pipelines

Apply the principles of the Well-Architected Security Pillar to your pipelines, with particular attention to the separation of permissions. Regularly assess the security properties of your pipeline infrastructure. Effectively managing the security of the pipelines allows you to deliver the security of the software that passes *through* the pipelines.

Desired outcome: The pipelines used to build and deploy your software should follow the same recommended practices as any other workload in your environment. The tests that are implemented in the pipelines should not be editable by the builders who are using them. The pipelines should only have the permissions needed for the deployments they are doing and should implement safeguards to avoid deploying to the wrong environments. Pipelines should not rely on long-term credentials, and should be configured to emit state so that the integrity of the build environments can be validated.

Common anti-patterns:

- Security tests that can be bypassed by builders.

- Overly broad permissions for deployment pipelines.
- Pipelines not being configured to validate inputs.
- Not regularly reviewing the permissions associated with your CI/CD infrastructure.
- Use of long-term or hardcoded credentials.

Benefits of establishing this best practice:

- Greater confidence in the integrity of the software that is built and deployed through the pipelines.
- Ability to stop a deployment when there is suspicious activity.

Level of risk exposed if this best practice is not established: High

Implementation guidance

Starting with managed CI/CD services that support IAM roles reduces the risk of credential leakage. Applying the Security Pillar principles to your CI/CD pipeline infrastructure can help you determine where security improvements can be made. Following the [AWS Deployment Pipelines Reference Architecture](#) is a good starting point for building your CI/CD environments. Regularly reviewing the pipeline implementation and analyzing logs for unexpected behavior can help you understand the usage patterns of the pipelines being used to deploy software.

Implementation steps

- Start with the [AWS Deployment Pipelines Reference Architecture](#).
- Consider using [AWS IAM Access Analyzer](#) to programmatically generate least privilege IAM policies for the pipelines.
- Integrate your pipelines with monitoring and alerting so that you are notified of unexpected or abnormal activity, for AWS managed services [Amazon EventBridge](#) allows you to route data to targets such as [AWS Lambda](#) or [Amazon Simple Notification Service](#) (Amazon SNS).

Resources

Related documents:

- [AWS Deployment Pipelines Reference Architecture](#)
- [Monitoring AWS CodePipeline](#)
- [Security best practices for AWS CodePipeline](#)

Related examples:

- [DevOps monitoring dashboard](#) (GitHub)

SEC11-BP08 Build a program that embeds security ownership in workload teams

Build a program or mechanism that empowers builder teams to make security decisions about the software that they create. Your security team still needs to validate these decisions during a review, but embedding security ownership in builder teams allows for faster, more secure workloads to be built. This

mechanism also promotes a culture of ownership that positively impacts the operation of the systems you build.

Desired outcome: To embed security ownership and decision making in builder teams, you can either train builders on how to think about security or you can augment their training with security people embedded or associated with the builder teams. Either approach is valid and allows the team to make higher quality security decisions earlier in the development cycle. This ownership model is predicated on training for application security. Starting with the threat model for the particular workload helps focus the design thinking on the appropriate context. Another benefit of having a community of security focused builders, or a group of security engineers working with builder teams, is that you can more deeply understand how software is written. This understanding helps you determine the next areas for improvement in your automation capability.

Common anti-patterns:

- Leaving all security design decisions to a security team.
- Not addressing security requirements early enough in the development process.
- Not obtaining feedback from builders and security people on the operation of the program.

Benefits of establishing this best practice:

- Reduced time to complete security reviews.
- Reduction in security issues that are only detected at the security review stage.
- Improvement in the overall quality of the software being written.
- Opportunity to identify and understand systemic issues or areas of high value improvement.
- Reduction in the amount of rework required due to security review findings.
- Improvement in the perception of the security function.

Level of risk exposed if this best practice is not established: Low

Implementation guidance

Start with the guidance in [SEC11-BP01 Train for application security \(p. 100\)](#). Then identify the operational model for the program that you think might work best for your organization. The two main patterns are to train builders or to embed security people in builder teams. After you have decided on the initial approach, you should pilot with a single or small group of workload teams to prove the model works for your organization. Leadership support from the builder and security parts of the organization helps with the delivery and success of the program. As you build this program, it's important to choose metrics that can be used to show the value of the program. Learning from how AWS has approached this problem is a good learning experience. This best practice is very much focused on organizational change and culture. The tools that you use should support the collaboration between the builder and security communities.

Implementation steps

- Start by training your builders for application security.
- Create a community and an onboarding program to educate builders.
- Pick a name for the program. Guardians, Champions, or Advocates are commonly used.
- Identify the model to use: train builders, embed security engineers, or have affinity security roles.
- Identify project sponsors from security, builders, and potentially other relevant groups.
- Track metrics for the number of people involved in the program, the time taken for reviews, and the feedback from builders and security people. Use these metrics to make improvements.

Resources

Related best practices:

- [SEC11-BP01 Train for application security \(p. 100\)](#)
- [SEC11-BP02 Automate testing throughout the development and release lifecycle \(p. 102\)](#)

Related documents:

- [How to approach threat modeling](#)
- [How to think about cloud security governance](#)

Related videos:

- [Proactive security: Considerations and approaches](#)

Conclusion

Security is an ongoing effort. When incidents occur, they should be treated as opportunities to improve the security of the architecture. Having strong identity controls, automating responses to security events, protecting infrastructure at multiple levels, and managing well-classified data with encryption provides defense in depth that every organization should implement. This effort is easier thanks to the programmatic functions and AWS features and services discussed in this paper.

AWS strives to help you build and operate architectures that protect information, systems, and assets while delivering business value.

Contributors

The following individuals and organizations contributed to this document:

- Sarita Dharankar, Security Pillar Lead, Well-Architected, Amazon Web Services
- Adam Cerini, Senior Solution Architect, Amazon Web Services
- Bill Shinn, Senior Principal, Office of the CISO, Amazon Web Services
- Brigid Johnson, Senior Software Development Manager, AWS Identity, Amazon Web Services
- Byron Pogson, Senior Solution Architect, Amazon Web Services
- Charlie Hammell, Principal Enterprise Architect, Amazon Web Services
- Darran Boyd, Principal Security Solutions Architect, Financial Services, Amazon Web Services
- Dave Walker, Principal Specialist Solutions Architect, Security and Compliance, Amazon Web Services
- John Formento, Senior Solution Architect, Amazon Web Services
- Paul Hawkins, Principal, Office of the CISO, Amazon Web Services
- Sam Elmalak, Senior Technology Leader, Amazon Web Services
- Pat Gaw, Principal Security Consultant, Amazon Web Services
- Daniel Begimher, Senior Consultant, Security, Amazon Web Services
- Danny Cortegaca, Senior Security Solutions Architect, Amazon Web Services
- Ana Malhotra, Security Solutions Architect, Amazon Web Services
- Debashis Das, Principal, Office of the CISO, Amazon Web Services
- Reef Dsouza, Principal Solutions Architect, Amazon Web Services

Further reading

For additional help, please consult the following sources:

- [AWS Well-Architected Framework whitepaper](#)
- [AWS Architecture Center](#)

Document revisions

To be notified about updates to this whitepaper, subscribe to the RSS feed.

Change	Description	Date
Updates for new Framework. (p. 117)	Best practices updated with prescriptive guidance and new best practices added. New best practice area of Application Security (AppSec) added.	April 10, 2023
Whitepaper updated (p. 117)	Best practices updated with new implementation guidance.	December 15, 2022
Whitepaper updated (p. 117)	Best practices expanded and improvement plans added.	October 20, 2022
Minor update (p. 117)	IAM information updated to reflect current best practices.	June 28, 2022
Minor update (p. 117)	Additional AWS PrivateLink information added and corrected broken links.	May 19, 2022
Minor update (p. 83)	Added AWS PrivateLink.	May 6, 2022
Minor update (p. 117)	Removed non-inclusive language.	April 22, 2022
Minor update (p. 117)	Added information about VPC Network Access Analyzer.	February 2, 2022
Minor update (p. 1)	Added Sustainability Pillar to introduction.	December 2, 2021
Minor update (p. 96)	Corrected link to Incident Response Runbook templates.	July 28, 2021
Minor update (p. 117)	Fixed broken link.	May 27, 2021
Minor update (p. 117)	Editorial changes throughout.	May 17, 2021
Major update (p. 117)	Added section on governance, added detail to various sections, added new features and services throughout.	May 7, 2021
Minor update (p. 117)	Updated links.	March 10, 2021
Minor update (p. 117)	Fixed broken link.	July 15, 2020
Updates for new Framework (p. 117)	Updated guidance on account, identity, and permissions management.	July 8, 2020

Updates for new Framework (p. 117)	Updated to expand advice in every area, new best practices, services and features.	April 30, 2020
Whitepaper updated (p. 117)	Updates to reflect new AWS services and features, and updated references.	July 1, 2018
Whitepaper updated (p. 117)	Updated System Security Configuration and Maintenance section to reflect new AWS services and features.	May 1, 2017
Initial publication (p. 117)	Security Pillar - AWS Well-Architected Framework published.	November 1, 2016

Notices

Customers are responsible for making their own independent assessment of the information in this document. This document: (a) is for informational purposes only, (b) represents current AWS product offerings and practices, which are subject to change without notice, and (c) does not create any commitments or assurances from AWS and its affiliates, suppliers or licensors. AWS products or services are provided “as is” without warranties, representations, or conditions of any kind, whether express or implied. The responsibilities and liabilities of AWS to its customers are controlled by AWS agreements, and this document is not part of, nor does it modify, any agreement between AWS and its customers.

© 2023 Amazon Web Services, Inc. or its affiliates. All rights reserved.

AWS glossary

For the latest AWS terminology, see the [AWS glossary](#) in the *AWS General Reference*.