



OpenStack Labs

Lab 04: Deploying an External Instance

Contents

Introduction	2
Objectives	3
Lab Settings.....	4
1 Managing External Networks	5
2 Preparing OpenStack Routers to Deploy an Instance.....	13
3 Maintaining Floating IP Addresses.....	20
4 Implementing Security.....	27
5 Launching an External Instance	37
6 Verifying an External Instance	42

Introduction

In this lab, you will manage external networks, floating IP addresses, implement security, and launch an external instance.

Objectives

- Manage external networks.
- Manage OpenStack routers.
- Manage floating IP addresses.
- Manage SSH key pairs and security groups.
- Launch and verify an external instance.

Lab Settings

The information in the table below will be needed in order to complete the lab. The task sections below provide details on the use of this information.

Virtual Machine	IP Address	Account	Password
workstation	ens3: 192.168.1.21 ens4: 172.25.250.21	ubuntu	ubuntu
devstack	ens3: 192.168.20 ens4: 172.25.250.20	ubuntu	ubuntu

1 Managing External Networks

In this task, you will use the *Horizon Dashboard* and the **OpenStack Unified CLI** to create and configure an external network.

- 1.1. Log into the **workstation** machine as the **ubuntu** user with password **ubuntu**.

```
Ubuntu 18.04.6 LTS workstation tty1

workstation login: ubuntu
Password:
```

- 1.2. Launch the graphical user interface.

```
ubuntu@workstation:~$ startx
```

```
Welcome to Ubuntu 18.04.6 LTS (GNU/Linux 4.15.0-213-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:     https://landscape.canonical.com
 * Support:        https://ubuntu.com/advantage

 System information as of Fri Jun  7 21:01:55 UTC 2024

 System load:  0.6              Processes:           197
 Usage of /:   7.9% of 116.12GB  Users logged in:      0
 Memory usage: 13%            IP address for ens3: 192.168.1.21
 Swap usage:   0%            IP address for ens4: 172.25.250.21

 Expanded Security Maintenance for Infrastructure is not enabled.

 2 updates can be applied immediately.
 To see these additional updates run: apt list --upgradable

 146 additional security updates can be applied with ESM Infra.
 Learn more about enabling ESM Infra service for Ubuntu 18.04 at
 https://ubuntu.com/18-04

ubuntu@workstation:~$ startx_
```

- 1.3. Open the web browser. Navigate to **192.168.1.20** and log in to the dashboard as **admin** with the password **secret**.
- 1.4. Switch to the **demo** project. Navigate to **Admin > Network > Routers**. Check the box in the same row as **router1**, then click **Delete Routers**.

The screenshot shows the OpenStack Admin interface under the 'demo' project. The left sidebar has 'Admin' selected under 'Network'. The main area is titled 'Routers' and shows one item: 'router1' (Project: demo, Status: Active, External Network: public, Admin State: UP). A red box highlights the 'demo' project in the top navigation bar and the 'Network' section of the sidebar.

- 1.5.** Now, navigate to **Networks**. Check the box in the same row as **public**, then click **Delete Networks**.

The screenshot shows the OpenStack Admin interface under the 'demo' project. The left sidebar has 'Admin' selected under 'Network'. The main area is titled 'Networks' and shows three items: 'private' (Project: demo), 'public' (Project: admin), and 'shared' (Project: admin). A red box highlights the 'Networks' section in the top navigation bar and the 'admin' project in the sidebar. The 'public' network row has a checked checkbox in the first column.

- 1.6.** Click **Create Network**.

The screenshot shows the OpenStack Admin interface under the 'demo' project. The left sidebar has 'Admin' selected under 'Network'. The main area is titled 'Networks' and shows four items: 'private' (Project: demo), 'public' (Project: admin), 'shared' (Project: admin), and a new network (Project: demo). A red box highlights the 'Networks' section in the top navigation bar and the 'demo' project in the sidebar. The 'Create Network' button is visible at the top right.

- 1.7. Enter **net1** in the *Network Name* field. Select **demo** in the *Project* dropdown. For *Provider Network Type*, select **Flat**. Enter **public** into the *Physical Network* field. Check the *Shared* and *External Network* check boxes, and ensure the *Create Subnet* check box is checked. Click **Next** to go to the *Subnet* tab.

Create Network

X

Network * Subnet Subnet Details

Name Create a new network. In addition, a subnet associated with the network can be created in the following steps of this wizard.

Project *

Provider Network Type *

Physical Network *

Enable Admin State ?

Shared


External Network

Create Subnet

Availability Zone Hints ?

MTU ?

Cancel « Back Next »

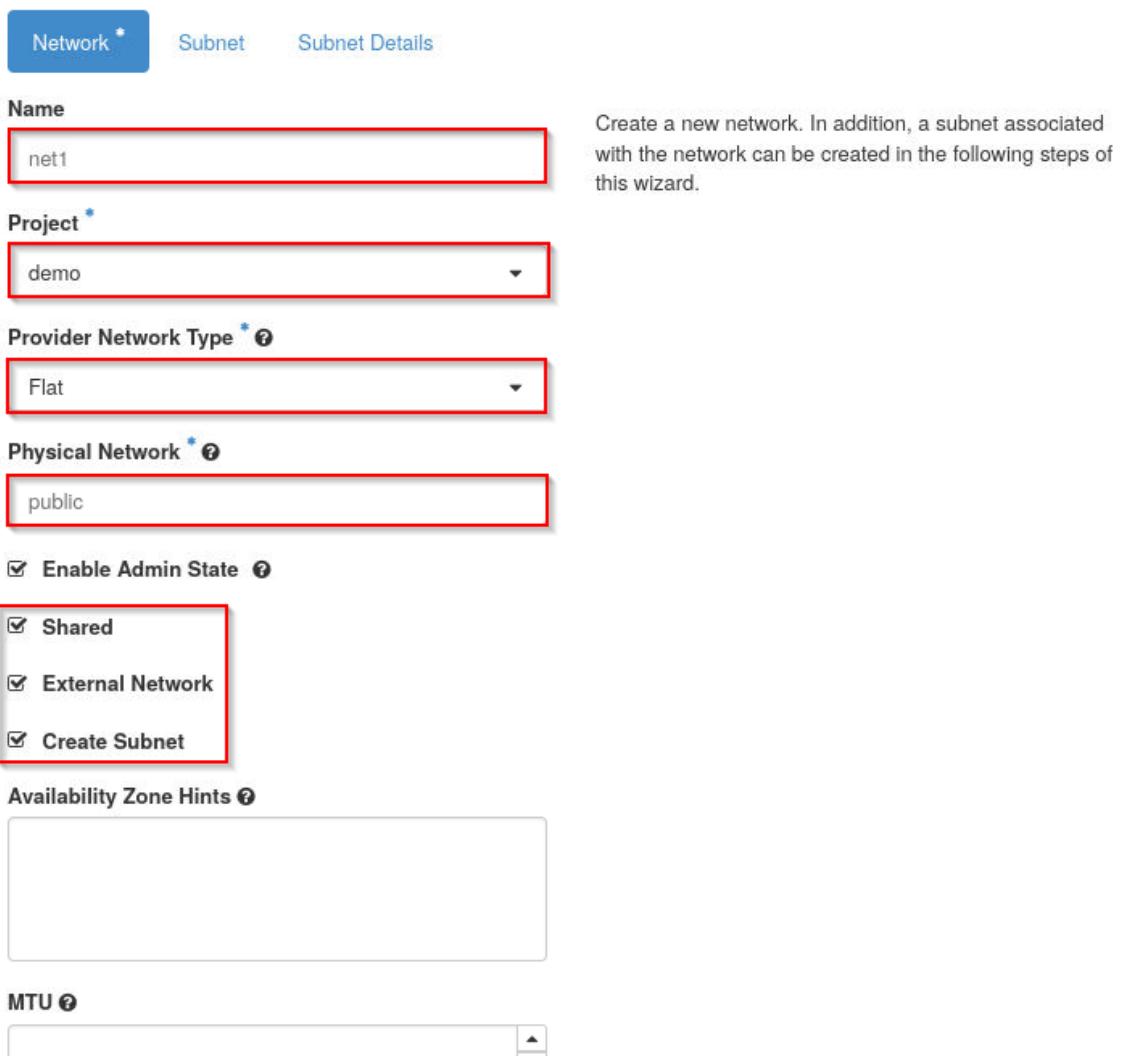

- 1.8. In the *Subnet* tab, enter **subnet1** in the *Subnet Name* field, and enter **172.25.250.0/24** in the *Network Address* field. Click **Next** to go to the *Subnet Details* tab.

Create Network



Network *

Subnet

Subnet Details

Subnet Name

subnet1

Creates a subnet associated with the network. You need to enter a valid "Network Address" and "Gateway IP". If you did not enter the "Gateway IP", the first value of a network will be assigned by default. If you do not want gateway please check the "Disable Gateway" checkbox. Advanced configuration is available by clicking on the "Subnet Details" tab.

Network Address Source

Enter Network Address manually

Network Address ?

172.25.250.0/24

IP Version

IPv4

Gateway IP ? **Disable Gateway**[Cancel](#)[« Back](#)[Next »](#)

- 1.9.** In the *Subnet Details* tab, uncheck the *Enable DHCP* check box. Enter **172.25.250.5**, **172.25.250.100** in the *Allocation Pools* field. Click **Create** to create the network and subnet.

Create Network

Network * Subnet Subnet Details

Enable DHCP

Specify additional attributes for the subnet.

Allocation Pools ②
172.25.250.5,172.25.250.100

DNS Name Servers ②

Host Routes ②

Create

1.10. Log out of the *Horizon Dashboard* and close the web browser.

1.11. Open a terminal window and source the keystone credentials for the **admin** user.

```
ubuntu@workstation:~$ source ~/keystonerc-admin
```

```
ubuntu@workstation:~$ source ~/keystonerc-admin
ubuntu@workstation:~$ 
```

1.12. Delete the **subnet1** subnet.

```
ubuntu@workstation:~$ openstack subnet delete subnet1
```

```
ubuntu@workstation:~$ openstack subnet delete subnet1
ubuntu@workstation:~$ 
```

1.13. Delete the **net1** network.

```
ubuntu@workstation:~$ openstack network delete net1
```

```
ubuntu@workstation:~$ openstack network delete net1
ubuntu@workstation:~$
```

1.14. Create an external network named **external**. Set the network type to **flat** and the physical network to **public**. Set the network as shared and external.

```
ubuntu@workstation:~$ openstack network create external \
> --external --share \
> --provider-network-type flat \
> --provider-physical-network public
```

```
ubuntu@workstation:~$ openstack network create external \
> --external --share \
> --provider-network-type flat \
> --provider-physical-network public
+-----+-----+
| Field           | Value          |
+-----+-----+
| admin_state_up | UP             |
| availability_zone_hints | None           |
| availability_zones | None           |
| created_at     | 2023-11-16T17:38:08Z |
| description    | None           |
| dns_domain     | None           |
| id             | ccf7ae57-24bd-4ef7-add5-b6ceca28f2a6 |
| ipv4_address_scope | None           |
| ipv6_address_scope | None           |
| is_default     | False          |
| is_vlan_transparent | None           |
| mtu            | 1500           |
| name           | external        |
| port_security_enabled | True           |
| project_id     | c524eaead1f74d4f9141f71b280e0237 |
| provider:network_type | flat           |
| provider:physical_network | public         |
| provider:segmentation_id | None           |
| qos_policy_id   | None           |
| revision_number | 1              |
| router:external | External        |
| segments        | None           |
| shared          | True           |
| status          | ACTIVE         |
| subnets         | None           |
| tags            | None           |
| updated_at      | 2023-11-16T17:38:08Z |
+-----+-----+
ubuntu@workstation:~$
```

Tip

When typing the command, make sure there is a space between **external** and the **** character, and press **Enter** to get the **>** and continue typing the rest of the command.

- 1.15.** Create a subnet named **subext** in the **external** network. Give the subnet a range of **172.25.250.60** to **172.25.250.80**. Disable DHCP services for the subnet and use the address **172.25.250.254** as the gateway as well as the DNS name server.

```
ubuntu@workstation:~$ openstack subnet create \
> --subnet-range 172.25.250.0/24 \
> --no-dhcp \
> --gateway 172.25.250.254 \
> --dns-nameserver 172.25.250.254 \
> --allocation-pool start=172.25.250.60,end=172.25.250.80 \
> --network external \
> subext
```

```
ubuntu@workstation:~$ openstack subnet create \
> --subnet-range 172.25.250.0/24 \
> --no-dhcp \
> --gateway 172.25.250.254 \
> --dns-nameserver 172.25.250.254 \
> --allocation-pool start=172.25.250.60,end=172.25.250.80 \
> --network external \
> subext
+-----+-----+
| Field | Value |
+-----+-----+
| allocation_pools | 172.25.250.60-172.25.250.80 |
| cidr | 172.25.250.0/24 |
| created_at | 2023-11-20T20:29:27Z |
| description | |
| dns_nameservers | 172.25.250.254 |
| enable_dhcp | False |
| gateway_ip | 172.25.250.254 |
| host_routes | |
| id | 3bb68218-3879-4f34-8f09-1d182db8227d |
| ip_version | 4 |
| ipv6_address_mode | None |
| ipv6_ra_mode | None |
| name | subext |
| network_id | d8e6f5bd-6c4e-47ab-9cc7-1d8c88b5961d |
| project_id | c524eaead1f74d4f9141f71b280e0237 |
| revision_number | 0 |
| segment_id | None |
| service_types | |
| subnetpool_id | None |
| tags | |
| updated_at | 2023-11-20T20:29:27Z |
+-----+
ubuntu@workstation:~$ █
```

- 1.16. Leave the terminal window open and continue to the next task.

2 Preparing OpenStack Routers to Deploy an Instance

In this task, you will create and configure a router using the *Horizon Dashboard* and *OpenStack Unified CLI* and use command line tools to test the connectivity of the router.

- 2.1. Open the web browser and navigate to **192.168.1.20**. Log into the dashboard as **admin** with the password **secret**.
- 2.2. Switch to the **demo** project and navigate to **Project > Network > Routers**. Click **Create Router** to create a new router.

- 2.3. Enter **router1** in the *Router Name* field and select **external** in the *External Network* dropdown. Click **Create Router**.

Name	Description
Router Name	Creates a router with specified parameters.
External Network	Enable SNAT will only have an effect if an external network is set.
Availability Zone Hints	

- 2.4.** Click the router name, **router1**, to access its details.

The screenshot shows a table with the following columns: Name, Status, External Network, Admin State, Availability Zones, and Actions. The 'Name' column contains a link to 'router1', which is highlighted with a red box. The 'Status' column shows 'Active'. The 'External Network' column shows 'external'. The 'Admin State' column shows 'UP'. The 'Actions' column contains a 'Clear Gateway' button. At the top right, there are buttons for 'Router Name', 'Filter', '+ Create Router', and 'Delete Routers'.

- 2.5.** Click the **Interfaces** tab to manage the interfaces for the router. Click **Add Interface** to add a new interface.

The screenshot shows a table with the following columns: Name, Fixed IPs, Status, Type, Admin State, and Actions. The 'Name' column contains a link to '(d30b316e-659c)', which is highlighted with a red box. The 'Fixed IPs' column shows '172.25.250.68'. The 'Status' column shows 'Active'. The 'Type' column shows 'External Gateway'. The 'Admin State' column shows 'UP'. The 'Actions' column contains a 'Delete Interface' button. At the top right, there is a 'Clear Gateway' button. Below the table, there are tabs for 'Overview', 'Interfaces' (which is selected and highlighted with a red box), and 'Static Routes'.

- 2.6.** Select **shared: 172.25.233.0/24 (shared-subnet)** from the *Subnet* dropdown and click **Submit** to add the interface.

The screenshot shows the 'Add Interface' dialog box. On the left, there is a 'Subnet' dropdown menu with the option 'shared: 192.168.233.0/24 (shared-subnet)' selected, which is highlighted with a red box. On the right, there is a 'Description:' section with the following text: 'You can connect a specified subnet to the router. If you don't specify an IP address here, the gateway's IP address of the selected subnet will be used as the IP address of the newly created interface of the router. If the gateway's IP address is in use, you must use a different address which belongs to the selected subnet.' At the bottom right, there are 'Cancel' and 'Submit' buttons, with 'Submit' highlighted with a red box.

- 2.7.** Log out of the dashboard and close the web browser.

- 2.8.** Open a terminal window if one is not already open, and source the **admin** credentials.

```
ubuntu@workstation:~$ source ~/keystonerc-admin
```

```
ubuntu@workstation:~$ source ~/keystonerc-admin
ubuntu@workstation:~$ █
```

- 2.9.** Show the details of **router1**. Copy the `subnet_id` from the `interfaces_info` row of the output.

```
ubuntu@workstation:~$ openstack router show router1
```

```
ubuntu@workstation:~$ openstack router show router1
+-----+-----+
| Field | Value |
+-----+-----+
| admin_state_up | UP
| availability_zone_hints | None
| availability_zones | None
| created_at | 2024-01-12T18:07:29Z
| description | None
| distributed | False
| external_gateway_info | {"network_id": "3eeb3caf-f410-408e-adf8-7d64ab0a57a", "enable_snat": true, "external_fixed_ips": [{"subnet_id": "6fd67391-02eb-4782-9274-d8c9ef9a9d2", "ip_address": "172.25.250.71"}]}
| flavor_id | None
| host | None
| id | f51ad59c-9224-4feb-baa9-f691bcac2c45
| interfaces_info | [{"subnet_id": "85998680-f76d-4cba-887c-f4946a26e071", "ip_address": "192.168.233.1", "port_id": "a9le677c-6a01-4657-9c64-c930c9cf4ad0"}]
| name | router1
| project_id | a9le677c-6a01-4657-9c64-c930c9cf4ad0
| revision_number | 1
| routes | []
| status | ACTIVE
| tags | None
| updated_at | 2024-01-12T18:25:25Z
+-----+-----+
ubuntu@workstation:~$ █
```

Tip

You can copy from the terminal to the clipboard the keyboard shortcut **Ctrl+Shift+C**.

- 2.10.** Delete the interface in the **shared** subnet for the **router1** router using the command below. Substitute the subnet ID with the one you copied previously. Make sure not to include any characters besides numbers and hyphens.

```
ubuntu@workstation:~$ openstack router remove subnet router1 \
> 85998680-f76d-4cba-887c-f4946a26e071
```

```
ubuntu@workstation:~$ openstack router remove subnet router1 \
> 85998680-f76d-4cba-887c-f4946a26e071
ubuntu@workstation:~$ █
```

Tip

You can paste from the clipboard into the terminal with the keyboard shortcut **Ctrl+Shift+V**.

- 2.11.** Unset the **external** network as the gateway for the router.

```
ubuntu@workstation:~$ openstack router unset --external-gateway router1
```

```
ubuntu@workstation:~$ openstack router unset --external-gateway router1
ubuntu@workstation:~$ █
```

2.12. Delete the **router1** router.

```
ubuntu@workstation:~$ openstack router delete router1
```

```
ubuntu@workstation:~$ openstack router delete router1
ubuntu@workstation:~$ █
```

2.13. Create a router named **exercise-router**.

```
ubuntu@workstation:~$ openstack router create exercise-router
```

Field	Value
admin_state_up	UP
availability_zone_hints	
availability_zones	
created_at	2023-11-18T23:53:37Z
description	
distributed	False
external_gateway_info	None
flavor_id	None
ha	False
id	287b9ee8-ff5a-4402-ba09-e7b1b5063c90
name	exercise-router
project_id	c524eaead1f74d4f9141f71b280e0237
revision_number	1
routes	
status	ACTIVE
tags	
updated_at	2023-11-18T23:53:37Z

2.14. Connect the router to the **shared-subnet** subnet.

```
ubuntu@workstation:~$ openstack router add subnet \
> exercise-router shared-subnet
```

```
ubuntu@workstation:~$ openstack router add subnet \
> exercise-router shared-subnet
ubuntu@workstation:~$ █
```

2.15. Set the **external** network as the gateway for the router.

```
ubuntu@workstation:~$ openstack router set \
> --external-gateway external \
> exercise-router
```

```
ubuntu@workstation:~$ openstack router set \
> --external-gateway external \
> exercise-router
ubuntu@workstation:~$
```

2.16. Show the details of the **exercise-router** router. Take note of the IP address listed in the *external_gateway_info* row, as you will ping this address in a later step to verify that the router can be reached.

```
ubuntu@workstation:~$ openstack router show exercise-router
```

```
ubuntu@workstation:~$ openstack router show exercise-router
+-----+-----+
| Field           | Value          |
+-----+-----+
| admin_state_up | UP             |
| availability_zone_hints |           |
| availability_zones |           |
| created_at     | 2023-11-21T22:19:55Z |
| description    |               |
| distributed    | False          |
| external_gateway_info | {"network_id": "f940f9bd-6695-427b-8598-09a12672e9cc", "enable_snat": true, "external_fixed_ips": [{"subnet_id": "ad188951-37cb-4f68-bf28-009bc5a396e7", "ip_address": "172.25.250.71"}]} |
| flavor_id      | None           |
| host           |               |
| id             | f9bd2f8-7979-4c84-9bfe-a2fa781231a9 |
| interfaces_info | [{"subnet_id": "5c9345df-47ac-446a-a7e3-8e6821ff6f08", "ip_address": "192.168.233.1", "port_id": "f083dcacf-5647-456c-b969-9a566b9dde37"}] |
| name           | exercise-router |
| project_id     | c524eed1f74d4f9141f71b280e0237 |
| revision_number | 3              |
| routes         |               |
| status          | ACTIVE         |
| tags           |               |
| updated_at     | 2023-11-21T22:54:27Z |
+-----+-----+
ubuntu@workstation:~$
```

2.17. SSH into the **devstack** virtual machine. Log in with the password **ubuntu**.

```
ubuntu@workstation:~$ ssh 192.168.1.20
```

```
ubuntu@workstation:~$ ssh 192.168.1.20
ubuntu@192.168.1.20's password:
Welcome to Ubuntu 22.04.3 LTS (GNU/Linux 5.15.0-1046-kvm x86_64)

 * Documentation: https://help.ubuntu.com
 * Management: https://landscape.canonical.com
 * Support: https://ubuntu.com/advantage

 * Strictly confined Kubernetes makes edge and IoT secure. Learn how MicroK8s
 just raised the bar for easy, resilient and secure K8s cluster deployment.

 https://ubuntu.com/engage/secure-kubernetes-at-the-edge

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.

Expanded Security Maintenance for Applications is not enabled.

2 updates can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

Last login: Fri Nov 17 00:56:21 2023 from 192.168.1.254
ubuntu@devstack:~$
```

- 2.18.** Use the ping command on the IP address found from the openstack router show command to verify that the router can be reached.

```
ubuntu@devstack:~$ ping -c3 172.25.250.71
```

Note

The actual IP address may differ from this example.

```
ubuntu@devstack:~$ ping -c3 172.25.250.71
PING 172.25.250.71 (172.25.250.71) 56(84) bytes of data.
64 bytes from 172.25.250.71: icmp_seq=1 ttl=254 time=0.953 ms
64 bytes from 172.25.250.71: icmp_seq=2 ttl=254 time=0.599 ms
64 bytes from 172.25.250.71: icmp_seq=3 ttl=254 time=0.461 ms

--- 172.25.250.71 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2030ms
rtt min/avg/max/mdev = 0.461/0.671/0.953/0.207 ms
ubuntu@devstack:~$
```

- 2.19.** Exit the SSH session.

```
ubuntu@workstation:~$ exit
```

```
ubuntu@devstack:~$ exit  
logout  
Connection to 192.168.1.20 closed.  
ubuntu@workstation:~$ ~█
```

- 2.20. Leave the terminal window open and continue to the next task.

3 Maintaining Floating IP Addresses

In this task, you will create a set of floating IP addresses and allocate them to an instance.

- 3.1. If a terminal window is not already open, open one and source the admin credentials from the `~/keystonerc-admin` file.
- 3.2. Create a new instance named `instance1`. Use the `ubuntu` image, `m1.small` flavor, and `shared` network.

```
ubuntu@workstation:~$ openstack server create \
> --image ubuntu \
> --flavor m1.small \
> --nic net-id=shared \
> --wait instance1
```

```
ubuntu@workstation:~$ openstack server create \
> --image ubuntu \
> --flavor m1.small \
> --nic net-id=shared \
> --wait instance1

+-----+-----+
| Field          | Value        |
+-----+-----+
| OS-DCF:diskConfig | MANUAL      |
| OS-EXT-AZ:availability_zone | nova       |
| OS-EXT-SRV-ATTR:host | devstack    |
| OS-EXT-SRV-ATTR:hypervisor_hostname | devstack   |
| OS-EXT-SRV-ATTR:instance_name | instance-00000006 |
| OS-EXT-STS:power_state | Running     |
| OS-EXT-STS:task_state | None        |
| OS-EXT-STS:vm_state | active      |
| OS-SRV-USG:launched_at | 2023-11-19T22:24:07.000000 |
| OS-SRV-USG:terminated_at | None        |
| accessIPv4 |           |
| accessIPv6 |           |
| addresses | shared=192.168.233.153 |
| adminPass | S8eek4bFqWHX |
| config_drive |           |
| created | 2023-11-19T22:23:49Z |
| flavor | m1.small (2) |
| hostId | 151e314f6e3cfc8b4db0b1f6035cc4b68cb1e6c9aa97163a575f9f6c |
| id | 10602cea-bc68-43a0-8537-c9231adfb791 |
| image | ubuntu (10d986bd-8501-47be-b9d9-d72eab219920) |
| key_name | None        |
| name | instance1   |
| progress | 0            |
| project_id | c524eaead1f74d4f9141f71b280e0237 |
| properties |           |
| security_groups | name='default' |
| status | ACTIVE      |
| updated | 2023-11-19T22:24:08Z |
| user_id | b4bdeae0865449e1905fc5e639007753 |
| volumes_attached |           |
+-----+-----+
ubuntu@workstation:~$
```

- 3.3. Leave the terminal window open and open the web browser. Navigate to **192.168.1.20**. Log into the *Horizon Dashboard* as the **admin** user with the password **secret**.
- 3.4. Switch to the **demo** project. Navigate to **Project > Network > Floating IPs**. Click **Allocate IP to Project**.

The screenshot shows the OpenStack interface under the 'demo' project. The 'Network' section is selected, and the 'Floating IPs' tab is active. A red box highlights the 'Allocate IP To Project' button at the top right of the table header.

3.5. Ensure **external** is set as the *Pool*. Click **Allocate IP**.

The dialog box has the following fields:

- Pool ***: external (highlighted with a red box)
- Description**: (empty input field)
- DNS Domain**: (empty input field)
- DNS Name**: (empty input field)
- Description:** Allocate a floating IP from a given floating IP pool.
- Project Quotas**: Floating IP: 0 of 50 Used
- Buttons**: Cancel (gray), Allocate IP (blue box with a red border)

3.6. Click **Associate** in the row of the floating IP address.

The table has the following columns:

IP Address	Description	DNS Name	DNS Domain	Mapped Fixed IP Address	Pool	Status	Actions
172.25.250.66			-		external	Down	Associate (highlighted with a red box)

Displaying 1 item

- 3.7.** In the *Port to be associated* dropdown, select **instance1: 192.168.233.XYZ**. Click **Associate**.

Manage Floating IP Associations

IP Address *

- +

Select the IP address you wish to associate with the selected instance or port.

Port to be associated *

Cancel
Associate

Note

The actual value of the floating IP address may differ.

- 3.8.** Navigate to **Compute > Instances**. Click the arrow next to the **Create Snapshot** in the same as **instance1**. Select **Disassociate Floating IP** to detach the floating IP from the instance.

The screenshot shows the OpenStack Compute Instances interface. On the left, there's a navigation sidebar with links like Project, API Access, Compute (which is selected), Overview, Instances (selected), Images, Key Pairs, Server Groups, Volumes, Network, Admin, and Identity. The main area is titled "Instances" and shows a table with one item: "Instance1" (ubuntu, m1.small flavor, nova availability zone, running status). To the right of the table is a context menu with options: Create Snapshot (selected), Disassociate Floating IP (highlighted with a red box), Attach Interface, Detach Interface, Edit Instance, Attach Volume, and Detach Volume.

Instance Name	Image Name	IP Address	Flavor	Key Pair	Status	Availability Zone	Task	Power State	Age	Actions
Instance1	ubuntu	192.168.233.45, 172.25.250.69	m1.small	-	Active	nova	None	Running	5 minutes	Create Snapshot Disassociate Floating IP Attach Interface Detach Interface Edit Instance Attach Volume Detach Volume

- 3.9.** Check the *Release Floating IP* box and click **Disassociate**.

Disassociate floating IP

Disassociate Floating IP

Floating IP *

Release Floating IP

Description:

Select the floating IP to be disassociated from the instance.

Release Floating IP

If checked, the selected floating IP will be released at the same time.

Cancel Disassociate

3.10. Log out of the *Horizon Dashboard* and close the web browser.

3.11. From the terminal, create the floating IP **172.25.250.66** in the **external** network.

```
ubuntu@workstation:~$ openstack floating ip create \
> --floating-ip-address 172.25.250.66 \
> external
```

```
ubuntu@workstation:~$ openstack floating ip create \
> --floating-ip-address 172.25.250.66 \
> external
+-----+-----+
| Field | Value |
+-----+-----+
| created_at | 2023-11-20T21:53:23Z
| description | None
| fixed_ip_address | 172.25.250.66
| floating_ip_address | 172.25.250.66
| floating_network_id | d8e6f5bd-6c4e-47ab-9cc7-1d8c88b5961d
| id | 7bfda980-77b3-4348-9303-981b2c731529
| name | 172.25.250.66
| port_id | None
| project_id | c524eaead1f74d4f9141f71b280e0237
| qos_policy_id | None
| revision_number | 0
| router_id | None
| status | DOWN
| subnet_id | None
| updated_at | 2023-11-20T21:53:23Z
+-----+
ubuntu@workstation:~$
```

Tip

If an *HttpException: Conflict* error appears, this indicates that a floating IP from a previous step in this section was not released. If this is the case, either go back to

the *Horizon Dashboard* and release the floating IP address or use the next available floating IP address.

- 3.12. From the floating IP pool in the **external** network, create a floating IP.

```
ubuntu@workstation:~$ openstack floating ip create external
```

```
ubuntu@workstation:~$ openstack floating ip create external
+-----+-----+
| Field          | Value
+-----+-----+
| created_at     | 2024-01-12T18:48:37Z
| description    |
| fixed_ip_address | None
| floating_ip_address | 172.25.250.75
| floating_network_id | 3eeb3caf-f410-408e-adf8-7d64ab0a857a
| id             | 3975289d-1fc1-43cc-aa73-2bdea0c5ae03
| name           | 172.25.250.75
| port_id         | None
| project_id     | a96f441f305f48d4a2be02606b29faa8
| qos_policy_id   | None
| revision_number | 0
| router_id       | None
| status          | DOWN
| subnet_id       | None
| updated_at      | 2024-01-12T18:48:37Z
+-----+
ubuntu@workstation:~$
```

- 3.13. Allocate a second floating IP using the same command.

```
ubuntu@workstation:~$ openstack floating ip create external
```

```
ubuntu@workstation:~$ openstack floating ip create external
+-----+-----+
| Field | Value |
+-----+-----+
| created_at | 2024-01-12T18:48:56Z
| description | None
| fixed_ip_address | 172.25.250.65
| floating_ip_address | 3eeb3caf-f410-408e-adf8-7d64ab0a857a
| floating_network_id | 0fc02336-ebba-442e-bbc1-35482ee53631
| id | 172.25.250.65
| name | None
| port_id | a96f441f305f48d4a2be02606b29faa8
| project_id | None
| qos_policy_id | 0
| revision_number | None
| router_id | DOWN
| subnet_id | None
| updated_at | 2024-01-12T18:48:56Z
+-----+
ubuntu@workstation:~$ █
```

3.14. Allocate a third floating IP.

```
ubuntu@workstation:~$ openstack floating ip create external
```

```
ubuntu@workstation:~$ openstack floating ip create external
+-----+-----+
| Field | Value |
+-----+-----+
| created_at | 2024-01-12T18:49:16Z
| description | None
| fixed_ip_address | 172.25.250.74
| floating_ip_address | 3eeb3caf-f410-408e-adf8-7d64ab0a857a
| floating_network_id | 6671e8bf-11bb-4f06-83d4-fe44420b533c
| id | 172.25.250.74
| name | None
| port_id | a96f441f305f48d4a2be02606b29faa8
| project_id | None
| qos_policy_id | 0
| revision_number | None
| router_id | DOWN
| subnet_id | None
| updated_at | 2024-01-12T18:49:16Z
+-----+
ubuntu@workstation:~$ █
```

3.15. Associate the third floating IP with **instance1**.

```
ubuntu@workstation:~$ openstack server add \
> floating ip instance1 172.25.250.74
```

```
ubuntu@workstation:~$ openstack server add \
> floating ip instance1 172.25.250.74
ubuntu@workstation:~$ █
```

Note

The actual floating IP may differ. Use the floating IP address generated from your output from the previous step.

3.16. Leave the terminal window open and continue to the next task.

4 Implementing Security

In this task, you will use the *Horizon Dashboard* and *OpenStack Unified CLI* to manage SSH key pairs and security groups for OpenStack instances.

- 4.1. Open the web browser and navigate to **192.168.1.20**. Log into the dashboard as **admin** with the password **secret**.
- 4.2. Switch to the **demo** project and navigate to **Project > Compute > Key Pairs**. Click **Create Key Pair** to create a new key pair.

- 4.3. Enter **keypair1** in the *Key Pair Name* field, and select **SSH Key** in the *Key Type* dropdown. Click **Create Key Pair**. This will create the key pair and download it to the **~/Downloads** directory.

- 4.4. Navigate to **Network > Security Groups** and click **Create Security Group**.

Project / Network / Security Groups

Security Groups

Name	Security Group ID	Description	Shared	Actions
default	9e3ffbc... c073-456c-b78f-67b619a1f27e	Default security group	False	Manage Rules

- 4.5.** Enter **secgroup1** into the **Name** field and click **Create Security Group**.

Name *

Description

Description:

Security groups are sets of IP filter rules that are applied to network interfaces of a VM. After the security group is created, you can add rules to the security group.

Create Security Group

- 4.6.** After creating the security group, you should land on the page containing the rules for the security group. If not, click **Manage Rules** in the same column as **secgroup1** on the **Security Groups** page to get there. Click **Add Rule** to add a new rule in the security group.

Project / Network / Security Groups / Manage Security Group Rule...

Manage Security Group Rules: secgroup1 (287ccaa3-61ad-447d-8f6e-0f81d14c67dd)

Direction	Ether Type	IP Protocol	Port Range	Remote IP Prefix	Remote Security Group	Description	Actions
Egress	IPv4	Any	Any	0.0.0.0/0	-	-	Delete Rule
Egress	IPv6	Any	Any	::/0	-	-	Delete Rule

- 4.7.** Select **All ICMP** from the **Rule** dropdown and click **Add**. This will allow ICMP traffic, namely the ping command, to reach instances in this security group.

Add Rule



Rule *

All ICMP

Description ⓘ

Direction

Ingress

Remote * ⓘ

CIDR

CIDR * ⓘ

0.0.0.0/0

Description:

Rules define which traffic is allowed to instances assigned to the security group. A security group rule consists of three main parts:

Rule: You can specify the desired rule template or use custom rules, the options are Custom TCP Rule, Custom UDP Rule, or Custom ICMP Rule.

Open Port/Port Range: For TCP and UDP rules you may choose to open either a single port or a range of ports. Selecting the "Port Range" option will provide you with space to provide both the starting and ending ports for the range. For ICMP rules you instead specify an ICMP type and code in the spaces provided.

Remote: You must specify the source of the traffic to be allowed via this rule. You may do so either in the form of an IP address block (CIDR) or via a source group (Security Group). Selecting a security group as the source will allow any other instance in that security group access to any other instance via this rule.

Cancel

Add

- 4.8. Log out of the *Horizon Dashboard* and close the web browser.
- 4.9. If a terminal window is not already open, open one and source the **admin** credentials from the `~/keystonerc-admin` file.
- 4.10. Delete the private key located at `~/Downloads/keypair1.pem`.

```
ubuntu@workstation:~$ rm -f ~/Downloads/keypair1.pem
```

```
ubuntu@workstation:~$ rm -f ~/Downloads/keypair1.pem
ubuntu@workstation:~$
```

- 4.11. Delete the **keypair1** key pair.

```
ubuntu@workstation:~$ openstack keypair delete keypair1
```

```
ubuntu@workstation:~$ openstack keypair delete keypair1
ubuntu@workstation:~$
```

4.12. List the rules in the **secgroup1** security group.

```
ubuntu@workstation:~$ openstack security group rule \
> list secgroup1
```

```
ubuntu@workstation:~$ openstack security group rule \
> list secgroup1
+-----+-----+-----+-----+
| ID      | IP Protocol | IP Range | Port Range | Remote Security Group |
+-----+-----+-----+-----+
| 3027b819-ceaf-43e9-a556-9f4b622d6806 | None       | None     |           | None
| 7070ffa9-0746-4ac1-a504-99356ebdf2cf | None       | None     |           | None
| c92f0fdb-65b0-49ba-ae54-e9ec13ac98c1 | icmp       | 0.0.0.0/0 |           | None
+-----+-----+-----+-----+
ubuntu@workstation:~$
```

4.13. Use the *ID* for the ICMP rule to delete that rule.

```
ubuntu@workstation:~$ openstack security group rule \
> delete c92f0fdb-65b0-ae54-e9ec13ac98c1
```

```
ubuntu@workstation:~$ openstack security group rule delete c92f0fdb-65b0-49ba-ae54-e9ec13ac98c1
ubuntu@workstation:~$
```

Note

The actual ID value may differ.

4.14. Delete the **secgroup1** security group.

```
ubuntu@workstation:~$ openstack security group \
> delete secgroup1
```

```
ubuntu@workstation:~$ openstack security group \
> delete secgroup1
ubuntu@workstation:~$
```

4.15. Create the key pair **dev-keypair** and save the private key to the file **~/Downloads/dev-keypair.pem**.

```
ubuntu@workstation:~$ openstack keypair create \
> dev-keypair > ~/Downloads/dev-keypair.pem
```

```
ubuntu@workstation:~$ openstack keypair create \
> dev-keypair > ~/Downloads/dev-keypair.pem
ubuntu@workstation:~$
```

- 4.16.** the chmod command with a mode of **600** to make it so that the **ubuntu** user has read/write permissions on the file, and groups and other users have no permissions to the file.

```
ubuntu@workstation:~$ chmod 600 ~/Downloads/dev-keypair.pem
```

```
ubuntu@workstation:~$ chmod 600 ~/Downloads/dev-keypair.pem
ubuntu@workstation:~$ █
```

- 4.17.** Create the **dev-secgroup** security group.

```
ubuntu@workstation:~$ openstack security group \
> create dev-secgroup
```

```
ubuntu@workstation:~$ openstack security group \
> create dev-secgroup
+-----+
| Field | Value |
+-----+
| created_at | 2023-11-21T20:31:33Z |
| description | dev-secgroup |
| id | aa3d7521-489d-4270-be5a-f33c4b3celef |
| name | dev-secgroup |
| project_id | 0524e0ead1f74d4f9141f71b280e0237 |
| revision_number | 1 |
| rules | created at='2023-11-21T20:31:33Z', direction='egress', ethertype='IPv4', id='1245145b-c368-4f25-8462-3d0b5911524b', standard_attr_id='72', updated at='2023-11-21T20:31:33Z' |
| updated_at | 2023-11-21T20:31:33Z |
+-----+
ubuntu@workstation:~$ █
```

- 4.18.** Add a security rule in the **dev-secgroup** security group to allow remote ICMP traffic.

```
ubuntu@workstation:~$ openstack security group \
> rule create \
> --protocol icmp \
> dev-secgroup
```

```
ubuntu@workstation:~$ openstack security group \
> rule create \
> --protocol icmp \
> dev-secgroup
+-----+-----+
| Field | Value |
+-----+-----+
| created_at | 2023-11-21T20:35:44Z |
| description | ingress |
| direction | ingress |
| ether_type | IPv4 |
| id | fc550acd-9f63-4e78-9c58-2f49d5b3536e |
| name | None |
| port_range_max | None |
| port_range_min | None |
| project_id | c524eaead1f74d4f9141f71b280e0237 |
| protocol | icmp |
| remote_group_id | None |
| remote_ip_prefix | 0.0.0.0/0 |
| revision_number | 0 |
| security_group_id | aa3d7521-489d-4270-be5a-f33c4b3ce1ef |
| updated_at | 2023-11-21T20:35:44Z |
+-----+
ubuntu@workstation:~$ █
```

- 4.19. Add another security rule to allow remote connection using SSH on the default port 22.

```
ubuntu@workstation:~$ openstack security group \
> rule create \
> --protocol tcp \
> --dst-port 22 \
> dev-secgroup
```

```
ubuntu@workstation:~$ openstack security group \
> rule create \
> --protocol tcp \
> --dst-port 22 \
> dev-secgroup
+-----+
| Field          | Value
+-----+
| created_at    | 2023-11-21T20:36:26Z
| description    | ingress
| direction      | ingress
| ether_type     | IPv4
| id             | f9f6da93-31ef-4d43-8ec0-840b1cf79991
| name           | None
| port_range_max| 22
| port_range_min| 22
| project_id     | c524eaead1f74d4f9141f71b280e0237
| protocol       | tcp
| remote_group_id| None
| remote_ip_prefix| 0.0.0.0/0
| revision_number| 0
| security_group_id| aa3d7521-489d-4270-be5a-f33c4b3ce1ef
| updated_at     | 2023-11-21T20:36:26Z
+-----+
ubuntu@workstation:~$ █
```

- 4.20. Open the web browser and navigate to **192.168.1.20**. Log into the dashboard as **admin** with the password **secret**.
- 4.21. Navigate to **Project > Floating IPs**. Disassociate the floating IP assigned to **instance1**.

	IP Address	Description	DNS Name	DNS Domain	Mapped Fixed IP Address	Pool	Status	Actions
<input type="checkbox"/>	172.25.250.65				-	external	Down	<button>Associate</button>
<input type="checkbox"/>	172.25.250.75				-	external	Down	<button>Associate</button>
<input type="checkbox"/>	172.25.250.74				instance1 192.168.233.45	external	Active	<button>Disassociate</button>
<input type="checkbox"/>	172.25.250.66				-	external	Down	<button>Associate</button>

- 4.22. Click **Disassociate** to confirm the disassociation.

Confirm Disassociate

You have selected: "172.25.250.64". Please confirm your selection.

[Cancel](#) [Disassociate](#)

- 4.23.** Select all checkboxes and click **Release Floating IPs** to release all the floating IP addresses.

IP Address	Description	DNS Name	DNS Domain	Mapped Fixed IP Address	Pool	Status	Actions
172.25.250.64				-	external	Down	Associate
172.25.250.77				-	external	Down	Associate
172.25.250.66				-	external	Down	Associate
172.25.250.61				-	external	Down	Associate

- 4.24.** Click **Release Floating IPs** to confirm the release of the all the floating IP addresses.

Confirm Release Floating IPs

You have selected: "172.25.250.64", "172.25.250.77", "172.25.250.66", "172.25.250.61". Please confirm your selection.
Once a floating IP is released, there is no guarantee the same IP can be allocated again.

[Cancel](#) [Release Floating IPs](#)

- 4.25.** Navigate to the **Routers** tab. Click the **Clear Gateway** associated with **exercise-router** to remove its interface on the **external** network.

Name	Status	External Network	Admin State	Availability Zones	Actions
exercise-router	Active	external	UP	-	Clear Gateway

- 4.26.** Click **Clear Gateway** to confirm the clearing of the gateway.

Confirm Clear Gateway

You have selected: "exercise-router". Please confirm your selection. You may reset the gateway later by using the set gateway action, but the gateway IP may change.

[Cancel](#) [Clear Gateway](#)

- 4.27. Navigate to **Compute > Instances**. In the row for the **instance1** instance, click the dropdown next to the **Create Snapshot** button, then click **Detach Interface**.

The screenshot shows the OpenStack Compute > Instances interface. On the left, there's a sidebar with options like Project, API Access, Compute (selected), Overview, Instances (selected), Images, Key Pairs, Server Groups, Volumes, Network, Admin, and Identity. The main area displays a table with one item: Instance ID: Instance1, Image Name: ubuntu, IP Address: 192.168.233.45, Flavor: m1.small, Status: Active, Availability Zone: nova, Task: None, Power State: Running, Age: 1 hour, 40 minutes. To the right of the table is a 'More Actions' dropdown menu. The 'Create Snapshot' option is highlighted with a red box. A secondary dropdown menu is open under 'Create Snapshot', showing options: Associate Floating IP, Attach Interface, Detach Interface (highlighted with a red box), Edit Instance, Attach Volume, Detach Volume, and Update Metadata.

- 4.28. In the **Detach Interface** window, select **192.168.233.XYZ** and click **Detach Interface**.

Detach Interface

Port *

Description:

Select the port to detach.

[Cancel](#) [Detach Interface](#)

- 4.29. Click the checkbox next to **instance1**, then click **Delete Instances**.

Project / Compute / Instances

Instances

Instance ID = Filter  Delete Instances More Actions ▾

Displaying 1 item

<input checked="" type="checkbox"/>	Instance Name	Image Name	IP Address	Flavor	Key Pair	Status	Availability Zone	Task	Power State	Age	Actions
<input checked="" type="checkbox"/>	instance1	ubuntu	192.168.233.45	m1.small	-	Active	nova	None	Running	1 hour, 46 minutes	

Displaying 1 item

- 4.30. Click **Delete Instances** to confirm the deletion of **instance1**.

Confirm Delete Instances

You have selected: "instance1". Please confirm your selection. Deleted instances are not recoverable.

- 4.31. Close the web browser and continue to the next task.

5 Launching an External Instance

In this task, you will launch an external instance.

- 5.1. If a terminal window is not already open, open one and source the admin credentials from the `~/keystonerc-admin` file.
- 5.2. List all instances in the project. The list should be empty.

```
ubuntu@workstation:~$ openstack server list
```

```
ubuntu@workstation:~$ openstack server list

ubuntu@workstation:~$ █
```

- 5.3. Launch an instance named `instance-external` using the `ubuntu` image, the `m1.small` flavor, the `dev-keypair` key pair, the `shared` network, and the `dev-secgroup` security group.

```
ubuntu@workstation:~$ openstack server create \
> --image ubuntu \
> --flavor m1.small \
> --key-name dev-keypair \
> --nic net-id=shared \
> --security-group dev-secgroup \
> --wait instance-external
```

```
ubuntu@workstation:~$ openstack server create \
> --image ubuntu \
> --flavor m1.small \
> --key-name dev-keypair \
> --nic net-id=shared \
> --security-group dev-secgroup \
> --wait instance-external

+-----+-----+
| Field | Value |
+-----+-----+
| OS-DCF:diskConfig | MANUAL |
| OS-EXT-AZ:availability_zone | nova |
| OS-EXT-SRV-ATTR:host | devstack |
| OS-EXT-SRV-ATTR:hypervisor_hostname | devstack |
| OS-EXT-SRV-ATTR:instance_name | instance-00000007 |
| OS-EXT-STS:power_state | Running |
| OS-EXT-STS:task_state | None |
| OS-EXT-STS:vm_state | active |
| OS-SRV-USG:launched_at | 2023-11-21T21:43:30.000000 |
| OS-SRV-USG:terminated_at | None |
| accessIPv4 | |
| accessIPv6 | |
| addresses | shared=192.168.233.172 |
| adminPass | UDYpHip6pDGy |
| config_drive | |
| created | 2023-11-21T21:43:27Z |
| flavor | m1.small (2) |
| hostId | 151e314f6e3cfc8b4db0b1f6035cc4b68cb1e6c9aa97163a575f9f6c |
| id | 542a4800-5285-4523-8239-c94f77f76203 |
| image | ubuntu (10d986bd-8501-47be-b9d9-d72eab219920) |
| key_name | dev-keypair |
| name | instance-external |
| progress | 0 |
| project_id | c524eaead1f74d4f9141f71b280e0237 |
| properties | |
| security_groups | name='dev-secgroup' |
| status | ACTIVE |
| updated | 2023-11-21T21:43:31Z |
| user_id | b4bdeae0865449e1905fc5e639007753 |
| volumes_attached | |
+-----+-----+
ubuntu@workstation:~$
```

5.4. Set the **external** network as the gateway for the **exercise-router** router.

```
ubuntu@workstation:~$ openstack router set \
> --external-gateway external \
> exercise-router
```

```
ubuntu@workstation:~$ openstack router set \
> --external-gateway external \
> exercise-router
ubuntu@workstation:~$
```

5.5. Create a floating IP address for the project.

```
ubuntu@workstation:~$ openstack floating ip create external
```

ubuntu@workstation:~\$ openstack floating ip create external	
Field	Value
created_at	2023-11-21T22:54:54Z
description	
fixed_ip_address	None
floating_ip_address	172.25.250.66
floating_network_id	f940f9bd-6695-427b-8598-09a12672e9cc
id	d5c7805e-ed24-48de-afaf-37a3b41b0786
name	172.25.250.66
port_id	None
project_id	c524eaead1f74d4f9141f71b280e0237
qos_policy_id	None
revision_number	0
router_id	None
status	DOWN
subnet_id	None
updated_at	2023-11-21T22:54:54Z

- 5.6. Create a second floating IP address for the project.

```
ubuntu@workstation:~$ openstack floating ip create external
```

ubuntu@workstation:~\$ openstack floating ip create external	
Field	Value
created_at	2023-11-21T22:54:58Z
description	
fixed_ip_address	None
floating_ip_address	172.25.250.70
floating_network_id	f940f9bd-6695-427b-8598-09a12672e9cc
id	2a46cabb-57c4-403f-8937-587418f2a4e1
name	172.25.250.70
port_id	None
project_id	c524eaead1f74d4f9141f71b280e0237
qos_policy_id	None
revision_number	0
router_id	None
status	DOWN
subnet_id	None
updated_at	2023-11-21T22:54:58Z

- 5.7. Create a third floating IP address for the project.

```
ubuntu@workstation:~$ openstack floating ip create external
```

```
ubuntu@workstation:~$ openstack floating ip create external
+-----+-----+
| Field | Value |
+-----+-----+
| created_at | 2023-11-21T22:55:00Z
| description |
| fixed_ip_address | None
| floating_ip_address | 172.25.250.74
| floating_network_id | f940f9bd-6695-427b-8598-09a12672e9cc
| id | 49152876-3b61-40ab-9b24-1f0b67df3f7b
| name | 172.25.250.74
| port_id | None
| project_id | c524eaead1f74d4f9141f71b280e0237
| qos_policy_id | None
| revision_number | 0
| router_id | None
| status | DOWN
| subnet_id | None
| updated_at | 2023-11-21T22:55:00Z
+-----+
ubuntu@workstation:~$ █
```

- 5.8. Associate the third floating IP address with the **instance-external** instance.

```
ubuntu@workstation:~$ openstack server add floating ip \
> instance-external 172.25.250.74
```

```
ubuntu@workstation:~$ openstack server add floating ip \
> instance-external 172.25.250.74
ubuntu@workstation:~$ █
```

Note

Be sure to use the floating IP address that matches your output as they may differ slightly from this example.

- 5.9. Verify that the instance was assigned the floating IP address.

```
ubuntu@workstation:~$ openstack server list \
> -c Name \
> -c Networks
```

```
ubuntu@workstation:~$ openstack server list \
> -c Name \
> -c Networks
+-----+-----+
| Name | Networks |
+-----+-----+
| instance-external | shared=192.168.233.208, 172.25.250.74 |
+-----+-----+
ubuntu@workstation:~$ █
```

Tip

For commands that output tables, you can pull out only the columns you want by using the `-c` option followed by the column name. This option can be chained as in the command above to list multiple columns.

- 5.10.** Leave the terminal window open and continue to the next task.

6 Verifying an External Instance

In this task, you will verify the functionality of an external instance by using the ssh and ping commands to test the external network.

- 6.1. If a terminal window is not already open, open one and source the admin credentials from the `~/keystonerc-admin` file.
- 6.2. Use the `scp` command to send the `dev-keypair` key pair to the `devstack` machine over the SSH protocol.

```
ubuntu@workstation:~$ scp ~/Downloads/dev-keypair.pem \
> ubuntu@192.168.1.20:~/dev-keypair.pem
```

```
ubuntu@workstation:~$ scp ~/Downloads/dev-keypair.pem \
> ubuntu@192.168.1.20:~/dev-keypair.pem
ubuntu@192.168.1.20's password:
dev-keypair.pem                                              100% 1680      4.8MB/s   00:00
ubuntu@workstation:~$ █
```

- 6.3. SSH into the `devstack` machine.

```
ubuntu@workstation:~$ ssh 192.168.1.20
```

```
ubuntu@workstation:~$ ssh 192.168.1.20
ubuntu@192.168.1.20's password:
Welcome to Ubuntu 22.04.3 LTS (GNU/Linux 5.15.0-1046-kvm x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:     https://landscape.canonical.com
 * Support:        https://ubuntu.com/advantage

 * Strictly confined Kubernetes makes edge and IoT secure. Learn how MicroK8s
 just raised the bar for easy, resilient and secure K8s cluster deployment.

 https://ubuntu.com/engage/secure-kubernetes-at-the-edge

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The list of available updates is more than a week old.
To check for new updates run: sudo apt update
Last login: Tue Nov 21 22:27:04 2023 from 192.168.1.254
ubuntu@devstack:~$ █
```

- 6.4. Ping the **external-instance** instance using the floating IP that was assigned to it in the previous task.

```
ubuntu@devstack:~$ ping -c3 172.25.250.74
```

```
ubuntu@devstack:~$ ping -c3 172.25.250.74
PING 172.25.250.74 (172.25.250.74) 56(84) bytes of data.
64 bytes from 172.25.250.74: icmp_seq=1 ttl=63 time=2.31 ms
64 bytes from 172.25.250.74: icmp_seq=2 ttl=63 time=0.962 ms
64 bytes from 172.25.250.74: icmp_seq=3 ttl=63 time=0.820 ms

--- 172.25.250.74 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2002ms
rtt min/avg/max/mdev = 0.820/1.362/2.306/0.669 ms
ubuntu@devstack:~$ █
```

- 6.5. SSH into the **instance-external** instance, using the **dev-keypair.pem** file to authenticate.

```
ubuntu@devstack:~$ ssh -i ~/dev-keypair.pem \
> 172.25.250.74
```

```
ubuntu@devstack:~$ ssh -i ~/dev-keypair.pem \
> 172.25.250.74
The authenticity of host '172.25.250.74 (172.25.250.74)' can't be established.
ED25519 key fingerprint is SHA256:hNu/n5EEiloTiEqNJRi3pRoGhzyV9p9SaPGCwgFw4ZY.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.25.250.74' (ED25519) to the list of known hosts.
Welcome to Ubuntu 22.04.3 LTS (GNU/Linux 5.15.0-87-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:     https://landscape.canonical.com
 * Support:        https://ubuntu.com/advantage

System information as of Tue Nov 21 23:21:42 UTC 2023

System load:  0.15380859375   Processes:          85
Usage of /:   7.3% of 19.20GB  Users logged in:    0
Memory usage: 8%                IPv4 address for ens3: 192.168.233.208
Swap usage:   0%

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The list of available updates is more than a week old.
To check for new updates run: sudo apt update

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

ubuntu@instance-external:~$
```

Note

It may take a few minutes for the instance to be fully booted and ready to accept SSH connections.

6.6. Ping the DHCP server.

```
ubuntu@instance-external:~$ ping -c3 192.168.233.2
```

```
ubuntu@instance-external:~$ ping -c3 192.168.233.2
PING 192.168.233.2 (192.168.233.2) 56(84) bytes of data.
64 bytes from 192.168.233.2: icmp_seq=1 ttl=64 time=10.6 ms
64 bytes from 192.168.233.2: icmp_seq=2 ttl=64 time=2.06 ms
64 bytes from 192.168.233.2: icmp_seq=3 ttl=64 time=1.33 ms

--- 192.168.233.2 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2005ms
rtt min/avg/max/mdev = 1.329/4.667/10.618/4.218 ms
ubuntu@instance-external:~$ █
```

6.7. The lab is now complete.