

Profiling and Runtime Monitoring Tools


Testing different functions to see which would be the fastest at solving sum of squares.

Nathaniel Fitch

Created on April 1 | Last edited on April 1

<https://wandb.ai/nf843222-ohio-university/sum-of-squares-dp-static?nw=nwusernf843222>

▼ Graphs

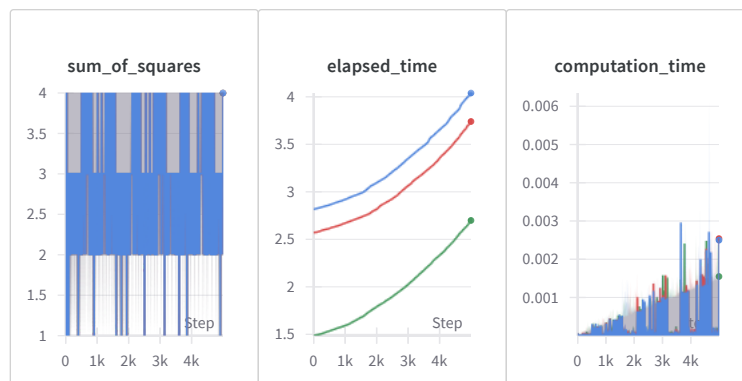

Run set 3			
Name (3 visualized)	State	Notes	Use
Math	Finished	Fastest	nf843222
Recursive	Finished	Second Fastest	nf843222
Recursive_Cache	Finished	Slowest	nf843222

- ▼ Gathering From this data above, it is shown that Math is the fastest way to find the sum of squares as shown in the elapsed_time graph. Although it is close, it appears that running recursive calls without cache is faster than with cache by a small margin.
- ▼ Given the data I have found, when creating new functions dealing with squaring, it would be best to use the "Math" function.

