



# Object-Oriented Programming

## CSE-703029

---

Faculty of Computer Science  
Phenikaa University

Lecture 4: Access Control & Reuse

Slides adapted from Steven Roehrig



# Today's Topics

---

- ❑ Implementation hiding with packages and access specifiers.
- ❑ Composition
- ❑ Inheritance
- ❑ More on constructors
- ❑ Finals
- ❑ Class loading

# Access Specifiers

---

- ❑ **public**, **protected**, **private** and “friendly”
- ❑ We haven’t used these yet, except for **main()** and **toString()**.
- ❑ **main()** needs to be **public**, so the runtime system can call it.
- ❑ **toString()** needs to be **public** since it is **public** in **Object**, and we are “overriding” it.



# The “Need To Know” Principle

---

- ❑ Like military secrets, portions of your classes are best kept private.
- ❑ The public interface of a class should provide everything users need, but nothing they don't.
- ❑ Access specifiers allow you to enforce the “need to know” principle.

# Access Specifiers

---

- ❑ **public** members (variables and methods) are freely available for anyone's use.
- ❑ **private** members can be accessed (used) only by the methods of the containing class.
- ❑ **protected** members are public to subclasses, private to others.
- ❑ “Friendly” members have *package access*:
  - no access specifier
  - public within the containing package



# Packages

---

- ❑ Java's concept of “module”.
- ❑ A group of related classes.
- ❑ A package can have a name, but there is the unnamed package, which holds all the classes in your program that you haven't put into a named package.
- ❑ E.g: `package com.mycompany.app`

Holds App.java (Main), Book.java, Time.java



# How Does It All Work?

---

- ❑ So far, we have used packages and access specifiers.
- ❑ We kept all our **class** files in the same folder; under the named package.  
com.mycompany.app
  - All of our members can revoke in the main.
  - App.java



# The Basic Rules

---

- ❑ Class members should be **private** unless there is a need to know or use.
- ❑ Think carefully about the public interface.
- ❑ Use accessors/mutators (aka get and set methods) to control access to private member variables.
- ❑ Often we create methods that are only used internally; make these **private**.
- ❑ We'll worry about **protected** later.





# Example

---

```
public class Fraction {  
  //Methods  
    public Fraction()  
    public Fraction(int n, int d)  
    public String toString()  
    public String toDecimal()  
    public Fraction add(Fraction f)  
    private int numerator;  
    private int denominator;  
    private int gcd(int a, int b)  
}
```

# How To Change the class of **Fraction**?

---

Some classes are “immutable” (fixed) for a reason. To change a **Fraction** object’s values, use encapsulation approach with set and get

□ provide a “set” function:

```
//private int numerator, denominator;
```

```
public void set(int n, int d) {  
    this.numerator = n;  
    this.denominator = d;  
}
```



---

# Encapsulation

Get & Set Method to access private variables



# Interface vs. Implementation

---

- ❑ Interface: Completely “abstract class” to group related method with empty bodies

```
interface Student() {  
    public void Record();// interface method (does not have a body)  
    public void Mark();// interface method (does not have a body)  
}
```



# Interface vs. Implementation

---

- ❑ Implementation: Class use Interface implementing its methods.

```
Class Person implements Student{  
    public void Record(){  
        System.out.println("Implement method of interface");  
    };  
    public void Mark(){  
    };  
}
```



# Interface vs. Implementation

---

- ❑ For flexibility, we want the right to change an implementation if we find a better one.
- ❑ But we don't want to break client code.
- ❑ Access specifiers restrict what clients can rely on.
- ❑ Everything marked private is subject to change.



---

# Interface

**Interface:** Abstract class to group methods with empty bodies

Class use interface will **implements** its methods



# Array Of Objects

---

1. Create using object class

**Class\_name [] objArrRef;**

Or

**Class\_name objArrRef [];**

2. Instantiate the array of Objects

**Class\_name obj [] = new Class\_name[array\_length];**

3. Revoke / Call

**Obj[0] = new Class\_name("abc", "def", 234);**





# Example: NNCollection

---

- ❑ Our clients want to store last names and associated telephone numbers.
- ❑ The list may be large.
- ❑ They want
  - a class NameNumber for name & number pairs
  - NNCollection()
  - insert(NameNumber)
  - findNumber(String)



# NameNumber

---

```
public class NameNumber {  
    private String lastName;  
    private String telNumber;  
    public NameNumber() {}  
    public NameNumber(String name, String num) {  
        lastName = name;  
        telNumber = num;  
    }  
    public String getLastName() {  
        return lastName;  
    }  
    public String getTelNumber() {  
        return telNumber;  
    }  
}
```



# NNCollection

---

```
public class NNCollection {  
    private NameNumber[] nnArray = new NameNumber[100];  
    private int free;  
    public NNCollection() {free = 0;}  
    public void insert(NameNumber n) {  
        int index = 0;  
        for (int i = free++;  
            i != 0 &&  
            nnArray[i-1].getLastName().compareTo(n.getLastName()) > 0;  
            i--) {  
            nnArray[i] = nnArray[i-1];  
            index = i;  
        }  
        nnArray[index] = n;  
    }  
}
```



# NNCollection (cont.)


---

```
public String findNumber(String lName) {  
    for (int i = 0; i != free; i++)  
        if (nnArray[i].getLastName().equals(lName))  
            return nnArray[i].getTelNumber();  
    return new String("Name not found");  
}  
}
```


# NNCollection Insertion

---

Initial Array

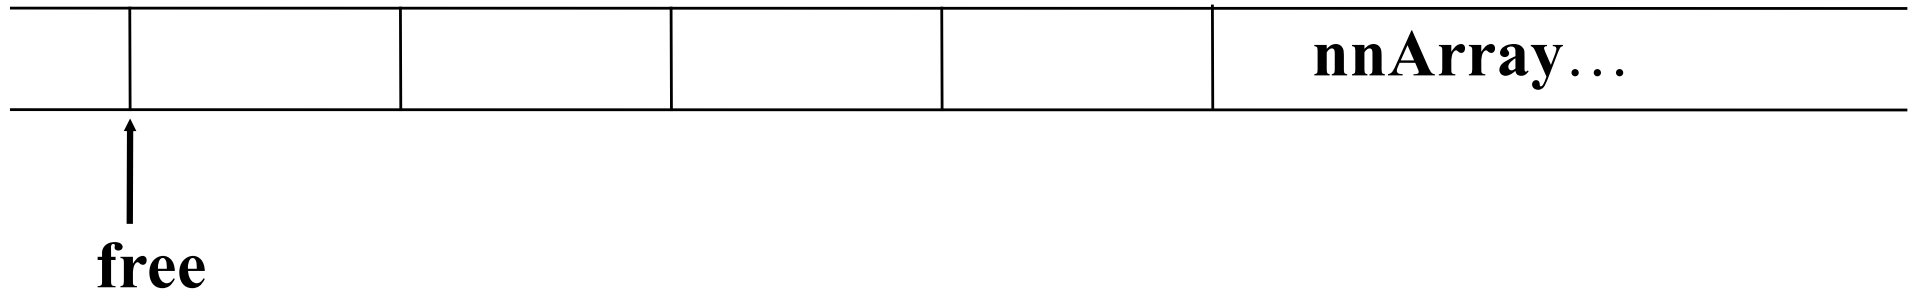


Insert “Lewis”

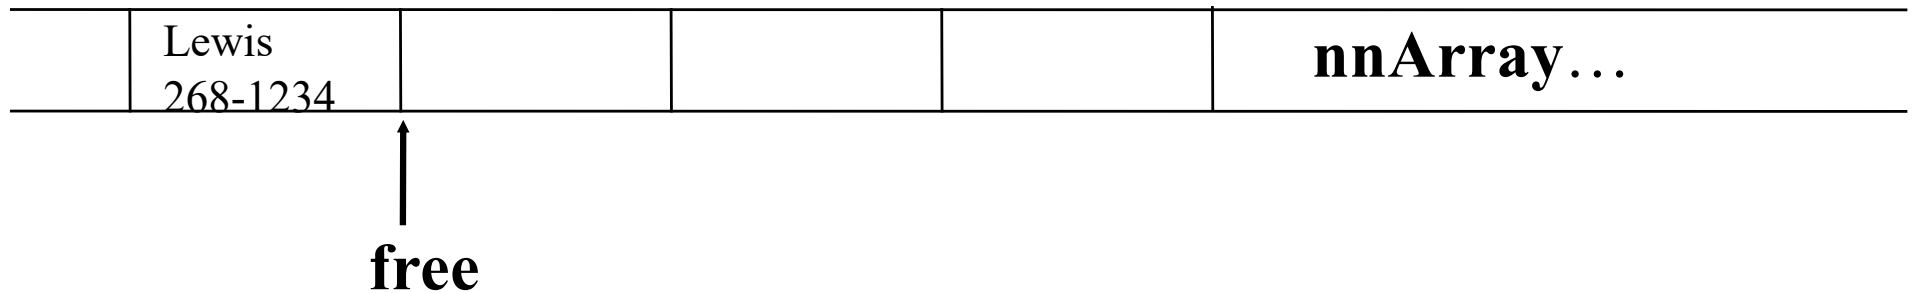

# NNCollection Insertion (cont.)

Insert “Clay”

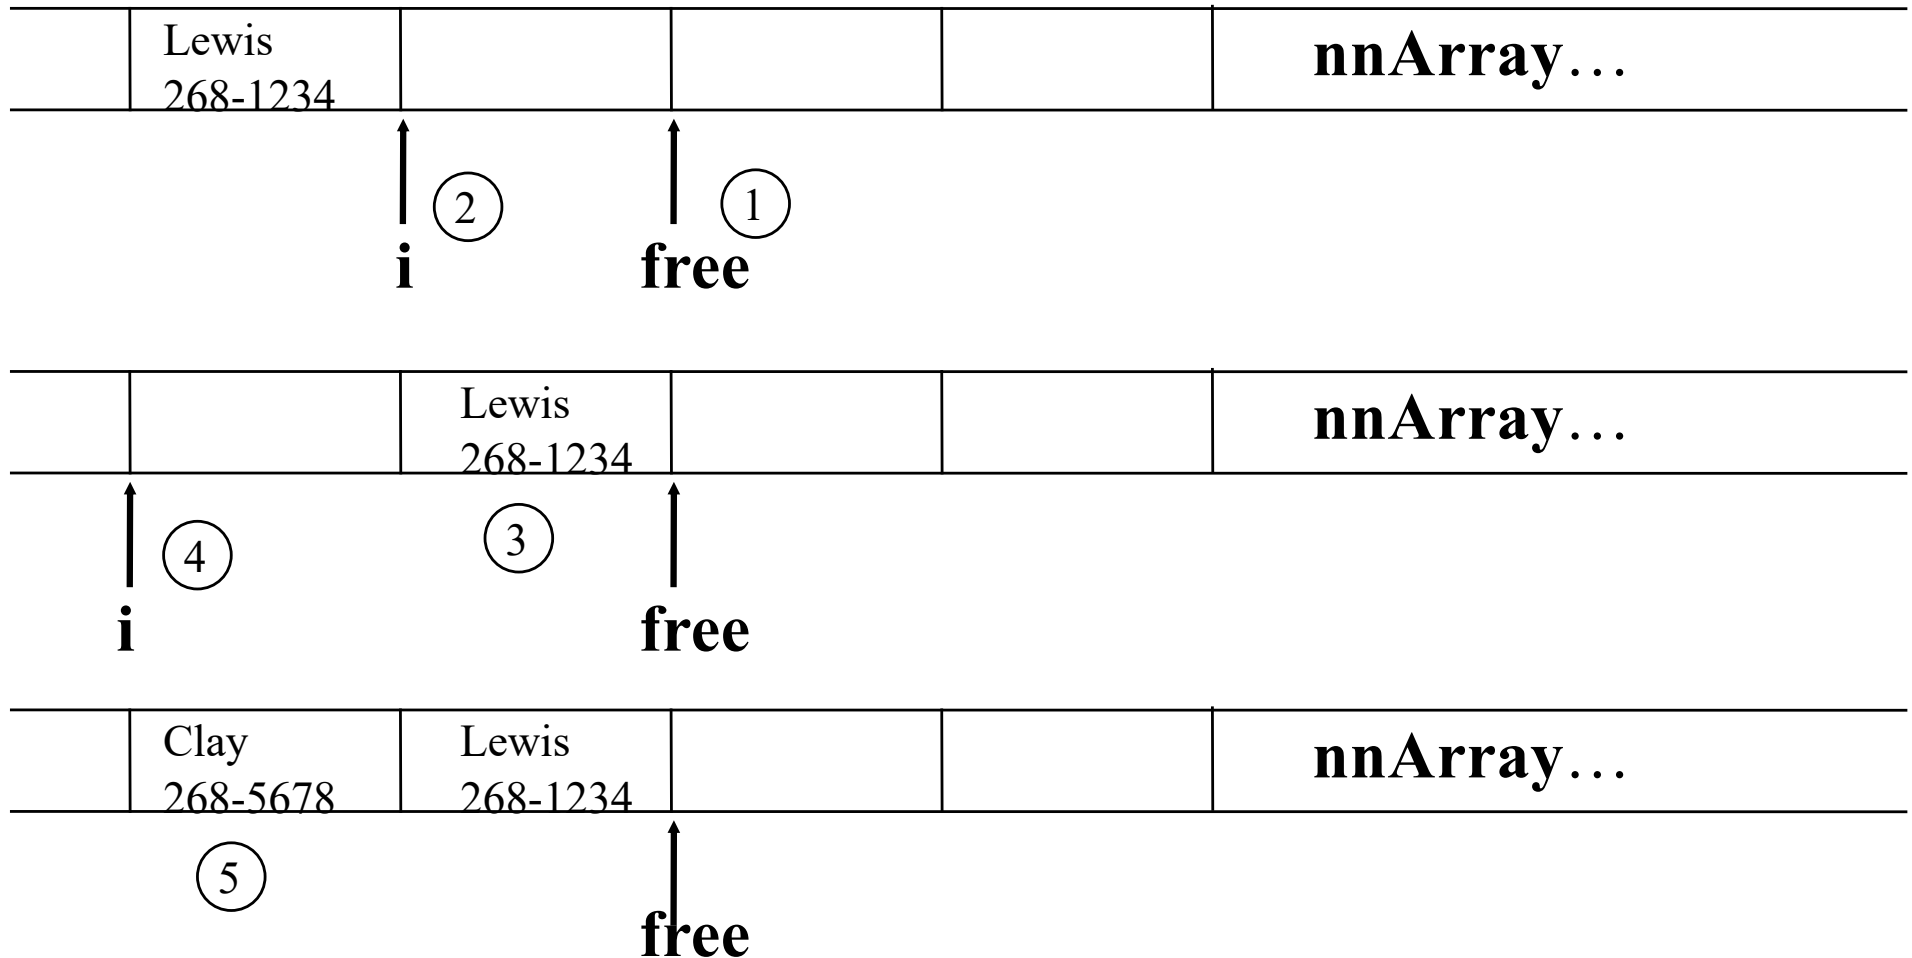



# Yes, This Is Rotten

---

- ❑ It uses a fixed-size array.
- ❑ Array elements are interchanged every time a new name is entered. Slow.
- ❑ The array is searched sequentially. Slow.
- ❑ But, our clients can get started on *their* code.
- ❑ We go back and build a better implementation.




# Better NNCollection

---

- ❑ Use a *binary tree*.
- ❑ Names “on the left” precede lexicographically.
- ❑ Roughly logarithmic insert and retrieve times.
- ❑ Very recursive, but not very expensive.



# Binary Tree Layout

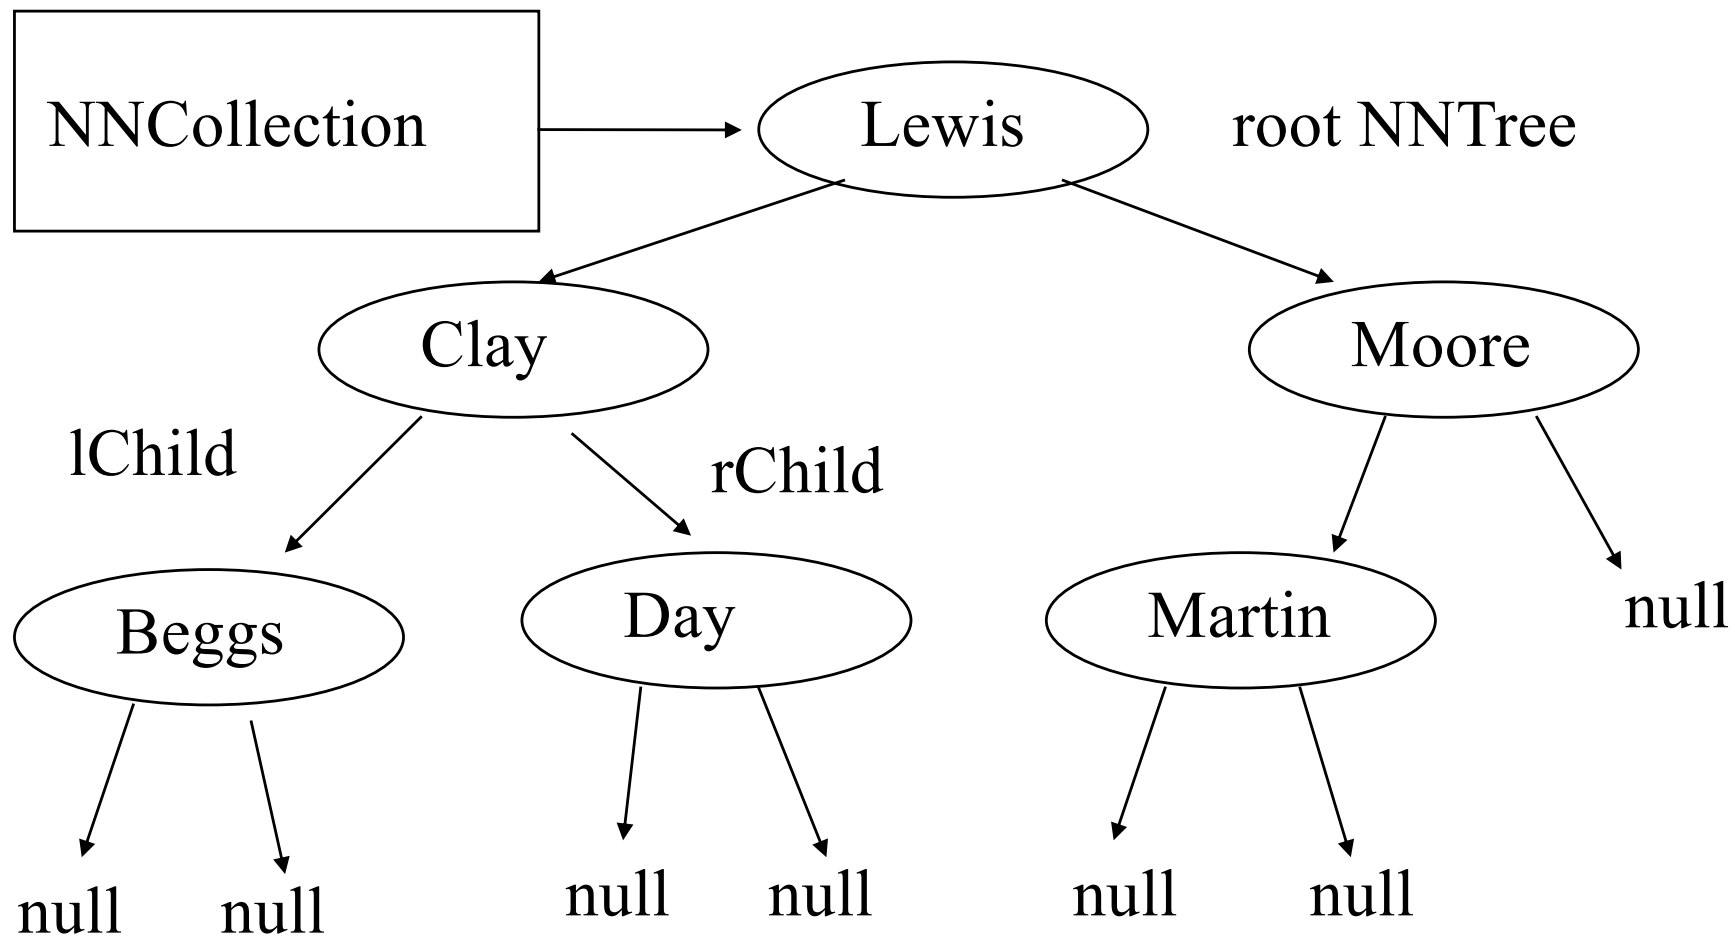

Note: Only the name of the **NameNumber** object is shown




# NNTree Class


---

- Each **NNTree** object
  - is a node, holding a **NameNumber** object.
  - keeps a reference to its left child and right child.
  - knows how to insert a **NameNumber** object.
  - knows how to find a **NameNumber** object.


# Inserting “McCoy”

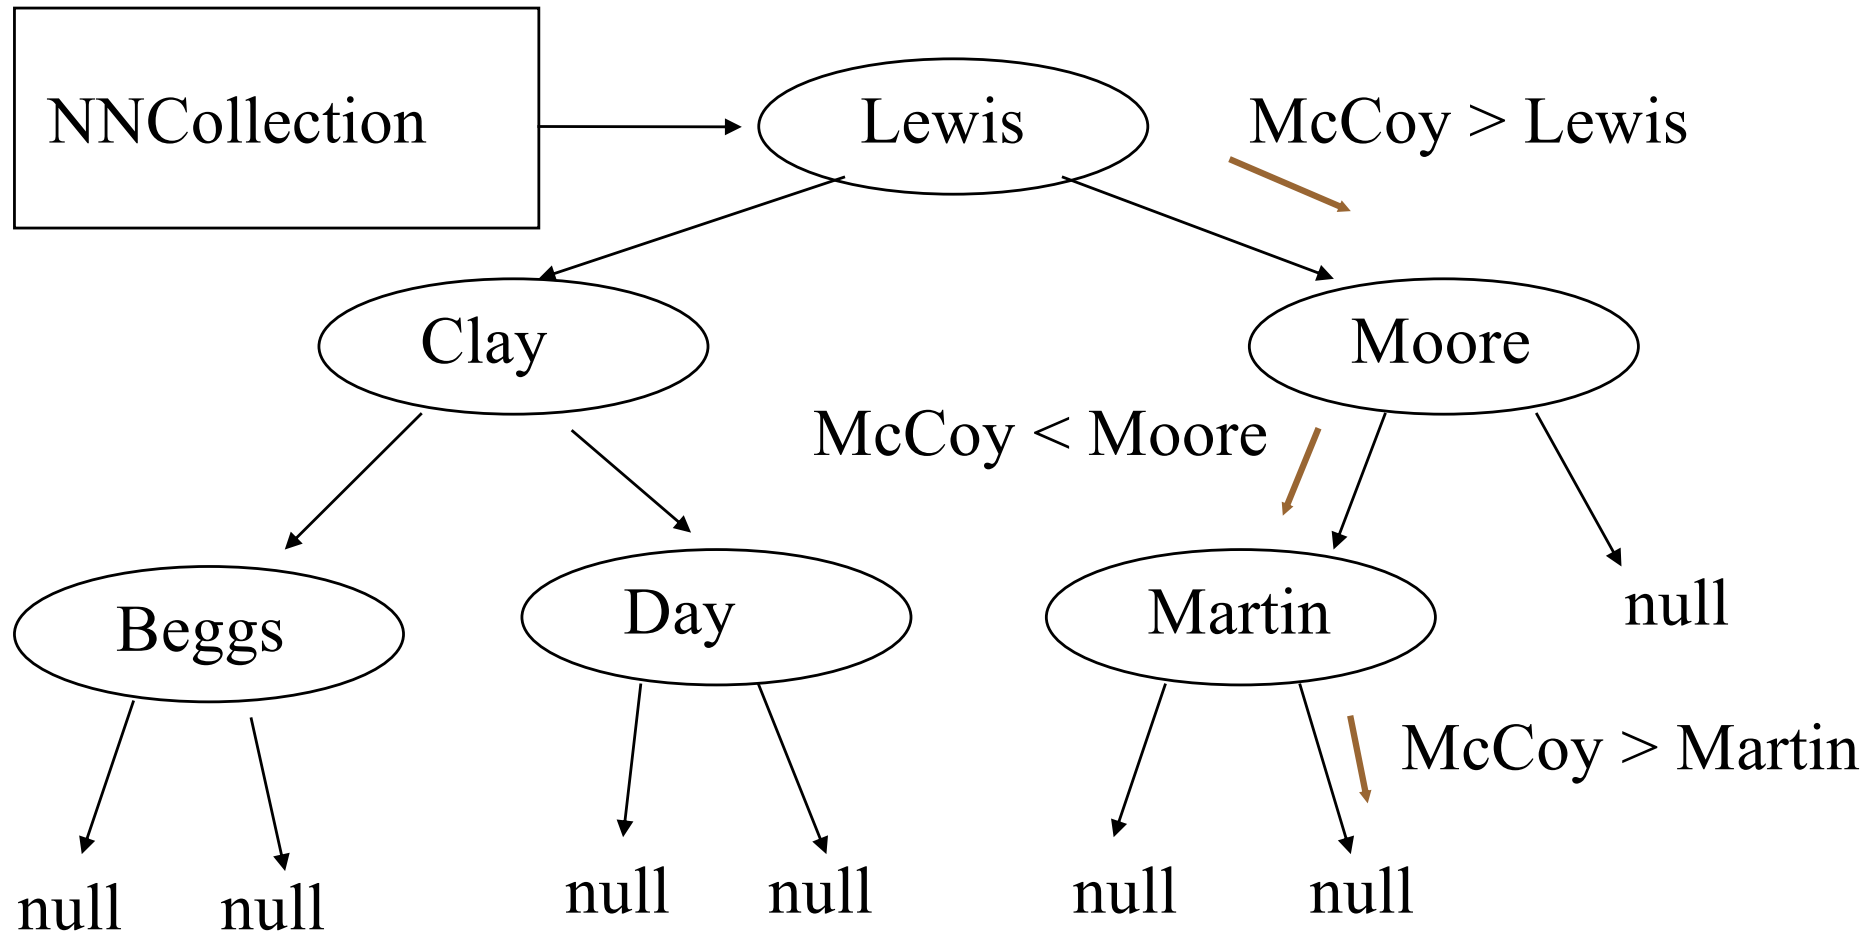

# Inserting “McCoy”

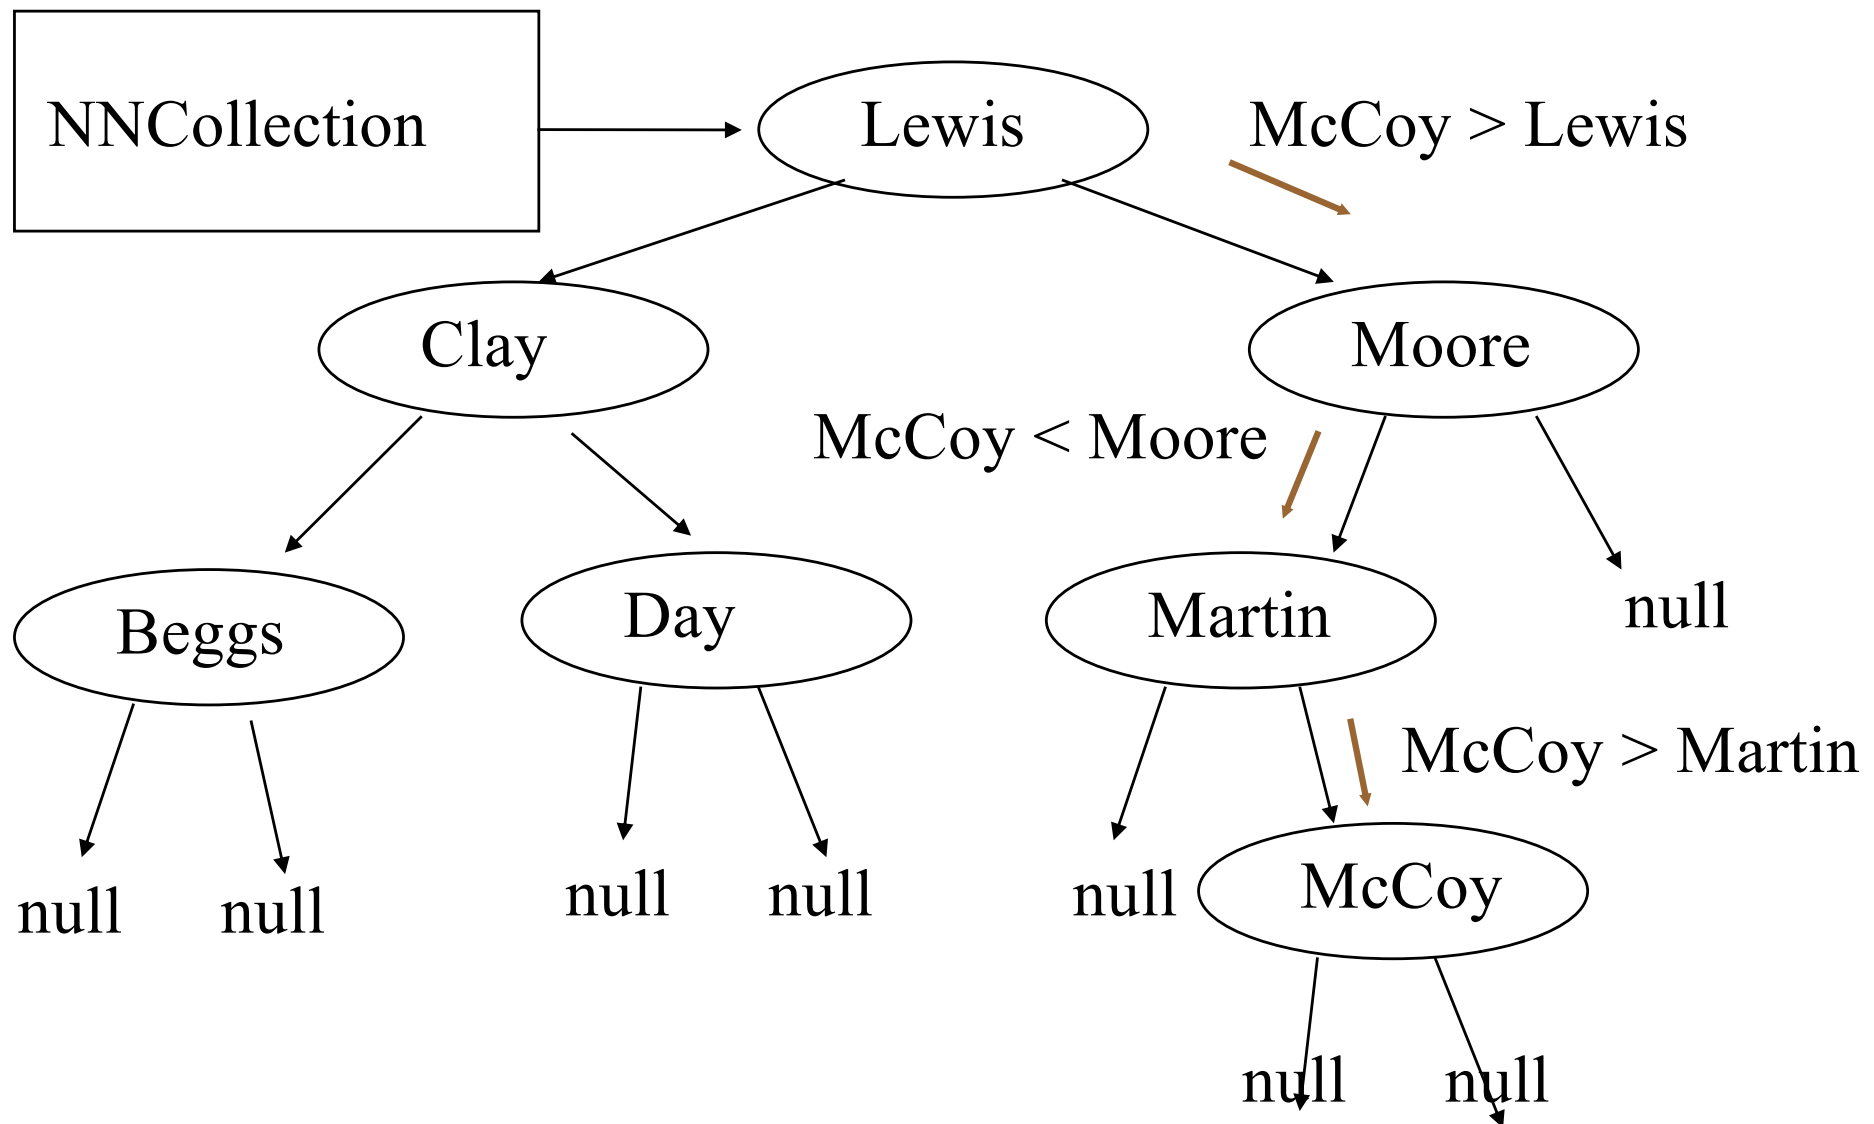

# Finding “Day”

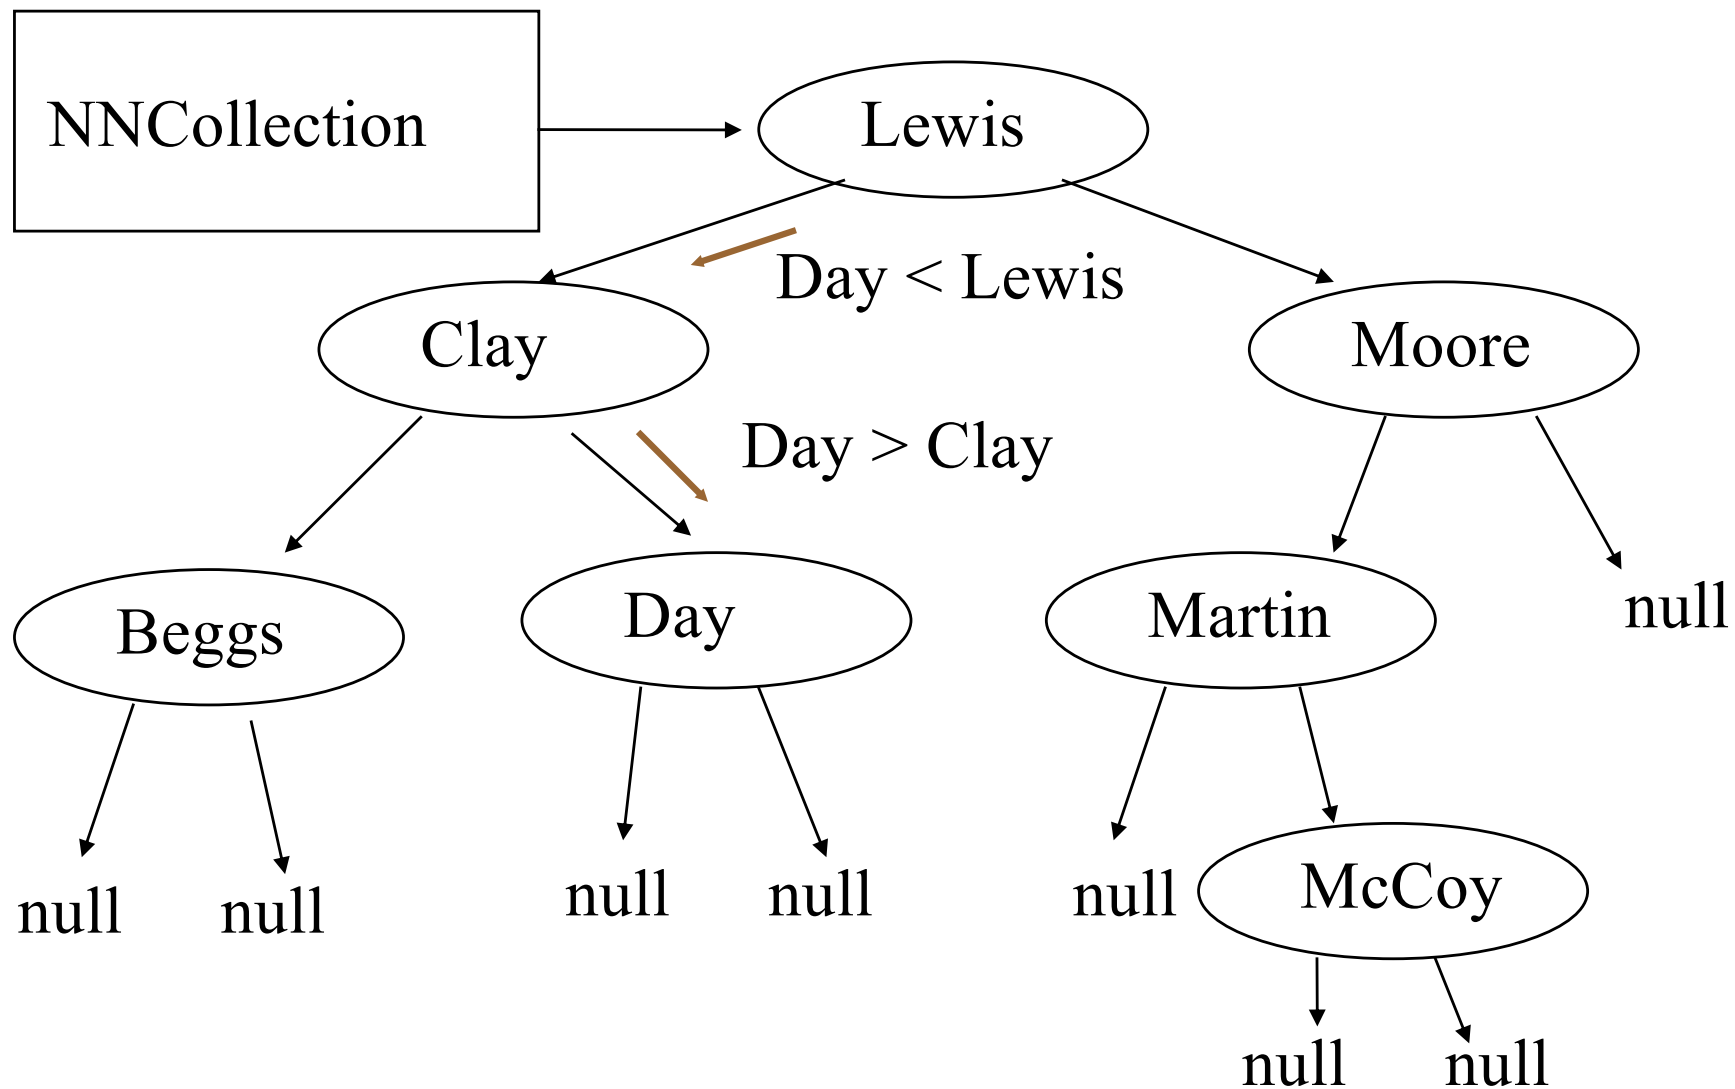



# NNTree Class Definition

---

```
public class NNTree {  
    private NNTree lChild;  
    private NNTree rChild;  
    private NameNumber contents;  
    public NNTree(NameNumber n) {  
        contents = n;  
}
```

# NNTree Class Definition (cont.)

---

```
public void insert(NameNumber n) {  
    if (n.getLastName().compareTo(contents.getLastName()) < 0)  
        if (lChild != null)  
            lChild.insert(n);  
        else  
            lChild = new NNTree(n);  
    else  
        if (rChild != null)  
            rChild.insert(n);  
        else  
            rChild = new NNTree(n);  
}
```

# NNTree Class Definition (cont.)

---

```
public String findNumber(String lName) {  
    if (lName.compareTo(contents.getLastName()) < 0)  
        if (lChild != null)  
            return lChild.findNumber(lName);  
        else  
            return new String("Name not found");  
    else if (lName.equals(contents.getLastName()))  
        return contents.getTelNumber();  
    else if (lName.compareTo(contents.getLastName()) > 0)  
        if (rChild != null)  
            return rChild.findNumber(lName);  
        else  
            return new String("Name not found");  
    else  
        return new String("Name not found");  
}
```



# NNCollection Again

---

```
public class NNCollection {  
    private NNTree root;  
    public NNCollection() {}  
    public void insert(NameNumber n) {  
        if (root != null) root.insert(n);  
        else root = new NNTree(n);  
    }  
    String findNumber(String lName) {  
        if (root != null)  
            return root.findNumber(lName);  
        else  
            return new String("Name not found");  
    }  
}
```

# More on Packages

---

- ❑ Bringing in a package of classes:  
**import java.util.\*;**
- ❑ Bringing in a single class:  
**import java.util.ArrayList;**
- ❑ The compiler can find these things, through the classpath.
- ❑ If we're working from the command line, the classpath must be an environmental variable.



# Creating a Package

---

- ❑ The very first line in all the files intended for the package named **myPackage**:  
**package myPackage;**
- ❑ Put all of the .class files in a directory named **myPackage**.
- ❑ Put the **myPackage** directory, as a subdirectory, in a directory given in the classpath.



# Class Access

---

- ❑ Classes can be **public** or not.
- ❑ Non-**public** classes are available only within the package they are defined in.
- ❑ There can be only one **public** class in a “compilation unit” (a .java file).
- ❑ Non-**public** classes are “helper” classes, not for public use.



# Class Reuse

---

- ❑ A noble goal, and in Java it's finally happening!
- ❑ Basically two ways: *composition* and *inheritance*.
- ❑ **Composition** is called “has-a”.
- ❑ **Inheritance** is called “is-a”.



---

# Composition & Inheritance

Composition: has-a

Inheritance : is-a



# Composition

E.g. Library **has a** Book

---

```
import Book;
public class Library {
    private final List<Book> books;
    public Library() { }
    Library(List<Book> b){
        this.books = b;
    }
    //get book
    public List<Book> getList(){
        return books;
    }
}
```

# Inheritance : “Effective Java” **is –a** Book

---

- An object of a new class that *inherits* from an existing class has all the “powers and abilities” of the parent class:
  - all data members
  - all methods
  - you can add additional data and methods if you wish
  - a derived class object “**is-an**” object of the parent class type, so can be used in function calls where a parent-class object is specified



# Inheritance Syntax

---

```
class Cleanser {  
    private String activeIngredient; //private  
    public void dilute(int percent)    { // water-down}  
    public void apply(DirtyThing d) { // pour it on}  
    public void scrub(Brush b)        { // watch it work}  
}  
  
public class Detergent extends Cleanser {  
    private String specialIngredient;  
    public void scrub(Brush b) {  
        // scrub gently, then  
        super.scrub(b); // the usual way  
    }  
    public void foam() { // make bubbles}  
}
```



# Access Control, Again

---

- ❑ **Detergent** does indeed have an **activeIngredient**, but it's not accessible.
- ❑ If **Detergent** needs to access it, it must be either
  - made **protected** (or friendly) in **Cleanser**, or
  - be accessible through get and set methods in **Cleanser**.
- ❑ **You can't inherit just to get access!**(PRIVATE)

# What Is A Detergent Object?

---

- ❑ An **object** of type **Cleanser**, having all the members of **Cleanser**.
- ❑ An object of type **Detergent**, having all the additional members of **Detergent**.
- ❑ An object that “responds” to “messages” (ummm...method calls) as though it’s a **Cleanser**, unless
  - new methods have been added to **Detergent** as **foam()** , or
  - **Methods of Cleanser** have been over-ridden, like scrub method



# Subclasses and Constructors

---

- ❑ Think of a **Detergent** object as containing a **Cleanser** *sub-object*.
- ❑ So, that sub-object has to be constructed when you create a **Detergent** object.
- ❑ The **Cleanser** object has to be created *first*, since constructing the remaining **Detergent** part might rely on it.
- ❑ “Always call the base class constructor first.”

# Subclasses and Constructors

---

```
class Cleanser {  
    private String activeIngredient;  
    Cleanser() {  
        System.out.println("Cleanser constructor");  
    }  
}  
public class Detergent extends Cleanser {  
    private String specialIngredient;  
    Detergent() {  
        System.out.println("Detergent constructor");  
    }  
    public static void main(String[] args) {  
        Detergent d = new Detergent();  
    }  
}
```



# super

---

Super with variable

**super.variableParent;**

Super with Methods

**super.methodParent();**

Super with Constructor

**super();**

**//call parent class constructor**



# Subclasses and Constructors

---

```
class Cleanser {  
    private String activeIngredient;  
    Cleanser(String active) {  
        activeIngredient = active;  
    }  
}  
  
public class Detergent extends Cleanser {  
    private String specialIngredient;  
    Detergent(String active, String special) {  
        super(active); // what if this isn't here?  
        specialIngredient = special;  
    }  
}
```

# Composition vs. Inheritance :

## Example

---

- ❑ Think “has-a” vs. “is-a”.
- ❑ Consider the **NNCollection** class. Suppose now we need to store a **String/int** pair (names and ages, perhaps).
- ❑ Should we inherit, or compose?
- ❑ In either approach, we just need to be able to turn **Strings** into **ints**, and vice versa (not hard).



# Composition vs. Inheritance:

## Example

---

**//composition**

```
class NACollection {  
    private NNCollection nnc;  
    NACollection() { // ...}  
    public void insert (NameAge n) { uses nnc's insert()  
    public int findAge(String name) { uses nnc's findNumber()  
}
```

**// OR inheritance**

```
class NACollection extends NNCollection {  
    NACollection() { //...}  
    public void insert(NameAge n) { uses super.insert()  
    public int findAge(String name) { uses super.findNumber()  
}
```



# protected Class Members


---

- ❑ **public** to subclasses.
- ❑ **private** to “the outside world”,
- ❑ except within the package (i.e., they are “friendly”).
- ❑ **private** is usually the best policy, unless you are looking for speed (but then why use Java!?).

# Upcasting vs Downcasting

---

+Upcasting  
+Is-a  
+Inheritance

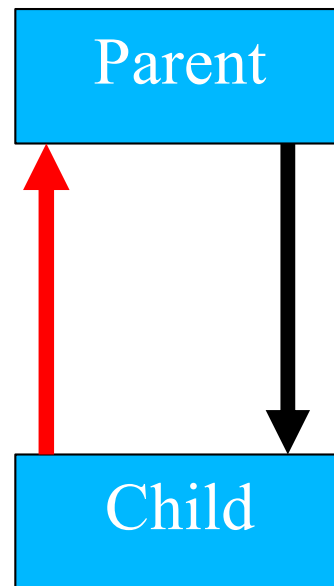

+ Downcasting  
+has-a  
+Composition



# Upcasting


---

```
class CellPhone {  
    cellPhone() { //...}  
    public void ring(Tune t) { t.play(); }  
}  
class Tune {  
    Tune() { // ...}  
    public void play() { // ...}  
}  
class ObnoxiousTune extends Tune{  
    ObnoxiousTune() { // ...}  
    // ...  
}
```

# An ObnoxiousTune “is-a” Tune

---

```
class DisruptLecture {  
    public static void main() {  
        CellPhone noiseMaker = new CellPhone();  
        ObnoxiousTune ot = new ObnoxiousTune();  
        noiseMaker.ring(ot); // ot works though Tune called for  
    }  
}
```

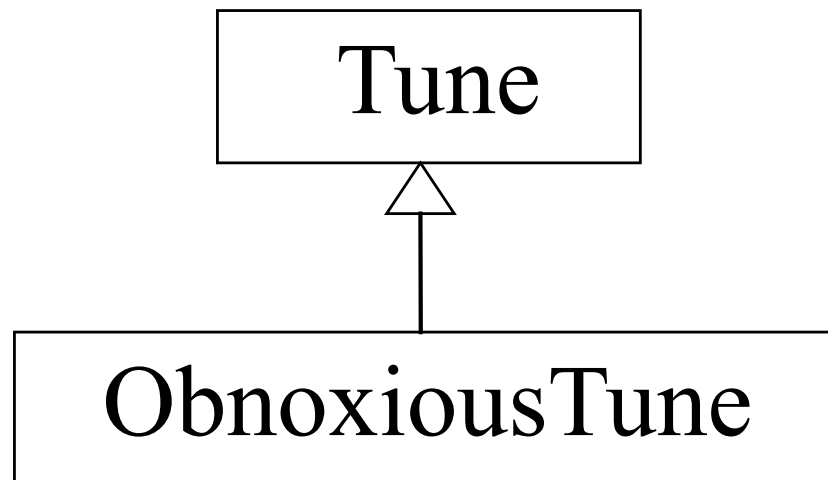

A “UML” diagram



---

# Final

**Non-access modifier** used for Class, Attribute, and Method



# The **final** Keyword

---

- Vaguely like **const** in C++.
- It says “this is invariant”.
- Can be used for
  - data
  - methods
  - classes
- A kind of protection mechanism.



# final


---

The **final** keyword is a non-access modifier used for classes, attributes and methods, which makes them non-changeable (impossible to inherit or override).



# final

---

<b>Final Variable</b>		<b>To Create constant variable</b>
<b>Final Methods</b>		<b>Prevent Method Overriding</b>
<b>Final Classes</b>		<b>Prevent Inheritance</b>

# final Data (Compile-Time)

---

- For primitive types (**int**, **float**, etc.), the meaning is “this can’t change value”.

**class Sedan {**

**final int numDoors = 4;**

- For references, the meaning is “this reference must always refer to the same object”.

**final Engine e = new Engine(300);**

# final Data (Run-Time)

---

- Called a “blank final;” the value is filled in during execution.

```
class Sedan {  
    final int topSpeed;  
    Sedan(int ts) {  
        topSpeed = ts;  
        // ...  
    }  
}
```

```
class DragRace {  
    Sedan chevy = new Sedan(120), ford = new Sedan(140);  
    //! chevy.topSpeed = 150;
```

# final Method Arguments

---

```
class Sedan {  
    public void replaceTire(final Tire t) {  
        //! t = new Tire();  
    }  
}
```

- Same idea:
  - a **final** primitive has a constant value
  - a **final** reference always refers to the same object.
- Note well: a **final** reference does *not* say that the object *referred to* can't change (*cf.* C++)



# final Methods

---

- ❑ **final** methods cannot be overridden in subclasses. Maybe a bad idea?
- ❑ **final** methods can be inlined, allowing the compiler to insert the method code where it is called.
- ❑ This may improve execution speed.
- ❑ Only useful for small methods.
- ❑ **private** methods are implicitly **final**.



# final Classes

---

- ❑ These can't be inherited from (ummm, “subclassed”?).
- ❑ All methods are implicitly **final**, so inlining can be done.



# Class Loading

---

- A **.class** file is loaded when
  - the first object of that type is created, or
  - when a static member is first used.
- When a derived class object is created, the base class file is immediately loaded (before the derived class constructor actually goes to work).

# Variable-Length Argument Lists

---

```
class A { int i; }  
public class VarArgs {  
    static void f(Object[] x) {  
        for (int i = 0; i < x.length; i++)  
            System.out.println(x[i]);  
    }  
    public static void main(String[] args) {  
        f(new Object[] {  
            new Integer(47), new VarArgs(),  
            new Float(3.14), new Double(11.11) } );  
        f(new Object[] { "one", "two", "three" } );  
        f(new Object[] { new A(), new A(), new A() } );  
    }  
}
```





# Variable-Length Argument Lists

---

- This prints

47

VarArgs@fee6172e

3.14

11.11

one

two

three

A@fee61874

A@fee61873

A@fee6186a