

# **QConnectWinapp**

**v. 1.0.0**

Nguyen Huynh Tri Cuong

25.04.2023

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Description</b>	<b>2</b>
2.1	Prerequisites . . . . .	2
2.2	Getting Started . . . . .	2
2.3	Usage . . . . .	2
2.3.1	Configurations for Winapp connection type . . . . .	2
2.3.2	How to define a GUI control . . . . .	3
2.4	Example . . . . .	3
2.5	Contribution Guidelines . . . . .	5
2.6	Configure Git and correct EOL handling . . . . .	6
2.7	Sourcecode Documentation . . . . .	6
2.8	Feedback . . . . .	6
2.9	About . . . . .	6
2.9.1	Maintainers . . . . .	6
2.9.2	Contributors . . . . .	6
2.9.3	3rd Party Licenses . . . . .	6
2.9.4	Used Encryption . . . . .	6
2.9.5	License . . . . .	7
<b>3</b>	<b>element_handler.py</b>	<b>8</b>
3.1	Class: ElementActionHandler . . . . .	8
3.1.1	Method: get_supported_level . . . . .	8
3.1.2	Method: get_attribute . . . . .	8
3.1.3	Method: divert_action . . . . .	8
<b>4</b>	<b>winapp_client.py</b>	<b>10</b>
4.1	Class: CustomWebDriver . . . . .	10
4.1.1	Method: start_session . . . . .	10
4.2	Class: WinappConfig . . . . .	10
4.3	Class: WinAppClient . . . . .	10
4.3.1	Method: connect . . . . .	11
4.3.2	Method: perform_action . . . . .	11
4.3.3	Method: send_obj . . . . .	11
4.3.4	Method: wait_4_trace . . . . .	11
4.3.5	Method: disconnect . . . . .	12
4.3.6	Method: quit . . . . .	12

<b>5</b>	<b>Appendix</b>	<b>13</b>
<b>6</b>	<b>History</b>	<b>14</b>

# Chapter 1

## Introduction

QConnectWinapp is an extension library for [QConnectBase](#) library, designed to simplify and automate Windows application GUI testing. QConnectWinapp is built to provide seamless and efficient GUI testing experiences for Windows applications.

The library uses the powerful backend of WinAppDriver (<https://github.com/microsoft/WinAppDriver>) to drive the testing of your Windows applications, ensuring reliable and accurate results. QConnectWinapp is designed to support Python 3.7+, RobotFramework 3.2+, and QConnectBase 1.0.0+.

With QConnectWinapp, you can easily and quickly automate the testing of your Windows applications, saving time and effort while ensuring that your applications are of the highest quality. Whether you're a seasoned tester or just starting out, QConnectWinapp offers a range of features and tools to make GUI testing simple and efficient.

# Chapter 2

## Description

*QConnectionWinapp*

### 2.1 Prerequisites

To use the QConnectWinapp library, users need to install the following app prerequisites:

WinAppDriver: <https://github.com/Microsoft/WinAppDriver/releases> (version  $\geq 1.2.1$ )

Windows SDK: <https://developer.microsoft.com/en-us/windows/downloads/windows-sdk/>

### 2.2 Getting Started

You can checkout all [QConnectWinapp](#) sourcecode from the GitHub.

After checking out the source completely, you can install by running below command inside **robotframework-qconnect-winapp** directory.

```
python setup.py install
```

### 2.3 Usage

QConnectWinapp is a backend extension for the QConnectBase library that adds support for testing WinApp UI. From the user's perspective, this means they now have an additional connection type for WinApp testing when using the **connect** keyword in the QConnectBase library. With QConnectWinapp, users can now easily automate tests for Windows desktop applications, and take advantage of its integration with WinAppDriver to interact with UI elements and validate their behavior.

Please refer to [QConnectBase](#) for more information on how to use the **connect** keyword. In this section, we will focus on the **Winapp** connection type and how to configure it.

#### 2.3.1 Configurations for Winapp connection type

QConnectBaseLibrary has already supported below connection types:

- **TCPIPClient**: Create a Raw TCPIP connection to TCP Server.
- **SSHClient**: Create a client connection to a SSH server.
- **SerialClient**: Create a client connection via Serial Port.
- **DLT**: Create a client connection to Diagnostic Log and Trace(DLT) Module.

QConnectWinapp add one more connection type for Winapp UI testing call **Winapp**

Below is the description of the configuration string for Winapp connection type:

```
{
  "host": [host ip],      # Optional. Default value is "localhost".
  "port": [listening port] # Optional. Default value is 4723.
  "caps": [Desired Capabilities string in JSON format], # E.g. { "app": "C:/Program ↵
↵ Files/BOSCH/CMST/CMST.exe"}
  "logfile": [Log file path. Possible values: 'nonlog', 'console', [user define path]]
}
```

Table 2.1: List of Capabilities

Capability	Description
app	The package full name or the executable file's full path of the application to automate (e.g. Microsoft.WindowsCalculator_8wekyb3d8bbwe!App).
deviceName	Mostly optional, but the name of your device
automationName	The name of the automation engine to use (e.g. windows).

### 2.3.2 How to define a GUI control

Currently, the QConnectWinapp library supports identifying a GUI control on a test application through its Accessible Name. There are various ways to determine the accessible name of a control, one of which is by using the Inspect.exe tool. To use it, follow these steps:

- Navigate to the Windows SDK folder located under C:\Program Files (x86)\Windows Kits\10\bin\10.0.17134.0\x64
- Open Inspect.exe
- Hover over the control you want to identify on the test application
- In the right-hand pane of Inspect.exe, you will be able to determine the Accessible Name of the control by its AutomationId property.

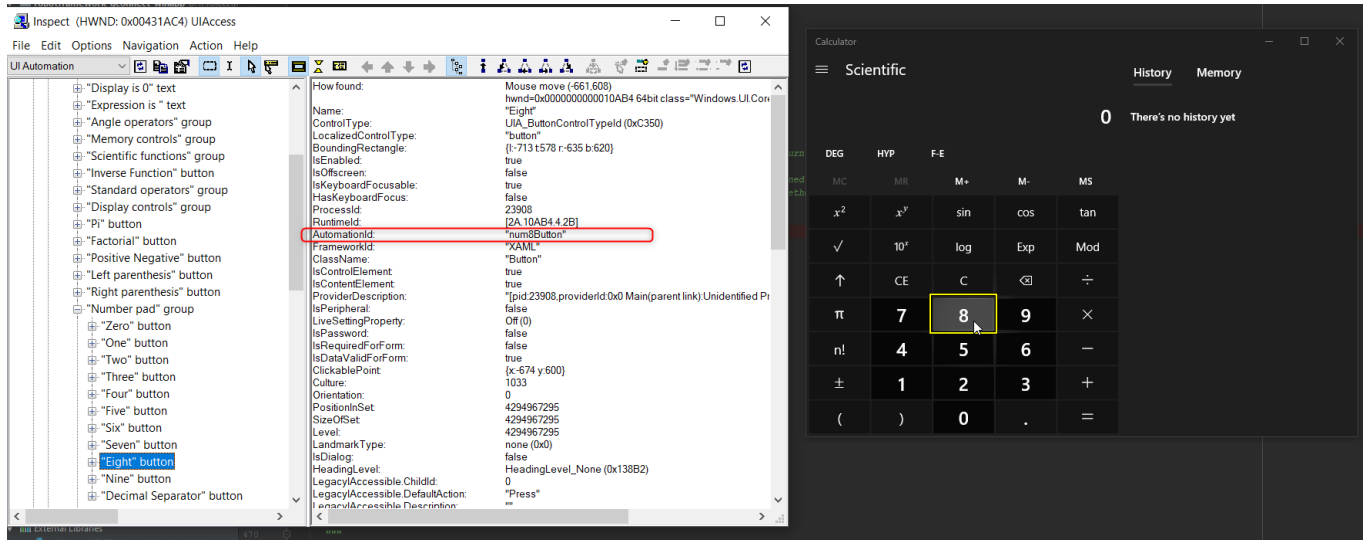


Figure 2.1: Using Inspect.exe to identify the Accessible Name of Number 8 button.

## 2.4 Example

In this example, I provide a test scenario that allows adding on the Calculator app as follows: the script will open the Calculator application on Windows, then press the '8' button, press the '+' button, press the '9' button, and then press the '=' button. Then, verify if the result textbox displays the result '17'.

```

*** Settings ***
Documentation      Suite description
Library           QConnectBase.ConnectionManager
Resource          QConnectWinapp/GUIAction.resource

*** Variables ***
${CONNECTION_NAME}  TEST_CONN

&{Number 8}        acc_id=num8Button
&{Number 9}        acc_id=num9Button
&{Equal}           acc_id=equalButton
&{Result}          acc_id=CalculatorResults
&{Plus}            acc_id=plusButton

*** Test Cases ***
Test Adding
    ${config_string}=    catenate
    ...    {\n
    ...        "host":    "localhost", \n
    ...        "port":    4723, \n
    ...        "caps":    \n
    ...        {\n
    ...            "app":    "Microsoft.WindowsCalculator_8wekyb3d8bbwe!App" \n
    ...        } \n
    ...    } \n

    log to console        \nConnecting with below configurations: \n${config_string}
    ${config}=            evaluate    json.loads('"'${config_string}"')    json

    connect                conn_name=${CONNECTION_NAME}
    ...                    conn_type=Winapp
    ...                    conn_conf=${config}

    send command           conn_name=${CONNECTION_NAME}
    ...                    element_def=${Number 8}
    ...                    command=${Action.click}

    Sleep                1s

    send command           conn_name=${CONNECTION_NAME}
    ...                    element_def=${Plus}
    ...                    command=${Action.click}

    Sleep                1s

    send command           conn_name=${CONNECTION_NAME}
    ...                    element_def=${Number 9}
    ...                    command=${Action.click}

    Sleep                1s

    send command           conn_name=${CONNECTION_NAME}
    ...                    element_def=${Equal}
    ...                    command=${Action.click}

    ${res}=                verify    conn_name=${CONNECTION_NAME}
    ...                    element_def=${Result}
    ...                    search_pattern=17
    ...                    send_cmd=${Action.get_text}
    ...                    timeout=20

    log to console        \nCalculation result: ${res}[0]

*** Keyword ***
Close Connection

```

```
disconnect    ${CONNECTION_NAME}
```

### Explanation:

- **&{Number 8} acc\_id=num8Button** : This line is used to identify the 'Number 8' button as the control on the application with an Accessible Name (acc\_id) of 'num8Button'.
- **"app": "Microsoft.WindowsCalculator\_8wekyb3d8bbwe!App"** : This line specifies that the AUT is the application with the package name 'Microsoft.WindowsCalculator\_8wekyb3d8bbwe!App'. You can also use the full path to the exe file of the AUT.
- **send command conn\_name=\${CONNECTION\_NAME}...command=\${Action.click}** : This line means to click on the Number 8 button on the AUT.
- **\${Action.click}** has been defined in the resource file **QConnectWinapp/GUIAction.resource**.

Currently supported in the GUIAction.resource:

Action	Description
<code>\${Action.click}</code>	Clicks on a GUI element
<code>\${Action.get_text}</code>	Gets the text of a GUI element
<code>\${Action.get_visible}</code>	Get the visibility of a GUI element
<code>\${Action.get_enable}</code>	Check if a GUI element is enabled

Table 2.2: Actions supported in GUIAction.resource

## 2.5 Contribution Guidelines

QConnectBaseLibrary is designed for ease of making an extension library. By that way you can take advantage of the QConnectBaseLibrary's infrastructure for handling your own connection protocol. For creating an extension library for QConnectBaseLibrary, please following below steps.

1. Create a library package which have the prefix name is **robotframework-qconnect-[your specific name]**.
2. Your handling connection class should be derived from **QConnectionLibrary.connection\_base.ConnectionBase** class.
3. In your *Connection Class*, override below attributes and methods:
  - **\_CONNECTION\_TYPE**: name of your connection type. It will be the input of the conn\_type argument when using **connect** keyword. Depend on the type name, the library will determine the correct connection handling class.
  - **\_\_init\_\_(self, \_mode, \_config)**: in this constructor method, you should:
    - Prepare resource for your connection.
    - Initialize receiver thread by calling **self.\_init\_thread\_receiver(cls.\_socket\_instance, mode="")** method.
    - Configure and initialize the lowlevel receiver thread (if it's necessary) as below
 

```
self._llrecv_thrd_obj = None
self._llrecv_thrd_term = threading.Event()
self._init_thrd_llrecv(cls._socket_instance)
```
    - In case you use the lowlevel receiver thread. You should implement the **thrd\_llrecv\_from\_connection\_interface** method. This method is a mediate layer which will receive the data from connection at the very beginning, do some process then put them in a queue for the **receiver thread** above getting later.
    - Create the queue for this connection (use `Queue.Queue`).
  - **connect()**: implement the way you use to make your own connection protocol.
  - **\_read()**: implement the way to receive data from connection.



- **\_write()**: implement the way to send data via connection.
- **disconnect()**: implement the way you use to disconnect your own connection protocol.
- **quit()**: implement the way you use to quit connection and clean resource.

## 2.6 Configure Git and correct EOL handling

Here you can find the references for [Dealing with line endings](#).

Every time you press return on your keyboard you're actually inserting an invisible character called a line ending. Historically, different operating systems have handled line endings differently. When you view changes in a file, Git handles line endings in its own way. Since you're collaborating on projects with Git and GitHub, Git might produce unexpected results if, for example, you're working on a Windows machine, and your collaborator has made a change in OS X.

To avoid problems in your diffs, you can configure Git to properly handle line endings. If you are storing the .gitattributes file directly inside of your repository, than you can assure that all EOL are manged by git correctly as defined.

## 2.7 Sourcecode Documentation

For investigating sourcecode, please refer to [QConnectWinapp Documentation](#)

## 2.8 Feedback

If you have any problem when using the library or think there is a better solution for any part of the library, I'd love to know it, as this will all help me to improve the library. Connect with me at [cuong.nguyenhuyhtri@vn.bosch.com](mailto:cuong.nguyenhuyhtri@vn.bosch.com).

Do share your valuable opinion, I appreciate your honest feedback!

## 2.9 About

### 2.9.1 Maintainers

[Nguyen Huynh Tri Cuong](#)

### 2.9.2 Contributors

[Nguyen Huynh Tri Cuong](#)

[Thomas Pollerspoeck](#)

### 2.9.3 3rd Party Licenses

You must mention all 3rd party licenses (e.g. OSS) licenses used by your project here. Example:

Name	License	Type
<a href="#">Apache Felix.</a>	<a href="#">Apache 2.0 License.</a>	Dependency

### 2.9.4 Used Encryption

Declaration of the usage of any encryption (see BIOS Repository Policy §4.a).

### 2.9.5 License

license BIOSL v4

Copyright (c) 2009, 2018 Robert Bosch GmbH and its subsidiaries. This program and the accompanying materials are made available under the terms of the Bosch Internal Open Source License v4 which accompanies this distribution, and is available at <http://bios.intranet.bosch.com/bioslv4.txt>

## Chapter 3

# element\_handler.py

### 3.1 Class: ElementActionHandler

*Imported by:*

```
from QConnectWinapp.ActionHandlers.element_handler import ElementActionHandler
```

#### 3.1.1 Method: get\_supported\_level

Get the supported level of this handler for a specific element object.

**Arguments:**

- `ele_obj`  
/ *Condition*: required / *Type*: WebElement /  
Winapp GUI element object.

**Returns:**

/ *Type*: int /  
Supported level of this action handler for the element object.

#### 3.1.2 Method: get\_attribute

Get element object's property.

**Arguments:**

- `attr`  
/ *Condition*: required / *Type*: str /  
Property's name to be got value.

**Returns:**

/ *Type*: str /  
Property's value.

#### 3.1.3 Method: divert\_action

Divert action string to the corresponding method, execute the method and return value.

**Arguments:**

- `action`  
/ *Condition*: required / *Type*: str /  
Action string to be diverted.

**Returns:**

/ *Type*: str /  
Corresponding method's return.

## Chapter 4

# winapp\_client.py

### 4.1 Class: CustomWebDriver

*Imported by:*

```
from QConnectWinapp.WinappDriver.winapp-client import CustomWebDriver
```

Customer WebDriver class for Winapp.

#### 4.1.1 Method: start\_session

Creates a new session with the desired capabilities.

Override for Winapp

**Arguments:**

- capabilities  
/ *Condition*: required / *Type*: Union /  
Read <https://github.com/appium/appium/blob/master/docs/en/writing-running-appium/caps.md> for more details.
- browser\_profile  
/ *Condition*: optional / *Type*: str / *Default*: None /  
Browser profile

### 4.2 Class: WinappConfig

*Imported by:*

```
from QConnectWinapp.WinappDriver.winapp-client import WinappConfig
```

Class to store the configuration for SSH connection.

### 4.3 Class: WinAppClient

*Imported by:*

```
from QConnectWinapp.WinappDriver.winapp-client import WinAppClient
```

Winapp client connection class.

### 4.3.1 Method: connect

Connect to WinappDriver which is listening on configured port.

**Returns:**

(no returns)

### 4.3.2 Method: perform\_action

Perform an action on user defined element.

**Arguments:**

- `obj_defined_dict`  
/ *Condition*: required / *Type*: dict /  
User's definition for a GUI element.
- `cmd`  
/ *Condition*: required / *Type*: str /  
Action to be perform on GUI element.
- `time_wait`  
/ *Condition*: optional / *Type*: int / *Default*: 0 /  
Timeout to find a GUI element based on user's definitions.

**Returns:**

/ *Type*: WebElement /  
GUI element.

### 4.3.3 Method: send\_obj

Action to be send to a GUI element.

**Arguments:**

- `obj`  
/ *Condition*: required / *Type*: str /  
Data to be sent.
- `element_def`  
/ *Condition*: required / *Type*: dict /  
User's definition for a GUI element.
- `args`  
/ *Condition*: optional / *Type*: tuple /  
Optional arguments.

**Returns:**

(no returns)

### 4.3.4 Method: wait\_4\_trace

Perform an action on GUI element and wait to receive a return which matches to a specified regular expression.

**Arguments:**

- `search_obj`  
*/ Condition: required / Type: str /*  
 Regular expression all received trace messages are compare to. Can be passed either as a string or a regular expression object. Refer to Python documentation for module 're'.
- `use_fetch_block`  
*/ Condition: optional / Type: bool / Default: False /*  
 Determine if 'fetch block' feature is used.
- `end_of_block_pattern`  
*/ Condition: optional / Type: str / Default: '.\*' /*  
 The end of block pattern.
- `filter_pattern`  
*/ Condition: optional / Type: str / Default: '.\*' /*  
 Pattern to filter message line by line.
- `timeout`  
*/ Condition: optional / Type: int / Default: 0 /*  
 Timeout parameter specified as a floating point number in the unit 'seconds'.
- `element_def`  
*/ Condition: required / Type: dict /*  
 User's definition for a GUI element.
- `args`  
*/ Condition: optional / Type: tuple /*  
 Optional arguments.

**Returns:**

- `match`  
*/ Type: re.Match /*  
 If no return value matched to the specified regular expression and a timeout occurred, return None.  
 If a return value has matched to the specified regular expression, a match object is returned as the result. The complete trace message can be accessed by the 'string' attribute of the match object. For access to groups within the regular expression, use the `group()` method. For more information, refer to Python documentation for module 're'.

**4.3.5 Method: disconnect**

Abstract method for disconnecting connection.

**Arguments:**

- `_device`  
*/ Condition: required / Type: str /*  
 Unused.

**Returns:**

(no returns)

**4.3.6 Method: quit**

Quiting the connection.

**Returns:**

(no returns)

## Chapter 5

# Appendix

About this package:

Table 5.1: Package setup

Setup parameter	Value
Name	QConnectWinapp
Version	1.0.0
Date	25.04.2023
Description	Robot Framework QConnect library extension for Winapp GUI testing
Package URL	<a href="#">robotframework-qconnect-winapp</a>
Author	Nguyen Huynh Tri Cuong
Email	<a href="mailto:cuong.nguyenhuyhtri@vn.bosch.com">cuong.nguyenhuyhtri@vn.bosch.com</a>
Language	Programming Language :: Python :: 3
License	License :: OSI Approved :: Apache Software License
OS	Operating System :: Microsoft :: Windows
Python required	>=3.0
Development status	Development Status :: 4 - Beta
Intended audience	Intended Audience :: Developers
Topic	Topic :: Software Development



## Chapter 6

# History

<b>1.0.0</b>	07/2022
<i>Initial version</i>	

---

**QConnectWinapp.pdf***Created at 22.06.2023 - 09:51:47**by GenPackageDoc v. 0.40.3*

---