

Bài 1

```
public class person {  
    private String name;  
    private Date birthday;  
    public void setName (String name)  
    { this.name = name; }  
    public void setBirthday (Date Birthday)  
    { this.birthday = birthday; }  
    public String getDetails ()  
    { return "Name : " + name + ", Birthday" + birthday;  
    }  
}
```

Một trang ở một tương lai




```

public class Employee extends Person
{
    private double salary;
    public void setSalary (double salary)
    {
        this.salary = salary;
    }
    @Override
    public String getDetails ()
    {
        return super.getDetails() + ", salary: " + salary;
    }
}

```

```

public class Manager extends Person
{
    private Employee assistant;
    public void setAssistant (Employee assistant)
    {
        this.assistant = assistant;
    }
}

```

```

    @Override
    public String getDetails ()
    {
        String assistantName = (assistant != null) ?
            assistant.getDetails(). "None";
        return super.getDetails() + ", Assistant: [ "
            + assistantName + " ] ";
    }
}

```



```
public class Main {
```

```
    public static void main (String[] args)
```

```
    {  
        person person1 = new Employee();
```

```
        person1.setName("Nguyen Van A");
```

```
        person1.SetBirthDay(new Date());
```

```
        person person2 = new Manager();
```

```
        person2.SetName("Tran Van B");
```

```
        person2.SetBirthDay(new Date());
```

```
        System.out.println("--Upcasting Employee--");
```

```
        System.out.println(person1.getDetails());
```

```
        System.out.println("---Upcasting Employee---");
```

```
        System.out.println(person2.getDetails());
```

Bài 2

```
public class Bank  
{  
    float getRateOfInterest()  
    { return 0; }  
}
```

```
class SBI extends Bank {
```

① Override

```
    float getRateOfInterest() { return 8.0f; }  
}
```

```
class ICICI extends Bank {
```

① Override

```
    float getRateOfInterest() { return 7.0f; }  
}
```

```
class AXIS extends Bank {
```

① Override

```
    float getRateOfInterest() { return 9.0f; }  
}
```



```

public class TestPolymorphism {
    public static void main (String [] args)
    {

```

```

        bank b;

```

```

        b = new SBI();

```

```

        System.out.println ("lãi SBI:" + b.getRateOfInterest() + "%");

```

```

        b = new ICICI();

```

```

        System.out.println ("lãi ICICI:" + b.getRateOfInterest() + "%");

```

```


        b = new AXIS();

```

```

        System.out.println ("lãi AXIS:" + b.getRateOfInterest() + "%");
    }
}

```

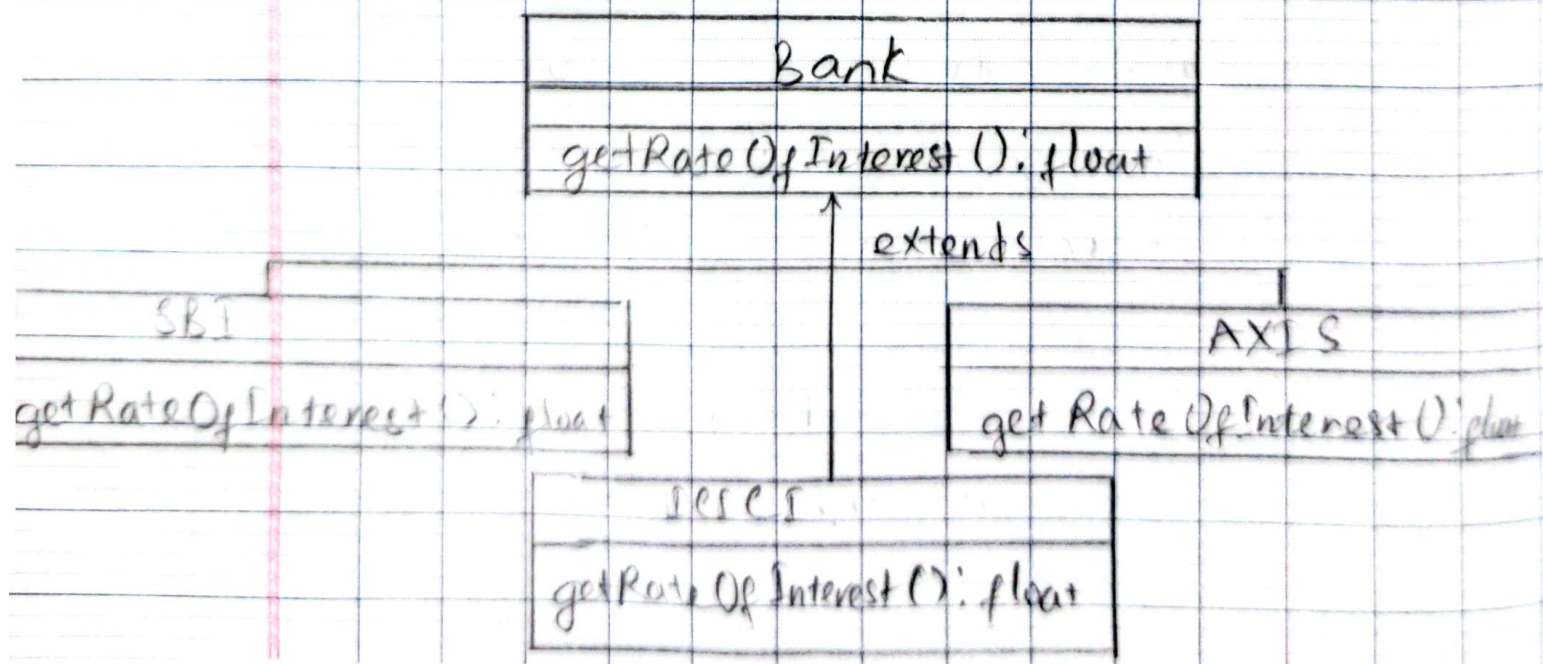

Bài 3

```
public class NhanVien {  
    protected String ten;  
    protected long luong;  
    public NhanVien () {}  
    public NhanVien (String ten)  
    { this.ten = ten; }  
    protected String loiNhanVien ()  
    { return " "; }  
    public void tinhLuong () {}  
    public void xuatThongTin ()
```



```

{
    System.out.println("NhanVien:" + ten + " ---");
    System.out.println("--loaiNhanVien:" + loaiNhanVien());
    System.out.println("Luong:" + luong + " VND");
}
}

```

```

public class NhanVienFullTime extends NhanVien
{
    private int loaiChucVu;
    private int ngayLamThem;
    public NhanVienFullTime (String ten,
    int ngayLamThem, int loaiChucVu)
    {
        super(ten);
        this.ngayLamThem = ngayLamThem;
        this.loaiChucVu = loaiChucVu;
    }
}

```

① Override

```

protected String loaiNhanVien() {
    return (loaiChucVu == 1) ? "Sep" : "linh";
}

```

② Override

```

public void tinhLuong() {
    long luongCoBan = (loaiChucVu == 1) ?
    20000000 : 10000000;
}

```

luong = luong co ban + (long) ngay lam the * 25000;

```
public class NhanVienPartTime extends NhanVien {  
    private int giamviec;  
    public NhanVienPartTime (String ten, int giamviec)  
    {  
        super (ten);  
        this.giamviec = giamviec; }  
}
```

@Override

```
protected String loaiNhanVien ()  
{  
    return "Nhan vien thoi vu (Part - time)"; }  
}
```

@Override

```
public void tinhLuong ()  
{  
    luong = (long) giamviec * 20000; }  
}
```

```
public class Main {
```

```
    public static void main (String [] args)
```

```
{  
    NhanVien nv1 = new NhanVienFullTime ("Nguyen  
   iep", 3, 1);  
    nv1.tinhLuong ();  
    nv1.xuatThongTin ();  
}
```


NhanVien nv2 = new NhanVien PartTime 1" là
thời vụ " , 40);

nv2 . tinh lương ();

nv2 . xuất thông tin ();

}

}