

# Duplicate-Aware Federated Query Processing over the Data Web

Muhammad Saleem  
Digital Enterprise Research Institute,  
National University of Ireland, Galway  
muhammad.saleem@deri.org

Axel-Cyrille Ngonga Ngomo  
Universität Leipzig, IFI/AKS  
PO 100920, D-04009 Leipzig  
ngonga@informatik.uni-leipzig.de

## ABSTRACT

Over the last years, the Linked Data Web has developed into a large compendium of interlinked data sets from diverse domains. Due to this distributed character, several of these data sets contain either duplicate or complementary data. So far, several federated querying approaches have been developed to retrieve information from these data sources. Still, only little attention has been paid to the effect of duplicates and fragmented data on the ranking of data sources during the processing of federated queries. This work presents a novel approach federated querying based on min-wise independent permutation vectors applied to RDF predicates. Our approach allows evaluating the ranking of data sources accurately while taking into account duplicate data. By these means, our approach achieves significantly smaller mean squared errors than the state of the art with respect to the approximation of result set sizes as well as in the ranking of data sources.

## Categories and Subject Descriptors

H.2.4 [Database Management]: Systems—*Distributed databases*

## General Terms

Algorithms, Experimentation, Theory

## Keywords

Federated queries, SPARQL, deduplication

## 1. INTRODUCTION (AN+MS)

Over the last years, the Linked Data Web has developed into a large compendium of interlinked data sets from diverse domains. One of the central principles underlying the architecture of these data sets is the reuse of URIs and vocabularies as well as the linking of knowledge bases. One of the results of this architectural choice is that certain queries can only be answered by retrieving information from several

knowledge bases. This type of querying, called *federated querying*, is of central importance for manifold applications such as question answering, knowledge retrieval and data integration. In addition to the information necessary to answer queries being distributed, certain pieces of information (i.e., triples) can be found in several knowledge bases. For example, the name of movie directors can be found both in DBpedia and LinkedMDB. Similarly, the authors of papers can be found in both the ACM and DBLP libraries. We call triples that can be found in several knowledge bases across the Web of Data *duplicates*.

While the importance of federated queries over the Web of Data has been stressed in previous work, the impact of duplicates has not received much attention. Yet (as we will show in the remainder of this paper), a duplicate-aware approach to query processing can lead to more time-efficient and effective algorithms for federated queries. In this paper, we address this drawback by presenting a duplicate-aware approach for query processing based on min-wise independent permutation (MIPS) vectors. Our approach is able to predict the amount of new information contained in a knowledge base with a higher accuracy than the state of the art, leading to a better performance with respect to source ranking and result set size optimization. In the rest of this paper, we aim to show experimentally that our approach outperforms the state-of-the-art by running it against ?? methods on ?? queries. We begin by giving a brief overview of the state of the art in federated query processing. In addition, we argue for the use of MIPS for the approximation of result size sets. Thereafter, we present our duplicate-aware federated query processing approach. After an overview of the datasets used in this paper, we present experimental results which corroborate the superior efficiency of our approach. We conclude the paper with a discussion of our findings and an overview of future work.

## 2. RELATED WORK (MS)

### 2.1 Federated SPARQL queries

The research work on federated query processing over the Data Web can be categorized into two main directions:

- Service description/index-assisted approaches, which make use of the dataset summaries that have been collected in a pre-processing stage. These approaches lead to a more efficient query federation. However, the index needs to be constantly updated to ensure up-to-date results. Also, the index size should not be large

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

Copyright 20XX ACM X-XXXXX-XX-X/XX/XX ...\$15.00.

to ensure that it does not increase the overall query processing time.

- Index-free approaches, in which the query federation is performed without using any stored data summaries. This approach is less efficient however; the query response time is faster than index assisted approach.

Both of the above approaches can further be divided into two categories (a) Query federation with complete result retrieval (b) Query federation with partial (sufficient) record retrieval. In our case, we are focusing on index-assisted, sufficient record retrieval.

Heiner et. al [1] describes how to extend the Sesame RDF repository to support distributed SeRQL queries over multiple Sesame RDF repositories. They use a special index structure to determine the relevant sources for a query. Quilitz and Leser [2] uses the theoretical knowledge of [1] to develop the first federated query engine (named DARQ) for remote RDF data sources. DARQ uses service descriptions for relevant data source selection. A service description describes the capabilities of a SPARQL endpoint. They used query rewriting mechanism based on [8] and a cost-based optimization algorithm to reduce the query processing time with the minimum bandwidth usage. DARQ is compatible with any SPARQL endpoint that implements the SPARQL standard. Their experimental results show that the optimization algorithm can greatly reduce the query processing time.

Andreas et al. [3] proposed a solution similar to DARQ using a mediator approach. All the SPARQL endpoints need to register first with the mediator using HTTP POST requests with an RDF document attached. The mediator continuously monitors the SPAQL endpoints for any dataset changes and updates the service descriptions automatically. Unlike DARQ, the service descriptions remain up-to-date all time.

Olaf et al. [4] present a new approach for federated query processing over the Web of Data. Their approach discovers data that might be relevant for answering a query during the query execution itself. The discovery of relevant data is accomplished by traversing RDF links. They used an iterator-based pipeline and a URI prefetching approach for efficient query execution. Both DARQ and [3] are not able to discover relevant data sources by the query itself.

The previous techniques cannot answer all types of queries due to index or service description limitations. Umbrich et al. [5], [6] proposed a Qtree-based index structure which summarizes the content of data source for query execution over the Web of Data. They concluded that this approach is able to handle more expressive queries and return more complete results than previous approaches. Schwarte et al. [7] proposed an index-free query federation for the Web of Data. Their approach gives a reasonably fast data retrieval as compared to all the previous techniques. However, since they do not keep any statistics, it works only for limited data sources.

Li and Heflin [15] build a tree structure which supports the integration of data from multiple heterogeneous sources. The tree is built in a bottom-up fashion; each triple pattern is rewritten according to the annotations on its corresponding datasets. Kaoudi et al. [16] propose a technique that runs on Atlas, a P2P system for processing RDF distributed data that are stored in hash tables. The purpose of

this technique is to minimize the query execution time and the bandwidth consumed; this is done by reducing the cardinality of intermediate results. A dynamic programming algorithm was implemented that relies on message exchange among sources

The Tukwila integration system [17] executes queries through several autonomous and heterogeneous sources. Tukwila decomposes original queries into a number of sub-queries on each source, and uses adaptive techniques to hide delays. Ludwig and Tran [18] propose a mixed query engine; sources are selected using aggregated indexes that keep information about triple patterns and join cardinalities for available sources; these statistics are updated on-the-fly. The execution ends when all relevant sources have been processed or a stop condition given by the user is reached; additionally, the Symmetric Hash Join is implemented to incrementally produce answers; recently, this approach was extended to also process Linked Data locally stored [19].

Maribel et al. [21] presented ANAPSID, an adaptive query engine for SPARQL endpoints that adapts query execution schedulers to data availability and run-time conditions. ANAPSID provides physical SPARQL operators that detect when a source becomes blocked or data traffic is bursty, and opportunistically, the operators produce results as quickly as data arrives from the sources.

Avalanche [24] produces the first  $k$  results, and sources are interrogated to obtain statistics which are used to decompose queries into sub-queries that are executed based on their selectivity; sub-queries results are sent to the next most selective source until all sub-queries are executed; execution ends when a certain stop condition is reached. Also, heuristics-based techniques are proposed to minimize query intermediate results [25].

Other notable contributions LINES [26], SILK [27], EAGLE [28] provides time-efficient approaches for Link Discovery using various distance measure techniques. LINES framework utilize the mathematical characteristics of metric spaces to compute similarity estimates between instances. It makes use of the triangle inequality to partition the metric space into different portions. Each of these portions of the space is then represented by an exemplar [33] that allows to compute an accurate distance approximation between different instances. SILK implements a multi-dimensional blocking approach for link discovery. The Levenshtein distance [34] is used for approximate for similarity estimation between different instances. EAGLE presents a novel active learning approach to learning link specifications based on genetic programming. EAGLE generates highly accurate link specifications while reducing the annotation burden for the user.

None of the above techniques used statistical information stored in the index or service description for pre-processing dataset overlap estimation. In the initial stage, like DARQ engine, we use service descriptions for query federation. In addition, we store MIPs vector statistics for each of the indexed data source. Query federator makes use of this special statistic information to estimate the possible overlap between the results of different sub-queries.

## 2.2 Filters

The overlap between two datasets can be estimated using min-wise independent permutations [9], bloom filters [10], or compressed bloom filters [11]. Bender et al. [12] also pro-

posed a technique for predicting the query-specific mutual overlap between peers. However, MIPs have proved to be the more accurate overlap estimation with small bandwidth consumption [9].

### 3. NOTATION

In this section, we present the core of the notation that will be used throughout this paper. We denote data sources with  $S$  and the total number of data sources with  $n$ . The set of all data sets is dubbed  $\mathfrak{S}$ . The set of all possible result sets is denoted  $R$  while the set of all possible SPARQL queries is labeled with  $Q$ . A data source ranking function  $rank : S \times Q \rightarrow \{1 \dots n\}$  is a function that assigns a ranking to each data source given a particular query  $q \in Q$ . Note that for any source ranking function  $rank$ , we assume that  $\forall S, S' \forall q \in Q : S \neq S' \iff rank(S, q) \neq rank(S', q)$ . A result set estimation function  $est : S \times Q \rightarrow \mathbb{N}$  aims at approximating the size of the result set that will be returned by a given query. Note that this function plays a crucial role in the processing of federated queries as it is most commonly used to decide upon the ranking of data sources for a given query. The aim of a federated query system such as the one described in this work is thus to optimize its estimation function  $est$  so as to ensure a ranking of the source close to the optimal ranking.

### 4. APPROACH (MS)

#### 4.1 Overview

Overall, our approach works as follows: The user begins by issuing a SPARQL query using any input form. The query is then forwarded to the query engine. Upon receiving, it is parsed to get all triples. The parser rewrites the original query in an execution-optimized form. The federator then makes use of the services descriptions directory/index to decompose single query into multiple sub-queries. The query optimizer takes all sub-queries to generate an optimized execution plan. At last, all the optimized sub-queries are forwarded to the relevant SPARQL endpoints. The results of each sub-query execution are integrated and finally sent back to the user. This architecture for distributed query processing is shown in figure 1.

While this architecture is the same for all federated query systems, the federator and optimizer of our system differ significantly from those of other approaches as they make use of the MIPs statistical information to generate a precise query execution plan. The generation of MIPs statistical information is explained in the next section.

#### 4.2 MIPS

Min-Wise Independent Permutations (MIPs) assumes that the set elements can be ordered (which is trivial for integer keys) and computes  $N$  random permutations of the elements. Each permutation uses a linear hash function of the form  $h_i(x) := a_i * x + i \bmod U$  where  $U$  is a big prime number and  $a_i, b_i$  are fixed random numbers. By ordering the resulting hash values, we obtain a random permutation. For each of the  $N$  permutations, the MIPs technique determines the minimum hash value, and stores it in an  $N$ -dimensional vector, thus capturing the minimum set element under each of these random permutations. The technique is illustrated with an example in figure 3 taken from [13]. Its fundamental rationale is that each element has the same probability


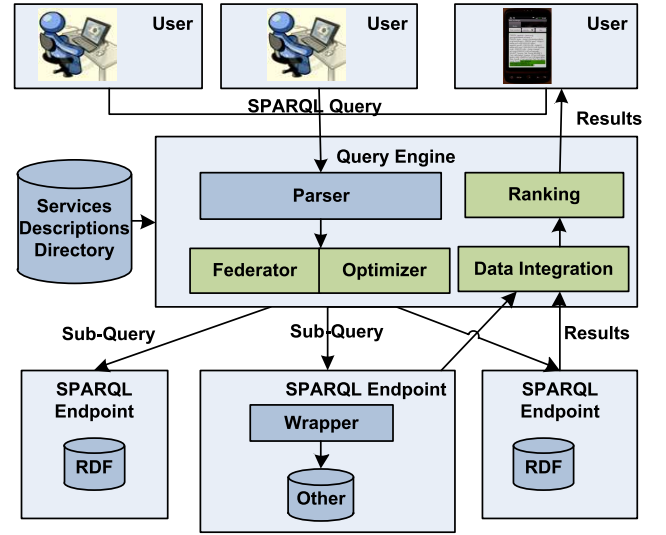


Figure 1: Federated SPARQL query processing architecture

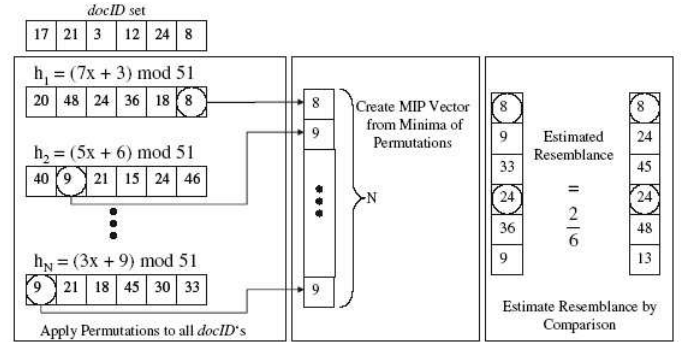

$$resemblance(S_A, S_B) = \frac{|S_A \cap S_B|}{|S_A \cup S_B|}$$

Figure 2: Min-Wise independent permutations (image taken from [13] with permission)

of becoming the minimum element under a random permutation. By using sufficiently many different permutations, we can approximate the set cardinality.

An unbiased estimate of the pair-wise resemblance of sets using their  $N$ -dimensional MIPs vectors is obtained by counting the number of positions in which the two vectors have the same number and dividing this by the number of permutations  $N$ . Essentially, this holds as the matched numbers are guaranteed to belong to the intersection of the sets.

For a predicate  $p \in D$ , the set elements are all triples  $T \in D$  with predicate  $p$  and computes  $N$  random permutations. The resulting MIP vector is stored against each capability of the service description. MIP vector statistics is used during source selection and sub-query generating algorithm for efficient, duplicate free query execution plan.

#### 4.3 Index construction

To find the set of relevant servers and decompose the user query into multiple sub-queries, the query engine needs information about the different data sets available at different servers. We call this catalog the **service description directory**. Each service description provides a declarative

description of the data available from a server along with statistical information. The statistical information is used for query optimization. However, the directory size should be small enough and must contain sufficient information to enable sub-query generation, optimization and pre-processing dataset overlap estimation. Moreover, the directory should be dynamically updated for up to date data retrieval and accurate overlap detection.

In the initial stage, we only store the *server url*, and for each distinct predicate **p** we record *predicate name*, *MIPs Vector*, and *total number of triples* having predicate **p**. The MIPs vectors are used to estimate the dataset overlap before query execution. The other statistical information is used during sub-query generation and optimization. During this work, we are planning to use other statistical information such as subject/object selectivity, histograms, links across the knowledge bases and ontology matching data. In addition, we will use a mediator to constantly update the service description directory. A sample service description for Galway geo data is given in the listing 1.

#### 4.4 Source Selection

A SPARQL query contains one or more filtered basic graph patterns of which each contains the actual triple patterns. The query planning step is performed separately for each filtered basic graph pattern. The algorithm used in DARQ for finding the relevant data sources for a query simply matches all triple patterns against the capabilities of the data sources. The matching compares the predicate in a triple pattern with the predicate defined for a capability and evaluates the constraint for subject and object. Let BGP be a set of triple patterns in a filtered basic graph pattern. The result of the source selection is a set of data sources  $D_j$  for each triple pattern.

\* need to include the source selection

We extended the DARQ source selection algorithm by comparing different MIP vectors for similarity. For a triple pattern, we compare the MIP vectors of all the relevant data sources for possible similarity. A specific source  $D$  is only added to the set of capable sources  $j$ , if  $D$  is able to produce new results above a specific threshold value defined for similarity. For a triple  $T$  in dataset  $D$ , if the resemblance value is less than the threshold,  $D$  is ignored from set  $D_j$ .

#### 4.5 Source Ranking

Result set estimation

#### 4.6 Sub-Query generation

We need an efficient algorithm for sub-query generation using the service description directory. In the initial stage we are using the sub-query generating algorithm of DARQ given in figure 2. We represent a sub-query as triple  $(T, C, d)$ , where  $T$  is a set of triple patterns,  $C$  is a set of value constraints and  $d$  is the data source that can answer the sub-query. Algorithm 1 shows how the sub-queries are generated. If a triple pattern matches exactly one data source ( $D_i = \{d\}$ ) the triple will be added to the set of a sub-query for this data source. All triples in this set can later be sent to the data source in one sub-query. If a triple matches multiple data sources the triple must be sent individually to all matching data sources in separate sub-queries.

### 5. EXPERIMENTS AND RESULTS

#### Algorithm 1 Sub-query generation

---

**Require:**  $T = \{t_1, \dots, t_n\}$ , // set of triple patterns  
 $D = \{D_1, \dots, D_n\}$  // sets of data sources matching to the triple patterns

```

1:  $queries = \emptyset$ ,  $separateQueries = \emptyset$ 
2: for each  $t_i \in T$  do
3:   if  $D_i = \{d\}$  then
4:      $q = queries.getQuery(d)$ 
5:     if  $q$  not null then
6:        $q.T = q.T + t_i$ 
7:     else
8:        $queries = queries + (\{t_i\}, \{\}, d)$ 
9:     end if
10:  else
11:    for each  $d_j \in D_i$  do
12:       $separateQueries = separateQueries + (\{t_i\}, \{\}, d_j)$ 
13:    end for
14:  end if
15: end for
16: return  $queries \cup separateQueries$  // Return all queries

```

---

Figure 3: Sub-Query Generating Algorithm

Dataset	BGP	S-1	S-2	P-1	P-2	P-3	Total
Diseaseome	5	5	5	4	5	2	26
Geo	5	5	5	0	0	0	15
LinkedMDB	5	0	0	0	0	0	5
Publication	5	5	5	7	7	4	33
Total	20	15	15	11	12	6	79

Table 2: Distribution of query types across datasets

The goal of our experiments was to quantify how well our duplicate-aware solution approximates the result sets from each of the data source from which it can choose and how this approximation affects the way the data sources are ranked. For this purpose, we compared our approach with two other approaches: DARQ and the optimal duplicate-unaware solution to result set estimation and query ranking. In the following, we describe our experimental setup in detail and contrast the results achieved by each of the approaches. All data used is either publicly available or can be found at the project webpage.<sup>1</sup>

### 5.1 Experimental Setup (AN)

#### 5.1.1 Datasets

Within our experiments, we used the four datasets described in Table 1. We chose data sets of different data sizes to gain some insights on the scalability of our approach. The size of the MIPS vectors was set to achieve a compression ratio of approx. 95% as used in previous work [?]. In addition, we emulated the difference between the number of relevant triples across datasets by introducing the discrepancy constant  $d$ . Given  $n$  data sources of sizes  $|S_i|$

$$d = \max_{1 \leq i \leq n} |S_i| - \min_{1 \leq j \leq n} |S_j|. \quad (1)$$

Note that the discrepancy accounted for between ca. 1.6% and 2.8% of the triples and was to increasingly higher values for increasingly larger data sets. The number of slices was set to 10 in all experiments.

#### 5.1.2 Queries

We used three main types of queries. Simple basic graph pattern (BGP) queries consisted of exactly one triple pattern in the query. Star-shaped and path-shaped queries were defined as in [?]: star-shaped queries (denoted S-k) have one

<sup>1</sup><http://???>

Dataset	Size (MB)	Summary Size (MB)	CR (%)	Slices	Discrepancy	Duplicate Slices	Duplicate Datasets	Total Triples	Sum. Gen. Time (sec)
Diseasome	18.6	1.0	95	10	1,500	1	10	91,122	9
DBLP	39.0	2.8	93	10	2,500	1	10	234,405	16
Geo Coordinates	274.1	24.4	92	10	50,000	2		1,900,006	2705
LinkedMDB	448.9	41.3	91	10	100,000	1	2	3,579,616	3556

Table 1: Overview of datasets. CR stands for Compression Ratio.

variable as subject and contained  $k$  triple patterns. Path-shaped queries, denoted P- $k$  on the other hand were generated by using a random walk approach to generate a path of length  $k$ . Note that previous work has shown that these query shapes are the most common shapes found in real-world RDF queries [?]. Overall, our benchmark data consisted of 79 queries as shown in Table 2. Note that some query shapes could not be used on certain datasets due to the topology of the ontology underlying the datasets not being permissive for such queries. For example, S-2 queries could not be sent to LinkedMDB because

### 5.1.3 Metrics

We used two measures to compare our approach with the state of the art. First, we measured the mean squared error of each approach with respect to their result set evaluation as follows: For each query  $q_i$ , each source  $S_i$  contained a number  $R_i(q_i)$  of non-duplicate results. Each of the approaches generated an approach  $\tilde{R}_i(q_i)$  of  $R_i(q_i)$ . The mean squared error with respect to the result set size (short *RSMSE*) was then computed as follows:

$$RSMSE = \frac{1}{|Q|} \sum_{q_i \in Q} |R_i(q_i) - \tilde{R}_i(q_i)|^2. \quad (2)$$

In addition to the MSERS, we also computed how well the approaches were able to rank the data sources with respect to the unseen triples they would return for a given query. Given the ideal ranking  $rank(S_i, q_j)$  of each data source  $S_i$  for each query  $q_j$ , we computed the mean squared ranking error (short *RankMSE*) of an approach characterized by the the ranking function  $\tilde{r}(S_i, q_j)$  by using the following formula:


$$RankMSE(q_j) = \frac{1}{|\mathcal{S}|} \sum_{S_i} |rank(S_i, q_j) - \tilde{r}(S_i, q_j)|^2. \quad (3)$$

$$RankMSE = \frac{1}{|Q|} \sum_{q_j \in Q} RankMSE(q_j). \quad (4)$$


For both measures, higher values are obviously worse.

## 5.2 Results

The RSMSE results are shown in Figures 4 while the ranking results are shown in Figure 5. In each figure, we compared the results of the approaches w.r.t. both the whole input query and to each of the triples patterns contained in the input queries. Our results clearly show that we outperform the state of the art w.r.t to both result set estimation and ranking. Especially, our estimation of the result set sizes is approximately 4 orders of magnitude better than DARQ’s or even DU’s. This is due to our approach being able to capture the existence of duplicates in the data sets and thus to better approximate the number of new results that can be expected from an endpoint. As expected, the

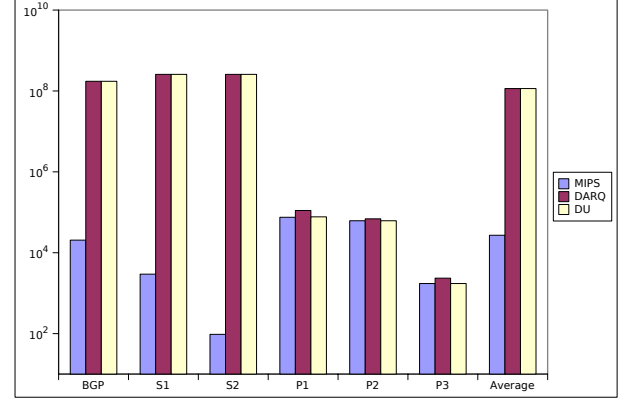

(a) RSMSE for query-wise selection (vertical log scale)

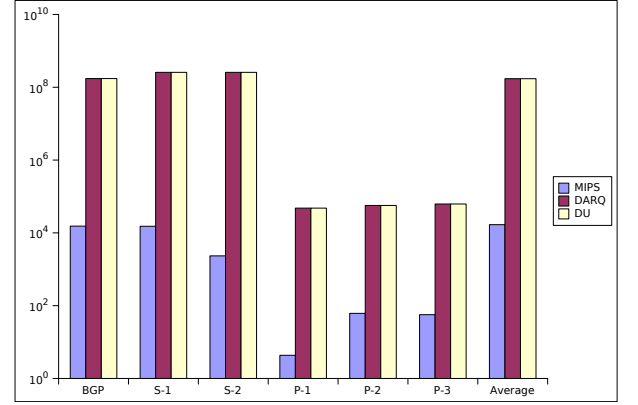

(b) RSMSE for subquery-wise selection (vertical log scale)

Figure 4: Mean squared errors with respect to result set evaluation

ranking error for datasets decreases when carrying the ranking of data sources at triple pattern level instead of query level (see Figures 4b and 4a). This is simply due to the overall error increasing when combining the several triple patterns to a query. The same overall behavior is also displayed when considering the result set estimation error (see Figures 5b and 5a). Interestingly, the approximation of our approach is slightly poorer on star-shaped queries (approx. 0.2 on S-2 queries). This is a result of our approach to generating the estimations for whole query, which is carried out by using the lower bound of the estimation of single query patterns in the query. Small errors in the estimation of the size of the result size can thus lead to minor absolute errors.

In addition, we measured the number of sub-query executions that could be escaped by our approach. The results shown in Table 3 clearly display that our approach can effectively reduce the total number of queries executed overall. In addition to the higher recall, the escaping of sub-query

Dataset	BGP	S-1	S-2	P-1	P-2	P-3	Total
Disease	7	21	21	8	20	12	89
Geo	10	15	23	0	0	0	48
LinkedMDB	5	0	0	0	0	0	5
Publication	1	2	5	0	0	0	8
Total	23	38	49	8	20	12	150


Table 3: Distribution of query escaped by our approach

executions is one of the main advantages of applying a subquery-wise execution of federated queries.


## 6. DISCUSSION (AN)

## 7. REFERENCES

- [1] Stuckenschmidt, H., Vdovjak, R., Houben, G.J., Broekstra, J.: Index structures and algorithms for querying distributed rdf repositories. In: WWW'04. (2004).
- [2] Quilitz, B., Leser, U.: Querying distributed RDF data sources with SPARQL. In: European semantic web conference on the semantic web: research and applications (ESWC 2008). LNCS, vol. 5021, pp. 524-538. Springer, Heidelberg (2008).
- [3] Langegger, A., Waoay, W., Blaochl, M.: A semantic web middleware for virtual data integration on the Web. In: European semantic web conference on the semantic web: research and applications (ESWC 2008). LNCS, vol. 5021, pp. 493-507. Springer, Heidelberg (2008).
- [4] Hartig, C. O., Bizer, J.-C. Freytag. Executing SPARQL queries over the web of linked data. 8th International Semantic Web Conference (ISWC 2009).
- [5] Harth, A., Hose, K., Karnstedt, M., Polleres, A., Sattler, K.U. Umbrich, J.: Data summaries for on-demand queries over linked data. In: (WWW 2010), USA.
- [6] Umbrich, J., Hose, K., Karnstedt, M., Harth, A., Polleres.: Comparing data summaries for processing live queries over Linked Data. In:(WWWJ 2011), special issue querying the data web.
- [7] Schwarte, .A, Haase, .P, Hose, .K, Schenkel, R, Schmidt, M.: FedX: Optimization Techniques for Federated Query Processing on Linked Data. In: 10th International semantic web conference (ISWC 2011).
- [8] Perez, J., Arenas, M., Gutierrez, C.: Semantics and Complexity of SPARQL. In: 4th International SemanticWeb Conference (ISWC), Athens, GA, USA (November 2006).
- [9] Broder, A. Z., Charikar, M., Frieze, A. M., & Mitzenmacher, M. (2000). Min-wise independent permutations. Journal of Computer and System Sciences, 60(3), 630-659.
- [10] Bloom, B. H. (1970). Space/time trade-offs in hash coding with allowable errors. Communications of ACM, 13(7), 422-426.
- [11] Mitzenmacher, M. (2002). Compressed bloom filters. In IEEE/ACM Transactions on Networking, 10(5), 604-612.
- [12] Bender, M., Michel, S., Weikum, G., & Zimmer, C. (2005). Minerva: Collaborative p2p search. In

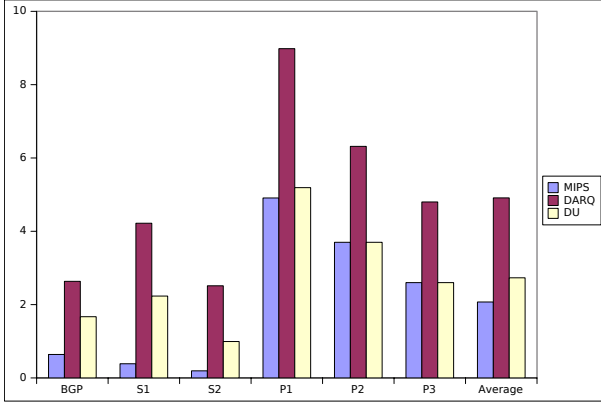

(a) RankMSE for query-wise selection

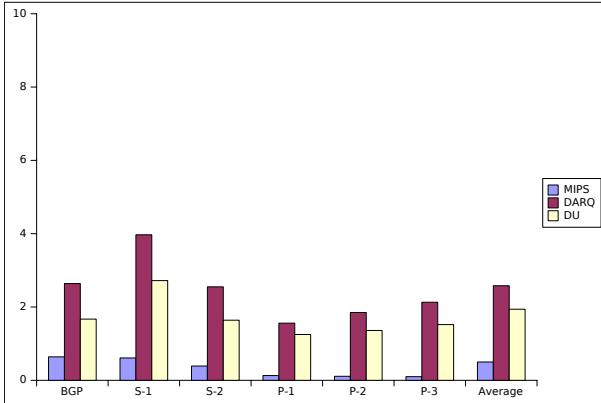

(b) RankMSE for subquery-wise selection

Figure 5: Mean squared errors with respect to ranking



- Proceedings of the (VLDB) conference (Demonstration).
- [13] Parreira, J.X, Michel, S., Weikum, G.: p2pDating: Real life inspired semantic overlay networks for Web search. In: Journal of Information Processing and Management 43 (2007) 643-664.
  - [14] <http://www4.wiwi.fu-berlin.de/lodcloud/state/>
  - [15] Y. Li and J. Heflin. Using reformulation trees to optimize queries over distributed heterogeneous sources. In ISWC, pages 502-517, 2010.
  - [16] Z. Kaoudi, K. Kyzirakos, and M. Koubarakis. Sparql query optimization on top of dhts. In ISWC, pages 418-435, 2010.
  - [17] A. Deshpande, Z. G. Ives, and V. Raman. Adaptive query processing. Foundations and Trends in Databases, 1(1):1-140, 2007.
  - [18] G. Ladwig and T. Tran. Linked data query processing strategies. In ISWC, pages 453-469, 2010.
  - [19] G. Ladwig and T. Tran. Sihjoin: Querying remote and local linked data. In ESWC (1), pages 139-153, 2011.
  - [20] Auer, S., Lehmann, J., Ngonga, A.C.: Introduction to Linked Data and Its Lifecycle on the Web. In: Reasoning Web. Semantic Technologies for the Web of Data, Pages 1-75, 2011.
  - [21] M. Acosta, M.-E. Vidal, T. Lamps, J. Castillo, and E. Ruckhaus. Anapsid: An adaptive query processing engine for sparql endpoints. In Proc. of International Semantic Web Conference (ISWC), 2011.
  - [22] C. Buil-Aranda, M. Arenas, and O. Corcho. Semantics and optimization of the sparql 1.1 federation extension. In ESWC (2), pages 1-15, 2011.
  - [23] M. Stoker, A. Seaborne, A. Bernstein, C. Keifer, and D. Reynolds. SPARQL Basic Graph Pattern Optimizatin Using Selectivity Estimation. In WWW, 2008.
  - [24] C. Basca and A. Bernstein. Avalanche: Putting the Spirit of the Web back into Semantic Web Querying. In The 6th International Workshop on SSWS at ISWC, 2010.
  - [25] O. Hartig. Zero-knowledge query planning for an iterator implementation of link traversal based query execution. In ESWC, pages 154-169, 2011.
  - [26] Axel-Cyrille Ngonga Ngomo and Soren Auer. LINES - A Time-Ecient Approach for Large-Scale Link Discovery on the Web of Data. In Proceedings of IJCAI, 2011.
  - [27] R. Isele, A. Jentzsch, and C. Bizer. Ecient Multidimensional Blocking for Link Discovery without losing Recall. In WebDB, 2011.
  - [28] Axel-Cyrille Ngonga Ngomo and Klaus Lyko. EAGLE: Ecient Active Learning of Link Specifications using Genetic Programming. In: ESWC(2012).
  - [29] Unger, C.; Buhmann, L.; Lehmann, J.; Ngonga Ngomo, A.-C.; Gerber, D.; and Cimiano, P. Templatebased question answering over RDF data. In WWW (2012).
  - [30] G.Koutrika, and Y.Ioannidis, Personalized Queries under a Generalized Preference Model, In ICDE 2005.
  - [31] G.Koutrika, and Y.Ioannidis, Personalization of Queries in Database Systems, In ICDE 2004.
  - [32] S.Magliacane, A. Bozzon.E.D. Valle. Efficient Execution of Top-k SPARQL Queries. In: ISWC(2012), USA.
  - [33] B. J. Frey and D. Dueck. Clustering by passing messages between data points. Science, 315:972-976, 2007.
  - [34] V. Levenshtein. Binary codes capable of correcting deletions, insertions, and reversals. In Soviet Physics Doklady, volume 10, 1966.
  - [35] M. Morsey, J. Lehmann, S. Auer, and A.-C. Ngonga Ngomo. DBpedia SPARQL Bench- mark - Performance Assessment with Real Queries on Real Data. In 10th International Semantic Web Conference (ISWC2011), 2011