

VIETNAM NATIONAL UNIVERSITY - HO CHI MINH CITY
INTERNATIONAL UNIVERSITY
CITY school of Computer science and Engineering



PROJECT REPORT

E- COMMERCE WEBSITE

**For WEB APPLICATION DEVELOPMENT
COURSE**

By Assoc.Prof Nguyen Van Sinh

Team member

Nguyễn Nhật Nam – ITITWE22149

Nguyễn Quang Thái – ITCSIU22227

Ngô Minh Ý – ITCSIU22169

Table of Contents

Table of Figures	3
Abstract	5
I.Introduction	5
1. Overview	5
2. Problem Statement	5
3. Goal	6
4. Tools	6
1.1.1. GitHub	6
1.1.2. MySQL (Database Layer)	6
1.1.3. Redis	7
1.1.4. Swagger	7
II.Methodology	9
2.1 Diagrams	9
2.1.1 Sequence Diagrams	9
2.1.2: Use Case Diagram	17
2.2. Backend Implementation Overview	18
2.2.1 Project Structure	18
2.3. Front-end Overview and Architecture	25
2.3.1 Project Structure	26
2.3.2 API Calls	29
2.3.2. State Management	30
2.3.3. Pages and Components	31
2.3.4 Features using extra libraries	32
2.5. Database Overview	33
2.5.1. Core Entities	33
2.5.2 Relationship Description	34
2.5.3 Entity Relationship Diagram	34
III.Demo	36
1. Authentication	36
2. Product Browsing	38
2.1 Home Page	38
2.2. Search	38
2.3 Shop	39
3. Shopping and Checkout	40

3.1 Shopping Cart.....	40
3.2. Checkout.....	41
3.3 Order History	43
4. Order & System Management.....	44
4.1 User Account Management.....	44
4.2 Admin / Staff Management	46
IV. Discussion	47
V. Conclusion	48
VI. References	49

Table of Figures

Figure 1.ERD	7
Figure 2:Backend API Documentation	8
Figure 3:User Registration	9
Figure 4:User Login	10
Figure 5:Browse Product.....	11
Figure 6:Place Order.....	12
Figure 7:Real-time chat.....	13
Figure 8:Payment Process	14
Figure 9:View Order	15
Figure 10:Review	16
Figure 11:Use case Diagram.....	17
Figure 12:Backend flow.....	18
Figure 13:Backend project folder structure.....	19
<i>Figure 14:Order router mapping admin API endpoints to controllers.</i>	20
Figure 15:Create Order controller.....	20
Figure 16:. Payment Service	21
Figure 17:. Create Order Model	22
Figure 18: Authentication and authorization middleware for securing API endpoints	23
Figure 19:Authentication request validation schema	24
Figure 20: JWT utility functions for token generation and verification	24
Figure 21:Realtime module handling WebSocket-based communication	25
Figure 22: Front-end architecture overview	26
Figure 23: Front-end project folder structure.	28
Figure 24: Example of API call with Axios.	30
Figure 25:Global authentication state management on the front-end.	31
Figure 26: Product detail page	32
Figure 27: Entity Relationship Diagram (ERD) of the E-Commerce System	35
Figure 28:Sign Up Form	36
Figure 29: Sign Up Form.....	37
Figure 30: Stay Home Page	38
Figure 31: Search Function in Header.....	39

Figure 32: Product Detail Page	40
Figure 33: Add to Cart Action	40
Figure 34: Shopping Cart Page	41
Figure 35: Checkout Page	42
Figure 36: Bank Transfer Payment Page	43
Figure 37: Payment Successful Page	43
Figure 38: Order History Page	44
Figure 39: Order Detail Page	44
Figure 40: User Account Menu	45
Figure 41: My Account Page	45
Figure 42: Admin Account Menu	46
Figure 43: Admin Dashboard	46
Figure 44: Staff Account Menu (Role-Based Access)	47
Figure 45: Staff Panel	47

Contribution

Name	ID	Contribution
Nguyễn Nhật Nam	ITITWE22149	35%
Nguyễn Quang Thái	ITCSIU22227	35%
Ngô Minh Ý	ITCSIU22169	30%

Abstract

This study describes the design and implementation of a full-stack e-commerce web application utilizing a service-oriented architecture. The backend is developed using Express.js and TypeScript to provide a robust and scalable API, while the frontend is implemented with React and Vite to deliver a responsive and user-friendly interface. The system supports comprehensive functionalities for both customers and administrators, including product management, order processing, and user authentication. The proposed application aims to enhance the efficiency of online shopping processes and administrative operations, thereby providing a reliable and scalable solution for modern e-commerce platforms.

I.Introduction

1. Overview

This project is a full-stack e-commerce web application designed to provide a complete online shopping experience. The platform consists of a backend REST API built with Node.js, Express.js, and TypeScript, paired with a modern frontend developed using React and Vite. The system supports three user roles: customers who can browse products, place orders, and make payments; staff members who manage orders and provide customer support; and administrators who have full control over products, categories, users, and system settings. Key features include user authentication with JWT, product catalog with search and filtering, shopping cart, multiple payment gateways (VNPay, MoMo, ZaloPay, COD), order management, product reviews, discount coupons, and real-time customer support chat using Socket.IO.

2. Problem Statement

Traditional retail businesses face significant challenges in reaching customers beyond their physical locations, resulting in limited market reach and reduced sales potential. Manual inventory management, order processing, and customer service operations are time-consuming, error-prone, and difficult to scale. Additionally, customers today expect convenient 24/7 shopping experiences with multiple payment options, real-time order tracking, and instant customer support. Small and medium businesses often lack the technical resources to

build and maintain sophisticated e-commerce systems that meet these modern consumer expectations while ensuring security, performance, and reliability.

3. Goal

The primary goal of this project is to develop a scalable, secure, and user-friendly e-commerce platform that addresses the challenges faced by both businesses and customers in online retail. For businesses, the system aims to streamline product management, automate order processing, provide sales analytics, and reduce operational overhead. For customers, the goal is to deliver a seamless shopping experience with intuitive product discovery, secure checkout, flexible payment options, and responsive customer support. The platform is designed with modern web technologies and best practices to ensure high performance, maintainability, and the ability to scale as the business grows.

4. Tools

1.1.1. GitHub

Github repository of the project:

<https://github.com/ngthais0607/e-commerce>

1.1.2. MySQL (Database Layer)

The project used MySQL as the primary relational database to store application data such as users, products, categories, orders, and order items. MySQL ensures data consistency through relational constraints (primary keys, foreign keys) and supports efficient querying for features like search, filtering, and order management.

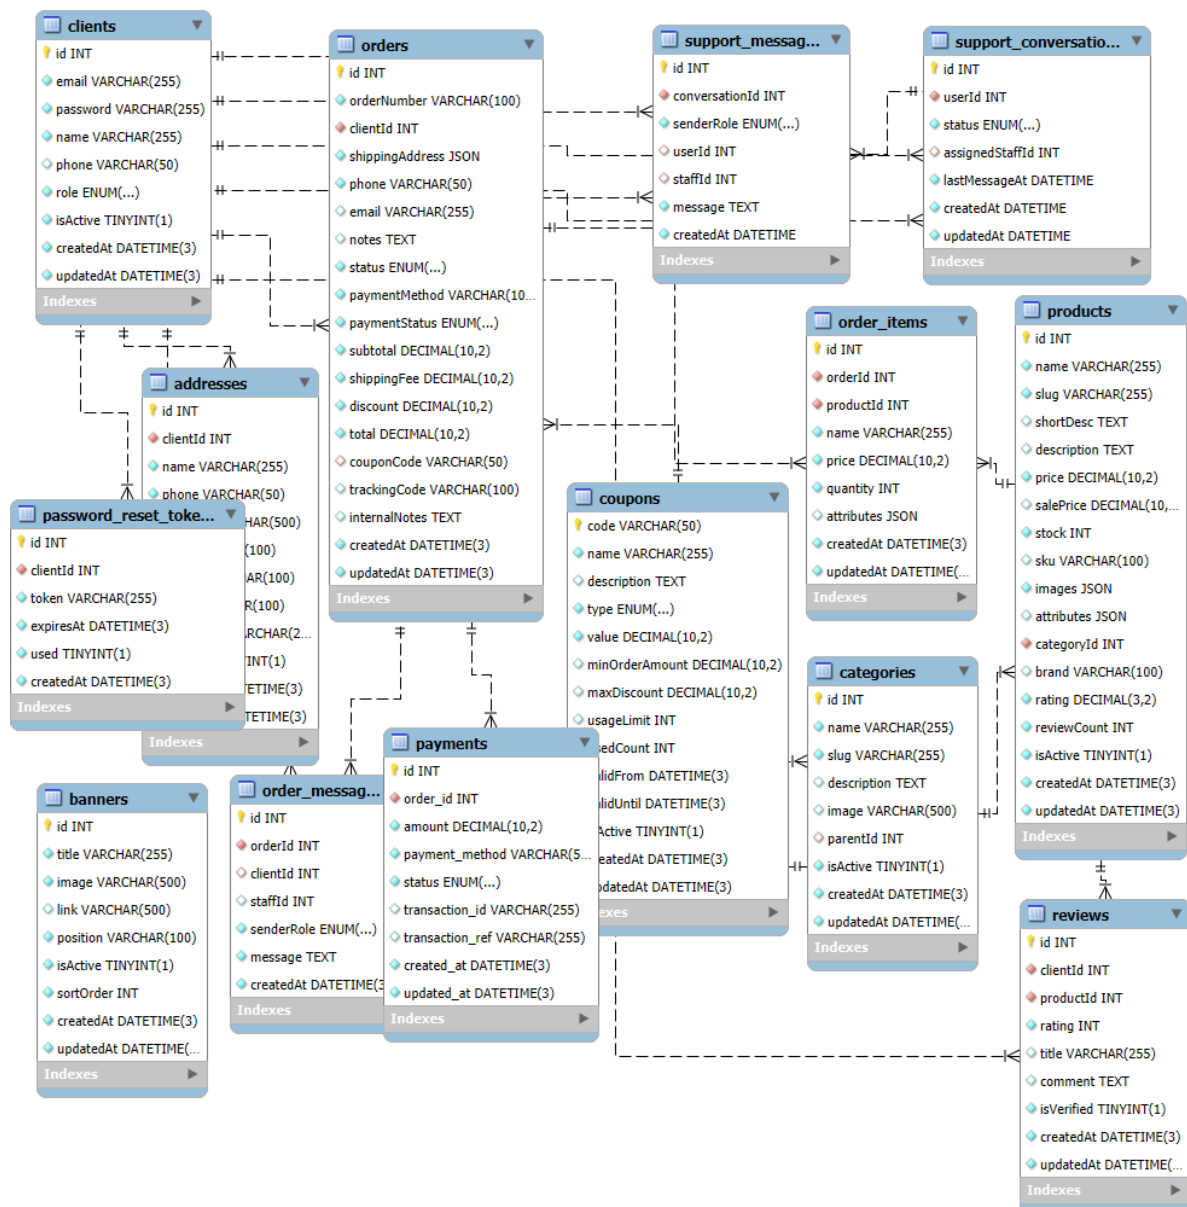


Figure 1.ERD

1.1.3. Redis

We used a Redis cloud database for store refresh token, caching frequently used data,...

1.1.4. Swagger

Our project utilizes Swagger, set of tools built around the OpenAPI Specification, mainly used for designing, documenting, and testing RESTful APIs. It generates interactive documentation that lets users explore and test API endpoints directly in the browser. Swagger is especially useful for creating clear, standardized API docs and for generating client/server code from API definitions.

Admin - Upload			^
POST	/api/admin/upload/images	Upload multiple product images	🔒 ✓
POST	/api/admin/upload/image	Upload single product image	🔒 ✓
Authentication			^
POST	/api/auth/register	Register a new user	🔒 ✓
POST	/api/auth/login	Login user	🔒 ✓
GET	/api/auth/me	Get current user profile	🔒 ✓
POST	/api/auth/forgot-password	Request password reset	🔒 ✓
POST	/api/auth/reset-password	Reset password with token	🔒 ✓
Orders			^
GET	/api/orders	Get user's orders	🔒 ✓
POST	/api/orders	Create a new order	🔒 ✓
GET	/api/orders/{id}	Get order by ID	🔒 ✓
Products			^
GET	/api/products	Get list of products	🔒 ✓
GET	/api/products/slug/{slug}	Get product by slug	🔒 ✓
GET	/api/products/{id}	Get product by ID	🔒 ✓

Figure 2: Backend API Documentation

II.Methodology

2.1 Diagrams

2.1.1 Sequence Diagrams

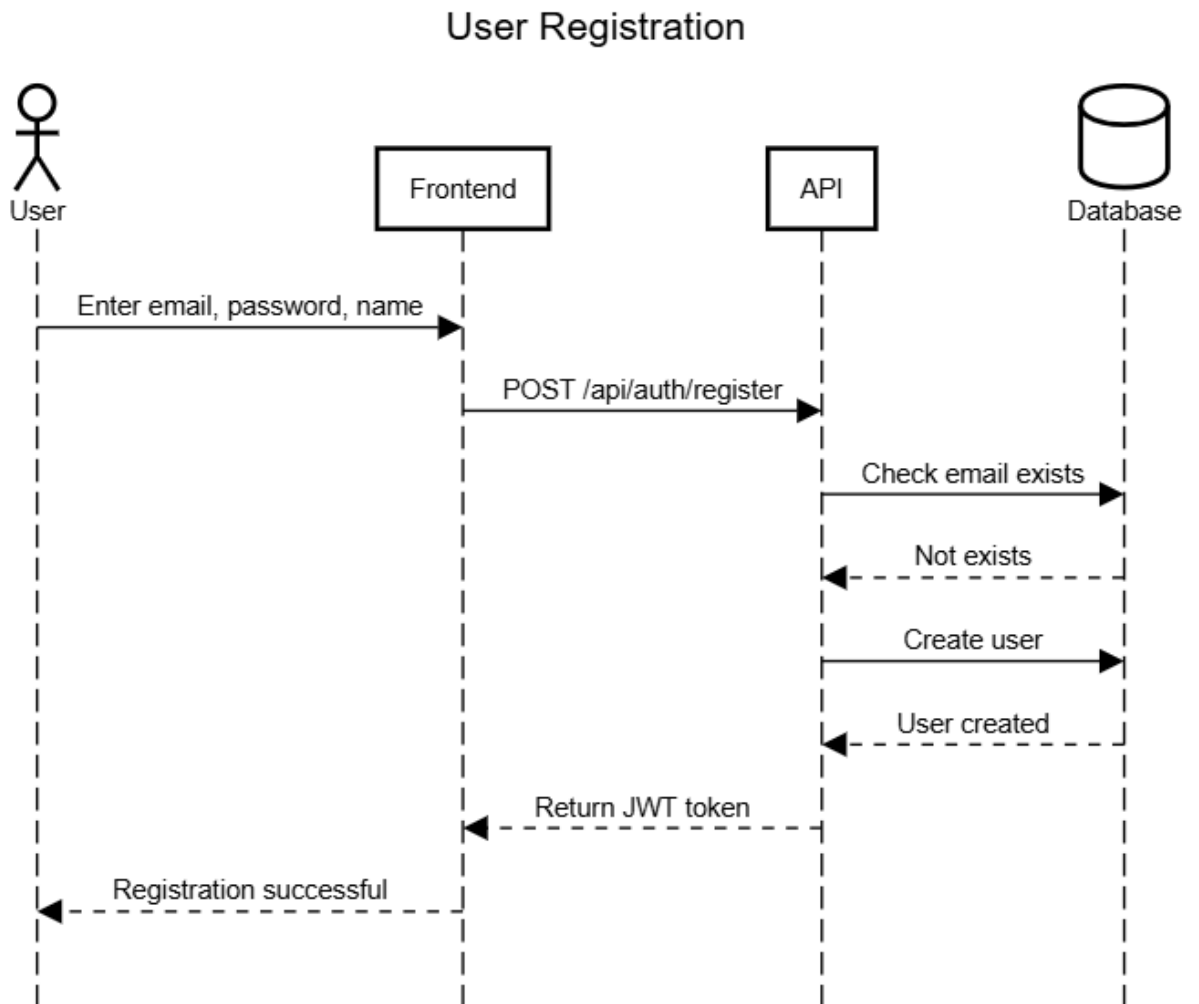


Figure 3:User Registration

User Login

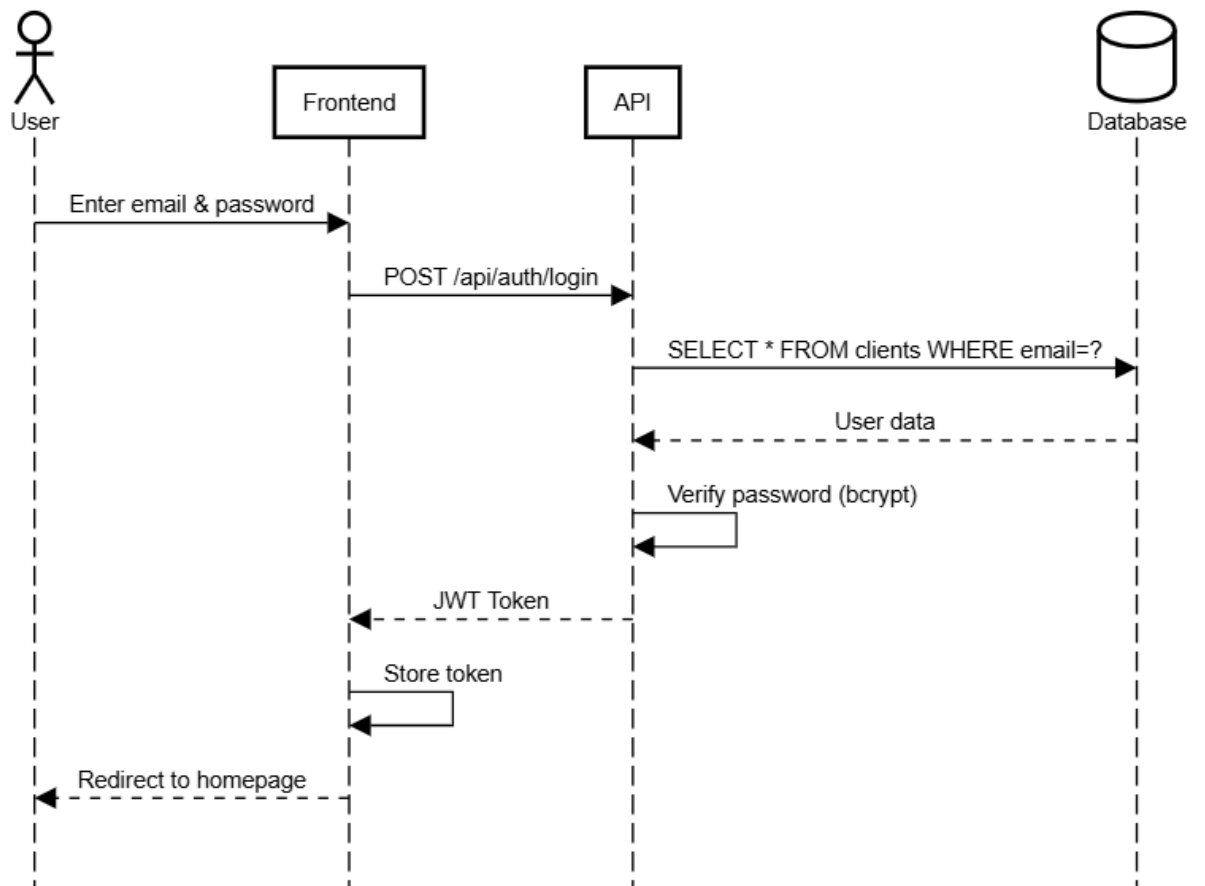


Figure 4: User Login

Browse Products

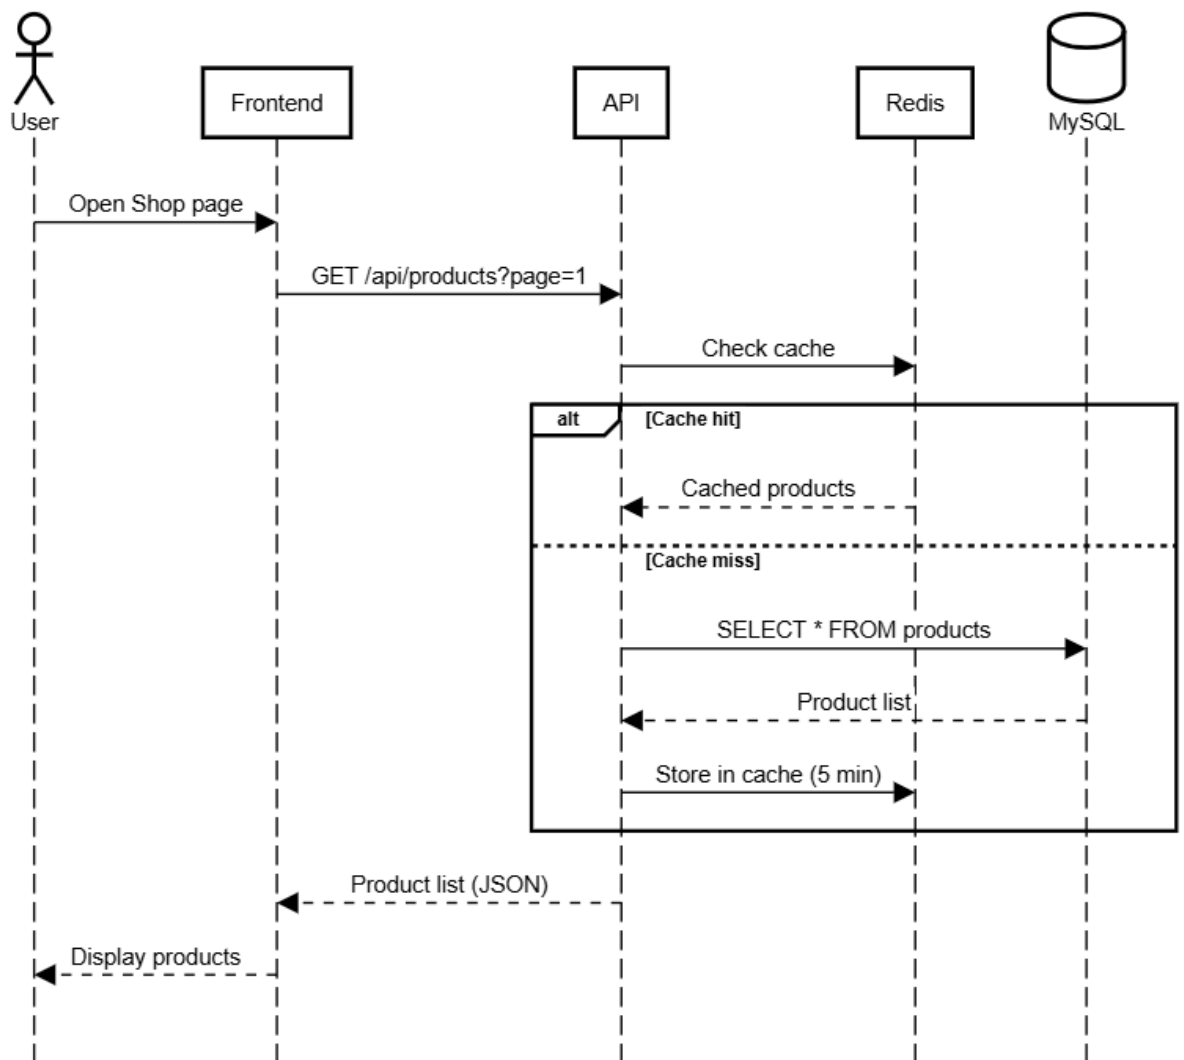


Figure 5:Browse Product

Place Order Flow

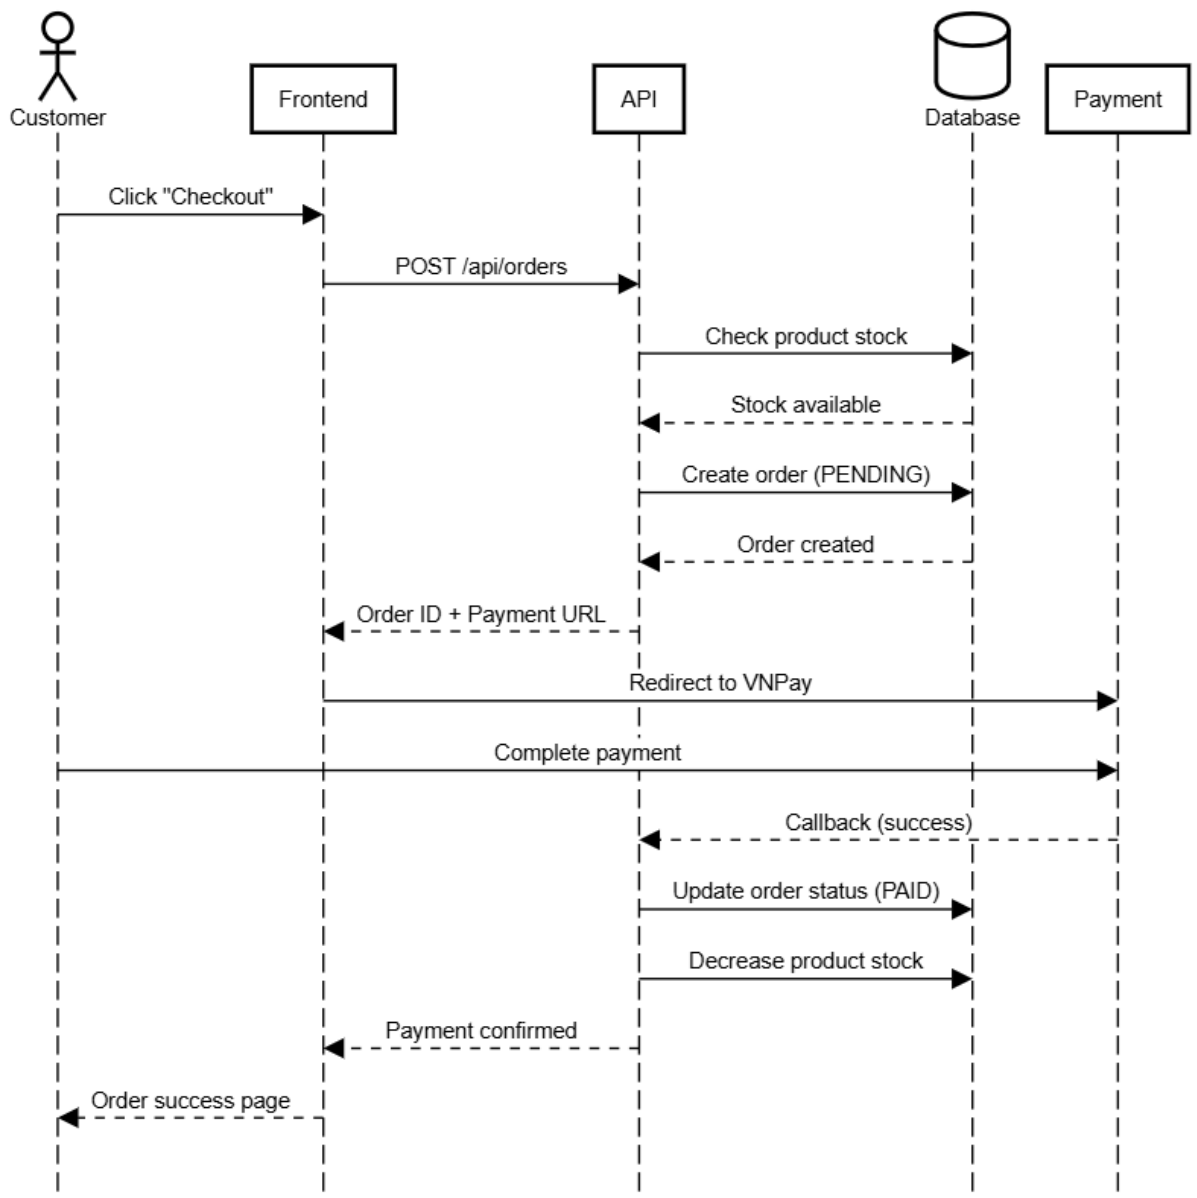


Figure 6:Place Order

Customer Support Chat

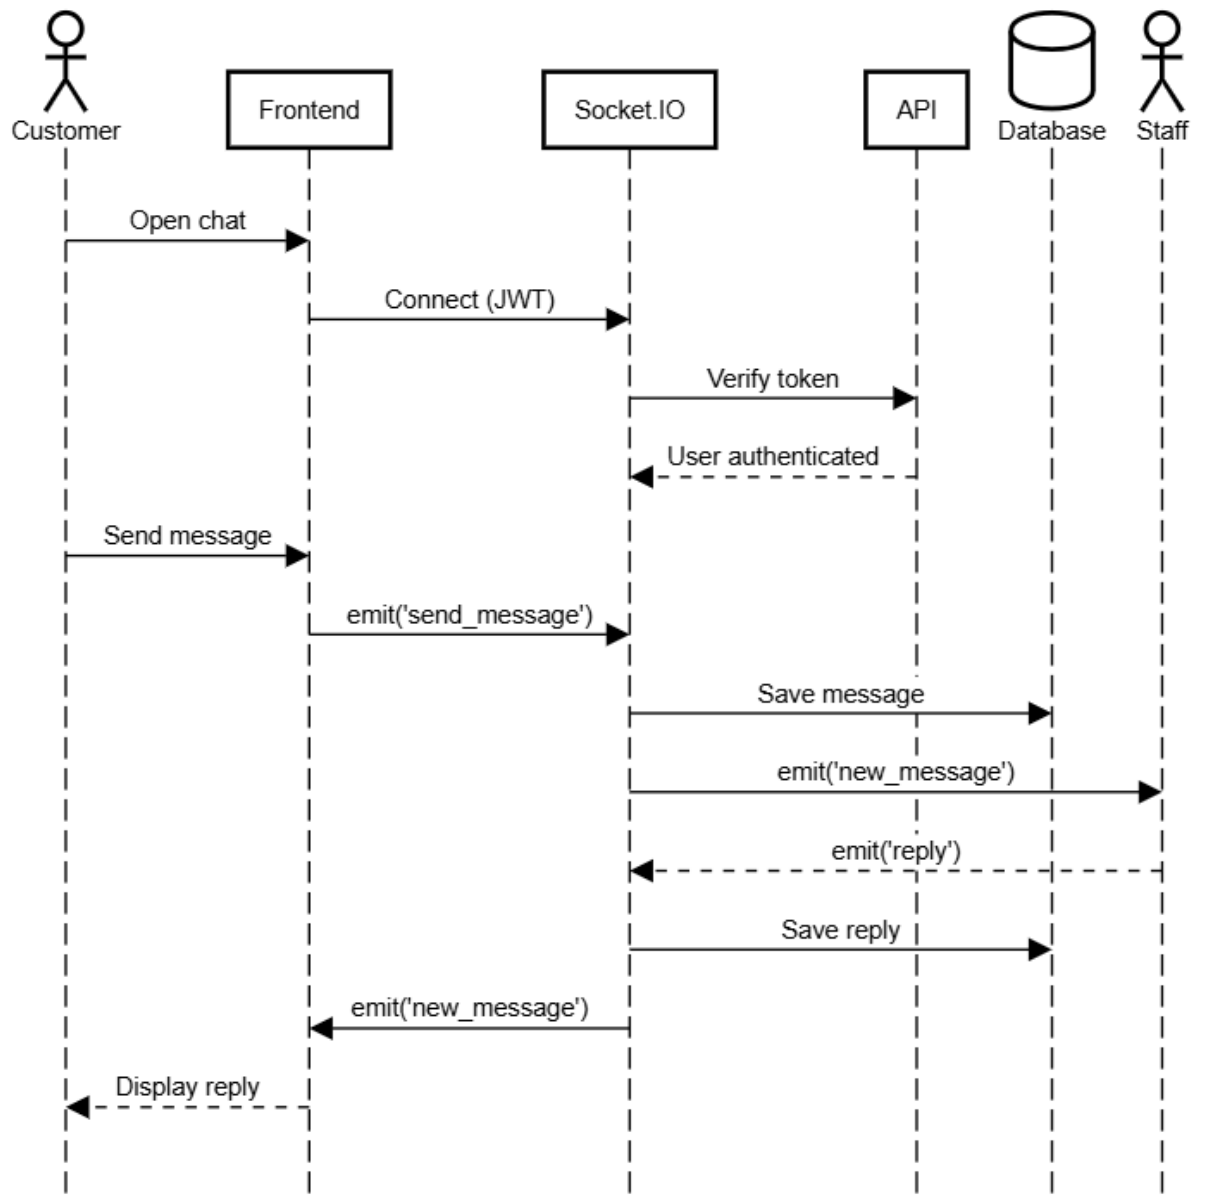


Figure 7:Real-time chat

Payment Process

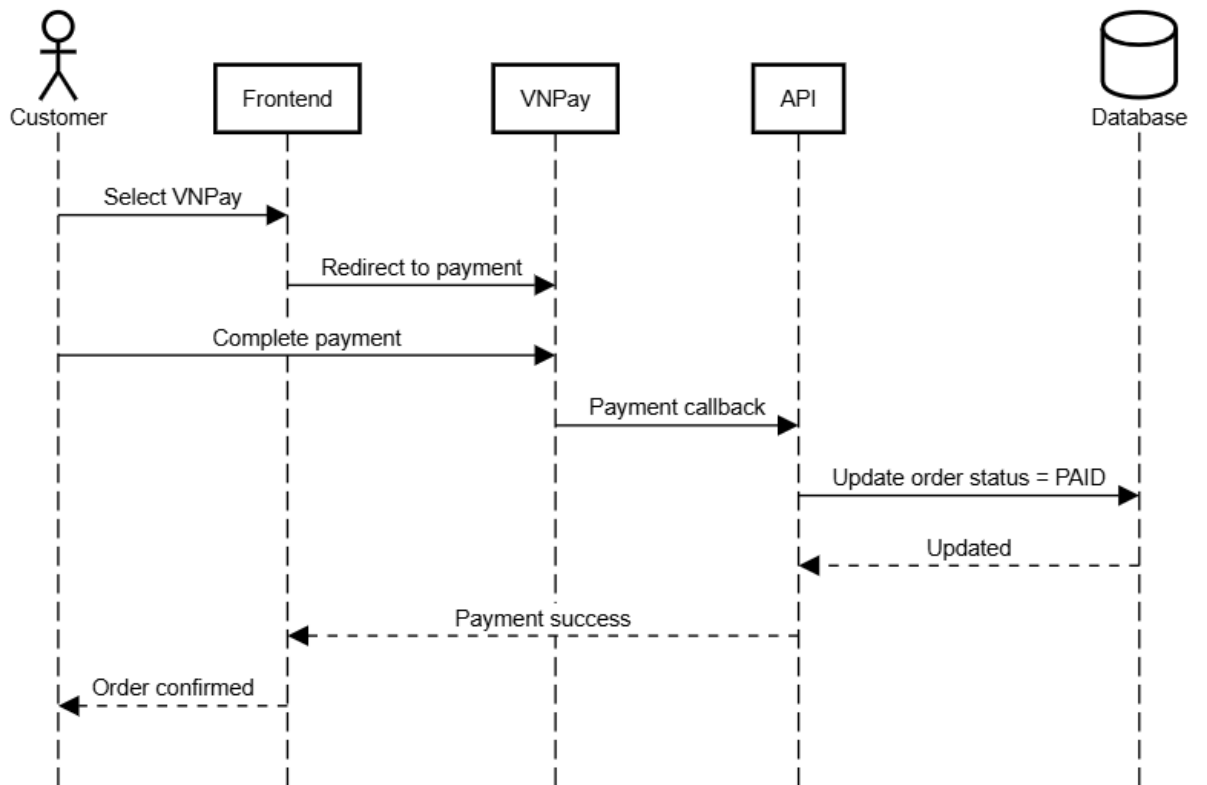


Figure 8: Payment Process

View Order History

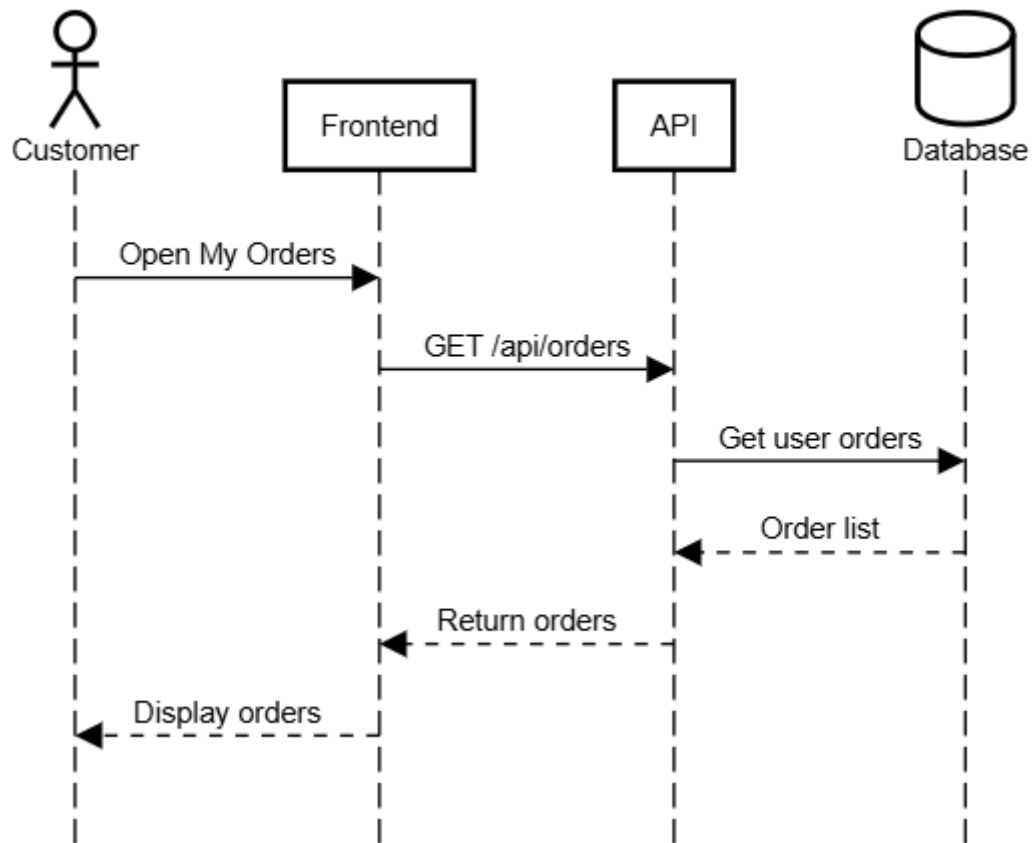


Figure 9:View Order

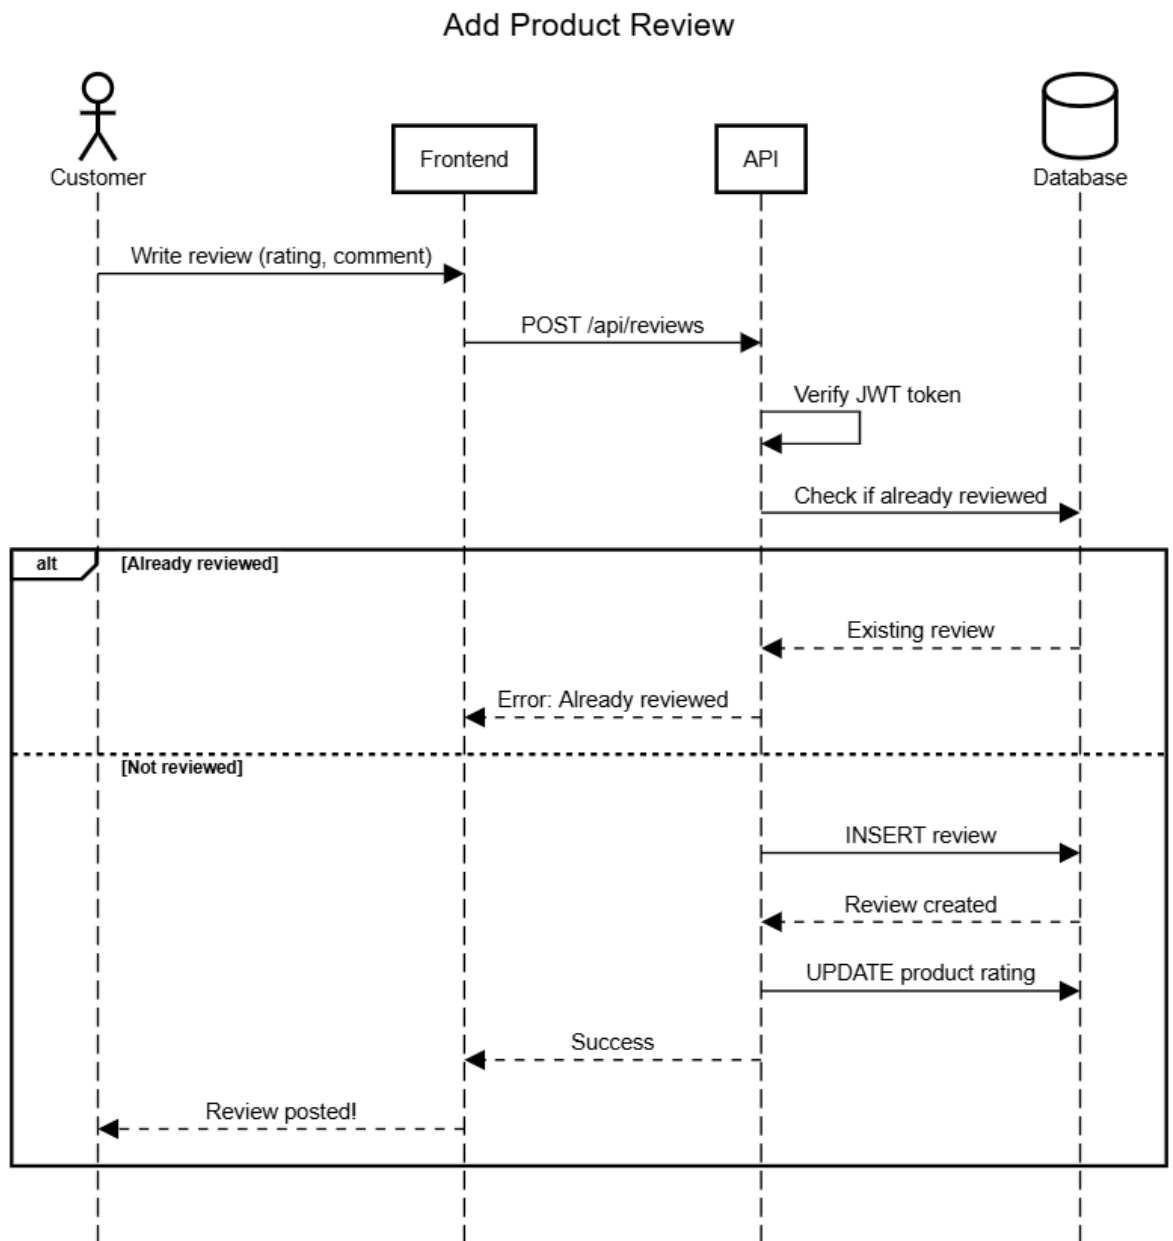


Figure 10:Review

2.1.2: Use Case Diagram

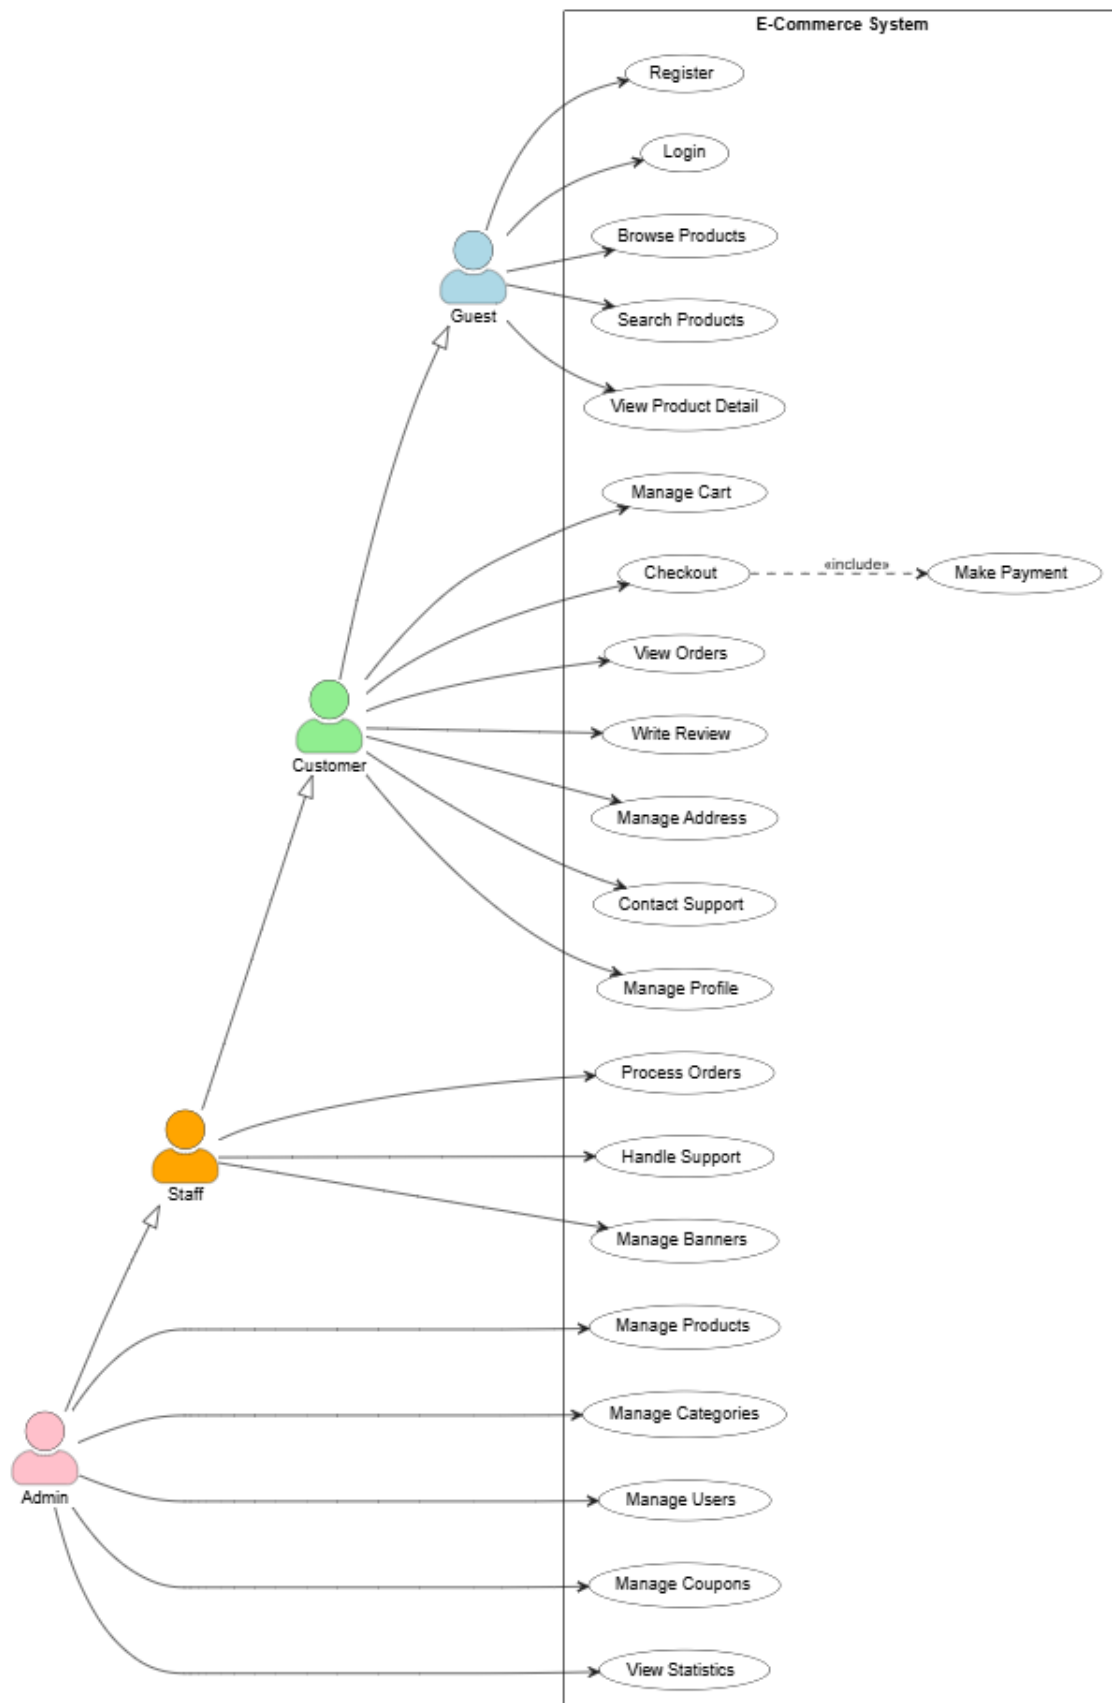


Figure 11: Use case Diagram

2.2. Backend Implementation Overview

The backend of the system is implemented using the Model–View–Controller (MVC) architecture to ensure clear separation of concerns, scalability, and maintainability. The client communicates with the backend through RESTful APIs. Incoming requests are first handled by Controllers, which validate input data, apply business rules, and coordinate the processing flow. Controllers then interact with Models to perform data operations, where Models represent the database entities and handle queries/transactions with the MySQL database. Finally, the backend returns structured JSON responses to the client.

Overall, the backend follows an MVC request flow: Client → Routes → Controllers → Models → Database → JSON Response, as illustrated in Figure

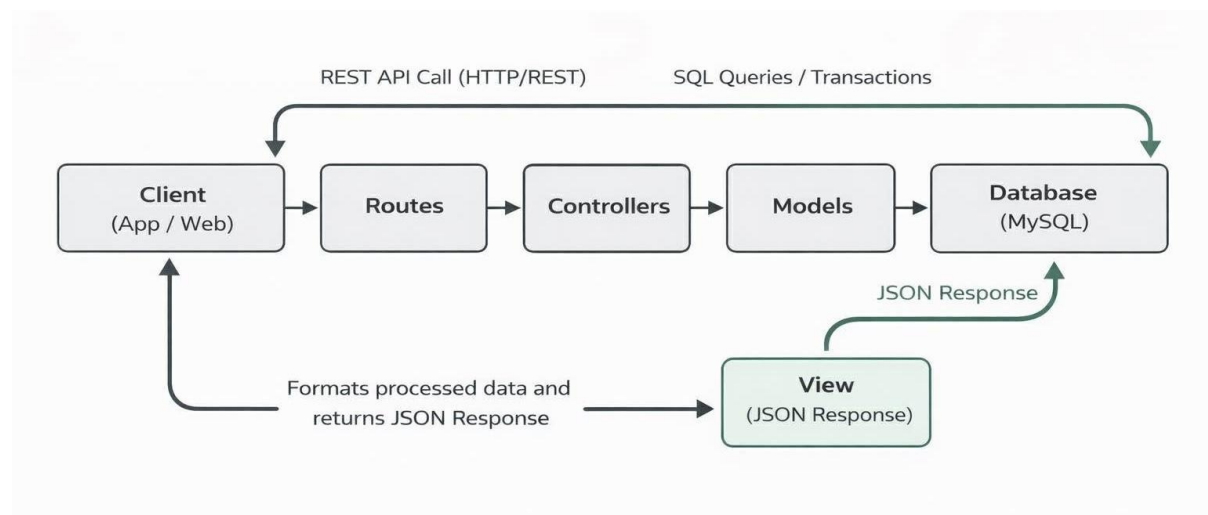


Figure 12:Backend flow

2.2.1 Project Structure

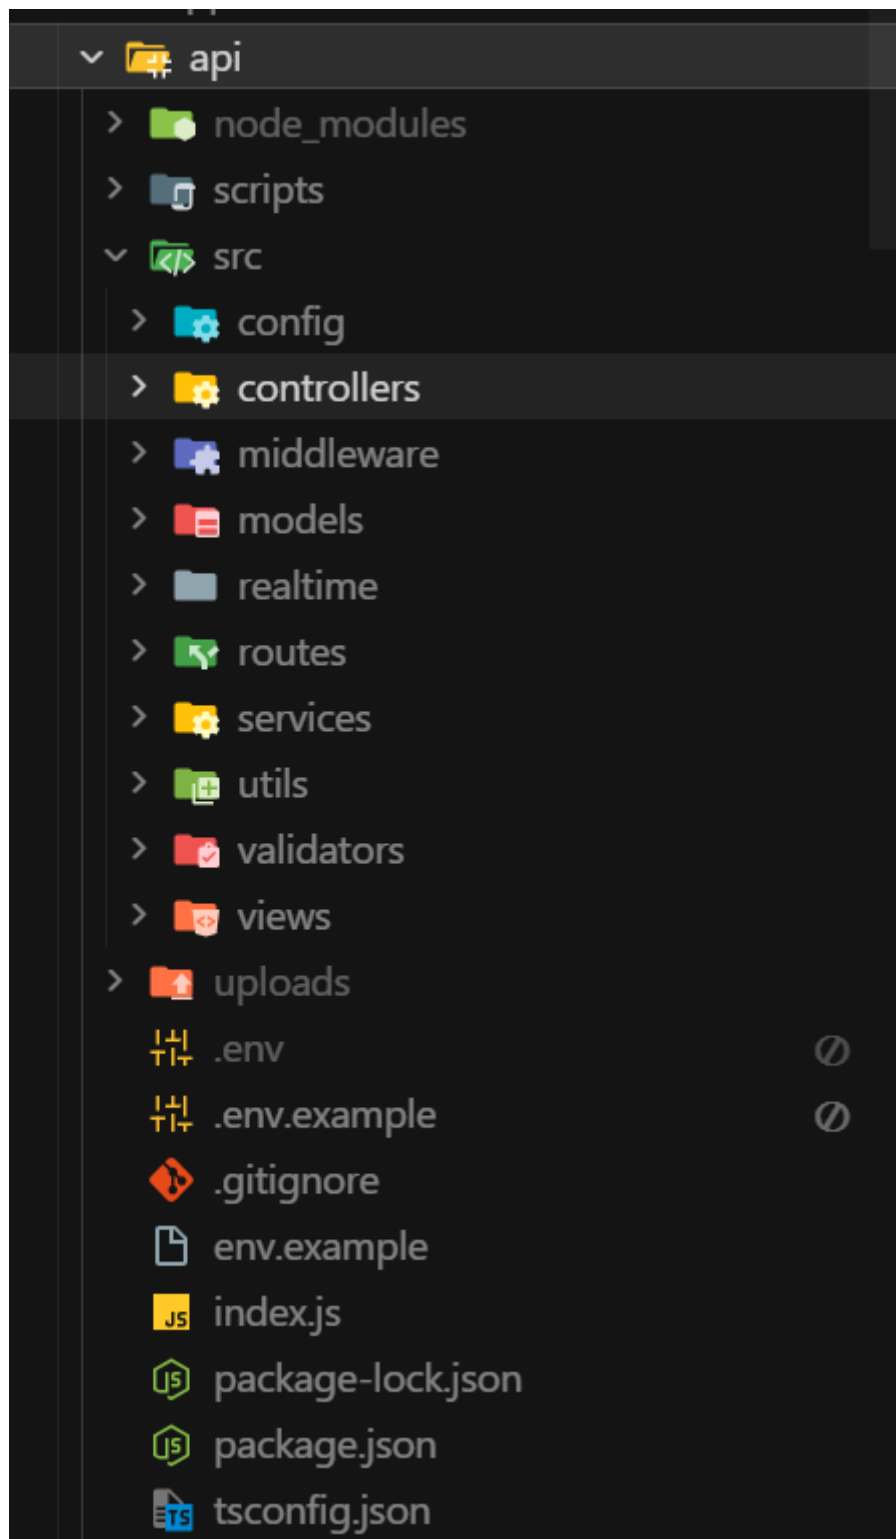


Figure 13: Backend project folder structure

Main folders of the projects are:

- + Routing Layer :The routing layer defines all RESTful API endpoints of the system. Each router groups endpoints by functional domain (e.g.,

authentication, products, orders) and maps HTTP requests to controller methods.

Example:

```
1 import express from 'express';
2 import * as orderController from '../controllers/admin/order.controller.js';
3 import { authenticate, authorize } from '../middleware/auth.js';
4
5 const router = express.Router();
6
7 router.use(authenticate, authorize('ADMIN', 'STAFF'));
8 router.get('/', orderController.getOrders);
9 router.get('/:id', orderController.getOrder);
10 router.put('/:id/status', orderController.updateOrderStatus);
11 router.get('/:id/payment', orderController.getOrderPayment);
12 router.put('/:id/payment-status', orderController.updateOrderPaymentStatus);
13
14 export default router;
```

Figure 14: Order router mapping admin API endpoints to controllers.

- + Controller Layer : Controllers handle incoming HTTP requests from routers. They extract request data, perform validation, invoke business logic, and return standardized responses to the client with appropriate HTTP status codes.

Example:

```
export const createOrder = async (req, res, next) => {
  try {
    // Validate request body
    const validationResult = createOrderSchema.safeParse({ body: req.body });

    if (!validationResult.success) {
      const errors = validationResult.error.errors.map(err => ({
        field: err.path.join('.'),
        message: err.message,
      }));
      return res.status(400).json({
        error: 'Validation error',
        details: errors,
        message: errors[0]?.message || 'Invalid request data'
      });
    }
  }
}
```

Figure 15: Create Order controller

- + Service Layer: The service layer contains the core business logic of the application. It enforces domain rules and coordinates complex workflows such as order processing, price calculation, and discount application.

Example:

```
export class PaymentService {
  static async updatePaymentStatus(
    orderId: number,
    status: 'PENDING' | 'PAID' | 'FAILED' | 'REFUNDED',
    transactionId?: string
  ): Promise<void> {
    const connection = await beginTransaction();
    try {
      // Convert undefined to null for SQL
      const transactionIdValue = transactionId ?? null;

      // Check if payment record exists
      const [existingPayments] = await connection.execute(
        `SELECT id FROM payments WHERE order_id = ?`,
        [orderId]
      );

      if (Array.isArray(existingPayments) && existingPayments.length === 0) {
        // Payment record doesn't exist, create it
        // Get order info to create payment
        const [orders] = await connection.execute(
          `SELECT total, paymentMethod FROM orders WHERE id = ?`,
          [orderId]
        );
      }
    }
  }
}
```

Figure 16.: Payment Service

- + Model Layer: The model layer is responsible for interacting with the MySQL database. It encapsulates SQL queries and manages database transactions to ensure data consistency and integrity.

+ Example:

```
async create(orderData) {
  const connection = await beginTransaction();
  try {
    const {
      userId,
      items,
      shippingAddress,
      phone,
      email,
      notes,
      paymentMethod,
      couponCode,
      shippingFee = 0,
    } = orderData;

    let subtotal = 0;
    let discount = 0;

    // Get products
    const productIds = items.map((item) => item.productId);
    const placeholders = productIds.map(() => '?').join(',');
    const [products] = await connection.execute(
      `SELECT * FROM products WHERE id IN (${placeholders}) AND isActive = 1`,
      productIds
    );

    if (products.length !== productIds.length) {
      throw new Error('Some products not found or inactive');
    }
  }
}
```

Figure 17:.. Create Order Model

+ Middleware Layer: Middleware components handle cross-cutting concerns that are applied before requests reach the controller layer. This includes authentication, authorization, and other request preprocessing tasks. By centralizing these concerns, middleware ensures consistent security and request handling across all API endpoints.

Example:

```
import { verifyToken } from '../utils/jwt.js';
import { authClientModel } from '../models/client/auth.model.js';

export const authenticate = async (req, res, next) => {
  try {
    const token = req.headers.authorization?.replace('Bearer ', '');

    if (!token) {
      return res.status(401).json({ error: 'Authentication required' });
    }

    const decoded = verifyToken(token);
    const user = await authClientModel.findById(decoded.userId);

    if (!user) {
      return res.status(401).json({ error: 'Invalid or inactive user' });
    }

    req.user = {
      id: user.id,
      email: user.email,
      name: user.name,
      role: user.role,
      isActive: true,
    };
    next();
  } catch (error) {
    return res.status(401).json({ error: 'Invalid token' });
  }
};
```

Figure 18: Authentication and authorization middleware for securing API endpoints

- + Validation Layer: The validation layer ensures that incoming request data conforms to predefined rules and constraints before being processed by controllers or business logic. This helps prevent invalid or malicious data from entering the system and improves overall reliability.

Example:

```
export const registerSchema = z.object({
  body: z.object({
    email: z.string().email('Invalid email address'),
    password: z.string().min(6, 'Password must be at least 6 characters'),
    name: z.string().min(2, 'Name must be at least 2 characters'),
    phone: z.string().optional(),
  }),
});

export const loginSchema = z.object({
  body: z.object({
    email: z.string().email('Invalid email address'),
    password: z.string().min(1, 'Password is required'),
  }),
});
```

Figure 19: Authentication request validation schema

- + Utility Layer: The utility layer contains reusable helper functions that support multiple backend modules. These utilities handle common tasks such as authentication helpers, password hashing, logging, caching, and data formatting. Centralizing these helpers helps reduce code duplication and improves maintainability.

Example:

```
const JWT_REFRESH_EXPIRES_IN = config.jwt.refreshExpiresIn;

/**
 * Generate a JWT access token for a user
 * @param {number} userId - User ID to include in token
 * @returns {string} JWT token string
 * @throws {Error} If token generation fails
 */
export const generateToken = (userId: number): string => {
  return jwt.sign({ userId }, JWT_SECRET, { expiresIn: JWT_EXPIRES_IN } as SignOptions);
};

/**
 * Generate a JWT refresh token for a user
 * @param {number} userId - User ID to include in token
 * @returns {string} JWT refresh token string
 * @throws {Error} If token generation fails
 */
export const generateRefreshToken = (userId: number): string => {
  return jwt.sign({ userId, type: 'refresh' }, JWT_SECRET, { expiresIn: JWT_REFRESH_EXPIRES_IN } as SignOptions);
};

/**
 * Verify and decode a JWT token
 * @param {string} token - JWT token string to verify
 * @returns {{ userId: number; exp?: number; iat?: number; type?: string }} Decoded token payload
 * @throws {Error} If token is invalid or expired
 */
export const verifyToken = (token: string): { userId: number; exp?: number; iat?: number; type?: string } => {
  return jwt.verify(token, JWT_SECRET) as { userId: number; exp?: number; iat?: number; type?: string };
};
```

Figure 20: JWT utility functions for token generation and verification

- + **Realtime Layer:** The realtime layer enables bidirectional communication between the server and connected clients using WebSocket or Socket.IO. This layer supports real-time features such as order status updates, notifications, or customer support chat without relying on traditional HTTP request-response cycles.

Example:

```
export function initSocket(server) {
  const io = new Server(server, {
    cors: {
      origin: config.corsOrigin,
      methods: ['GET', 'POST'],
      credentials: true,
    },
  });

  io.use((socket, next) => {
    const token = socket.handshake.auth?.token || socket.handshake.query?.token;

    if (!token || typeof token !== 'string') {
      return next(new Error('Authentication error'));
    }

    try {
      const decoded = verifyToken(token.replace('Bearer ', ''));
      socket.data.userId = decoded.userId;
      socket.data.role = decoded.role;
      next();
    } catch (error) {
      next(new Error('Authentication error'));
    }
  });
}
```

Figure 21: Realtime module handling WebSocket-based communication

2.3. Front-end Overview and Architecture

The front-end follows a layered architecture consisting of UI Components, State Management, and an API Service Layer. User interactions are handled by UI components, which update the centralized state using Zustand. The API service layer communicates with the backend via RESTful APIs. Real-time features are supported through a Socket.IO server using WebSocket connections, enabling live updates without page reloads.

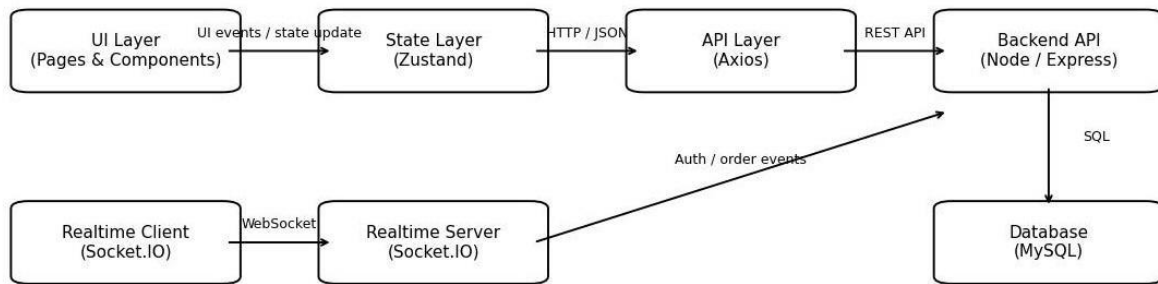


Figure 22: Front-end architecture overview

2.3.1 Project Structure

- >  assets
- >  components
- >  config
- >  constants
- >  contexts
- >  hooks
- >  i18n
- >  lib
- >  pages
- >  services
- >  store
- >  types
- >  utils
-  App.tsx
-  index.css
-  main.tsx
-  vite-env.d.ts
-  .env.example
-  .env.local
-  .gitignore
-  components.json
-  eslint.config.mjs
-  index.html
-  package-lock.json
-  package.json
-  postcss.config.js
-  tailwind.config.js
-  tsconfig.json
-  tsconfig.node.json
-  vite.config.ts

Figure 23: Front-end project folder structure.

Each module and logic is separated clearly to ensure modular and clean code with minimal dependency. The clean separation between API calls, views, components and theme makes it easier for us to ensure maintainability and consistency throughout the system, with high level of code resuablity.

- + assets: This folder contains static resources such as images, icons, and fonts used throughout the user interface.
- + components: This folder includes reusable UI components such as buttons, cards, forms, and navigation elements that are shared across multiple pages.
- + config: This folder stores front-end configuration files, such as environment-specific settings or application constants.
- + constants: This folder defines constant values (e.g., enums, fixed strings, default values) used across the front-end to ensure consistency and reduce duplication.
- + contexts: This folder contains React Context definitions used for global state management, such as authentication state and notification handling, allowing data to be shared across components without excessive prop drilling.
- + hooks: This folder includes custom React hooks that encapsulate reusable logic, improving code readability and reusability.
- + i18n: This folder manages internationalization configuration and translation resources to support multiple languages.
- + lib: This folder provides shared libraries or wrapper utilities for third-party integrations used by the front-end.
- + pages: This folder contains page-level components that represent the main views of the application, such as product listing, product details, cart, and checkout pages.
- + services: This folder handles communication with the backend API, centralizing all HTTP requests and responses.

- + **store:** This folder manages global application state using a state management solution (e.g., Redux or equivalent), enabling consistent data sharing across the application.
- + **types:** This folder defines TypeScript type declarations and interfaces to ensure type safety across the front-end codebase.
- + **utils:** This folder contains utility helper functions shared across different front-end module

2.3.2 API Calls

In the e-commerce application, the front-end communicates with the backend using RESTful API calls implemented with Axios. A centralized Axios instance is used to manage HTTP requests and automatically attach authentication tokens through request interceptors. This approach ensures consistent and secure communication between the front-end and backend services.

```

const api = axios.create({
  baseURL: config.api.baseURL,
  timeout: config.api.timeout,
  headers: {
    'Content-Type': 'application/json',
  },
});

api.interceptors.request.use(
  (config) => {
    if (
      config.url?.includes('/auth/login') ||
      config.url?.includes('/auth/register')
    ) {
      delete config.headers.Authorization;
      return config;
    }

    const token = localStorage.getItem(STORAGE_KEYS.TOKEN);
    if (token) {
      config.headers.Authorization = `Bearer ${token}`;
    } else {
      delete config.headers.Authorization;
    }
    return config;
  },
  (error) => {
    return Promise.reject(error);
  }
);

```

Figure 24: Example of API call with Axios.

2.3.2. State Management

Global application state, including user authentication and shopping cart data, is managed centrally on the front-end. This allows shared data to be accessed

consistently across multiple pages and components, which is essential for core e-commerce features such as cart updates and user sessions.

```
export const useAuthStore = create<AuthState>()(
  persist(
    (set) => ({
      user: null,
      token: null,
      isAuthenticated: false,

      login: async (email: string, password: string) => {
        // Clear any existing auth data before login
        localStorage.removeItem('token');
        localStorage.removeItem('auth-storage');

        const response = await api.post('/auth/login', { email, password });
        const { user, token } = response.data;

        // Set new token and state
        localStorage.setItem('token', token);
        set({ user, token, isAuthenticated: true });
      },

      register: async (email: string, password: string, name: string, phone?: string) => {
        const response = await api.post('/auth/register', { email, password, name, phone });
        const { user, token } = response.data;
        localStorage.setItem('token', token);
        set({ user, token, isAuthenticated: true });
      },
    })
  )
);
```

Figure 25: Global authentication state management on the front-end.

2.3.3. Pages and Components

The front-end user interface is built using a combination of page-level components and reusable UI components. Pages represent the main views of the e-commerce application, such as product listing, product details, cart, and checkout, while reusable components are shared across multiple pages to ensure UI consistency. This component-based approach improves code reusability and simplifies maintenance of the user interface.

```

export default function ProductDetailPage() {
  const { slug } = useParams();
  const navigate = useNavigate();
  const [product, setProduct] = useState<Product | null>(null);
  const [reviews, setReviews] = useState<Review[]>([]);
  const [quantity, setQuantity] = useState(1);
  const [loading, setLoading] = useState(true);
  const [activeImage, setActiveImage] = useState(0);
  const [activeTab, setActiveTab] = useState<'description' | 'reviews'>('description');
  const [showReviewForm, setShowReviewForm] = useState(false);
  const [reviewRating, setReviewRating] = useState(5);
  const [reviewTitle, setReviewTitle] = useState('');
  const [reviewComment, setReviewComment] = useState('');
  const [submittingReview, setSubmittingReview] = useState(false);
  const { addItem } = useCartStore();
  const { isAuthenticated } = useAuthStore();
  const { toast } = useToast();

  useEffect(() => {
    if (slug) {
      fetchProduct();
    }
  }, [slug]);

  const fetchProduct = async () => {
    try {
      const res = await api.get(`/products/slug/${slug}`);
      setProduct(res.data);
      if (res.data.reviews) {
        setReviews(res.data.reviews);
      }
    }
  }
}

```

Figure 26: Product detail page

2.3.4 Features using extra libraries

To enhance the user experience and development efficiency of the e-commerce application, several features were implemented using third-party npm libraries:

- + HTTP Client: <https://www.npmjs.com/package/axios>
- + State Management: <https://www.npmjs.com/package/zustand>
- + Routing: <https://www.npmjs.com/package/react-router-dom>
- + Form Management: <https://formik.org/>
- + Animation: <https://www.npmjs.com/package/framer-motion>
- + Styling: <https://tailwindcss.com/>

In conclusion, the front-end of the e-commerce system was developed with a strong focus on modularity, maintainability, and user experience. The use of modern libraries

and frameworks enables efficient development while ensuring seamless integration with backend services and a responsive shopping experience.

2.5. Database Overview

The system uses a relational database (MySQL) to store and manage all persistent data for the E-Commerce platform. The database is designed to support core business processes including user management, product catalog management, shopping cart and order processing, payment handling, promotions, reviews, and customer support. A normalized relational schema is applied to reduce redundancy and ensure data integrity, consistency, and scalability. Primary keys and foreign keys are clearly defined across all tables to maintain referential integrity between entities. The database structure also supports advanced features such as coupon management, order messaging, and real-time customer support, while remaining flexible for future extensions without major schema changes.

2.5.1. Core Entities

The database schema is structured around the following core entities:

Clients

This entity stores user account information, including authentication credentials, personal and contact details, and role-based access data (e.g., CUSTOMER, ADMIN, STAFF).

Addresses

The Addresses entity manages multiple shipping addresses associated with each client and supports the designation of a default address.

Categories

This entity organizes products into logical groupings and supports hierarchical parent–child relationships to enable multi-level category structures.

Products

The Products entity stores comprehensive product information, including product name, price, available stock, images, attributes, brand, rating, and category associations.

Carts / Cart Items

The shopping cart is handled as a logical concept at the application level, where selected items are temporarily stored before checkout. Persistent storage of purchased items occurs through the Orders and Order_Items entities.

Orders

This entity records purchase transactions, capturing customer information, shipping details, order and payment status, total amounts, applied coupons, and shipment tracking data.

Order_Items

The Order_Items entity stores detailed information for each product included in an order, such as quantity, purchase price at the time of transaction, and selected product attributes.

Payments

This entity manages payment-related data, including payment methods, transaction identifiers, and payment status.

Coupons

The Coupons entity manages discount codes and promotional rules, including usage limits, validity periods, and discount conditions.

Reviews

This entity stores customer ratings and reviews for products, with constraints enforcing a single review per customer per product.

Banners

The Banners entity manages promotional banners displayed across various positions within the user interface.

2.5.2 Relationship Description

Each Client can have multiple Addresses, multiple Orders, and can participate in Reviews, Order Messages, and Support Conversations. Each Order belongs to a single client and may reference a Coupon. Orders are associated with products through the Order_Items table, which stores additional attributes such as quantity and price at the time of transaction. Each Product belongs to a specific Category, enabling efficient product organization, searching, and filtering. Products can receive multiple Reviews, which contribute to aggregated rating and review count values. Each Order may have one or more associated Payments, allowing the system to track payment status independently from order status. Additionally, Order_Messages support internal communication between customers and staff for each order, while Support_Conversations and Support_Messages enable real-time customer support interactions. These relationships ensure accurate and consistent data management across the entire shopping, checkout, payment, order fulfillment, and customer support workflows.

2.5.3 Entity Relationship Diagram


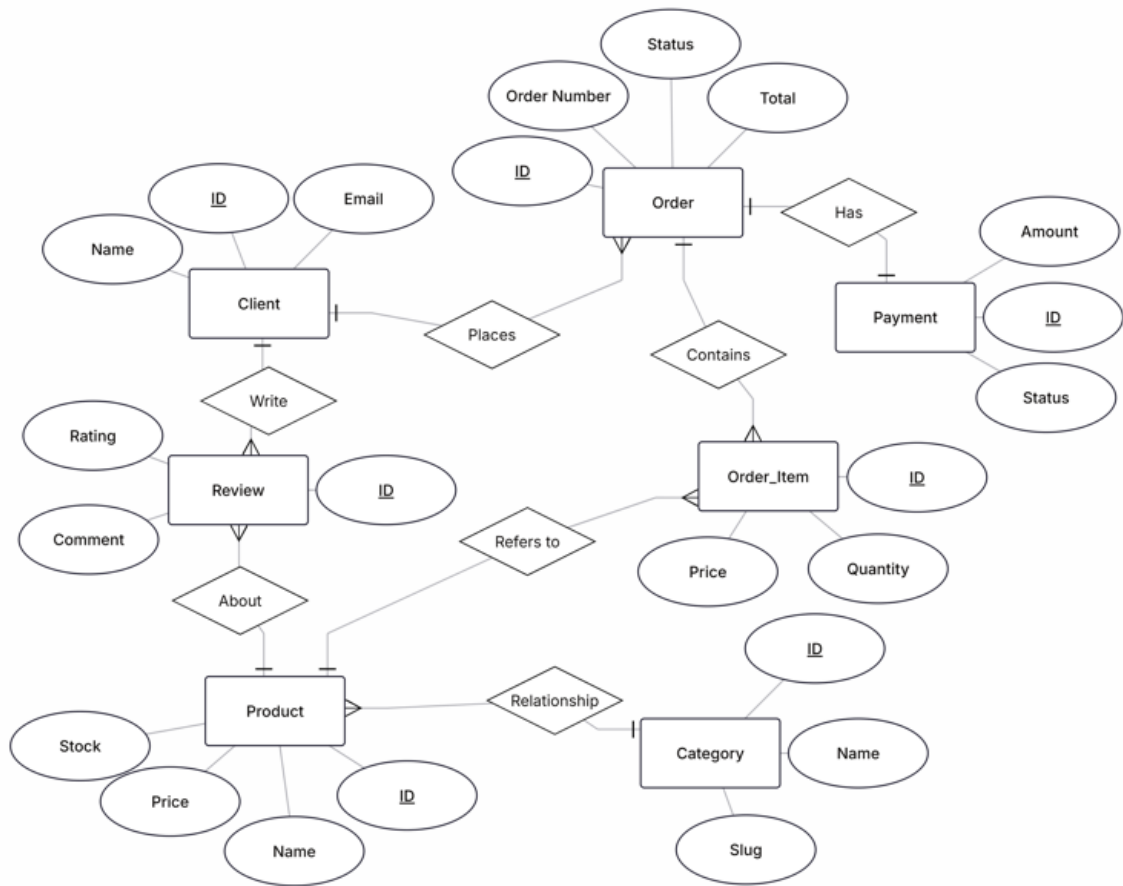


Figure 27: Entity Relationship Diagram (ERD) of the E-Commerce System

III.Demo

1. Authentication

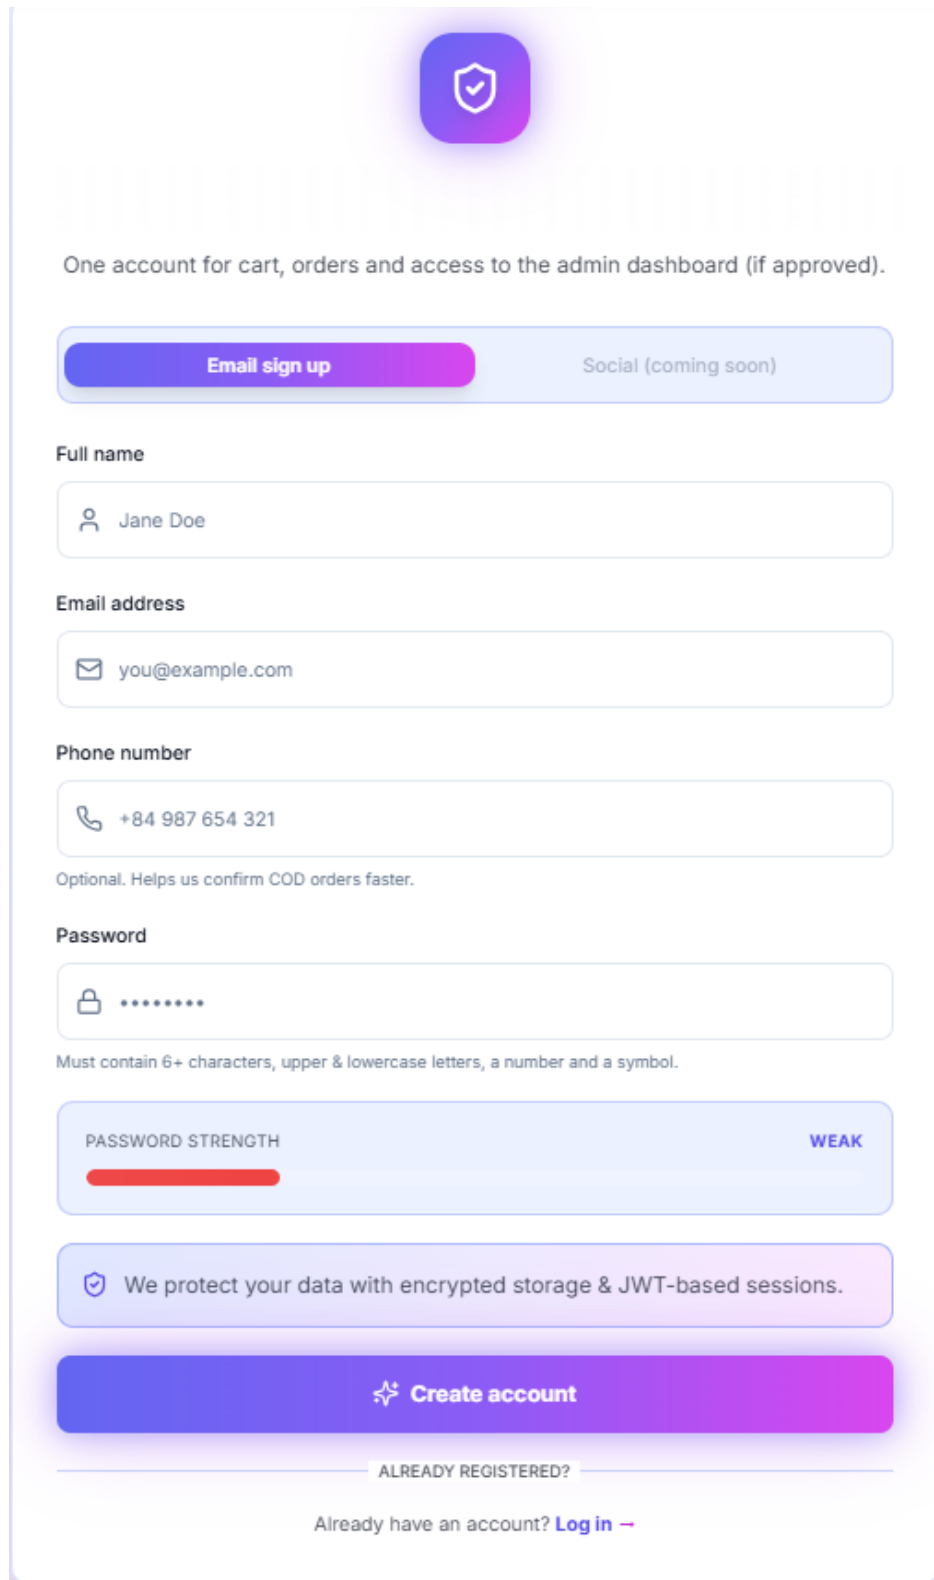

The sign-up form features a purple shield icon with a checkmark at the top. Below it, a heading reads "ONE ACCOUNT FOR EVERYTHING". A subtext states: "One account for cart, orders and access to the admin dashboard (if approved)." There are two tabs: "Email sign up" (active) and "Social (coming soon)". The form includes input fields for "Full name" (Jane Doe), "Email address" (you@example.com), and "Phone number" (+84 987 654 321). A note says "Optional. Helps us confirm COD orders faster." The "Password" field is masked with dots. A password strength indicator shows a red bar and the label "WEAK". A security message states: "We protect your data with encrypted storage & JWT-based sessions." A large purple button labeled "Create account" is at the bottom. Below it, a link "ALREADY REGISTERED?" is followed by "Already have an account? Log in →".

ONE ACCOUNT FOR EVERYTHING

One account for cart, orders and access to the admin dashboard (if approved).

Email sign up Social (coming soon)

Full name

Jane Doe

Email address

you@example.com

Phone number

+84 987 654 321

Optional. Helps us confirm COD orders faster.

Password

Must contain 6+ characters, upper & lowercase letters, a number and a symbol.

PASSWORD STRENGTH WEAK

We protect your data with encrypted storage & JWT-based sessions.

Create account

ALREADY REGISTERED?

Already have an account? [Log in →](#)

Figure 28: Sign Up Form

First, the user opens the Sign Up page and selects the Email sign up option.

Next, the user enters their Full name, Email address, and an optional Phone number to complete the basic account information.

Then, the user creates a Password that meets the security requirements, including a minimum length and a combination of uppercase letters, lowercase letters, numbers, and symbols. A password strength indicator is displayed in real time.

One account for cart, orders and access to the admin dashboard (if approved).

Email sign up Social (coming soon)

Full name

Nguyen Thai

Email address

quangthai06072k4@gmail.com

Phone number

0774676233

Optional. Helps us confirm COD orders faster.

Password

Must contain 6+ characters, upper & lowercase letters, a number and a symbol.

PASSWORD STRENGTH STRONG

We protect your data with encrypted storage & JWT-based sessions.

Create account

ALREADY REGISTERED?

Already have an account? [Log in --](#)

Figure 29: Sign Up Form

After all required fields are validated, the user clicks Create account. The system creates the account and automatically logs the user into the website without requiring a separate login step.

Finally, the user is redirected to the main interface of the e-commerce website and can immediately access features such as browsing products, managing the shopping cart, and placing orders.

2. Product Browsing

2.1 Home Page

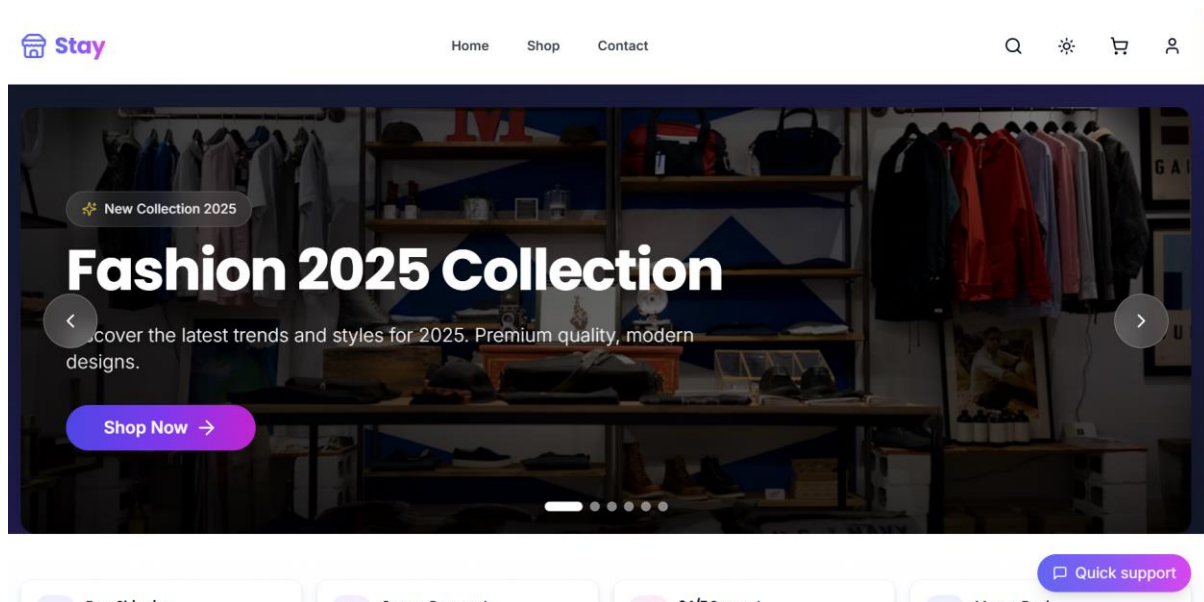


Figure 30: Stay Home Page

After successful login, the user is redirected to the Home Page. The hero section highlights the latest fashion collection with a promotional banner and a Shop Now button, allowing users to quickly access featured products.\

2.2. Search

The header provides main navigation options, including Home, Shop, and Contact, along with user-related actions such as account access, shopping cart, and theme settings.

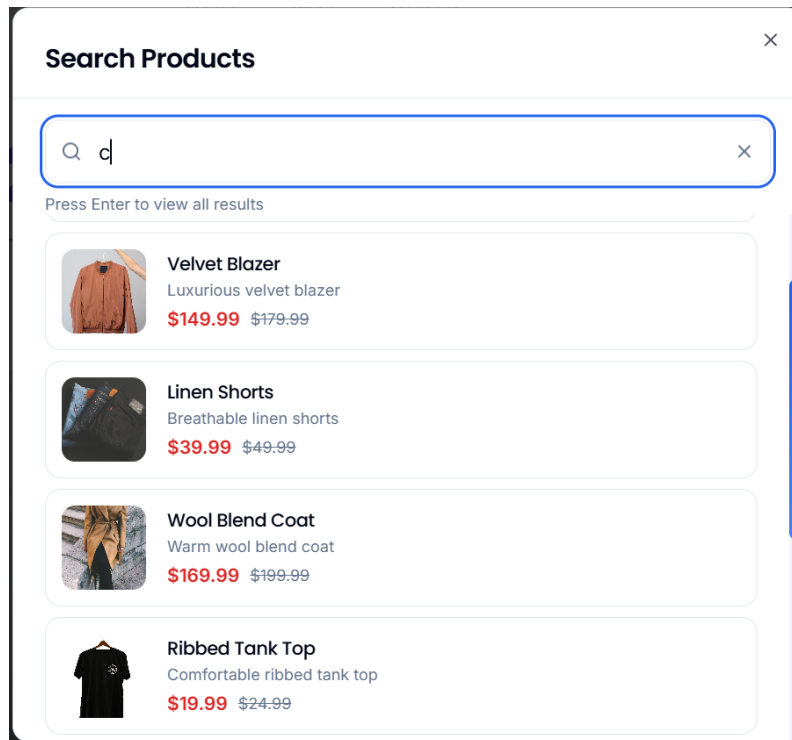


Figure 31: Search Function in Header

The search function is accessible directly from the header through a search icon. When users click the search icon, a search dialog appears, allowing them to enter keywords and quickly find products without leaving the current page.

2.3 Shop

The Shop All Products page displays the complete list of products available in the system, including product images, categories, pricing details, and discount indicators. Users can refine product results using the filter panel on the left, which supports searching by keyword, filtering by category, and selecting a price range. Additionally, products can be sorted by criteria such as Newest Arrivals, and each product card provides a quick Add to Cart option, allowing users to add items to their shopping cart directly from the shop page.

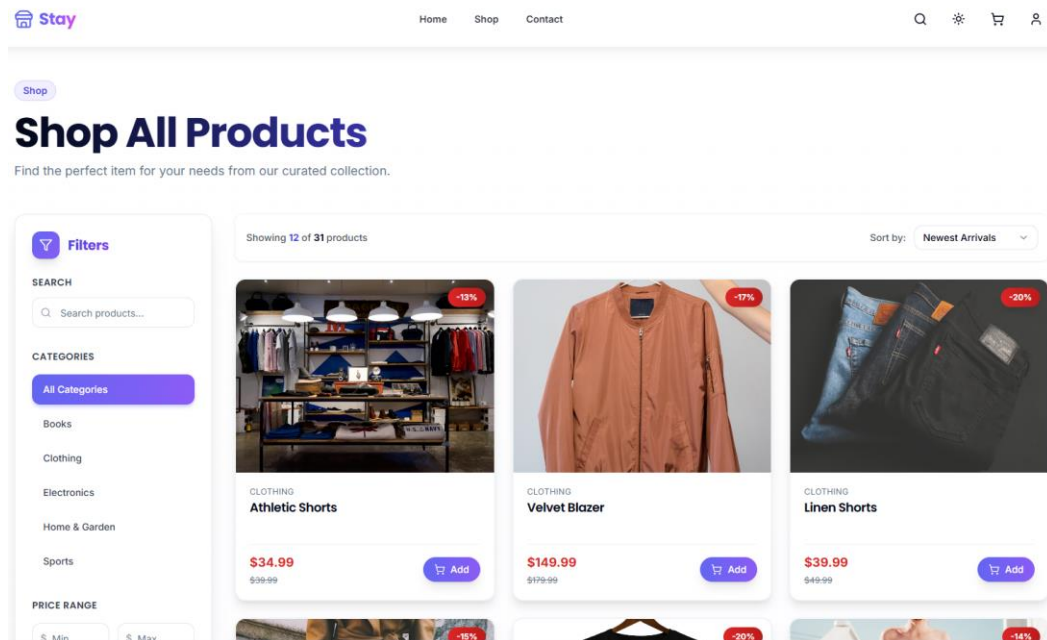


Figure 32: Product Detail Page

After a product is added to the cart, the cart icon in the header is updated with a numeric badge, indicating the current number of items in the shopping cart. This provides immediate feedback to the user.



Figure 33: Add to Cart Action

3. Shopping and Checkout

3.1 Shopping Cart

The Shopping Cart Page displays all products that the user has added to the cart, including product name, price, and selected quantity. Users can increase or decrease the quantity of each item or remove products from the cart. An Order Summary section shows the subtotal, shipping information, and total cost. From this page, users can choose to Proceed to Checkout or Continue Shopping.

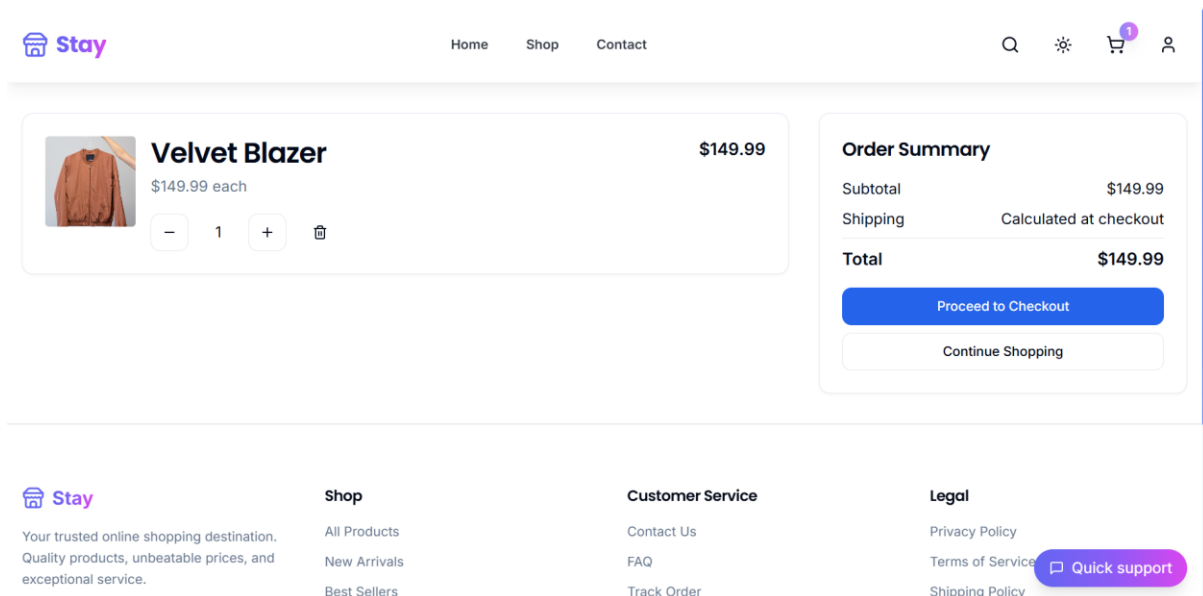


Figure 34: Shopping Cart Page

3.2. Checkout

After adding products to the shopping cart, the user proceeds to the Checkout Page to complete the order. First, the user enters the required shipping address information, including full name, phone number, and delivery address.

Next, the user may enter a coupon code (if available) and select a payment method, such as Cash on Delivery (COD), bank transfer, or e-wallet options. The Order Summary section is updated to reflect the selected items, subtotal, shipping fee, and total amount.

Checkout

Shipping Address

NGUYỄN THÁI

0774676233

NGUYỄN XÌ

Hồ Chí Minh

A

Á

A

Coupon Code

Enter coupon code

Apply

Payment Method

☐ **Cash on Delivery (COD)**
Pay when you receive

☒ **Bank Transfer**
Transfer to our bank account

☐ **MoMo Wallet**
Pay with MoMo e-wallet

☐ **ZaloPay**
Pay with ZaloPay e-wallet

Order Notes

Order Summary

Velvet Blazer x 1

\$149.99

Subtotal

\$149.99

Shipping

\$0.00

Total

\$149.99

Place Order

Figure 35: Checkout Page

When the user clicks Place Order, the system simulates the order transaction and automatically marks it as successful. This approach is used to demonstrate the complete checkout workflow in the e-commerce system without integrating a real payment gateway. After the order is placed, the order data is saved in the system, and the checkout process is completed.

Bank Name

Vietcombank

Account Number

1234567890

Account Name

E-COMMERCE COMPANY LIMITED

Branch

Hanoi Branch

SWIFT Code

BFTVNVXX

Transfer Amount

\$149.99

Important:

Please include your order number (43) in the transfer note for faster processing and verification.

Transfer Information

Your Account Name

John Doe

Your Account Number

9876543210

Your Bank Name

Techcombank

Transfer Amount

149.99

Required amount:

\$149.99

Transfer Note

Payment for order 43

Include order number for faster processing

Confirm Bank Transfer

Cancel

Payment Instructions

1. Transfer the exact amount \$149.99 to the bank account information shown above

2. Include your order number (43) in the transfer note/message field

3. Fill in all the required transfer information in the form on the right

4. Click "Confirm Bank Transfer" button to submit your payment information

5. Your order will be processed once the bank transfer is verified by our team

Processing Time:

Bank transfers are usually processed within 1-2 business days. You will receive an email confirmation once your payment is verified and your order status is updated.

Example Transfer Note:

"Payment for order 43" or "Order #43"

Figure 36: Bank Transfer Payment Page

After entering the required transfer information, the user clicks Confirm Bank Transfer to submit the payment details. The system simulates the bank transfer verification and automatically marks the transaction as successful. Once confirmed, the order status is updated, and the payment process is completed successfully.

Payment Successful!

Your payment has been processed successfully. Your order is being prepared for shipment.

Order ID: 43

View Order

Order History

Figure 37:Payment Successful Page

3.3 Order History

After completing the checkout process, users can navigate to the Order History page to view a list of their previous orders. Each order entry displays the order ID, order date, number of items, total amount, and payment status. This page allows users to track their purchases and review order information after successful payment.

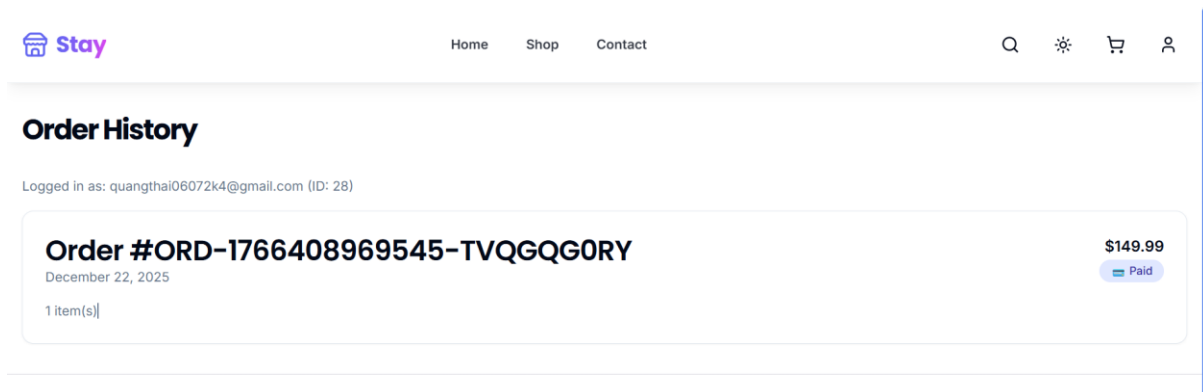


Figure 38: Order History Page

When users select an order from the Order History page, the system navigates to the Order Detail Page. This page displays detailed information about the selected order, including order items, quantity, price, and order summary. Users can view the shipping address, order status, payment status, and payment method. In addition, a support chat section is provided to allow users to contact staff regarding the selected order.

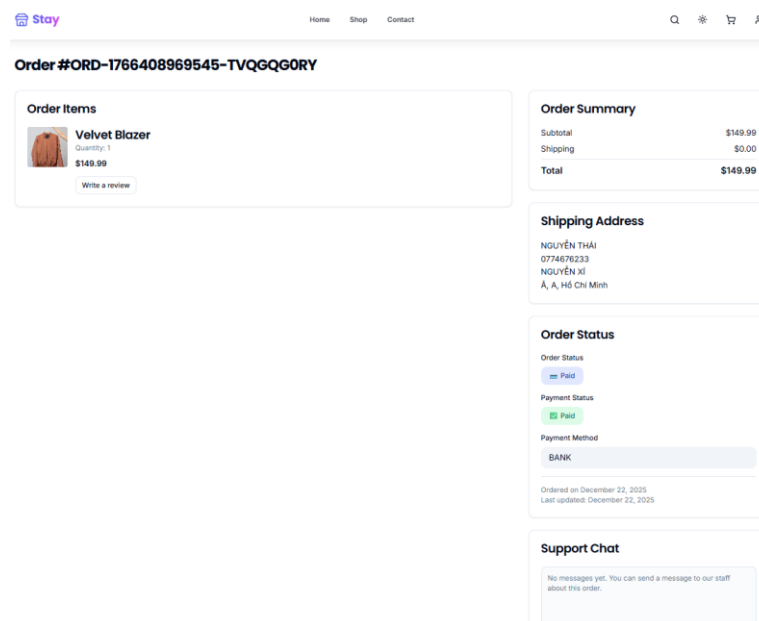


Figure 39: Order Detail Page

4. Order & System Management

4.1 User Account Management

From the user icon in the header, users can open the account menu to access key account-related features, including My Account, Orders, and Logout. This menu provides quick and convenient navigation for managing user information and viewing order history.

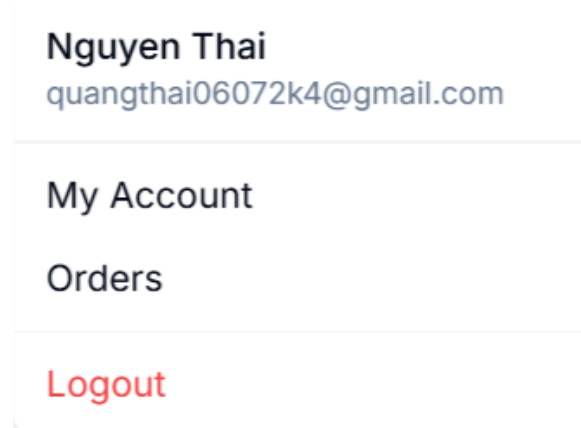


Figure 40: User Account Menu

After selecting My Account from the account menu, the system navigates to the My Account page. This page allows users to view and update their personal profile information, such as name and phone number, and optionally change their password. Users can save changes by clicking Update Profile.

My Account

A screenshot of the 'My Account' page. It features a section titled 'Profile Information' with four input fields: 'Name' (containing 'Nguyen Thai'), 'Email' (containing 'quangthai06072k4@gmail.com'), 'Phone' (containing '0774676233'), and 'New Password (optional)' (which is empty). A blue 'Update Profile' button is located at the bottom of the form.

Figure 41: My Account Page

When users select Orders from the account menu, the system navigates to the Order History page. This page displays a list of all previous orders, allowing users to review order details, track order status, and access individual order information.

4.2 Admin / Staff Management

When an administrator logs into the system, the account menu displays additional options, including access to the Admin Panel. This menu allows authorized users to switch between user functionalities and administrative management features.

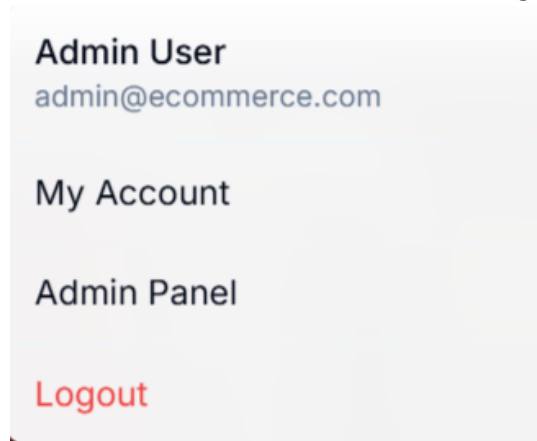


Figure 42: Admin Account Menu

The Admin Dashboard provides an overview of store activity and system statistics. It displays key metrics such as total orders, total revenue, total users, and total products, helping administrators monitor overall system performance.

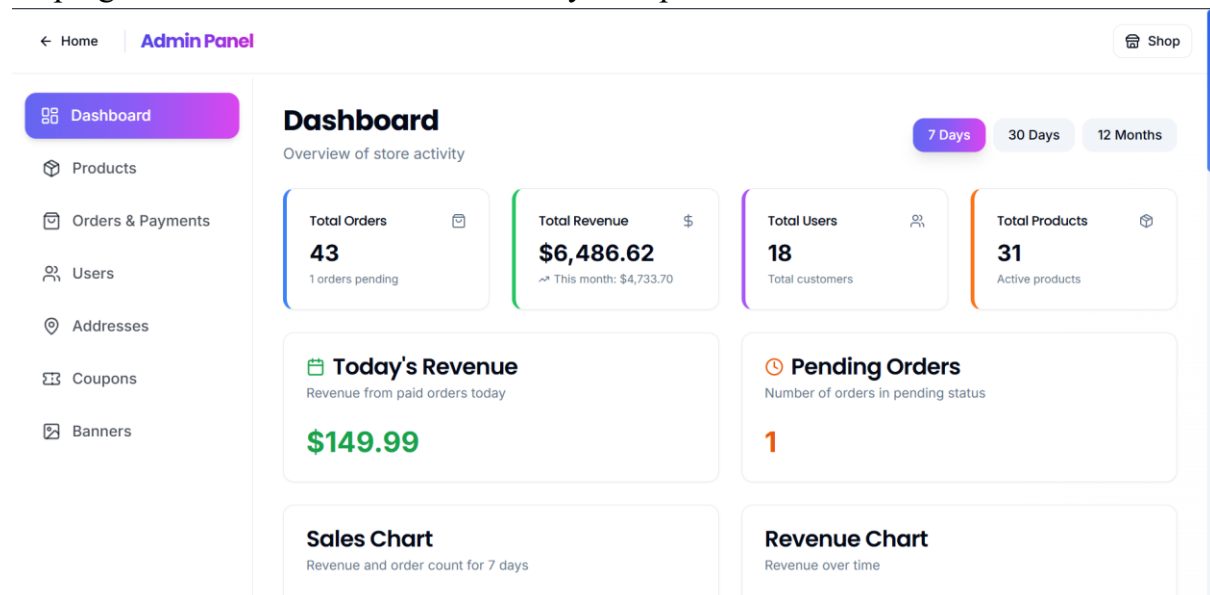


Figure 43: Admin Dashboard

From the admin panel, administrators can manage core system resources, including products, orders and payments, users, addresses, coupons, and banners. This centralized interface supports efficient store management and operational control.

The system implements role-based access control to distinguish between admin and staff users. Only users whose roles are assigned by an administrator can access management features through the Admin Panel or Staff Panel.

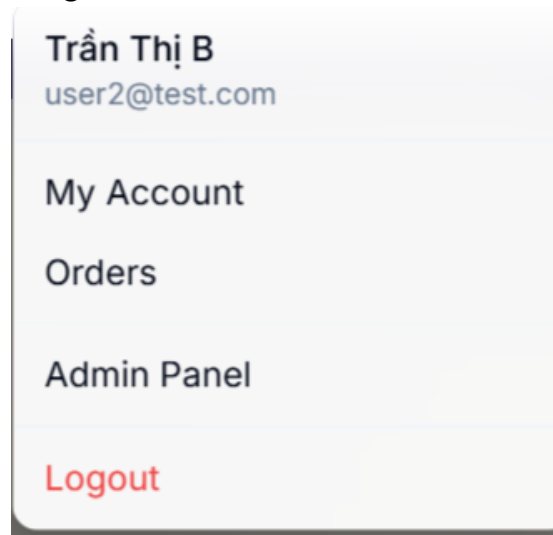


Figure 44: Staff Account Menu (Role-Based Access)

Staff users are granted access to a dedicated Staff Panel designed for daily operational tasks. This panel allows staff to monitor order statuses, manage orders and payments, view shipping addresses, update banners, and respond to customer inquiries via the support chat, without access to system-level configuration.

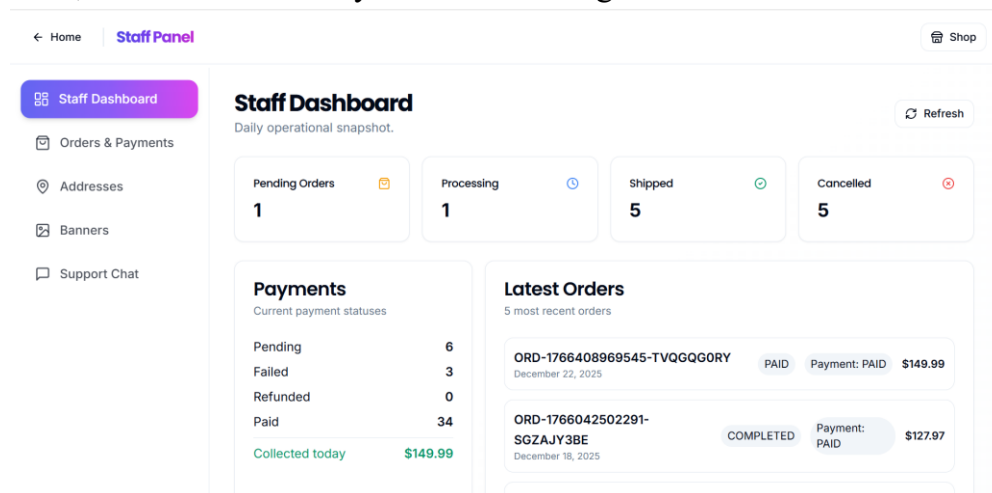


Figure 45: Staff Panel

This separation of responsibilities ensures secure system operation while supporting efficient store management.

IV. Discussion

This project successfully demonstrates the design and implementation of a full-stack e-commerce web application with a complete end-to-end workflow. The system

covers essential user functionalities, including authentication, product browsing, shopping cart management, checkout, payment simulation, and order tracking.

From a user perspective, the application provides a clear and intuitive purchasing flow, allowing users to browse products, place orders, and manage their accounts efficiently. The order history and order detail features enable users to track purchases and review order information after checkout, which is a core requirement for modern e-commerce platforms.

In addition to user-facing features, the system implements role-based access control to separate responsibilities between regular users, staff, and administrators. Staff members are provided with a dedicated panel for handling daily operations such as order processing and customer support, while administrators have access to higher-level management features. This separation improves system security and reflects real-world e-commerce practices.

The backend architecture follows a RESTful API design, with endpoints documented using Swagger. This approach improves maintainability, scalability, and ease of integration between the frontend and backend. Authentication and authorization mechanisms ensure that protected resources are accessed only by authorized users.

However, the system still has some limitations. Payment processing is currently simulated and does not integrate real payment gateways. Additionally, advanced features such as real-time notifications, automated shipment tracking, and advanced analytics are not fully implemented.

Overall, the project achieves its primary objectives and provides a solid foundation for future development. With further enhancements, the system can be extended into a production-ready e-commerce platform.

V. Conclusion

In this project, we designed and developed a full-stack e-commerce web application that demonstrates a complete purchasing workflow, from user authentication and product browsing to checkout, payment processing, and order management. The system successfully integrates frontend and backend components through a RESTful API architecture, ensuring clear separation of concerns and maintainability.

The application supports essential e-commerce functionalities for users, including shopping cart management, order history, and account management.

Additionally, role-based access control was implemented to distinguish between regular users, staff, and administrators, enabling secure system operation and efficient management of store activities.

Although payment processing is currently simulated and some advanced features are not fully implemented, the system fulfills its primary objectives and reflects real-world e-commerce design practices. Overall, this project provides a solid foundation for further enhancements and can be extended into a production-ready application with additional development

VI. References

- [1] <https://swagger.io/specification/>
- [2] <https://nodejs.org/en/docs>
- [3] <https://react.dev>
- [4] <https://expressjs.com>

