
Multi-user (MU)

one shared space, no tenant concept




access differs only by user role (RBAC)

Instances: 1
Tenant boundary: none; roles only
Configuration: partly: same functions for all

Multi-instance (MI)

one dedicated stack per customer

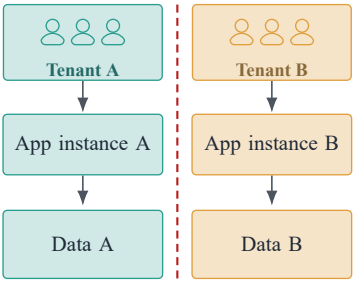


the boundary exists because the stacks are separate
N tenants mean N instances to deploy and upgrade

Instances: N (one per tenant)
Tenant boundary: structural: separate instances
Configuration: possible, per instance

Multi-tenant (MT)

one shared stack, tenants separated inside

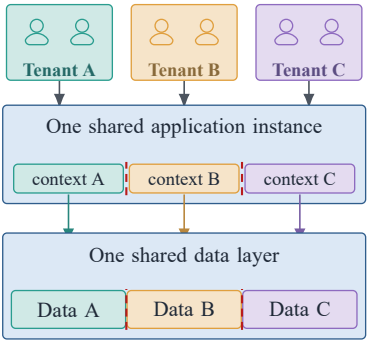

the boundary is enforced inside the shared instance

Instances: 1 (shared)
Tenant boundary: enforced by software and policy
Configuration: full, at runtime, per tenant

Legend: blue = shared by several tenants; coloured = dedicated to one tenant; red dashed = tenant boundary. Shared resources and runtime configurability follow Kabbedijk (2014), Table 2.5.