

CDM · Conceptual Data Model

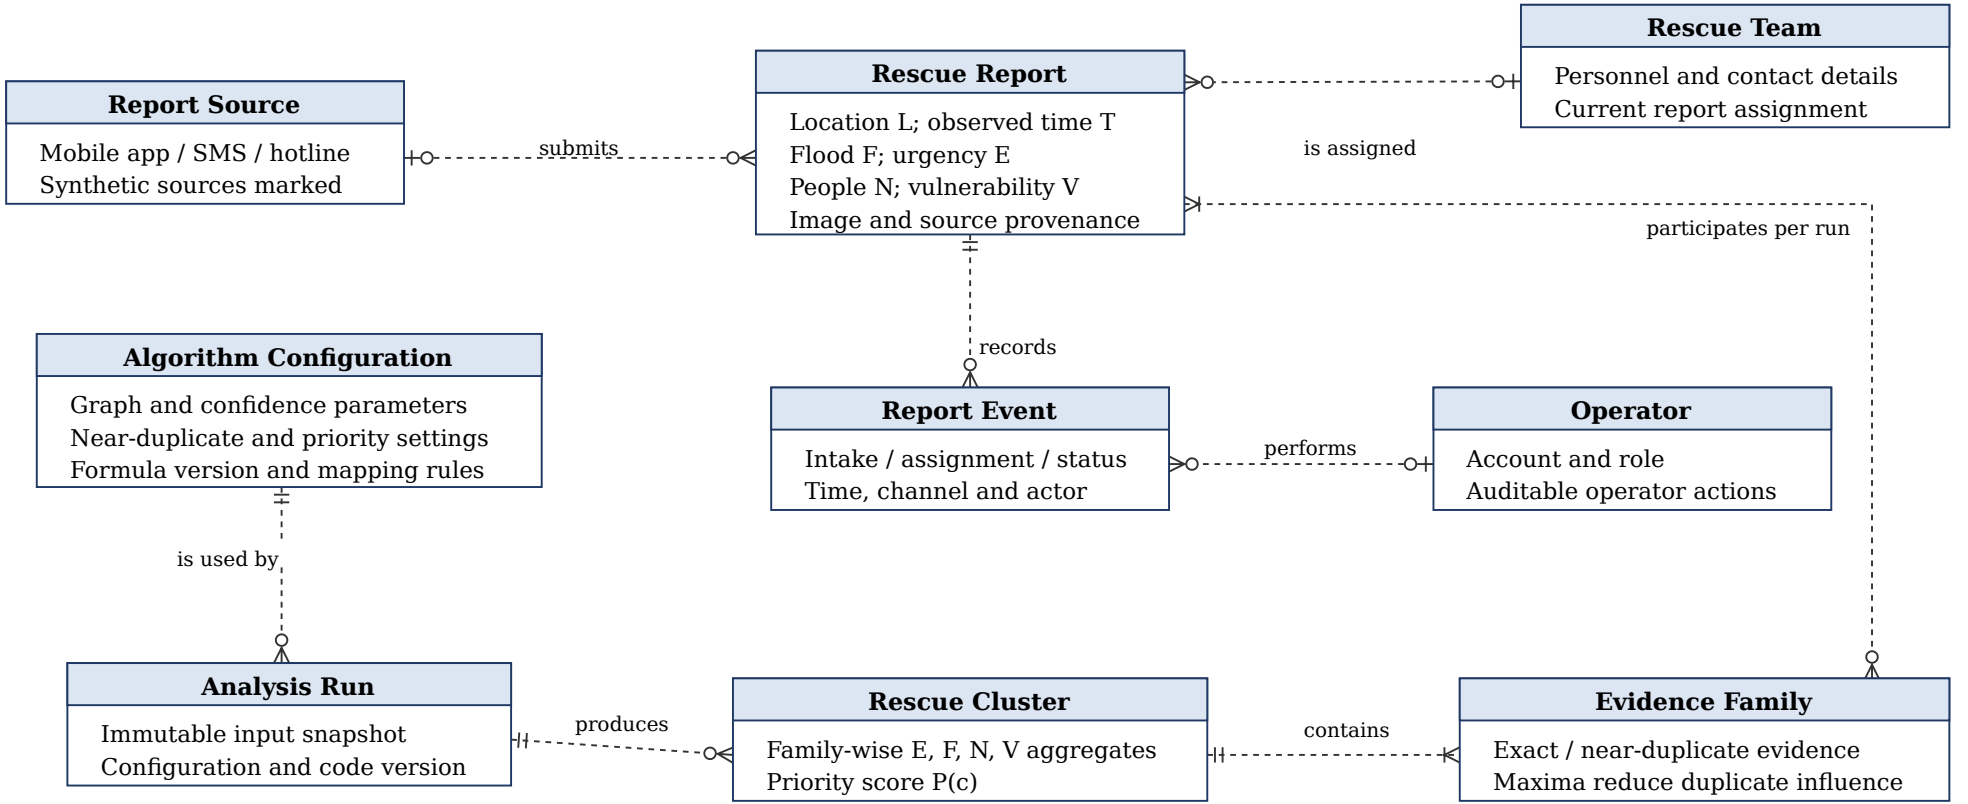


Q and P(c) are derived values. Each evidence family belongs to one cluster within one analysis run.

LDM · Logical Data Model

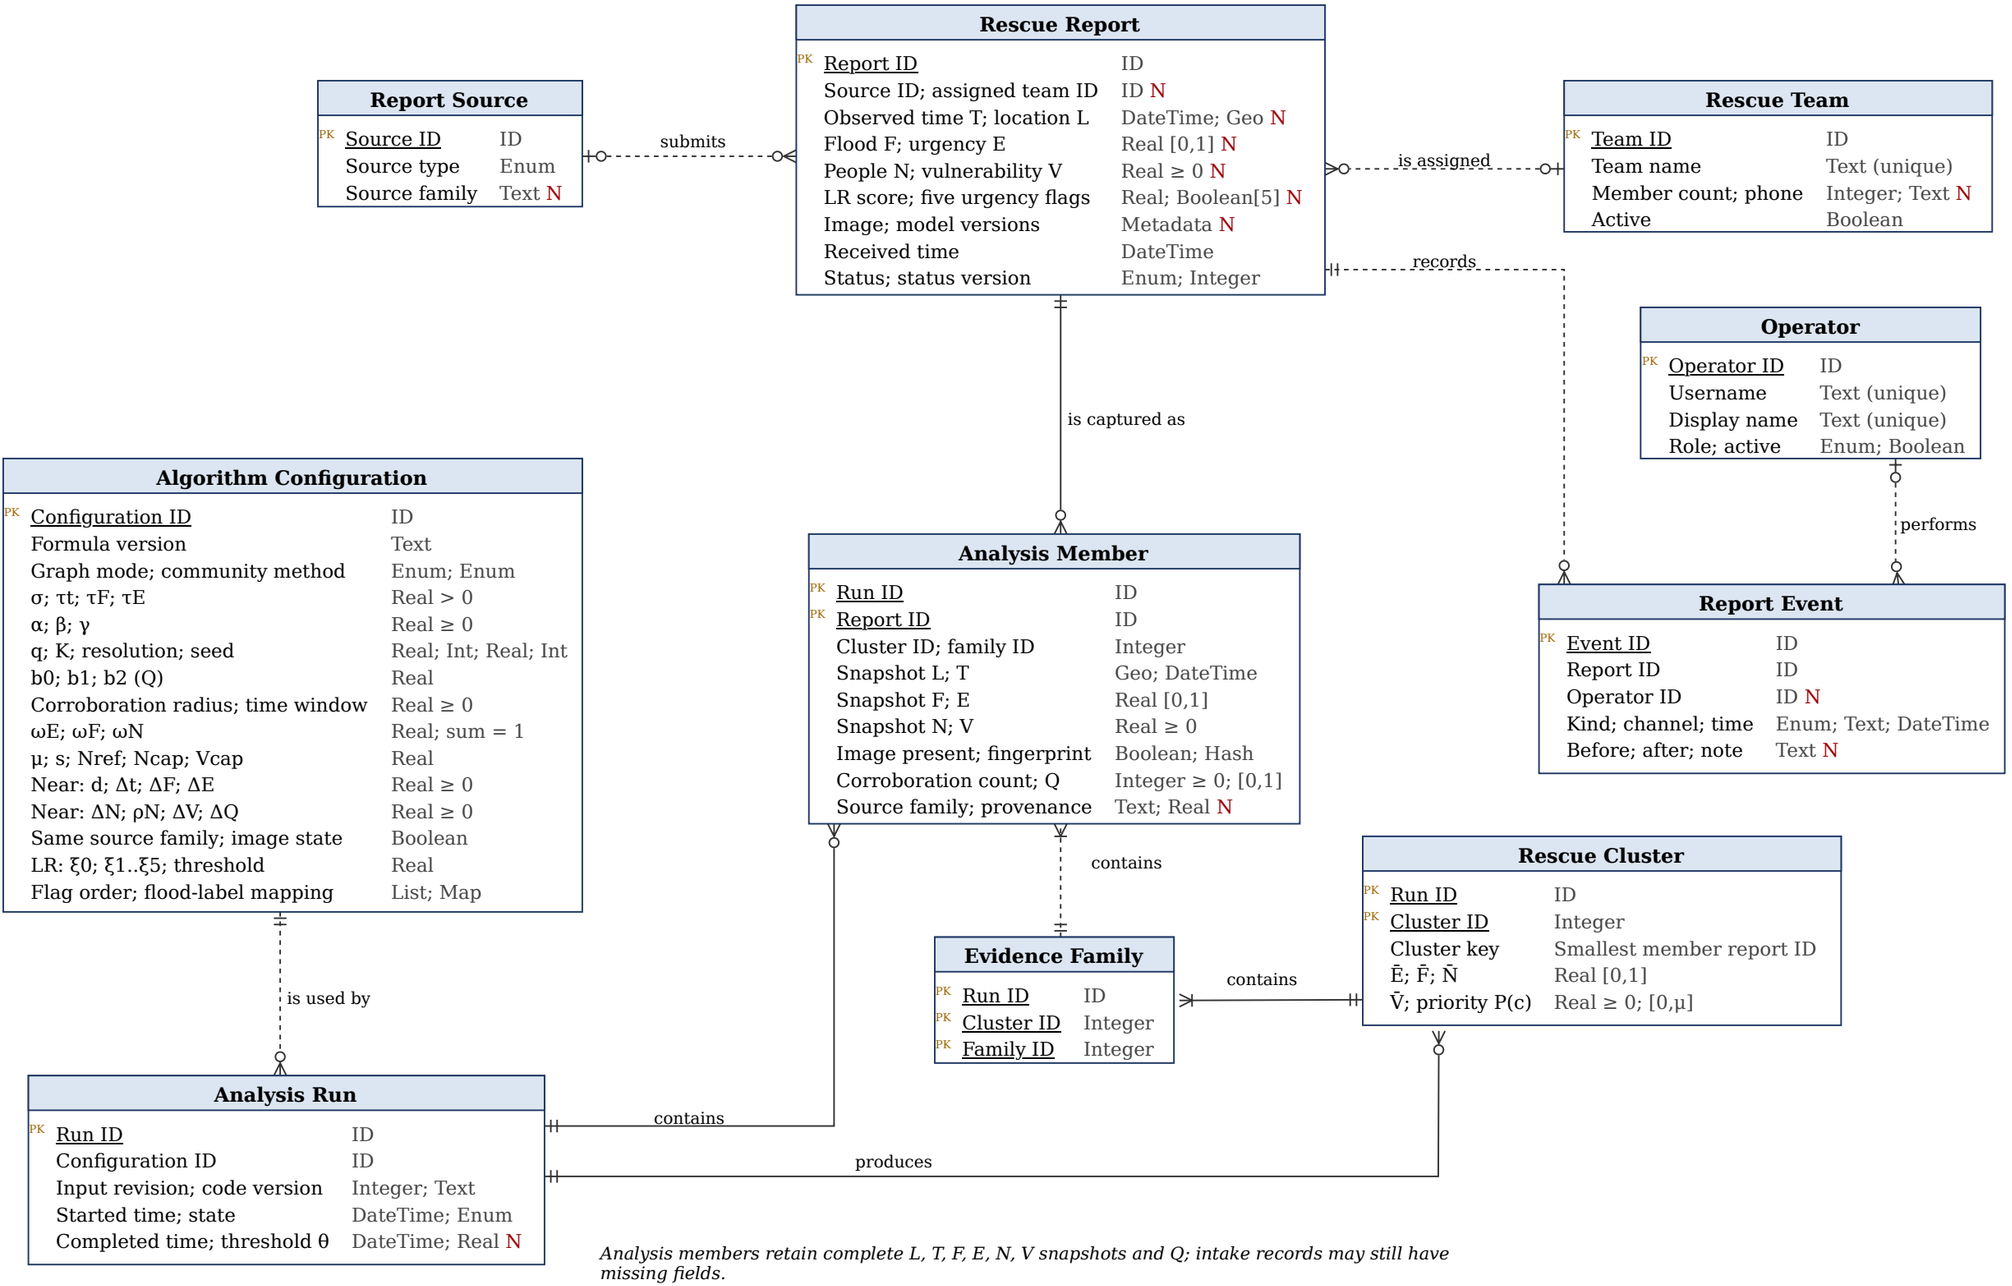

Analysis members retain complete L, T, F, E, N, V snapshots and Q; intake records may still have missing fields.

PDM · Proposed SQLite Schema — All Columns

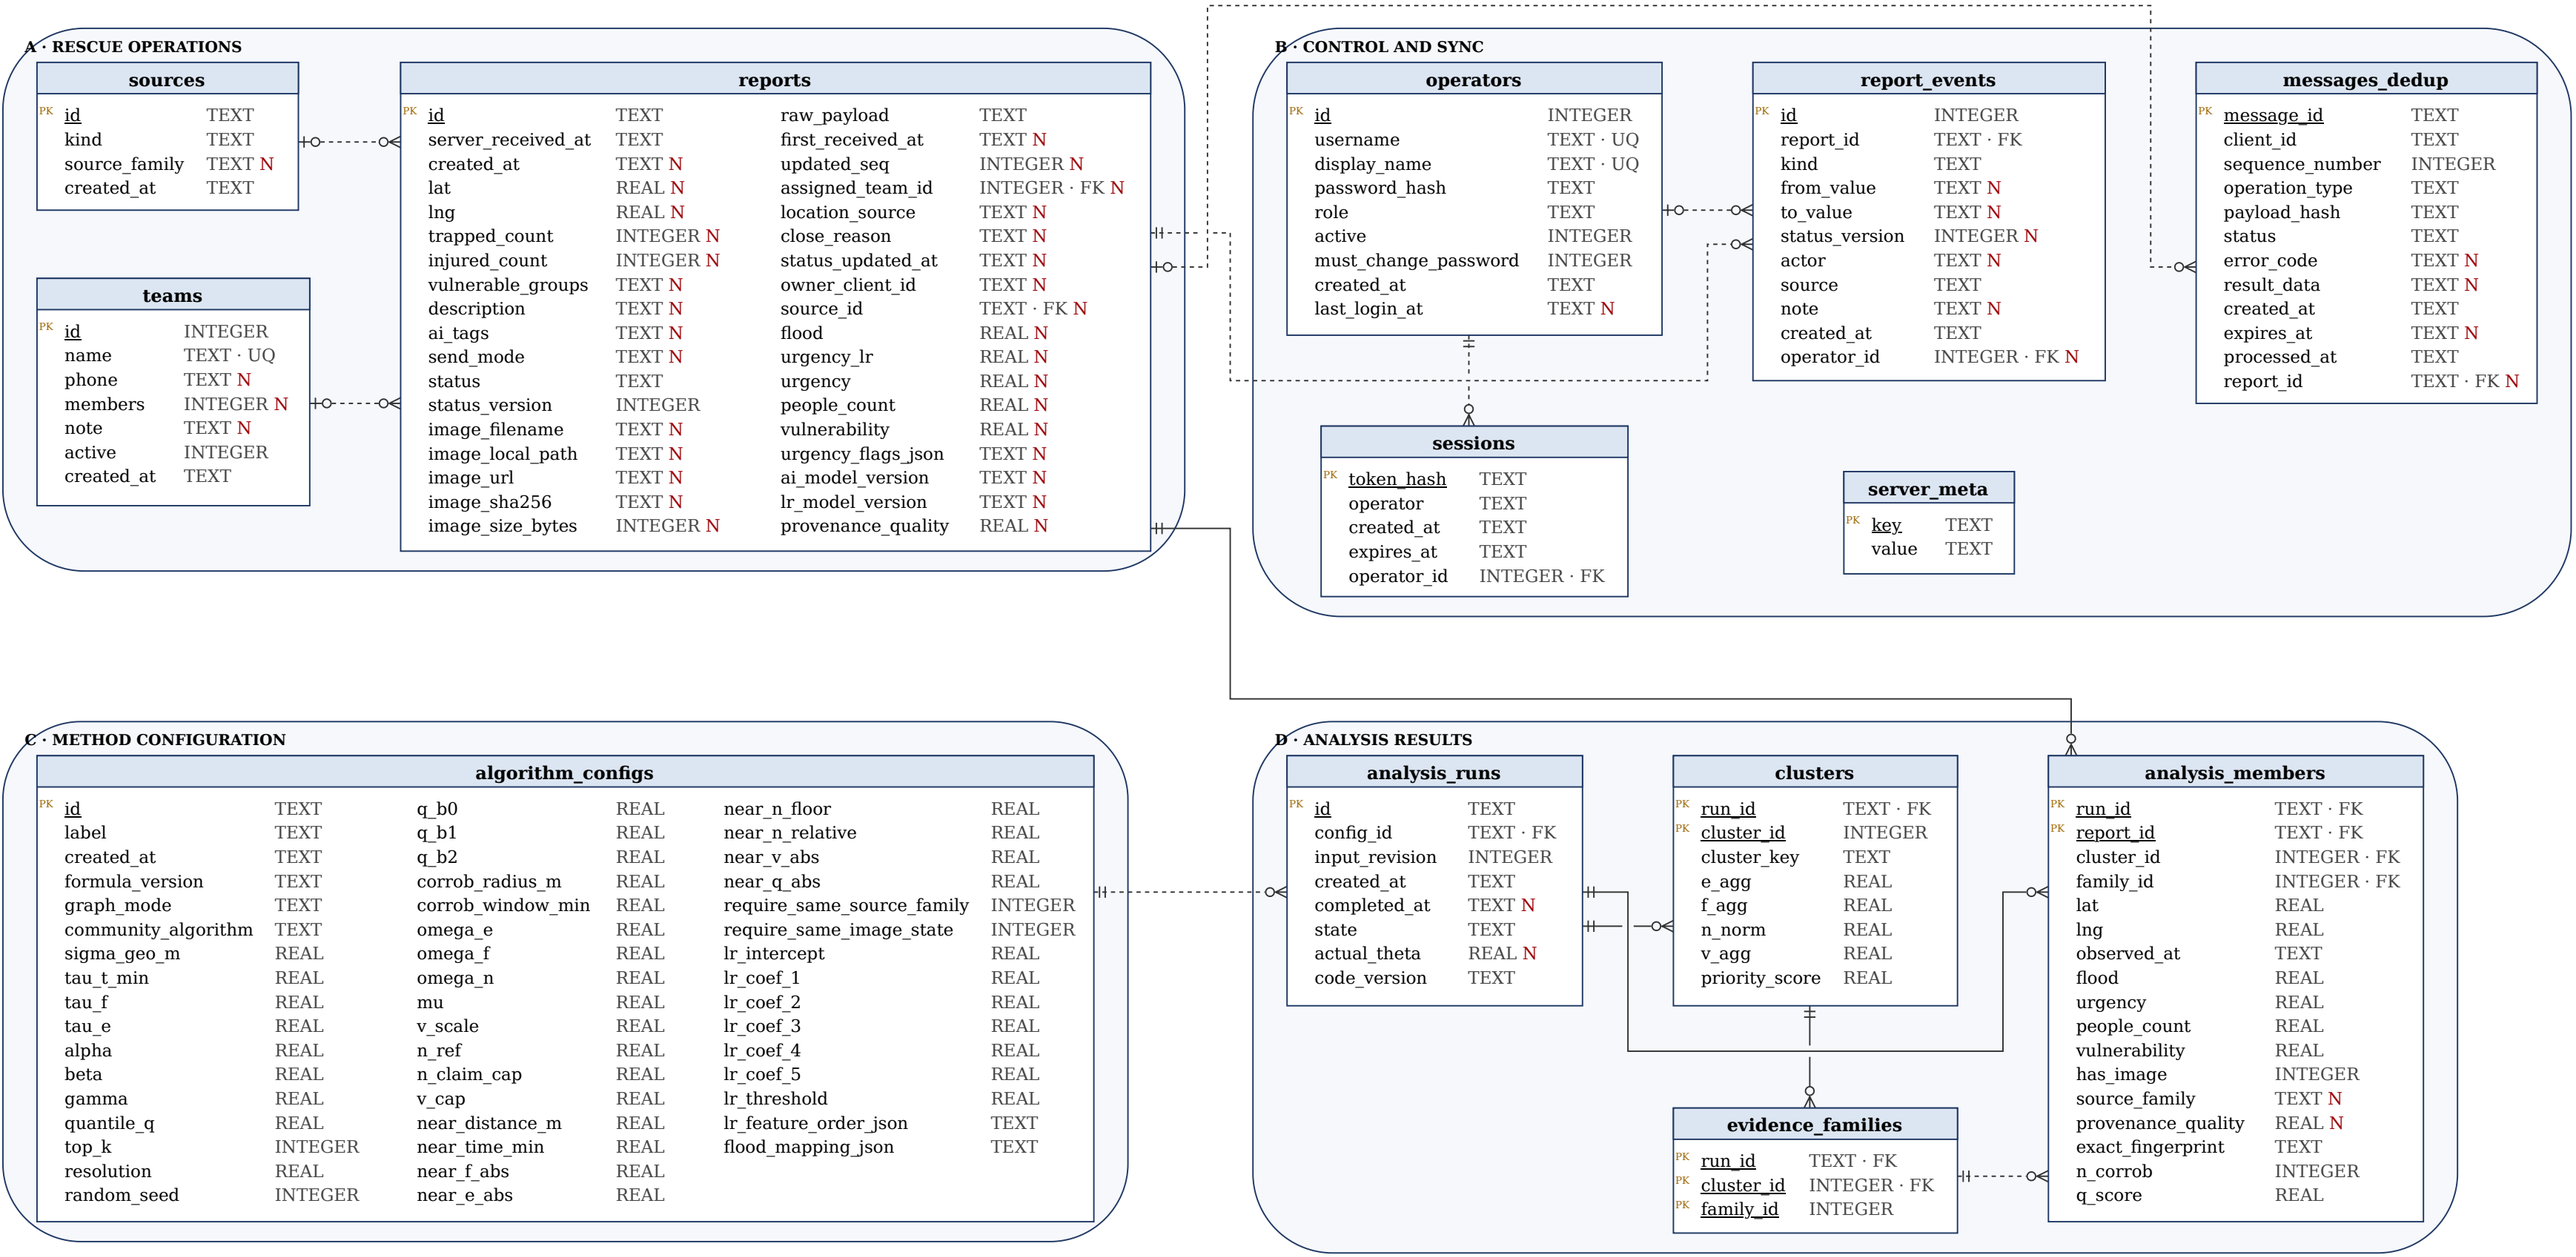

Proposed 13-table schema: retains columns of seven existing tables and adds six tables. Not implemented in the backend.