

PERFIN Overall Use Case Diagram

Each actor appears once. The twelve observable goals are grouped by domain; detailed behavior is specified with flow tables in Chapter 3.

Color Legend

User actor and interaction

Deterministic-core use case

Use case assisted by an external AI service

Use case involving state or a background worker


Notation Legend

Actor-to-use-case association

Orthogonal association using one corridor per actor

Dashed actor: service outside the system boundary

How to read: each actor appears once. Its associations use a dedicated vertical corridor and branch horizontally to the related use cases, which avoids crossing connectors.

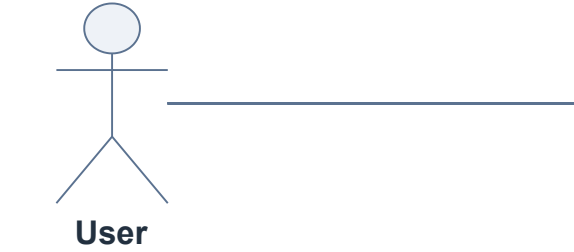

FR identifiers are preserved for traceability to Chapter 3. Parser, validation, TTL and transaction steps are intentionally documented in sequence diagrams and flow tables instead of as use cases.

