
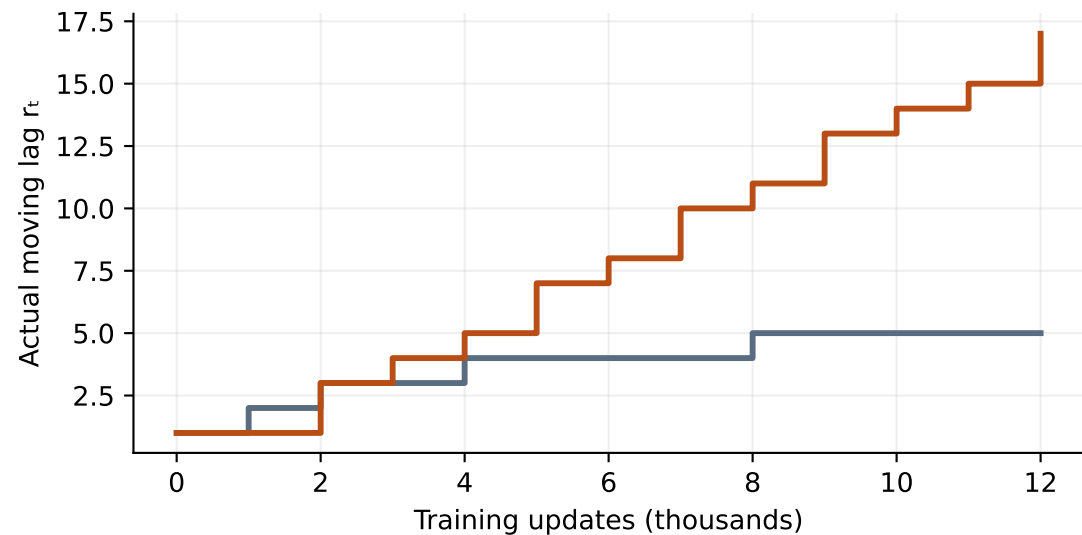
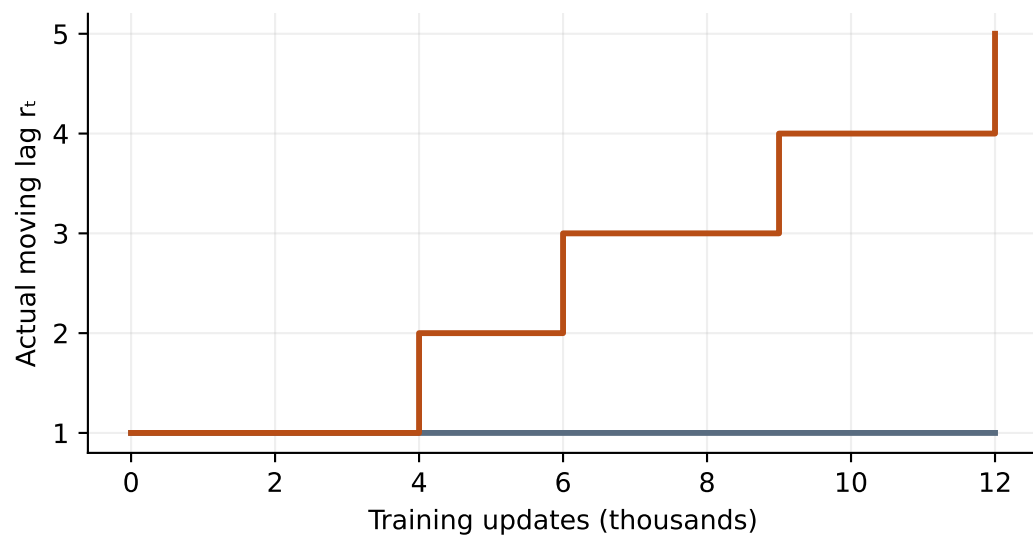
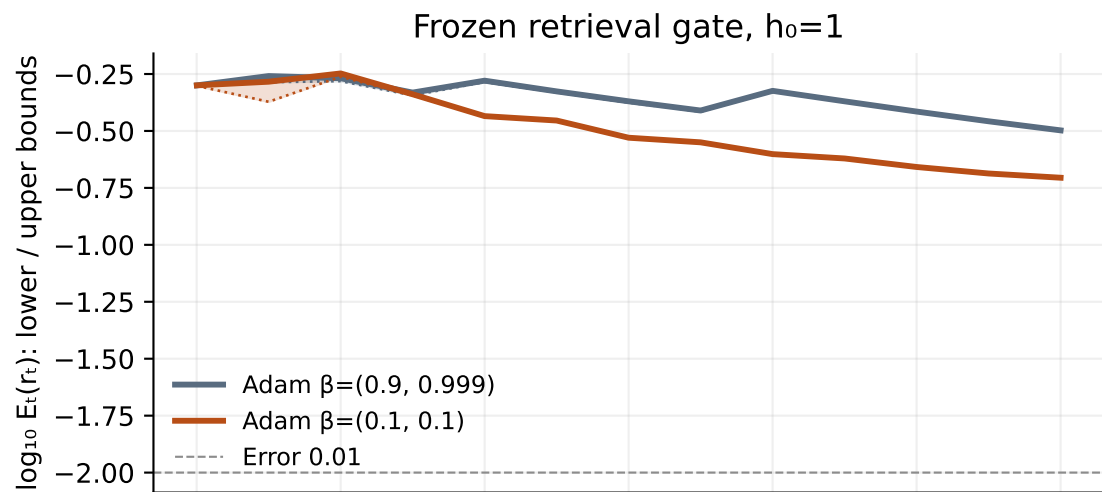


Adam at growing lags: finite pilot sensitivity to moment settings

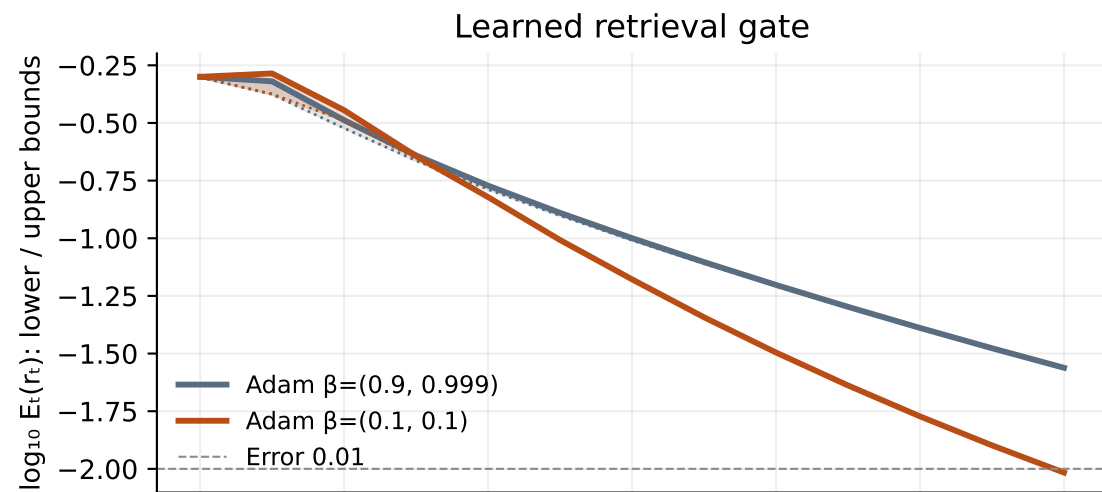

$N=8$, $d=2,048$, $R=2$, seed 0. Moving lag uses $\theta=0.75$; solid = upper bound, dotted = lower.
Matched Gaussian initialization; changing moments affects both acquisition and continuation. These are CPU pilots, not A100 runs.