


//preprocess directive for debugging

```
#include <iostream>
using namespace std;


#define DEBUG
using namespace std;
int main() {
    int x = 10;
    #ifdef DEBUG
        cout << "Debugging is enabled. Value of x: "
            << x << endl;
    #endif
}
```



```
Debugging is enabled. Value of x: 10
```

//Vector example

```
#include <iostream>
#include <vector>
using namespace std;
int main() {
    vector<int> numbers = {1, 2, 3, 4, 5};
    numbers.push_back(6);
    for (int num : numbers) {
        cout << num << " ";
    }
    return 0;
}
```

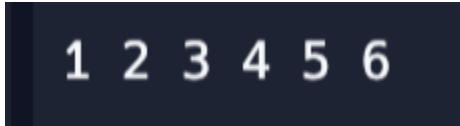

```
1 2 3 4 5 6
```

it feels weird that there's only two examples but the other ones don't have outputs and I typed them out. I hope this is acceptable.