

# Assignment 4: The Relational Algebra

Hien Tu - tun1

November 3, 2021

## The requested queries

1.  $\sigma_{\text{startdate} < \text{enddate}}(\text{event})$
2.  $\pi_{\text{U.uid}, \text{E.eid}}(\rho_{\text{U}}(\text{user}) \bowtie_{\text{U.postcode} = \text{E.postcode}} \rho_{\text{E}}(\text{event}))$
3.  $X := \rho_{\text{E}}(\text{event}) \bowtie_{\text{E.eid} = \text{EnoRv.eid}} \rho_{\text{EnoRv}}(\pi_{\text{eid}}(\text{event}) \setminus \pi_{\text{event}}(\text{review}))$   
 $\pi_{\text{E.eid}, \text{E.title}, \text{E.description}, \text{E.startdate}, \text{E.enddate}, \text{E.organizer}, \text{E.postcode}}(X)$

4. Select events with at least 3 keywords:  
 $X := \rho_{K_1}(\text{keyword}) \times \rho_{K_2}(\text{keyword}) \times \rho_{K_3}(\text{keyword})$   
 $Y := \sigma_{K_1.\text{word} \neq K_2.\text{word} \wedge K_1.\text{word} \neq K_3.\text{word} \wedge K_2.\text{word} \neq K_3.\text{word}}(X)$   
 $Z := \sigma_{K_1.\text{event} = K_2.\text{event} \wedge K_1.\text{event} = K_3.\text{event}}(Y)$

Select events with at least 2 keywords:

$$\begin{aligned} A &:= \rho_{K_4}(\text{keyword}) \times \rho_{K_5}(\text{keyword}) \\ B &:= \sigma_{K_4.\text{word} \neq K_5.\text{word}}(A) \\ C &:= \sigma_{K_4.\text{event} = K_5.\text{event}}(B) \end{aligned}$$

Select events with exactly 3 keywords:

$$\pi_{K_4.\text{event}}(C) \setminus \pi_{K_1.\text{event}}(Z)$$

5. (a)  $X := \rho_{R_1}(\text{review}) \times \rho_{R_2}(\text{review})$

Keep reviews from  $R_1$  that are not from latest date:

$$Y := \sigma_{R_1.\text{reviewdate} < R_2.\text{reviewdate} \wedge R_1.\text{user} = R_2.\text{user}}(X)$$

Select user id and event id for which the user wrote a review most recently:

$$Z := \pi_{\text{user}, \text{event}}(\text{review}) \setminus \pi_{R_1.\text{user}, R_1.\text{event}}(Y)$$

$$(b) \quad A := \rho_{R_1}(\text{review}) \times \rho_{R_2}(\text{review}) \times \rho_{E_1}(\text{event}) \times \rho_{E_2}(\text{event})$$

$$B := \sigma_{R_1.\text{user} = R_2.\text{user} \wedge R_1.\text{event} = E_1.\text{eid} \wedge R_2.\text{event} = E_2.\text{eid}}(A)$$

Select reviews whose  $E_1.\text{enddate}$  are not from the latest:

$$C := \sigma_{E_1.\text{enddate} < E_2.\text{enddate}}(B)$$


Select user id and event id of the most-recent event (according to enddate) for which the user wrote a review:

$$D := \pi_{R_1.\text{user}, E_1.\text{eid}}(B \setminus C)$$


$$(c) \quad \pi_{LR.\text{user}, LR.\text{lreview}, LE.\text{levent}}(\rho_{LR}(\text{user}, \text{lreview})(Z) \bowtie_{LR.\text{user} = LE.\text{user}} \rho_{LE}(\text{user}, \text{levent})(D))$$

### Efficiency of queries

7.

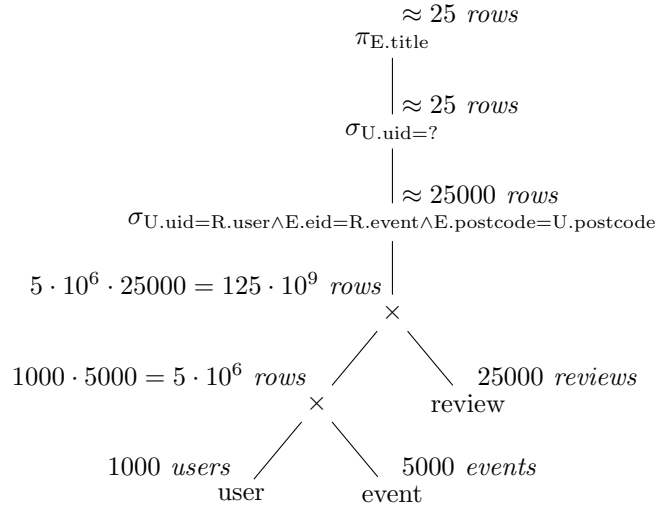

8.

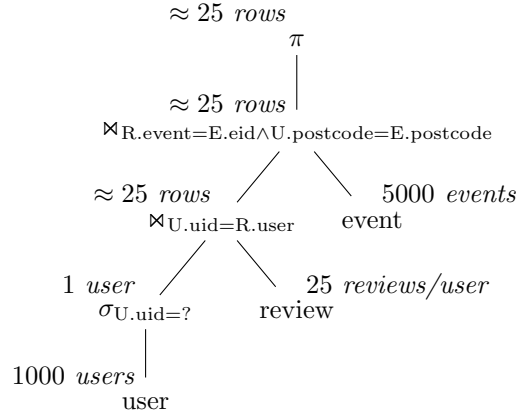

From the query execution plan in question 7, we can see that the result of the cross product of the 3 tables, *user*, *review* and *event* would have  $125 \cdot 10^9$  rows, which is enormous. We can reduce this significantly by first selecting the row from the table *user* where the *uid* is equal to the required user id (in this case, denoted as ?). This will result in only 1 rows since each *uid* is unique. After that, we will join the result with the *review*. Although the table *review* has 25000 rows, each user only has 25 reviews and since we have selected only 1 user, the result of this join would have approximately 25 rows. Then, we join this result with the table *event*. Again, although the table *event* has 5000 rows, since the previous result only has approximately 25 rows, there are only approximately 25 different event id. Thus, the result of this join only contains approximately 25 rows. Projecting just takes the specified column so the result of the whole query execution plan would have approximately 25 rows. This execution plan is good since the returned table in each intermediate step is significantly small.

9. The answer for question 9 is given in the answer for question 8.

10. **SELECT DISTINCT E.title**  
**FROM** user U, event E, review R  
**WHERE** U.uid = ? **AND**  
R.user = U.uid **AND**  
R.event = E.eid **AND**  
U.postcode = E.postcode;

11. The given SQL query can be simplified to

**SELECT DISTINCT K.word**  
**FROM** user U, review Rv, keyword K, event E, region  
Rg  
**WHERE** U.uid = ?<sub>1</sub> **AND**

```
Rv.user = U.uid AND  
Rv.event = K.eid AND  
E.postcode = Rg.postcode AND  
Rg.name = ?2 AND  
K.event = E.eid;
```