


# Static Configurations Entrypoints



træfik


# Static Config – Docker Provider

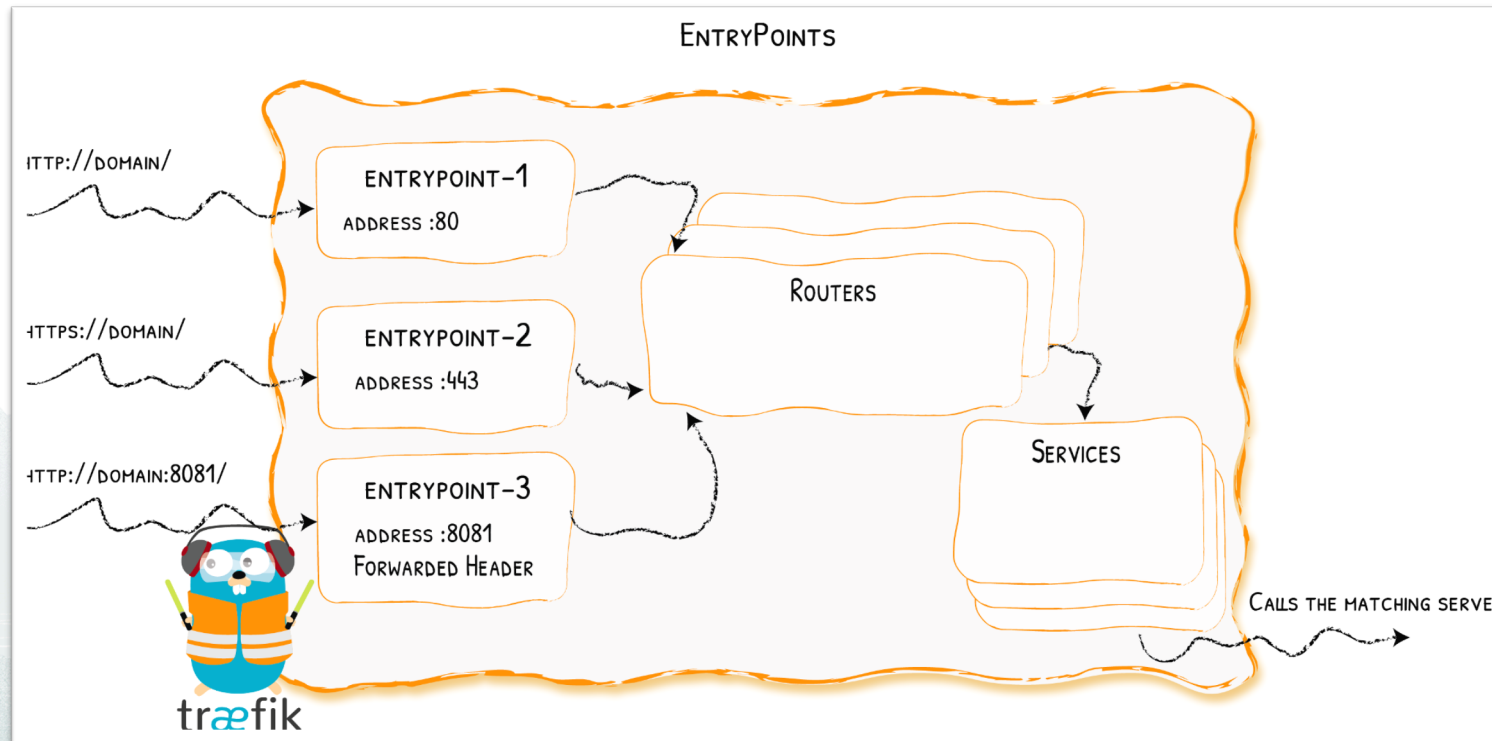



# Static Config – Entrypoint Configurations

- Can be defined using TOML, YAML, or CLI
- Define which ports to listen for incoming connections/packets
- Redirect connections from HTTP to HTTPS
- Forward Header configuration
- Override default TLS with user-defined TLS

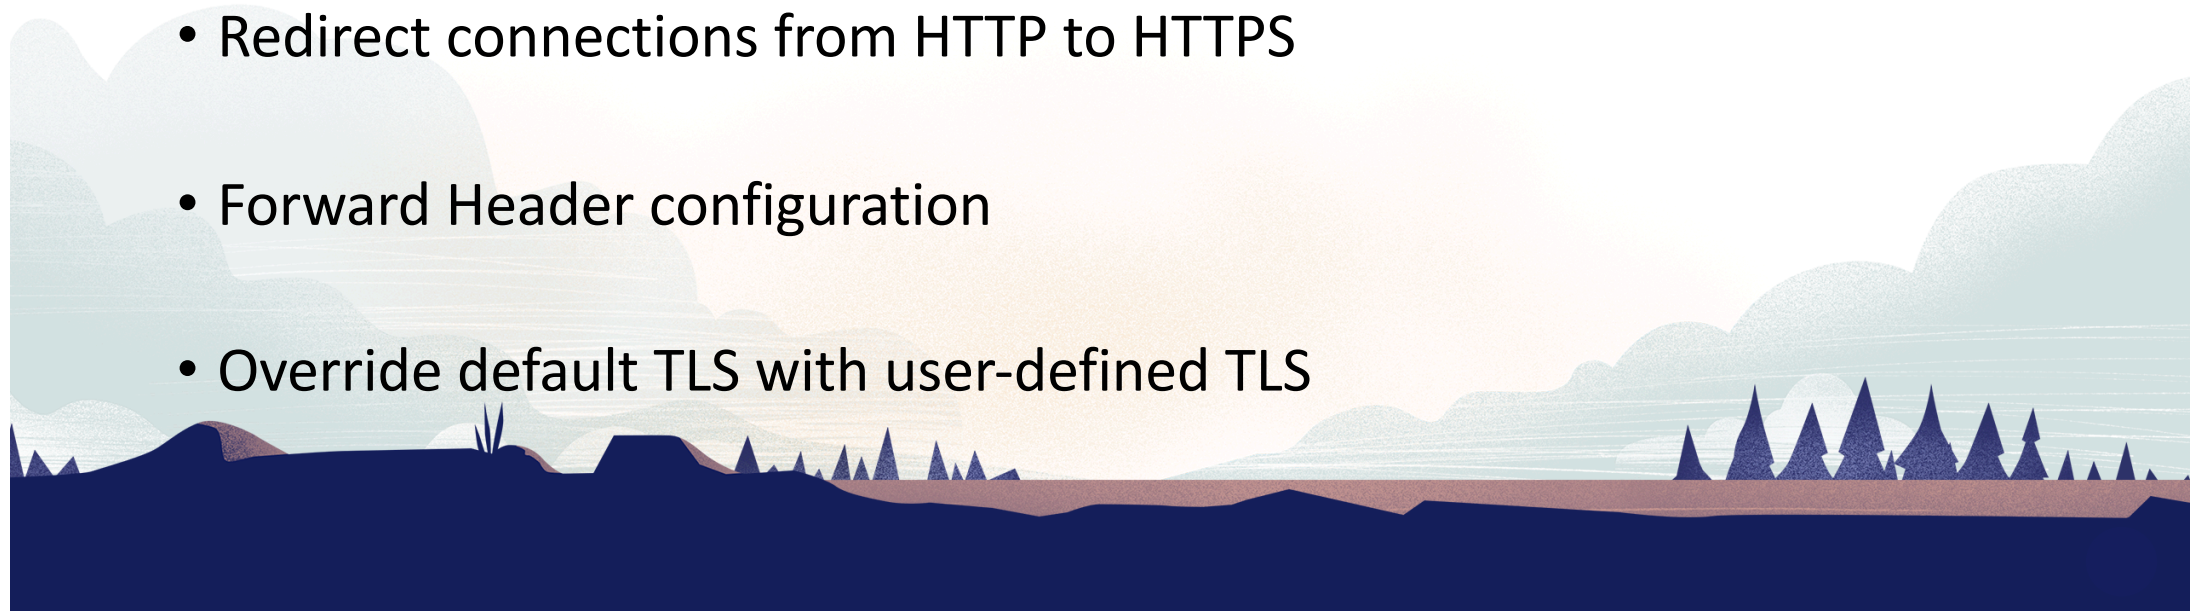





# Static Config – Entrypoint YAML



```
#####  
# Entrypoint  
#####  
entryPoints:  
  web:  
    address: ":80"  
  websecure:  
    address: ":443"
```



# Static Config – Entrypoint Redirects

```
#####  
# Entrypoint  
#####  
  
entryPoints:  
  web:  
    address: ":80"  
    http:  
      redirections:  
        entryPoint:  
          to: websecure  
          scheme: https  
  
  websecure:  
    address: ":443"
```



# Static Config – Entrypoint YAML

→] Entrypoints

TRAEFIK

**:8080**

WEB

**:80**

WEBSECURE

**:443**

# Static Config – Entrypoint YAML

