

BasicAuth Middleware




træfik



BasicAuth Middleware

Restricts access to the service using basic user/password

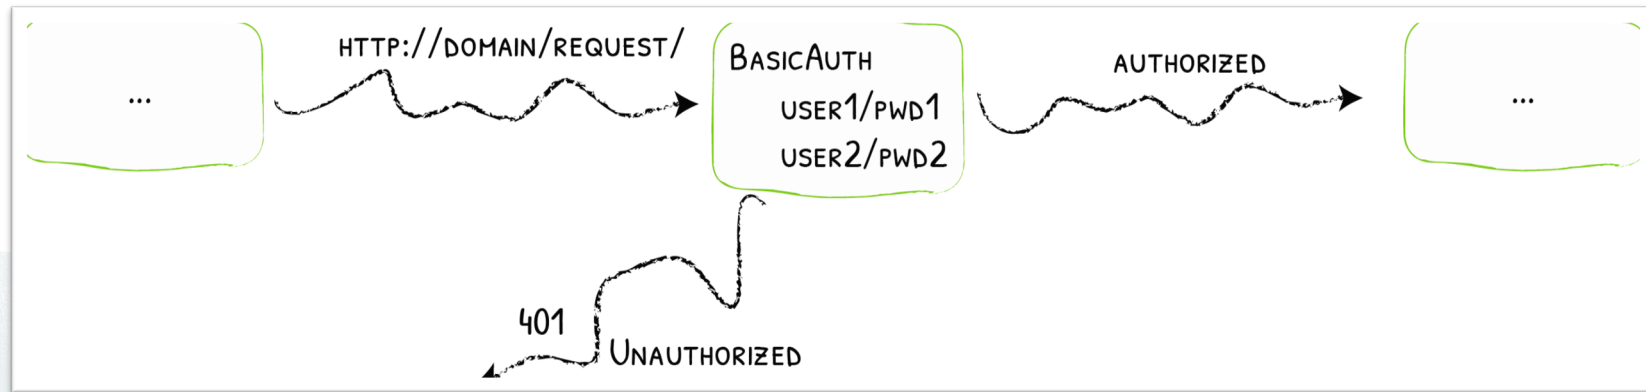



BasicAuth Configuration

```
● ● ●

# Declaring the user list
#
# Note: when used in docker-compose.yml all dollar signs in the hash need to be doubled for escaping.
# To create user:password pair, it's possible to use this command:
# echo $(htpasswd -nb user password) | sed -e s/\\$/\\$\\$/g
#
# Also note that dollar signs should NOT be doubled when they not evaluated (e.g. Ansible
docker_container module).
labels:
  - "traefik.http.middlewares.test-
auth.basicauth.users=traefik:$$apr1$$zPbdVg8$$LcHeyCZElH.JfxkxxlMPI.,user2:$$apr1$$XDrP1Fb1$$SZqSEjvNYW
44vgJgI3iEP0"

## user1: traefik password: training
## user2: user2 password: test123
```