

[Explore](#)[Ask the community](#) +[Community](#) / [Products](#) / [Bitbucket](#) / [Questions](#) / **What is reverse hunk, stage hunk in Source tree?**

# What is reverse hunk, stage hunk in Source tree?

**Jyoti Srivastava**

Aug 18, 2015



Whenever we commit something and track it into log history, we find two options; Reverse hunk and Stage Hunk at right corner in the section which shows changes made at the code by us, of the source tree. I want to know what actions will be performed by these two (Reverse hunk and Stage Hunk ) options?

[Answer](#)[Watch](#)[Like](#)[6 people](#) like this**1 answer** ✓ **1 accepted****10 votes****Answer accepted****Rahul Danwade**

Aug 18, 2015

Hi @Jyoti Srivastava

Hunk is related to diff in git.

## Reverse Hunk:

Some gui has revert changes option but that applies to the whole file.

There is an option to revert a line or hunk rather than the whole file.

You can Reverse file changes made to a file in a commit, undoing them in your working copy. This is more selective than resetting the entire file back to a previous point.

## Stage Hunk:

Hunk means a piece of change in the Git world. Stage hunk means it is being added to the staging area.

refer below link for more details

<https://answers.atlassian.com/questions/149780>

### Suggest an answer

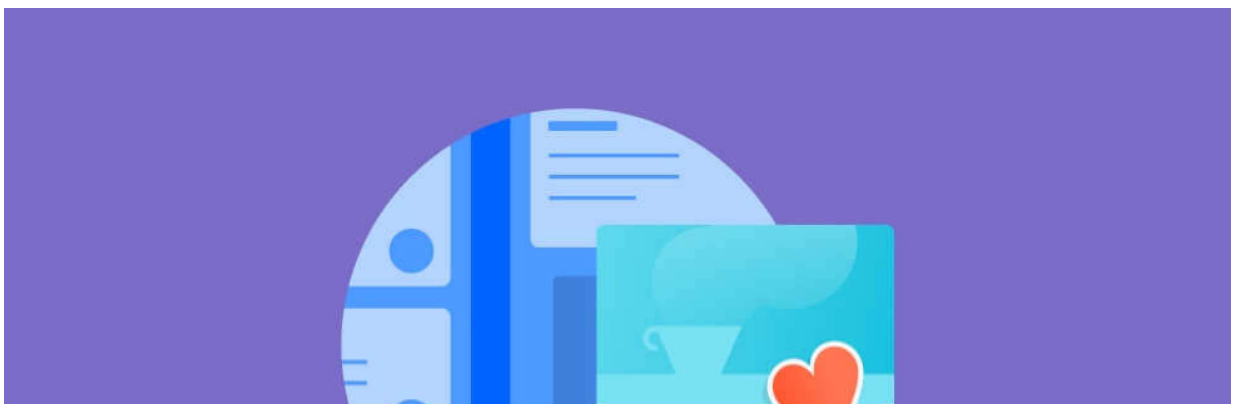
**Sourcetree**

bitbucket-cloud cloud



Add tag

### Related content

[SourceTree stage hunk committing all changes in a ...](#)[Is Stage/Discard hunk feature removed in source tr...](#)[Stage hunks](#)[Cannot stage truncated hunk](#)[Hunk generate garbled characters](#)



## 6 awesome ways to apply Trello, Jira and Confluence to your next project

Andy Makar, Atlassian Community Leader, has six tips to share that will improve your planning process, team collaboration, and personal productivity.

[Read more](#) ➤

### COMMUNITY SHOWCASE



Jesse Gibbs

Published in **Bitbucket Pipelines**

## Building a Bitbucket Pipe as a casual coder

```
...ipe.sh : #!/bin/bash source "${dirname "$0"}/common.sh" enable_debug extra_args="" if [[ "${DEBUG}" == "true" ]]; then extra_args="--verbose" fi # mandatory variables R...
```

3,045 views 1 20

[Read article](#)

## Community Events

Connect with like-minded Atlassian users at free events near you!

[Find events near me](#)



[FAQ](#)

[Community guidelines](#)

[Privacy policy](#)

[Terms of use](#)

© 2019 Atlassian