

# how can i edit req.headers['user-agent'] ....i am using postman to test my api..where is want hit my api with modified req.headers['user-agent'] #3827

[New issue](#)**Closed**

ishwarchandratiwari opened this issue on Nov 18, 2017 · 9 comments



ishwarchandratiw... commented on Nov 18, 2017

how can i edit req.headers['user-agent']  
....i am using postman to test my api..where is want hit my api with modified req.headers['user-agent']



2



1



1



1



1

Assignees



prashantagarwal

Labels

support

Projects

None yet

Milestone

No milestone

7 participants



ishwarchandratiw... commented on Nov 18, 2017

Author

how can i edit req.headers['user-agent']  
....i am using postman to test my api..where is want hit my api with modified req.headers['user-agent']



1



1



1



prashantagarwal commented on Nov 20, 2017

@ishwardeveloper You can set User-Agent Header in Postman app.



1



prashantagarwal added the **support** label on Nov 20, 2017



 ishwarechandratiw... commented on Nov 21, 2017

Author

...



a85 commented on Dec 14, 2017

Contributor

Read the docs



3



63



 a85 closed this on Dec 14, 2017



rm-fixeads commented on Mar 16, 2018

@ishwardeveloper

Key		Value
<input checked="" type="checkbox"/>	User-Agent	YOUR USER AGENT
<input checked="" type="checkbox"/>	Content-Type	application/json



32

thanx



caseyprovost commented on Apr 18

I am seeing that Postman appears to now override this value. I have `User-Agent` set, but all my requests are coming through as:


```
Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko)
Chrome/73.0.3683.103 Safari/537.36
```



numaanashraf commented on Apr 18

Member

@caseyprovost Looks like you might be using Postman for Chrome. User-Agent overrides are supported in Postman's Desktop apps (<https://www.getpostman.com/downloads/>)

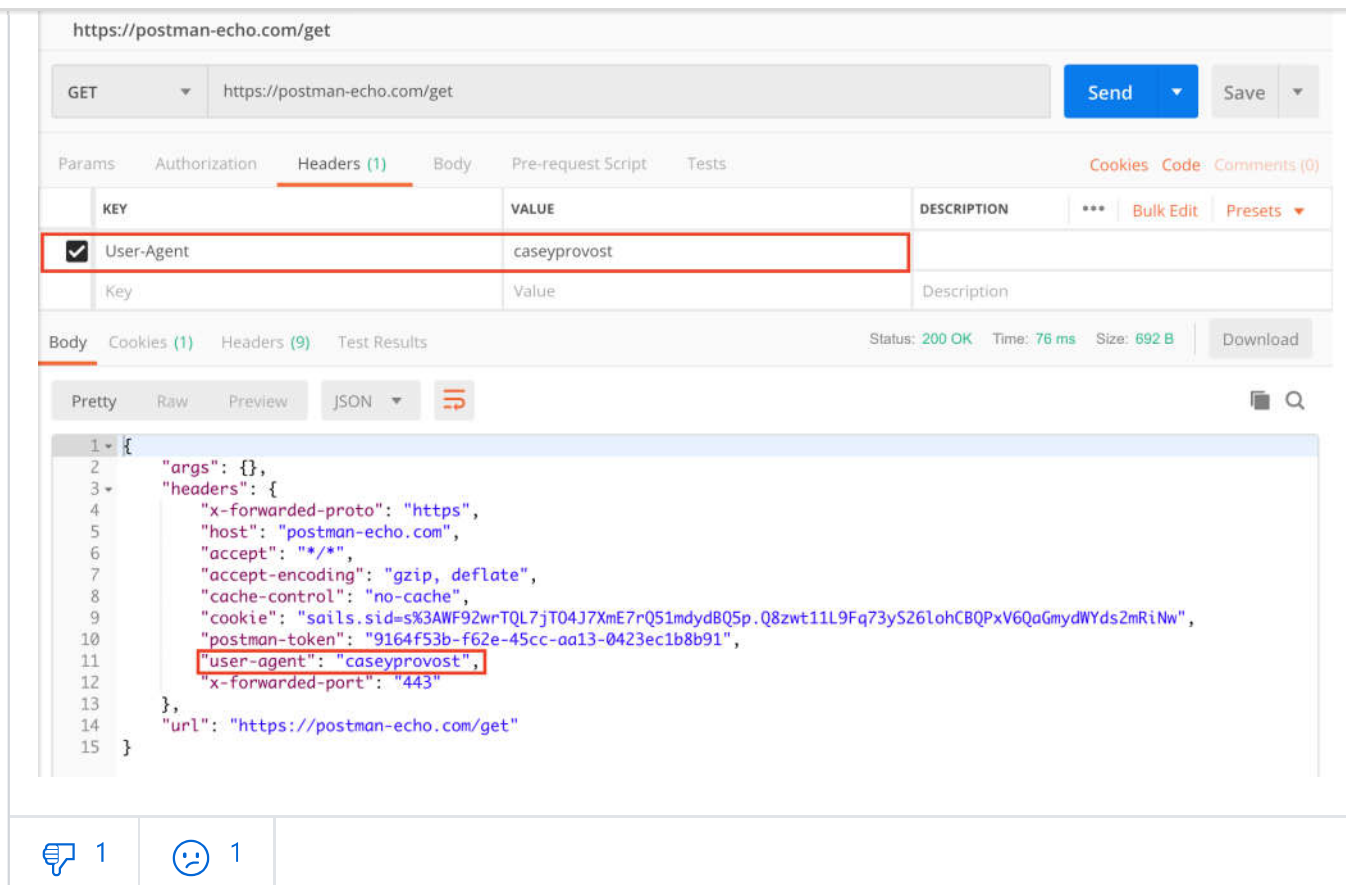

The screenshot shows the Postman interface for a GET request to `https://postman-echo.com/get`. The 'Headers' tab is selected, showing a table with one header: 'User-Agent' with the value 'caseyprovost'. Below the table, the 'Body' tab is selected, showing a JSON response. The JSON response includes a 'user-agent' field with the value 'caseyprovost', which is highlighted with a red box. The status bar at the bottom indicates 'Status: 200 OK', 'Time: 76 ms', and 'Size: 692 B'.

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> User-Agent	caseyprovost	

```
{
  "args": {},
  "headers": {
    "x-forwarded-proto": "https",
    "host": "postman-echo.com",
    "accept": "*/*",
    "accept-encoding": "gzip, deflate",
    "cache-control": "no-cache",
    "cookie": "sails.sid=s%3AWF92wrTQL7jT04J7XmE7rQ51mdydBQ5p.Q8zwt11L9Fq73yS26lohCBQPxV6QaGmydWYds2mRiNw",
    "postman-token": "9164f53b-f62e-45cc-aa13-0423ec1b8b91",
    "user-agent": "caseyprovost",
    "x-forwarded-port": "443"
  },
  "url": "https://postman-echo.com/get"
}
```



1



1



ThanhNg commented 6 days ago

@ishwardeveloper You can set User-Agent Header in Postman app.

Stupid and lazy answer!



1