# Session 9

Work with JSON Data

Col Marie Col.


# **Objectives**

- Identify data types supported by JSON
- Explain how to represent complex data with JSON
- Explain how to execute serialization and deserialization of JSON with JavaScript
- Describe tools and editors that can be used to work with JSON
- Describe the syntax and schema of a JSON document



# JSON Data Types 1-4

The two primary data types supported by JSON are primitive and structure.

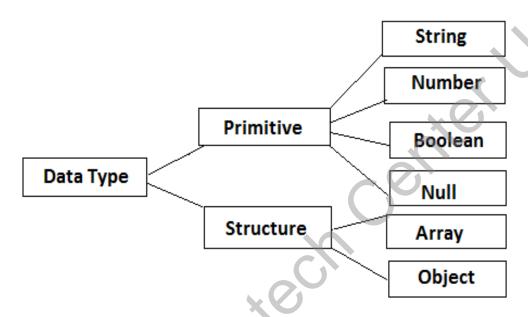

In JSON, the type of a variable is recognized automatically during the parsing phase.



### JSON Data Types 1-4

### Number

- It is a floating-point format (double precision).
- Does not accept Octal, hexadecimal, NaN, and Infinity values.
- The types allowed are integer, fraction, and exponent.
- Syntax {"string": number\_value, .....}

# **String**

- A series of zero or other Unicode characters within double quotes and backslash escapes.
- Delimited with double-quotation marks.
- A character denotes a single character string.
- Syntax {"string":"string value",
  .....}



# JSON Data Types 2-4

### Boolean

- Has only two values: true and false.
- Using quotes for Boolean values treats them as String values.
- Syntax {string: true/false, .....}

### Null

• Is an empty type.

# White Space

- A white space can appear between the characters in string values to make code more comprehensible.
- Syntax {string:" ",....}



# **JSON Data Types 3-4**

Arrays allow storing various values of the same type in one variable.

Syntax [value, .....]

The characteristics of an array in JSON are:

It is a sequential collection of values, not necessarily of the same type.

Indexing begins at 0 or 1.

It is enclosed in square brackets [.].

Each value is set apart by comma (,).



# **JSON Data Types 4-4**

An object is an independent data type, having its own attributes.

```
Syntax {string : value, .....}
```

The characteristics of an object in JSON are:

It is a non-sequential (having no order) set of key/value pairs.

It is enclosed in curly braces {.}.

Each key/value pairs are set apart by comma (,) and every key is proceeded by colon (:).

The keys are only strings, each differing from the other.

It is used when the key names are random strings.



### **JSON Value**

- In JSON, value can be of any primitive and structure data type.
- o A JSON value can be a number, string, Boolean such as true or false, null, object, or an array.
- The following Code Snippet shows some examples of JSON values:

```
var emp-no = 1234;
var name = "Sherill";
var experience = null;
```





# **Storing Different Values in Arrays**

JSON arrays can store elements of different types. Following is a sample code:

```
[ 456, "Dog", 123, "Frog", true ]
```

- Elements o and 2 in the array are of the type Number.
- Elements 1 and 3 are of String type.
- Element 4 is a Boolean type.

In JSON, arrays can also contain other arrays. This is called nesting of arrays.



# **Data Structures Supported by JSON**

In JSON, the built-in data structures can be used to develop other data structures.

The two data structures supported by JSON are:


# Collection of Name/Value Pairs

### **Ordered List of Values**

- Supported by different programming languages, in the form of objects.
- Includes arrays, lists, and vectors.



# Collections: Maps, Sets, and Lists

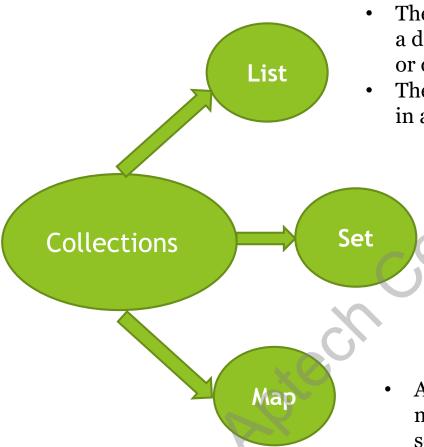

- The elements in a list follow a defined order and copies or duplicates are allowed.
- The elements are positioned in a specific location.
  - Collection without duplicate elements.
  - In JSON, it is not possible to avoid replicas, however, the parser removes the duplicates while serializing the data.
  - A type of data structure that mainly aids in quick searching of data.
  - Accepts data in the form of key and value pairs and each key is distinct.

### **JSON Schema**

 JSON schema specifies the rules that defines the structure of a JSON document.

 The two main aspects that define why a JSON schema language is required are:

To specify JSON data structures

Handy when the JSON-based Web services need to be made accessible to a large audience To validate JSON data structures

Handy when validating JSON documents from other applications

Helps to avoid parsing an invalid data structure in valid JSON documents



### Schema Overview

- Application/schema+json is the media type described by JSON schema and prescribes the design of JSON documents.
- It offers provision for defining the structure of the documents with respect to the permitted values, descriptions, and decoding connections to other resources.
- The JSON schema format is arranged in the following individual definitions:

# Core Schema Specification

• Explains a JSON structure and states valid elements in it.

# Hyper Schema Specification

 Explains the elements in a JSON structure that can be considered as hyperlinks.



### **JSON Comments**

- JSON does not have any provision for documentation or comments.
- However, comments are still supported by a few JSON parsers and must be provided within /\* ... \*/.

```
"id":2,
"title":"The fallen Hero", /* This books
is about Harvey Dent */
"noOfCopies":14,
"tags":[
"BatMan",
"Gowtam"
],
```



# Creating and Parsing JSON Messages with JavaScript

The JSON.stringify() method allows converting a JavaScript object into a JSON String.

The JSON.parse() method allows parsing a JSON object using JavaScript.

It converts a JSON String to an object in JavaScript.

Start by defining a string in JSON format, using the method for conversion, and then looping through the attributes for printing its values.



# JSON with Developer Tools on Browser

- There are many plugins or extensions that help in validating and formatting a JSON document or a JSON HTTP response.
- One such extension in Firefox is JSONView, which allows viewing a JSON document.
- With **JSONView** the JSON document is displayed in the browser.
- o **JSONView** displays the raw text even though the JSON document has errors.
- o Chrome also offers **JSONView** for validating a JSON document.
- For modifying the JSON values during runtime, it is recommended converting the JSON document to a JavaScript object before using the built-in browser developer tools.



### **Online Tools and Editors**


- JSONLint is an open source project that helps in validating JSON data.
- O Using JSONLint or any other online tool is easy, as it only requires copying the JSON data to its online editor.
- o In case of an error, the output similar to the following is displayed:

- Output shows the line number and the type of error that occurred.
- If everything is fine, the following output is displayed:



### Online JSON Viewers 1-2


- While working with JSON, it is often required to use a JSON viewer to see how the document will look in the browser.
- One of the most widely used is jsonviewer.stack.hu and JSON text can be directly copied to this online viewer.
- The following screenshot shows the jsonviewer.stack.hu:

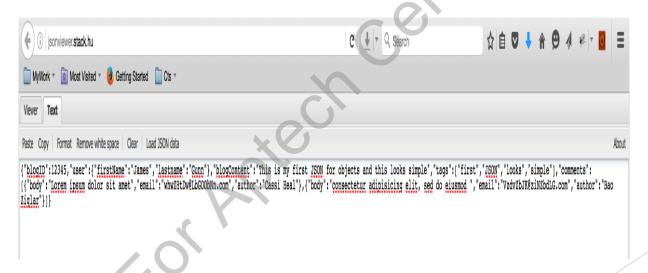



### Online JSON Viewers 2-2

 Another way of supplying data to the viewer is by clicking Load JSON data.

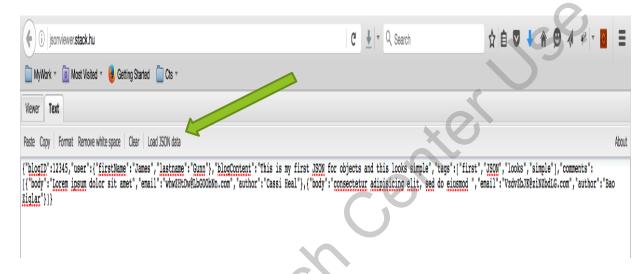

- The viewer takes data from the URL you provide and loads data from that source.
- o Once the JSON code is visible in the viewer, clicking **Format** formats the code.



### Summary

- The two primary data types supported by JSON are primitive and structure.
- The primitive types are String, Number, Null, and Boolean. The structure types are Array and Object.
- Arrays allow storing various values of the same type in one variable.
- An object is an independent data type, having its own attributes.
- In JSON, arrays can also contain other arrays. This is called nesting of arrays.
- The two data structures supported by JSON are Collection of Name/Value Pairs and Ordered List of Values.
- JSON schema specifies the rules that defines the structure of a JSON document.
- JSON does not have any provision for documentation or comments.
- o **JSONLint** is an open source project that helps in validating JSON data.

