Checkbox

Checkboxes let users select one or more items from a list, or turn an item on or off

Resources +2

Use cases

People should be able to use assistive technology to:

- Navigate to a checkbox
- Toggle the checkbox on and off
- Get appropriate feedback based on input type documented under Interaction & style

Interaction & style

Users should be able to select either the text label or the checkbox to select an option.

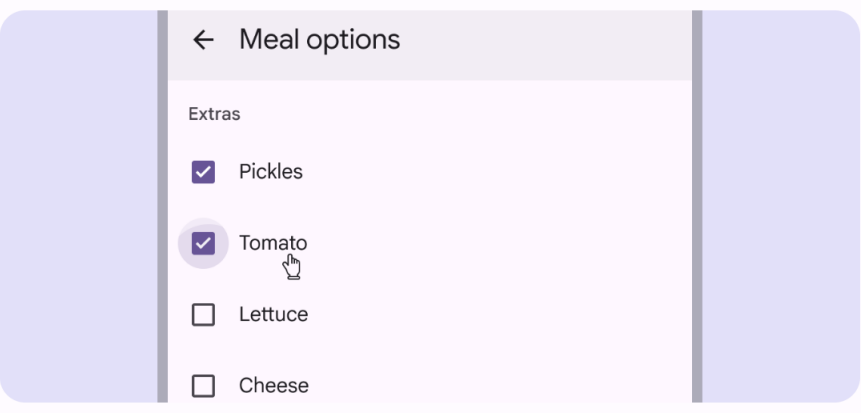

A checkbox selected via the text label

The parent checkbox has three states: selected, unselected, and indeterminate.

Checkboxes can be selected or unselected regardless of the state of the other checkboxes in a group.

If some, but not all, child checkboxes are checked, the parent checkbox becomes indeterminate. Selecting an indeterminate parent checkbox will check all of its child checkboxes.

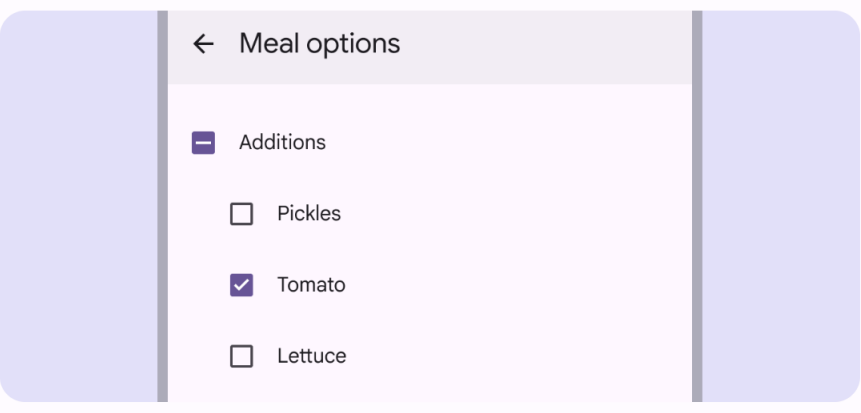

An indeterminate selection indicating that at least one checkbox is selected within a group

Avoid applying density by default

Don't apply density to checkboxes by default — this lowers their targets below our best practice of 48x48 CSS pixels. Instead, give people a way to choose a higher density, like selecting a denser layout or changing the theme.

To ensure that this density setting can be easily reverted when it's active, keep all the targets to change it at minimum 48x48 CSS pixels each.

Keyboard navigation

Keys	Actions
Tab	Moves focus to enabled chip or chip group
Space or **Enter**	Activates, selects, or deselects the focused chip
Backspace or **Delete**	Removes currently focused input chip
Arrows	Moves focus between chips

Labeling elements

If the UI text is correctly linked to the checkbox, assistive tech (such as a screen reader) will read the UI text followed by the component's role.

The accessibility label for an individual checkbox is typically the same as its adjacent text label.

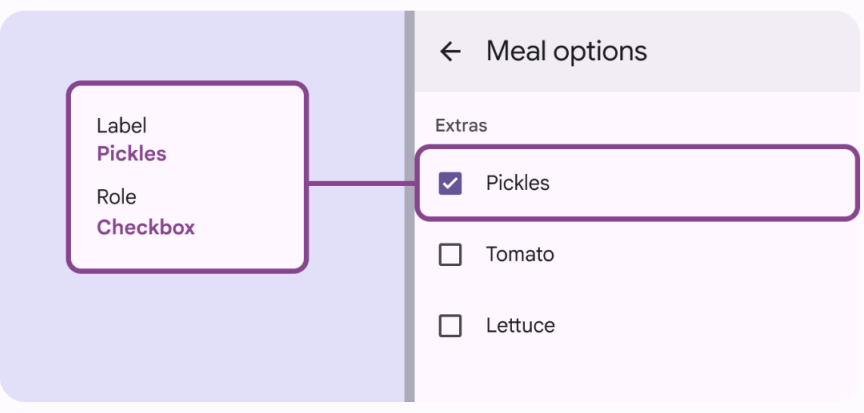

The accessibility label clearly states the text label of the checkbox