User Manual for Sandbox Execution Tool

Overview

The **Sandbox Execution Tool** is a PowerShell-based application designed to execute external executables in a controlled Windows Sandbox environment. This tool allows users to run potentially unsafe executables without affecting the host system, capturing their output for analysis. The tool includes a graphical user interface (GUI) for ease of use.

Features

- Execute External Programs: Run any executable file in a Windows Sandbox.
- **Output Capture**: Redirects the output of the executable to a specified file.
- Network Control: Option to disable network access for the sandboxed application.
- Read-Only Mode: Restrict file access to the mapped folder.
- **Timeout Setting**: Specify a timeout for the execution to prevent hanging processes.
- User-Friendly GUI: Simple interface for selecting files and configuring options.

Requirements

- Windows 10/11: The tool requires a Windows operating system with Windows Sandbox enabled.
- PowerShell: The tool is built using PowerShell and requires PowerShell to be installed.
- Windows Sandbox: Ensure that Windows Sandbox is enabled in Windows Features.

Installation

- 1. **Download the Tool**: Obtain the Execute2.ps1 and gui.ps1 files.
- 2. Place Files: Store both files in the same directory for proper execution.
- 3. Enable Windows Sandbox: Ensure that Windows Sandbox is enabled in your Windows Features.

Usage Instructions

Running the Tool

- 1. Open PowerShell:
 - Press Win + X and select Windows PowerShell.
- 2. Navigate to the Tool Directory:
 - Use the cd command to change to the directory where the scripts are located:
 cd C:\path\to\your\tool
- 3. Launch the Script:
 - Run the script to open the Sandbox Execution Tool. There are two possible ways:

```
.\Execute.ps1 -file "C:\{{pathToYourFolder}}\{{your_executable.exe}}" -execParams "—param1 -param2" -output "{{output_file}}.txt" -hostFolder "C:\{{path\to\your\executableFolder}}" -NoNetwork -timeout 20
```

Or

.\ Execute.ps1

• If you execute the script with full parameters, it will automatically perform its tasks. However, if your run it with no parameters at all, a GUI will be triggered to offer user with manual input selection for each required parameter.

Executing the script manually

```
PS C:\Users\920322\Workspace\SandBox> .\Execute.ps1 -file "C:\Users\920322\Workspace\Sandbox\SandBox.exe" -hostFolder "C:\Users\920322" -execParams "-output -param 123" -output "output2.txt" -NoNetwork -timeout 20
-output -param 123
Launching Windows Sandbox...
Waiting for output (timeout: 20 seconds)...
Results saved to: C:\Users\920322\output2.txt
Execution completed.
```

- 1. Following the sample syntax to fully execute the script, with required parameters:
 - -file: path to the executable
 - -output: the output file name
 - -hostFolder: the folder to contain the output file
 - -execParams: the parameter string that will be used by the executable
 - -NoNetWork: flag to disable network use of the script
 - -ReadOnly: flag to restrict file access
 - -timeout: flag to set the timeout for the script execution

Using the GUI

1. Executable Selection:

- Click the Browse button to select the executable file you want to run. The file must be an .exe file.
- Input the corresponding parameter for the executable, left empty if none is required

2. Output Settings:

- Specify the name of the output file where the results will be saved (e.g., output.txt).
- Specify the host folder where the output file will be saved. The default is C:\Users

3. Execution Options:

- Disable Network: Check this box if you want to disable network access for the executable.
- **Read Only**: Check this box to restrict file access to the mapped folder.
- **Timeout**: Set the timeout duration in seconds for the execution (default is 120 seconds).


4. Execute:

 Click the Execute in Sandbox button to run the selected executable in the Windows Sandbox.

Example Usage

1. Select an Executable:

• Choose C:\path\to\your\executable.exe by click the **Browse** button

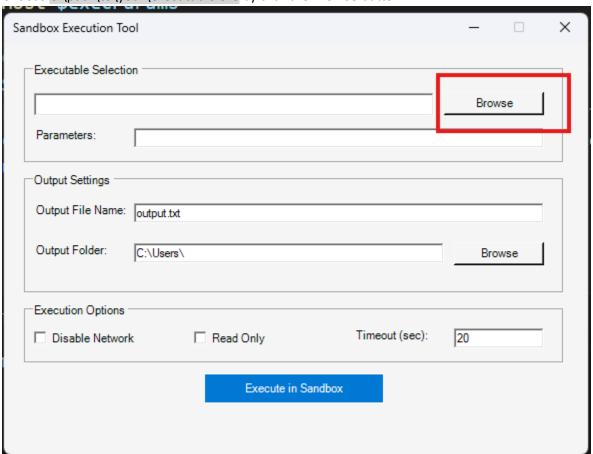


2. Set Output File:

• Enter {{output_file}}.txt as the output file name.


3. Set Host Folder:

• Ensure the host folder is set to an existing folder, in which the output file will be created.

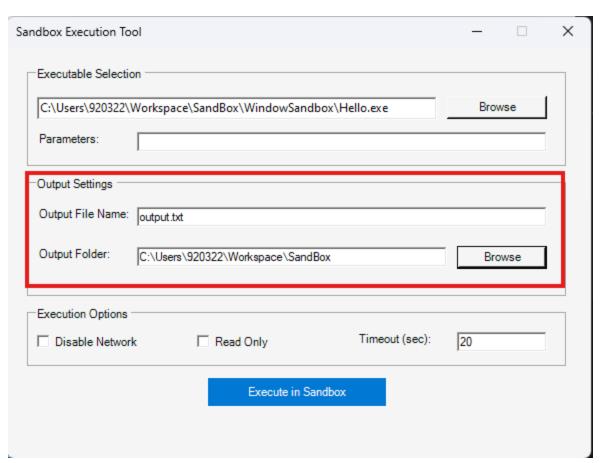

4. Execution Options:

- Optionally check **Disable Network** and **Read Only**.
- If necessary, add the timeout for the program to execute, the default value is 20 seconds

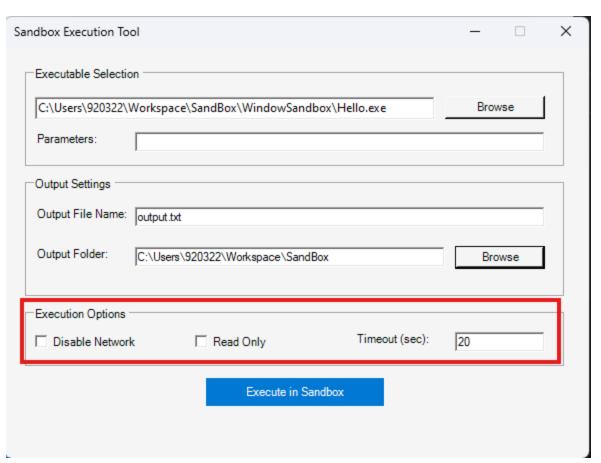


5. Run the Tool:

- Click **Execute in Sandbox**. The tool will launch the Windows Sandbox, run the executable, and capture the output.
- The window Sandbox will be open for a brief moment to run the executable in a secured environment



• After that it will automatically closed, with a notification window popup



• Finally, the notification about success execution will appear

```
PS C:\Users\920322\Workspace\SandBox> .\Execute.ps1

Launching Windows Sandbox...

Waiting for output (timeout: 20 seconds)...

Results saved to: C:\Users\920322\Workspace\SandBox\output.txt

Execution completed.

Cancel
```

Output

- After execution, the output will be saved in the specified output file (e.g., C:\Users\920322\Workspace\SandBox\output.txt).
- If the execution completes successfully, a message box will confirm the completion.

Error Handling

- If any required fields are not filled, or if the specified files or folders do not exist, the tool will display an error message.
- Ensure that the executable and host folder paths are valid before executing.

Conclusion

The Sandbox Execution Tool provides a safe and efficient way to run executables in a controlled environment, capturing their output for further analysis. By following the instructions in this manual, users can easily utilize the tool for various applications in computer science education and research.