
x1500 chrI:60001-65000 387 molecules

ERV46


CDC24

PTA1


Mean P(accessible) over the 387 fibers (per-read decode; no pooled-pileup decode for this model)

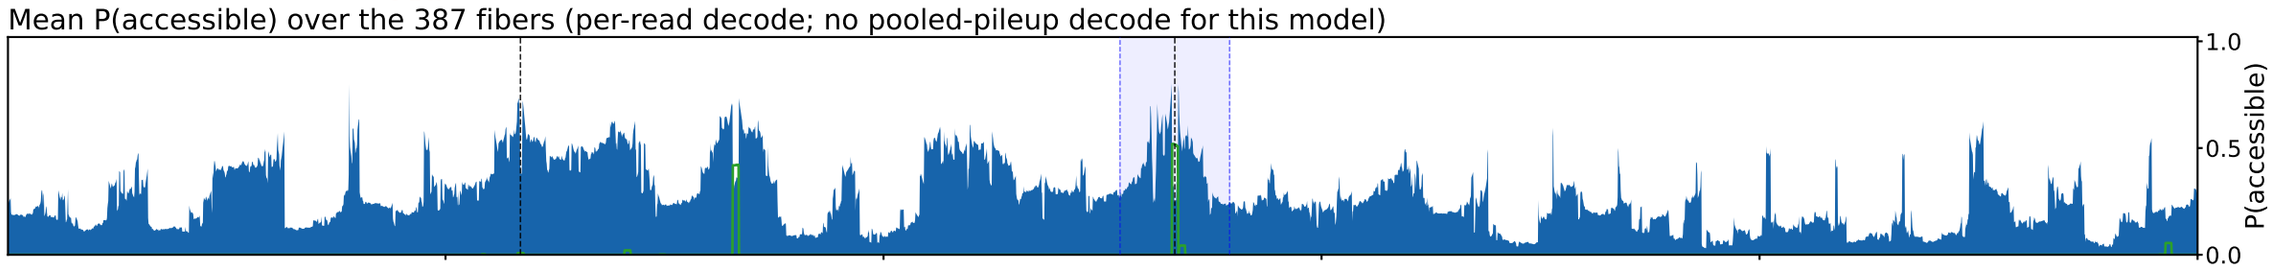


Pooled raw m6A: fraction of observed A's called m6A, all fibers (no decode)

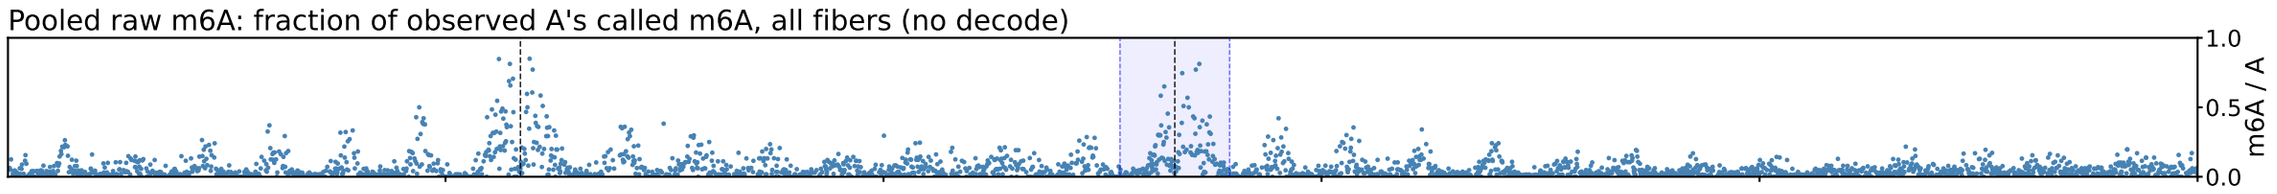


Fiber-seq raw m6A, single molecules (n=387 fibers, shuffled order)

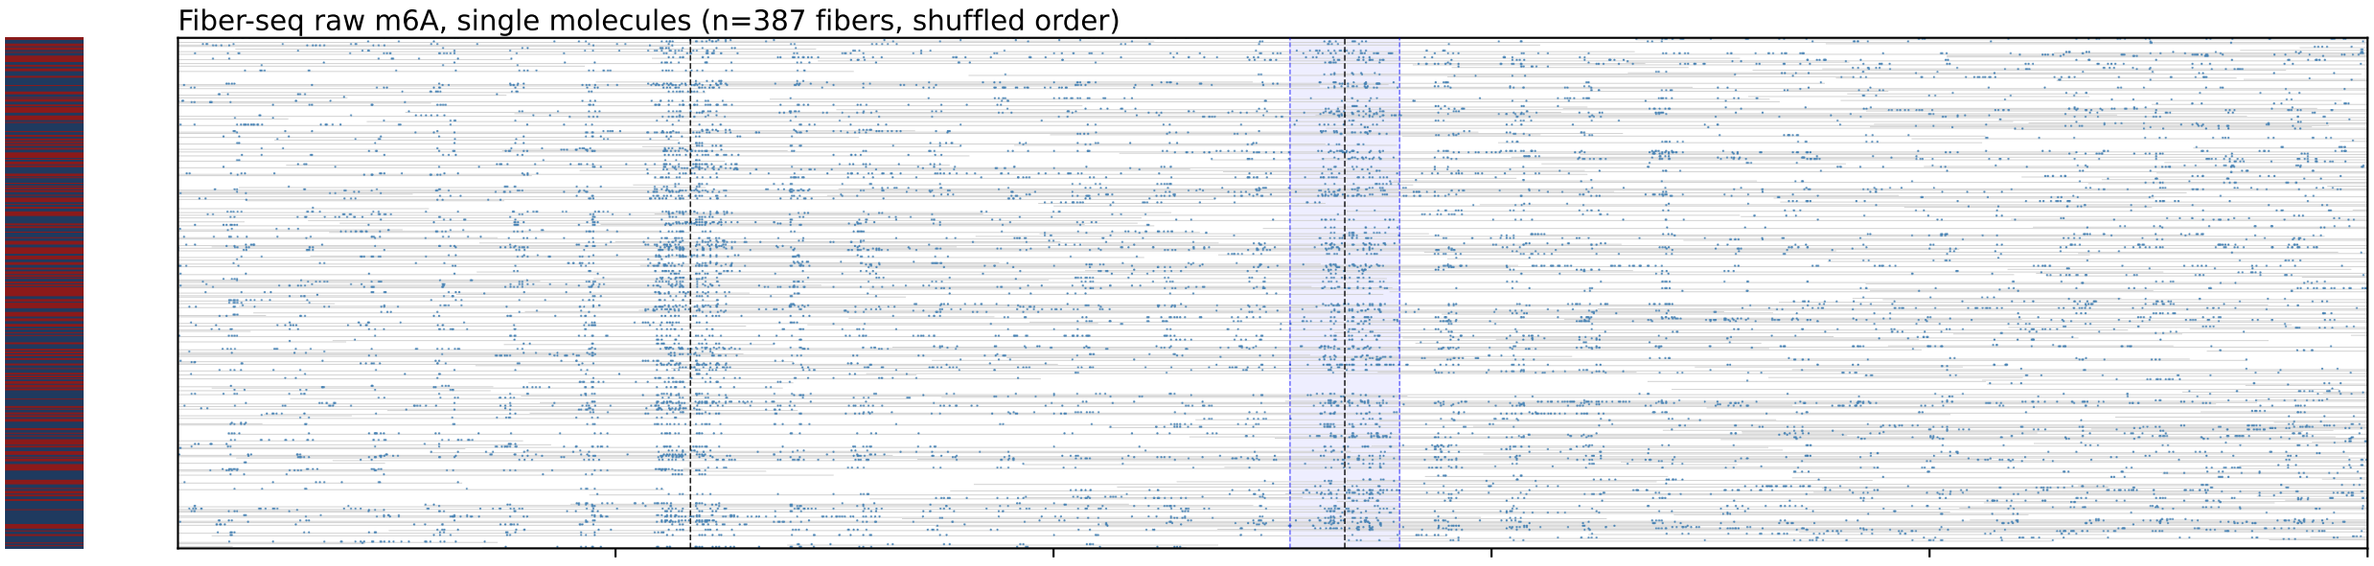


Fiber-seq raw m6A, CLUSTERED order (same rows as the decoded panels below; no decode)

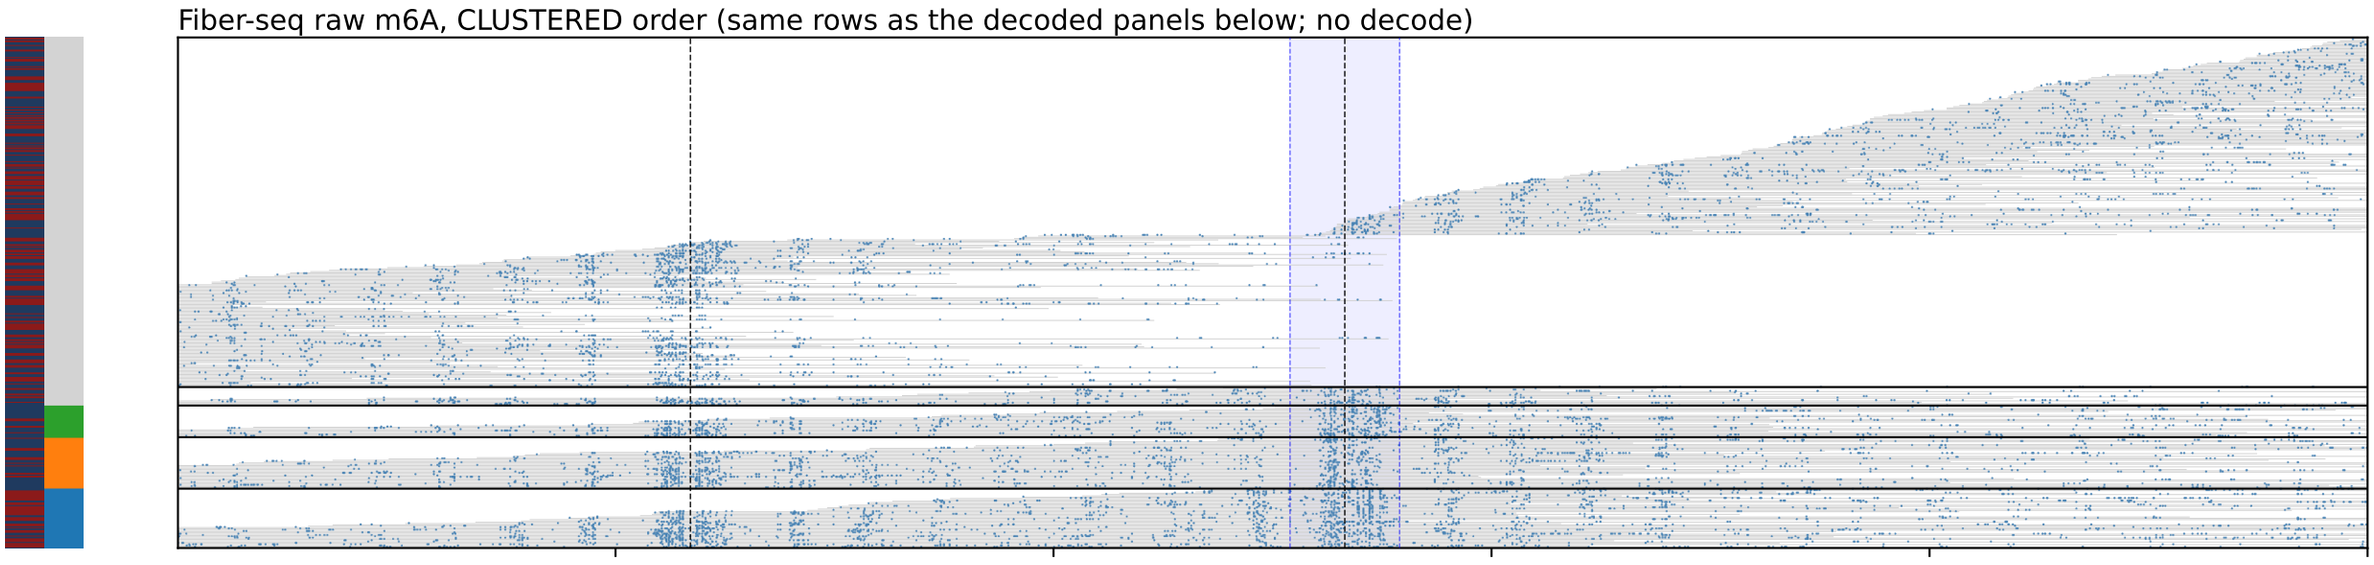


RoboCOP per-molecule P(accessible) = P(background), fibers clustered on the ABF1 window

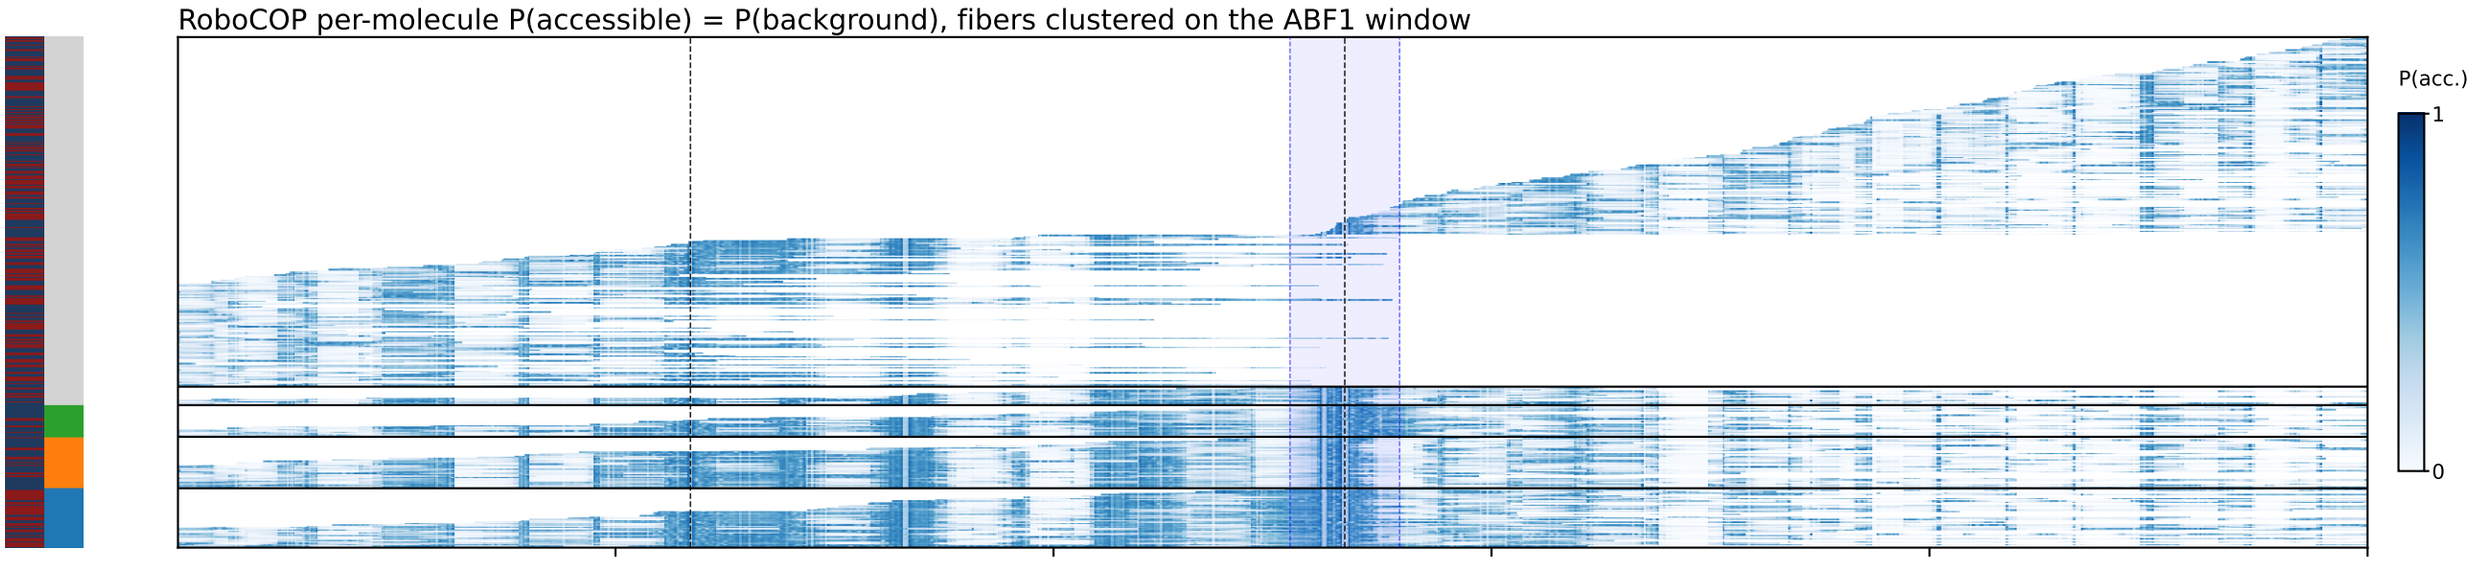

RoboCOP per-molecule P(nucleosome), same clustered order

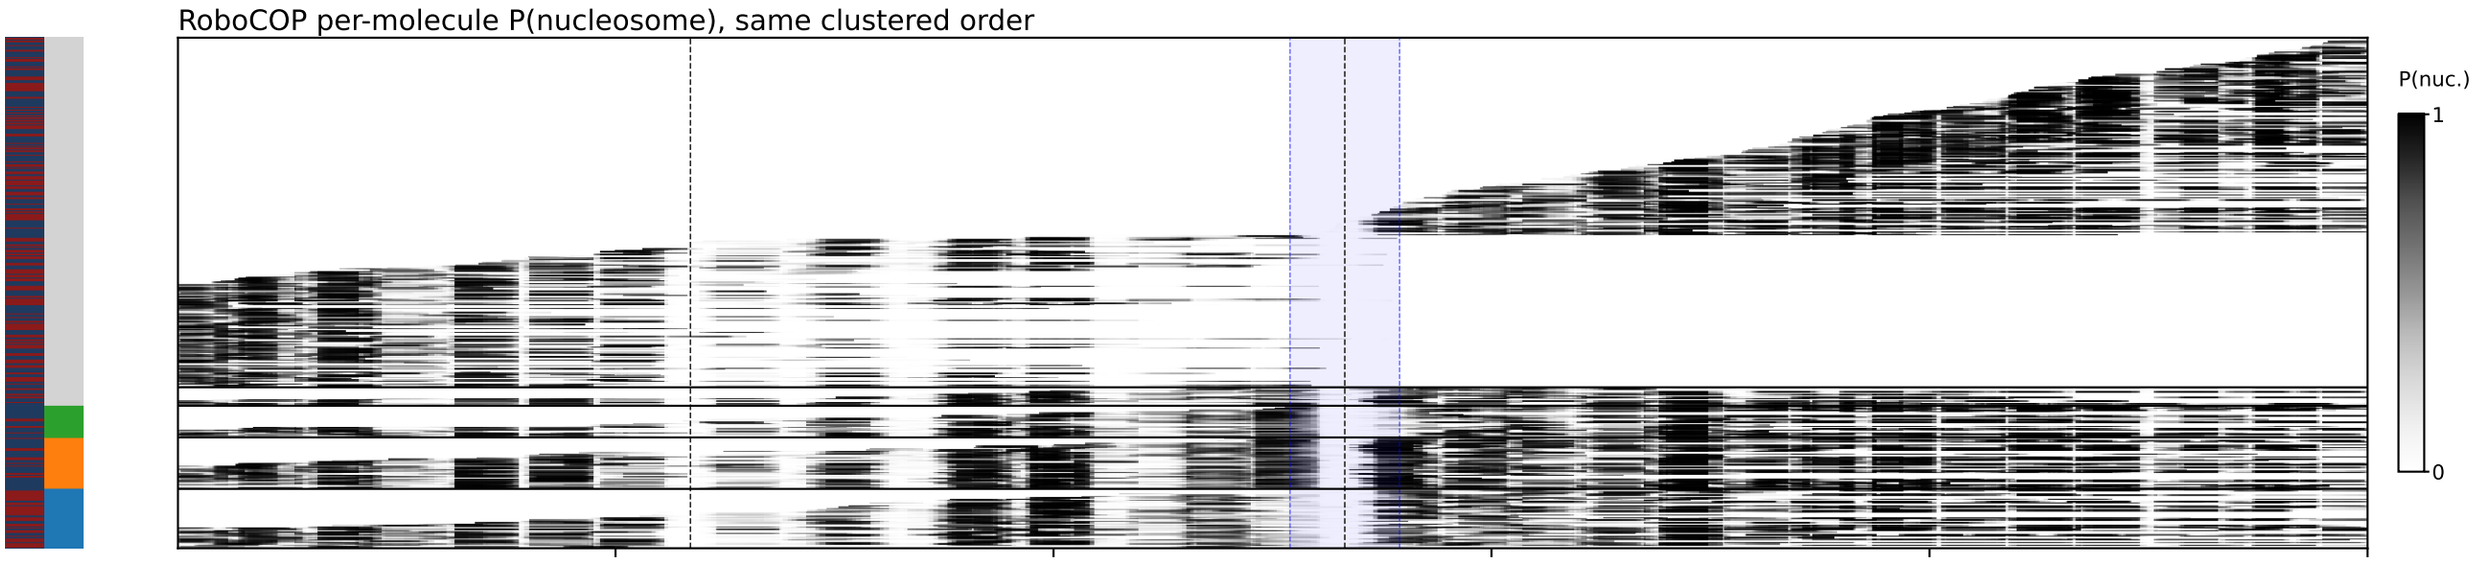

RoboCOP per-molecule P(ABF1), same order — colour scale 0 to 1 (data max 0.631)

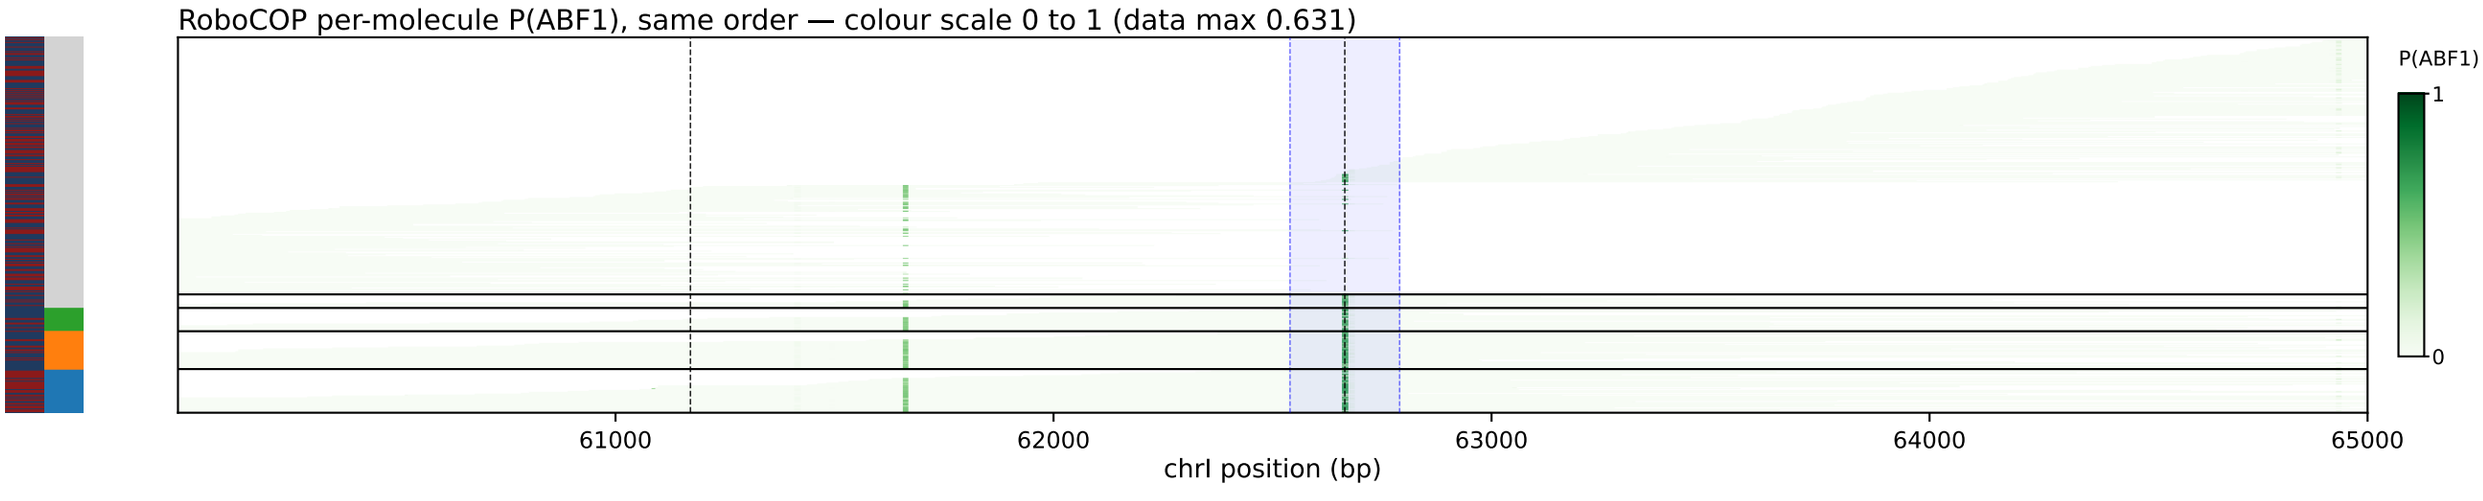

m6A
cluster 0 (n=45)
cluster 1 (n=39)
cluster 2 (n=24)
unclustered (n=14)
no clustering-window coverage (n=265)
Watson (+)
Crick (−)
MacIsaac ABF1 site
clustering window