Assignment No	**8**
Title	**Spring Framework**
Objective	**Design a JDBC application to insert, count, update**
Roll No	**MCA2542**

Source Code:

MoviesBean:

```
package edu.met.p1;

public class MoviesBean {
	long mid;
	String mtitle;
	String director;
	public MoviesBean(long mid, String mtitle, String director) {
		super();
		this.mid = mid;
		this.mtitle = mtitle;
		this.director = director;
	}
	public MoviesBean() {
		super();
		// TODO Auto-generated constructor stub
	}
	public long getMid() {
		return mid;
	}
	public void setMid(long mid) {
		this.mid = mid;
	}
	public String getMtitle() {
		return mtitle;
	}
	public void setMtitle(String mtitle) {
		this.mtitle = mtitle;
	}
	public String getDirector() {
		return director;
	}
	}
```

```
	public void setDirector(String director) {
		this.director = director;
	}
}
```

MoviesDao:

```
package edu.met.p1;

import org.springframework.jdbc.core.JdbcTemplate;

public class MoviesDao {
	JdbcTemplate jdbcT;

	public MoviesDao(JdbcTemplate jdbcT) {
		super();
		this.jdbcT = jdbcT;
	}
	public void insertRow(MoviesBean m1) {
		String insQ="insert into mymovies
values("+m1.getMid()+",'"+m1.getMtitle()+"','"+m1.getDirector()+"')";
		jdbcT.update(insQ);
	}
	//method to update record
	public int updateRow(MoviesBean m1) {
		String updtQ="update mymovies set mtitle=?, director=? where mid=?";
		return jdbcT.update(updtQ,m1.getMtitle(),m1.getDirector(),m1.getMid());
	}
	public int countMovies() {
		String countQ="select count(*) from mymovies";
		return jdbcT.queryForObject(countQ, Integer.class);
	}
}
```

MoviesImpl:

```
package edu.met.p1;

import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;

public class MoviesImpl {

	private static ApplicationContext ctx;
	public static void main(String[] args) {
		// TODO Auto-generated method stub
		ctx=new ClassPathXmlApplicationContext("AppCtx.xml");
		//Create DAO bean
		MoviesDao d1=(MoviesDao)ctx.getBean("moviesDao");
		//Create movies bean
```

```
		MoviesBean m1= (MoviesBean)ctx.getBean("movie");
		//Insert Row
		d1.insertRow(m1);
		m1.setMid(100);
		m1.setMtitle("Jurasic World");
		m1.setDirector("Harshal");
		if(d1.updateRow(m1) > 0) {
			System.out.println("Row updated successful");
		}
		else
		{
			System.out.println("Update Failed");
		}
		System.out.print(d1.countMovies());

		//by constructor args

	}


}
```

Output:


Insert:

	mid integer	mtitle character varying (50)	director character varying (50)
1	102	Interstellar	Cristopher Nolan
2	102	Openheimer	Cristopher Nolan
3	106	Jawan	atlee
4	106	Jawan	atlee
5	106	Jawan	atlee
6	106	Jawan	atlee
7	106	Jawan	atlee
8	100	Jurasic World	Harshal

Update:

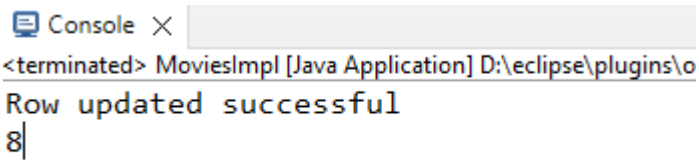

Count:

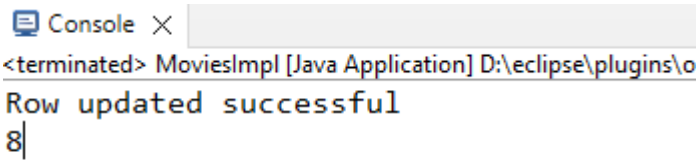
Console
<terminated> MoviesImpl [Java Application] D:\eclipse\plugins\o
Row updated successful
8