



redhat.<sup>®</sup>

# Red Hat Enterprise Linux 7

## Getting Started with Cockpit

Getting Started with Cockpit



# Red Hat Enterprise Linux 7 Getting Started with Cockpit

---

## Getting Started with Cockpit

## **Legal Notice**

Copyright © 2018 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

<http://creativecommons.org/licenses/by-sa/3.0/>

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux ® is the registered trademark of Linus Torvalds in the United States and other countries.

Java ® is a registered trademark of Oracle and/or its affiliates.

XFS ® is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL ® is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js ® is an official trademark of Joyent. Red Hat Software Collections is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack ® Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

## **Abstract**

This guide demonstrates how to use the Cockpit web-based interface to manage Red Hat Enterprise Linux and Red Hat Enterprise Linux Atomic Host servers.

## Table of Contents

<b>CHAPTER 1. OVERVIEW .....</b>	<b>3</b>
1.1. WHAT MAKES COCKPIT UNIQUE?	3
1.2. THE ROLE OF THIS GUIDE	3
<b>CHAPTER 2. INSTALLING AND ENABLING COCKPIT .....</b>	<b>4</b>
2.1. PREREQUISITES FOR A COCKPIT SERVER	4
2.2. SETTING UP THE PRIMARY COCKPIT SERVER	4
2.3. OPENING THE INTERFACE	5
2.4. CHANGING EXPIRED PASSWORDS	5
2.5. SSH TWO-FACTOR AUTHENTICATION WITH COCKPIT	7
<b>CHAPTER 3. USING COCKPIT .....</b>	<b>8</b>
3.1. GETTING TO KNOW THE COCKPIT INTERFACE	8
3.1.1. Adding secondary systems	16
3.1.2. Logging into other systems through Cockpit	18
3.1.3. Logging into a system via a Bastion Host	19
3.2. CHANGING THE COCKPIT PORT	19
3.3. ENABLING MORE COCKPIT FEATURES	20
<b>CHAPTER 4. COCKPIT ON RED HAT ENTERPRISE LINUX ATOMIC HOST .....</b>	<b>21</b>
4.1. INSTALLING COCKPIT ON ATOMIC HOST	21
4.2. COCKPIT INTERFACE SPECIFIC TO ATOMIC HOST	21
4.2.1. Working with Containers	23
4.3. CHANGING THE COCKPIT PORT ON ATOMIC HOST	27
4.4. ENABLING MORE COCKPIT FEATURES ON ATOMIC HOST	27



# CHAPTER 1. OVERVIEW

Cockpit is a user-friendly web-based interface for administering servers. It allows monitoring system resources and adjusting configuration with ease.

## 1.1. WHAT MAKES COCKPIT UNIQUE?

- Cockpit builds upon existing functionality.
- There is no lock-in. Feel free to use other tools alongside Cockpit. Switch back and forth with ease.
- Cockpit does not need special infrastructure or configuration. Once installed, it is ready to use.
- When not in use, Cockpit uses no memory or CPU on the server.
- Cockpit always updates its data to reflect the current state of the server, within seconds.
- Cockpit stores no data or policy. People keep their system-wide permissions and use the system credentials.
- Optionally take advantage of single sign-on with Kerberos.
- Cockpit itself is not used for configuration management. However, Cockpit can interact with configuration management and custom server tools.

## 1.2. THE ROLE OF THIS GUIDE

This document helps you get started with Cockpit. It walks through installation, explains typical server configuration, and demonstrates the Cockpit interface in detail.

## CHAPTER 2. INSTALLING AND ENABLING COCKPIT

A primary Cockpit server is the machine that runs a Cockpit service with the user interface. A secondary server is a machine that is administered using Cockpit. It is possible to add one or more secondary hosts to the primary server.

Setting up a primary Cockpit server involves:

1. Installing the cockpit packages.
2. Opening the port for Cockpit.
3. Starting the cockpit service.

After setting up, you can connect to Cockpit in a browser by typing the host name and port of the server. For example, from the primary host you can connect using local host : 9090.

For setting up a primary server on Red Hat Enterprise Linux Atomic Host, see [Installing Cockpit on Atomic Host](#).

### 2.1. PREREQUISITES FOR A COCKPIT SERVER

Before setting up Cockpit, ensure that you have:

1. Installed Red Hat Enterprise Linux. If required, see the [Installation Guide](#).
2. Enabled networking. If required, see the [Networking Guide](#).
3. Registered the system and attached subscription. If required, see the [Registering the System and Attaching Subscriptions](#) section of the System Administrator's Guide.

### 2.2. SETTING UP THE PRIMARY COCKPIT SERVER

To install and enable Cockpit:

1. Enable the Extras and Optional repositories:

```
# subscription-manager repos --enable=rhel-7-server-extras-rpms  
# subscription-manager repos --enable=rhel-7-server-optional-rpms
```

This gives you access to supplementary Cockpit packages such as cockpit-dashboard.

2. Install the cockpit and cockpit-dashboard packages:

```
$ sudo yum install cockpit cockpit-dashboard
```

The cockpit-dashboard package provides the "Dashboard" tab in the interface. This package is optional, but is assumed to be installed in this guide.

3. Allow external connections to port 9090 through the firewall:

```
# firewall-cmd --add-port=9090/tcp  
# firewall-cmd --permanent --add-port=9090/tcp
```

4. Enable and start the cockpit.socket service:

```
$ sudo systemctl enable cockpit.socket
$ sudo systemctl start cockpit.socket
```

5. Cockpit is now installed and running.

If you are installing Cockpit on a Red Hat Enterprise Linux Atomic Host system, see [Installing Cockpit on Atomic Host](#).

## 2.3. OPENING THE INTERFACE


1. Open a web browser and enter the server's IP address with port 9090 in the address bar. If the web browser is on the Cockpit server, open Local host : 9090 or host name: 9090.



### NOTE

If you use a self-signed certificate, the browser issues a warning. Carefully check the certificate before accepting the warning. Consider using a certificate signed by a certificate authority (CA). For more information on certificates, see the [An Overview of Certificates and Security](#) section of the RHEL System Administrator's Guide.

If you are sure you want to use self-signed certificates, then add this connection to the security exceptions. Click **Advanced** → **Add Exception** → **Confirm Security Exception**. After that, you will see the login screen.

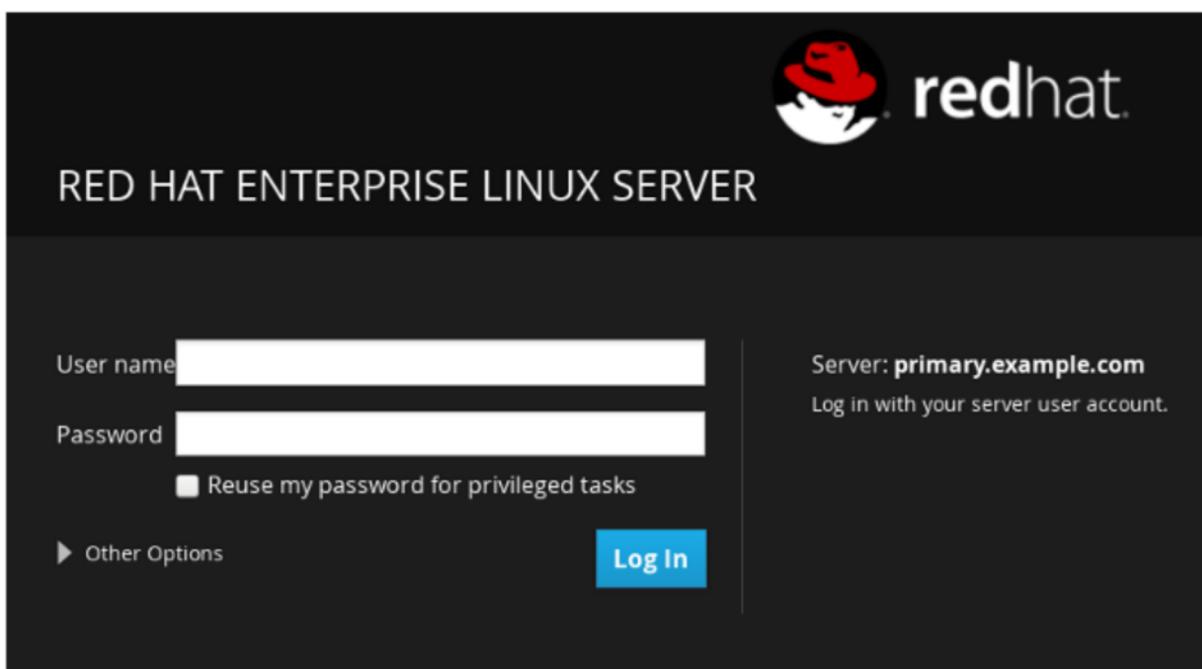


2. Log into the Cockpit interface with the same user name and password that you would normally use to log into the system.

## 2.4. CHANGING EXPIRED PASSWORDS


Cockpit supports changing expired passwords.

A fresh system installation with an expired password will prompt a password change during the first login. System administrators often use this feature to make sure users change their pre-assigned passwords to a custom password.

When logging in with an expired password, Cockpit prompts you to enter the current password a second time. Enter your current password and click **Log In**.

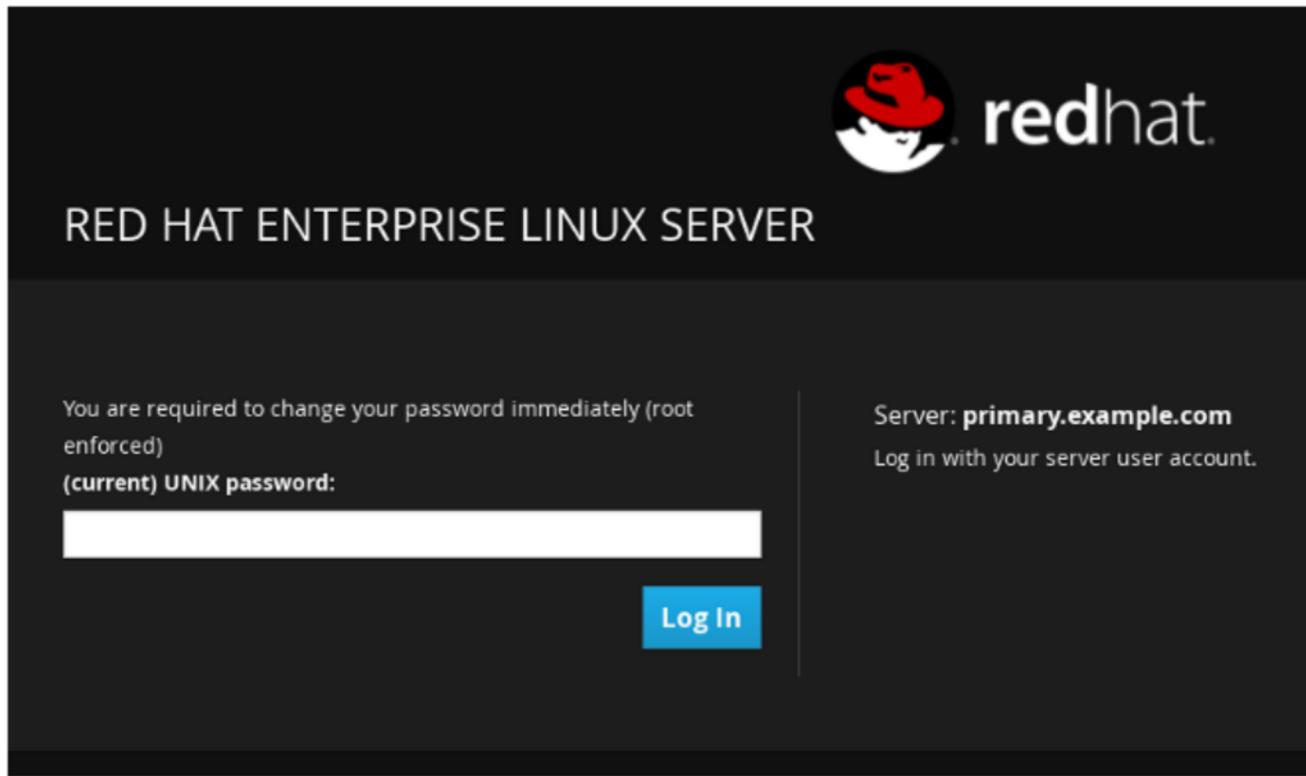

Choose a new password and click **Login**.

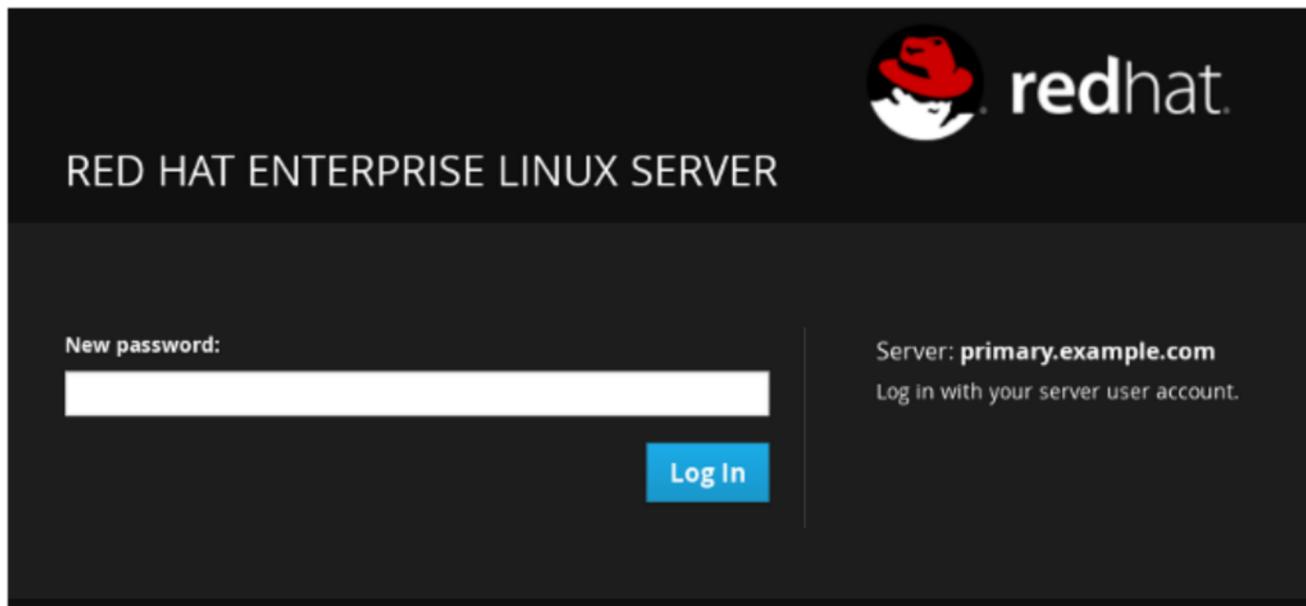

### NOTE

If you have issues logging in to Cockpit and the prompt for changing the password is not shown, check the `/etc/ssh/sshd_config` file on the Cockpit Server. Make sure `ChallengeResponseAuthentication` is set to `yes` and restart sshd with the `systemctl restart sshd` command.

## 2.5. SSH TWO-FACTOR AUTHENTICATION WITH COCKPIT

Cockpit supports two-factor authentication. If you have protected your SSH server with two-factor authentication, the login screen will prompt you to enter your password and PIN pair.

Setting up SSH for two-factor authentication requires two components:

1. A company's authenticator application that provides one-time passwords or PIN numbers. An example application is Google Authenticator, which also has its own Pluggable Authentication Module (PAM).
2. A server that validates the PINs from a dongle.

These two components are often implemented differently for different companies.

After setting up the authenticator application and the validation server, enable SSH two-factor authentication in Cockpit:

1. In the `/etc/pam.d/sshd` file, right after the last `auth` line, add this line:

```
| auth      required      <your_PAM_module>
```

Substitute `<your_PAM_module>` with the PAM module used by your application.


2. In the `/etc/ssh/sshd_config` file, set `ChallengeResponseAuthentication` to `yes`.
3. Restart the `sshd` service with the `systemctl restart sshd` command.

Cockpit will ask for your verification code the next time you log in.

## CHAPTER 3. USING COCKPIT


### 3.1. GETTING TO KNOW THE COCKPIT INTERFACE

Once you have logged in, you will see the main Cockpit interface. It has the **Dashboard** tab on the top and a side menu with details for the selected system on the left. The Dashboard shows a list of all systems added to the Cockpit server with graphs for their CPU usage, memory usage, disk I/O, and network traffic.

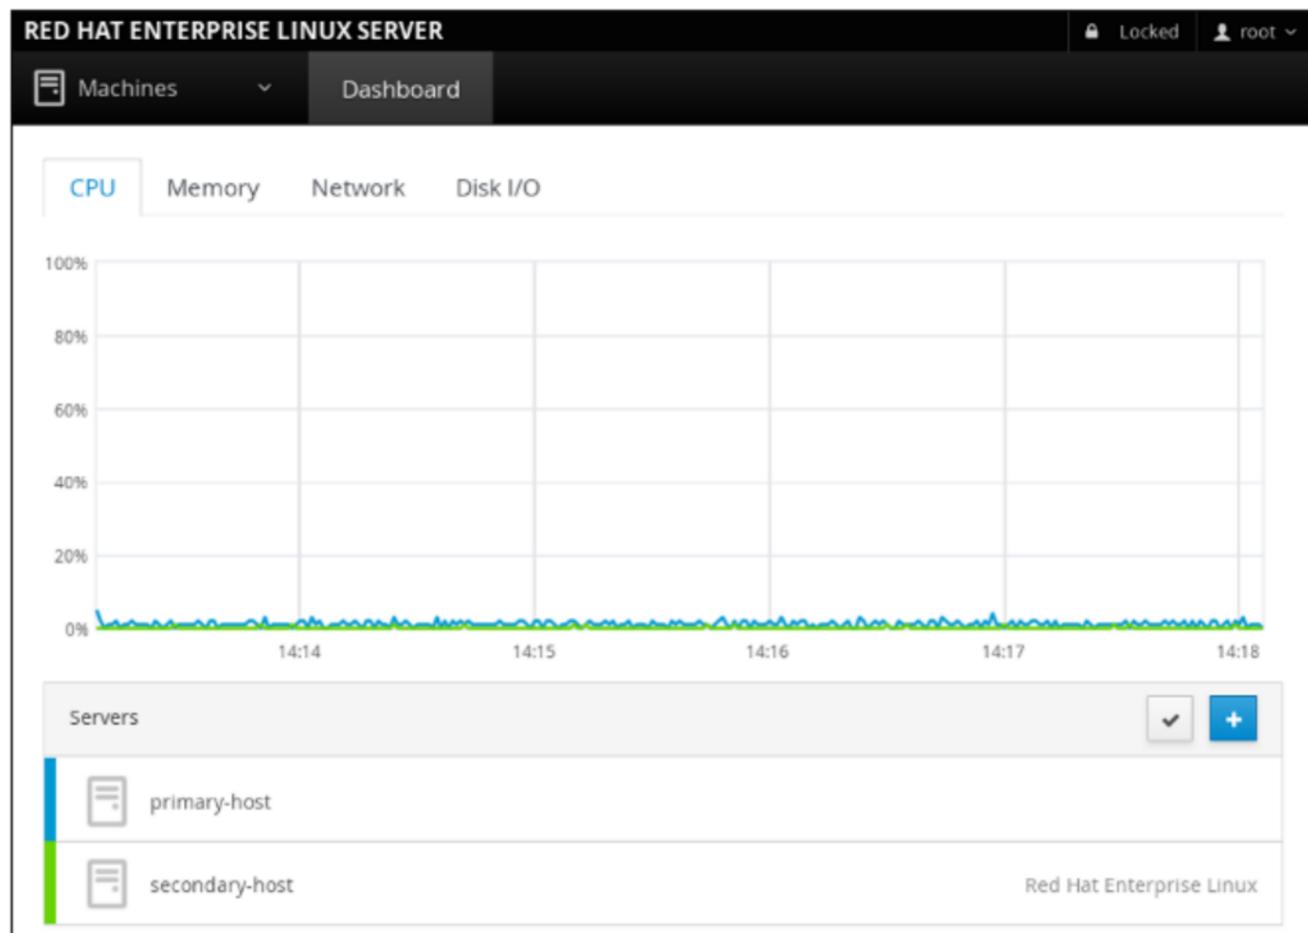

From Dashboard, you can select a system name, in this case primary-host , and have a look at the side menu:

**System:** Shows information about the system that Cockpit is running on. This includes CPU usage, memory usage, disk I/O, and network traffic, as well as hardware and operating system details.

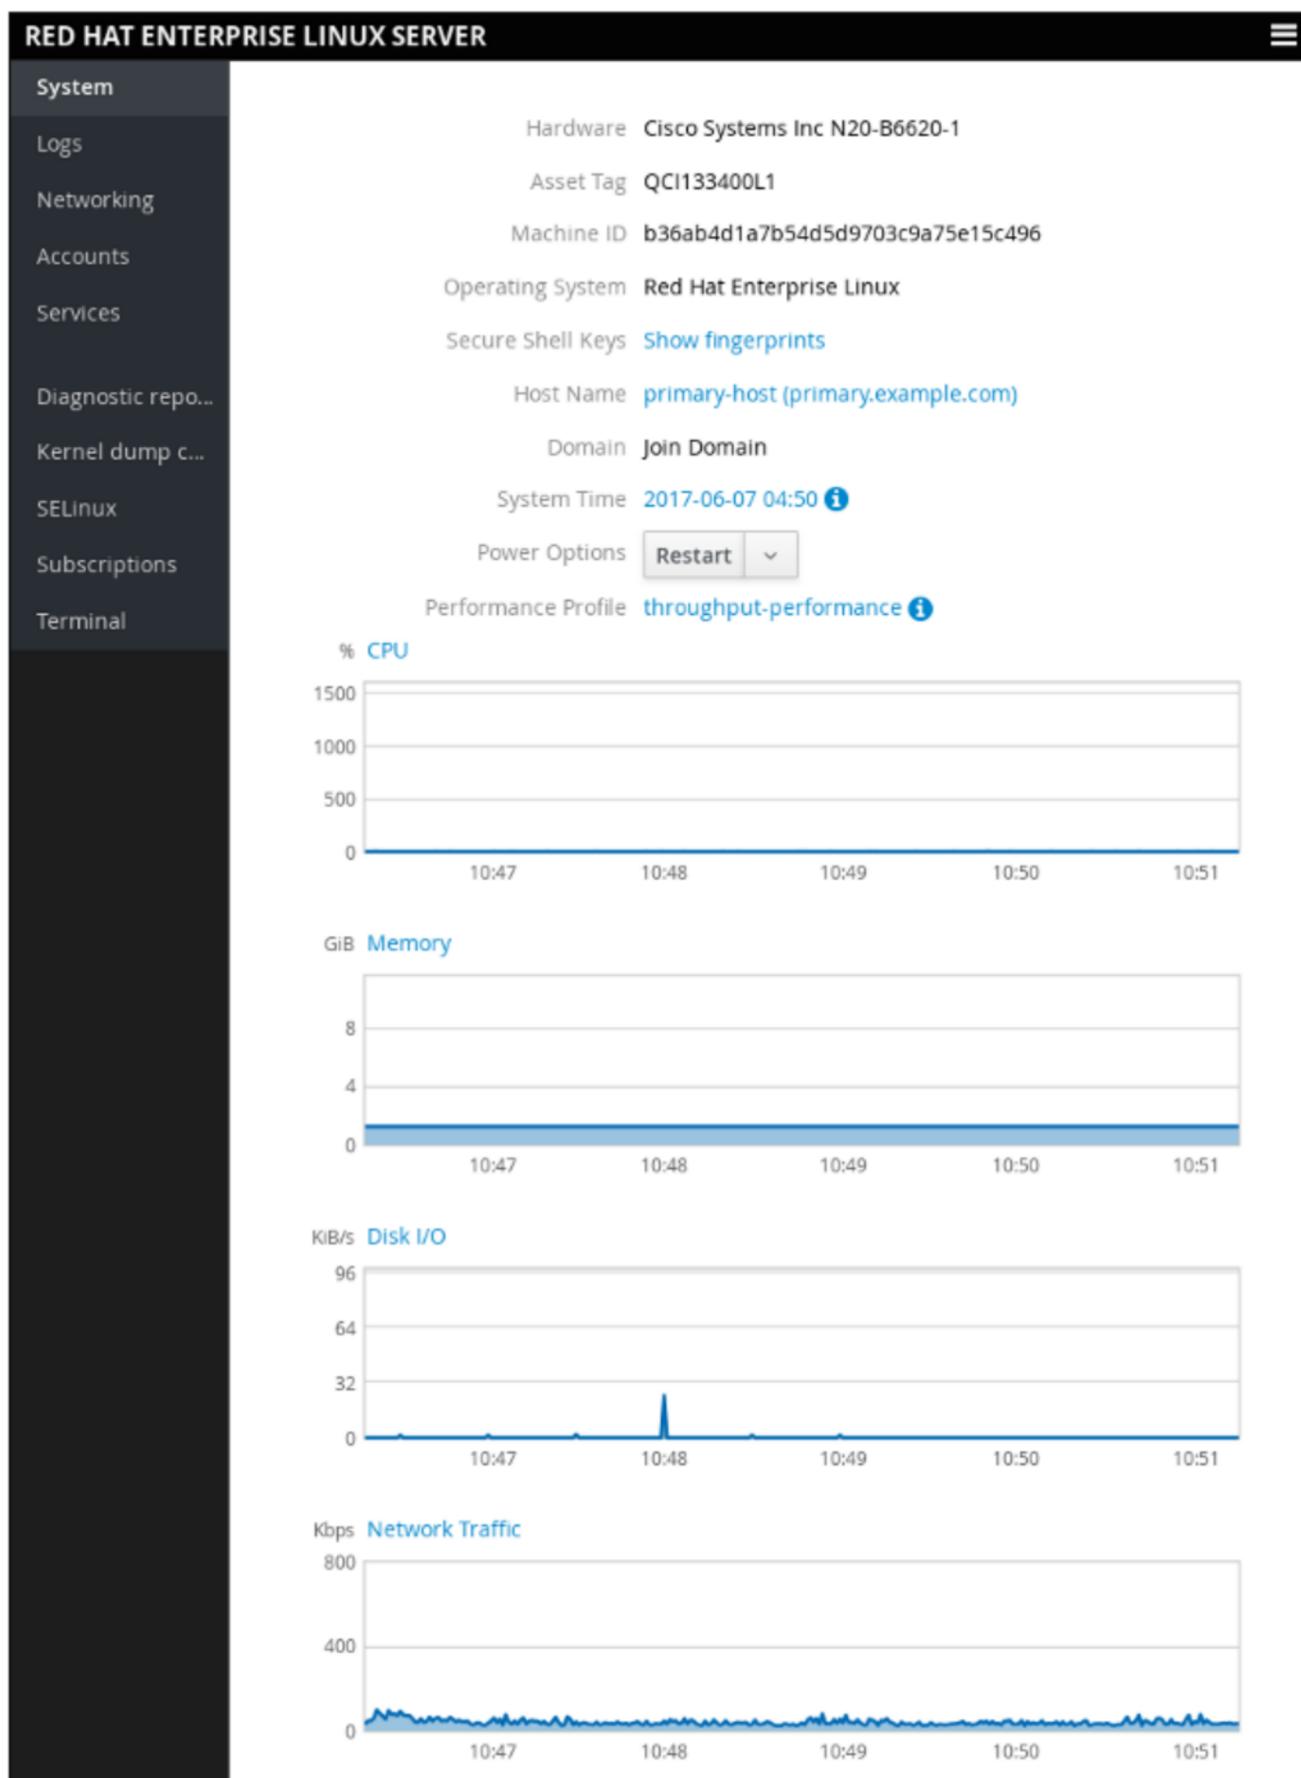


**Logs:** See messages produced by the systemd journal, including errors, warnings, and notices. The log is similar to the output of the `journctl` command. The log displays newest entries first, with options to filter by type.

The screenshot shows the 'Logs' section of the cockpit interface. On the left is a sidebar with links: System, Logs (which is selected), Networking, Accounts, Services, Diagnostic repo..., Kernel dump c..., SELinux, Subscriptions, and Terminal. At the top right are buttons for Errors, Warnings, Notices, and All. Below these is a date selector set to June 7, 2017. The main area displays log entries for that date:

Date	Message	Source
June 7, 2017	10:53 Started Hostname Service.	systemd
June 7, 2017	10:53 dbus[851]: [system] Successfully ac...	dbus-daemon
June 7, 2017	10:53 [system] Successfully activated ser...	dbus
June 7, 2017	10:53 Starting Hostname Service...	systemd
June 7, 2017	10:53 [system] Activating via systemd: se...	dbus
June 7, 2017	10:53 dbus[851]: [system] Activating via ...	dbus-daemon
June 7, 2017	10:53 New connection to session from 10.3...	cockpit-ws
June 7, 2017	10:53 WebSocket from 10.34.3.182 for sess...	cockpit-ws
June 7, 2017	10:53 <info> [1496825582.8676] policy: se...	NetworkManager
June 7, 2017	10:53 <info> [1496825582.8672] policy: se...	NetworkManager
June 7, 2017	10:52 <info> [1496825579.6927] policy: se...	NetworkManager

**Networking:** See networking interfaces (for example, eth0) and active graphs of sent and received data.

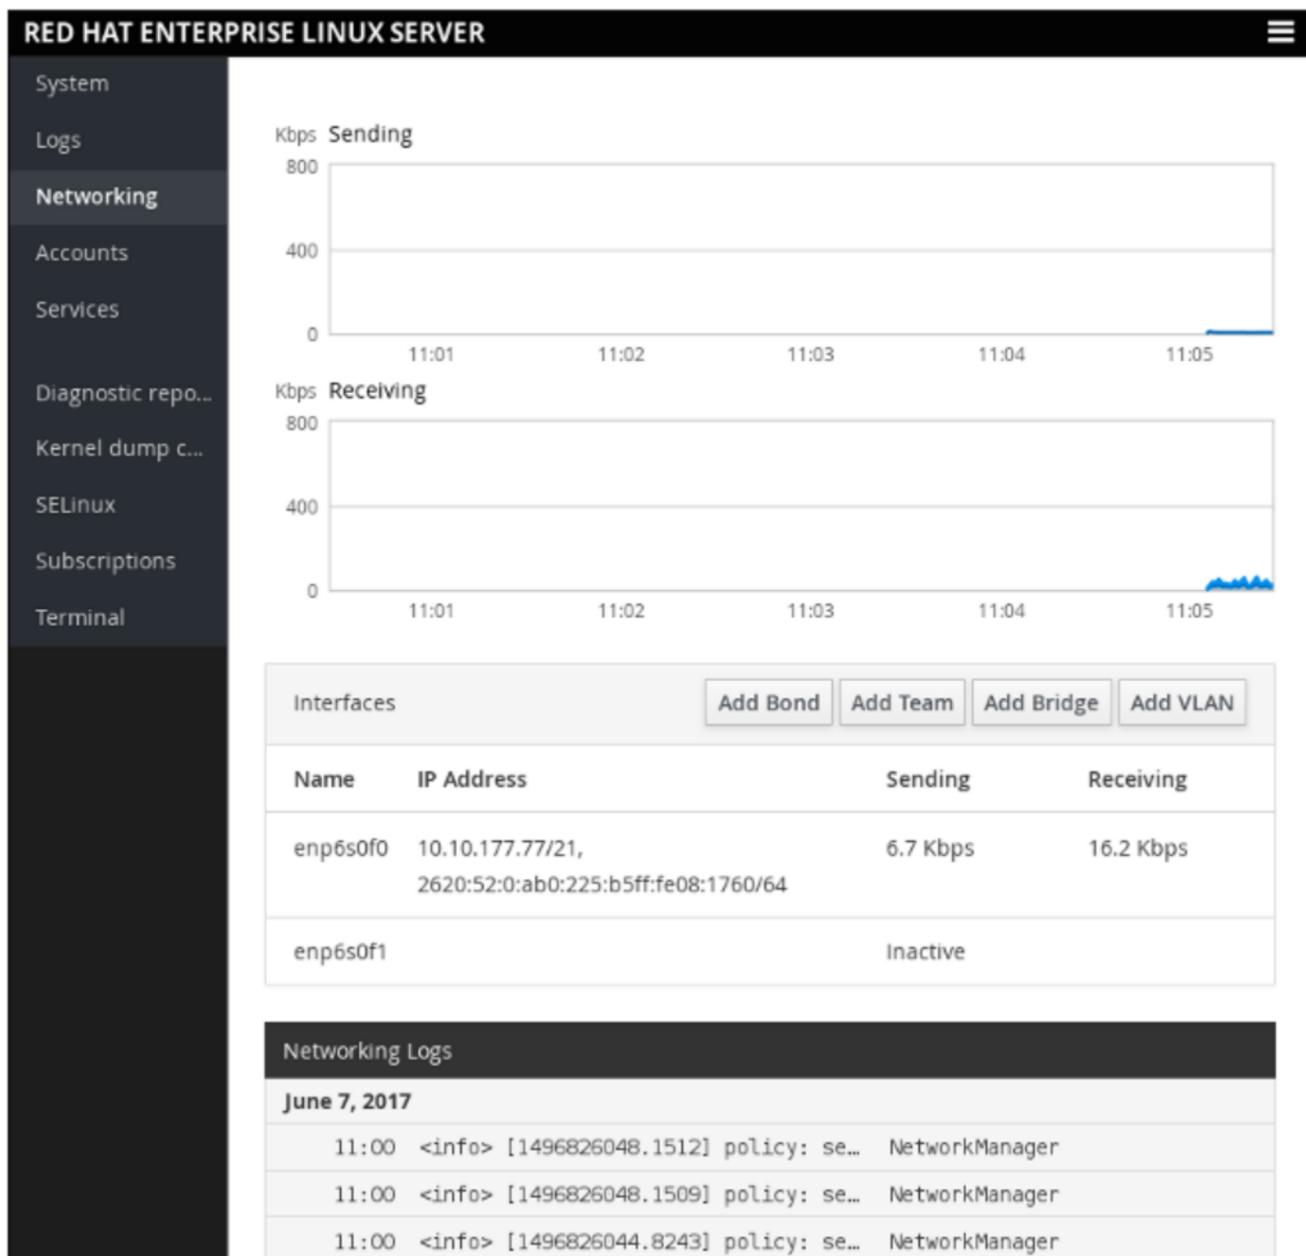

**Accounts:** Shows which administrative (root) and other users (for example, alan, djohnson) have accounts on the system.

The screenshot shows the 'Accounts' section of the Cockpit interface. On the left is a sidebar with options: System, Logs, Networking, Accounts (which is selected and highlighted in grey), Services, Diagnostic repo..., Kernel dump c..., SELinux, Subscriptions, and Terminal. The main area has a title 'RED HAT ENTERPRISE LINUX SERVER' at the top. Below it is a 'Create New Account' button. Two user accounts are listed: 'root' (with icon) and 'Test User' (with icon). The 'Test User' account is currently selected.

**Services:** Shows the systemd services running on the Cockpit server. You can see which are active/enabled or inactive. You can also see other systemd features: Targets, sockets, timers, and paths.

The screenshot shows the 'Services' section of the Cockpit interface. The sidebar on the left is identical to the previous screenshot. The main area has a title 'RED HAT ENTERPRISE LINUX SERVER'. Below it is a navigation bar with tabs: Targets, System Services (which is selected and highlighted in grey), Sockets, Timers, and Paths. A table titled 'Enabled' lists running services:

Description	Id	State
Job spooling tools	atd.service	active (running)
Security Auditing Service	audited.service	active (running)
autovt@.service Template	autovt@.service	
The Beaker backend server.	beah-beaker-backend.service	active (running)
The Beaker sync server for multi-host jobs	beah-fwd-backend.service	active (running)
The Beaker Harness server.	beah-srv.service	active (running)
Wait for chrony to synchronize system clock	chrony-wait.service	active (exited)
NTP client/server	chronyd.service	active (running)

Select a service to view its details:

**RED HAT ENTERPRISE LINUX SERVER**

- System
- Logs
- Networking
- Accounts
- Services**
- Diagnostic repo...
- Kernel dump c...
- SELinux
- Subscriptions
- Terminal

[Services](#) » chronyd.service

NTP client/server

**active (running)**  
Since 6/6/2017, 7:23:53 PM

loaded (/usr/lib/systemd/system/chronyd.service; enabled)

**Stop** **Disable**

**Service Logs**

**June 6, 2017**

15:23	System clock was stepped by -14400...	chronyd
15:23	System clock wrong by -14400.365956...	chronyd
15:23	Selected source 10.11.160.238	chronyd
19:23	Started NTP client/server.	systemd
19:23	chronyd version 3.1 starting (+CMDM...	chronyd
19:23	Starting NTP client/server...	systemd

**Diagnostic reports:** Collects system configuration and diagnostics information and prepares a report in the .xz compressed format.

**RED HAT ENTERPRISE LINUX SERVER**

- System
- Logs
- Networking
- Accounts
- Services
- Diagnostic rep...**
- Kernel dump c...
- SELinux
- Subscriptions
- Terminal




This tool will collect system configuration and diagnostic information from this system for use with diagnosing problems with the system.


The collected information will be stored locally on the system.

**Create report**

You can then download the report locally to your system:

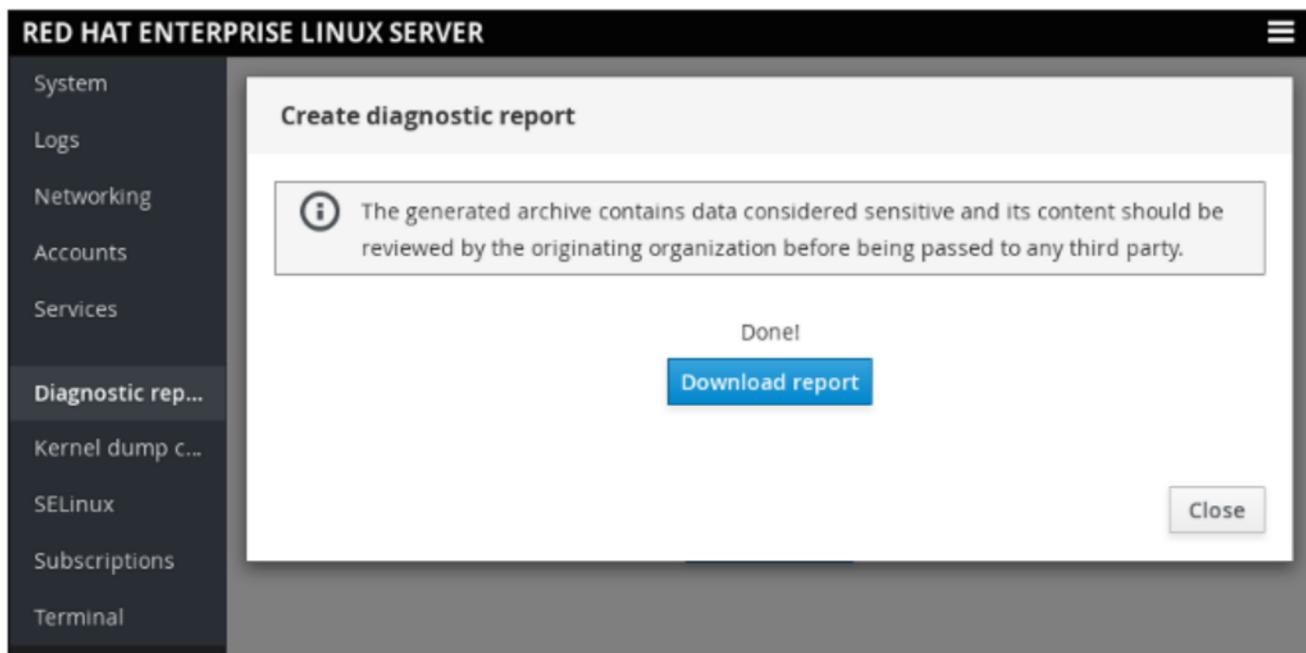

**Kernel dump configuration:** Shows kdump status and configuration and allows to crash the kernel to test kdump.

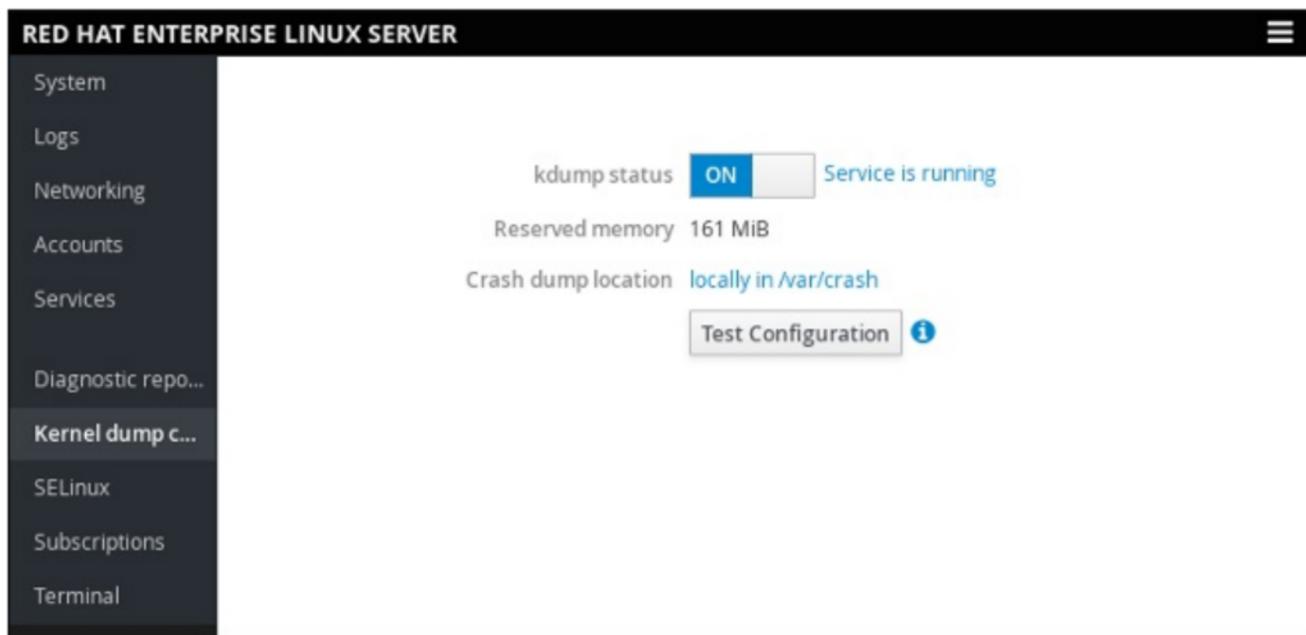

**SELinux:** Shows whether SELinux is enabled and lists access control errors.

RED HAT ENTERPRISE LINUX SERVER

System  
Logs  
Networking  
Accounts  
Services  
Diagnostic repo...  
Kernel dump co...  
**SELinux**  
Subscriptions  
Terminal

SELinux Policy

Enforce policy: **ON**

SELinux Access Control Errors

SELinux is preventing /usr/libexec/colord from read access on the file /etc/udev/hwdb.bin. 2

Click on an error to see detailed information about it, proposed solution, and audit log:

RED HAT ENTERPRISE LINUX SERVER

System  
Logs  
Networking  
Accounts  
Services  
Diagnostic repo...  
Kernel dump co...  
**SELinux**  
Subscriptions  
Terminal

SELinux Policy

Enforce policy: **ON**

SELinux Access Control Errors

▼ SELinux is preventing /usr/libexec/colord from read access on the file /etc/udev/hwdb.bin. 2

Solutions	Occurred between Yesterday at 10:30 AM and Today at 1:16 PM	
Audit log		

If you believe that colord should be allowed read access on the hwdb.bin file by default. You should report this as a bug. You can generate a local policy module to allow this access. Unable to apply this solution automatically

**solution details**  
Allow this access for now by executing: # ausearch -c 'colord' --raw | audit2allow -M my-colord # semodule -i my-colord.pp

**Subscriptions:** Displays installed Red Hat products and subscriptions.

The screenshot shows the 'Subscriptions' page in the Cockpit interface. On the left, a sidebar menu lists various system management options. The 'Subscriptions' option is highlighted. The main content area displays the status as 'Current' with a blue 'Unregister' button. Below this, the 'Installed products' section is shown, with 'Red Hat Enterprise Linux Server' expanded. Under the 'Details' tab, product information is listed:

- Product name: Red Hat Enterprise Linux Server
- Product ID: 69
- Version: 7.4 Beta
- Architecture: x86\_64
- Status: Subscribed
- Starts: 08/14/13
- Ends: 12/31/21

At the bottom of the content area, the text 'Red Hat Enterprise Linux 7 Server High Touch Beta' is visible.

**Terminal:** Opens an in-browser terminal with a command line session to the Cockpit system. In this terminal, you can run commands from your signed-in user account. For example, as root, you could run the `systemctl start` or `dnf install` commands.

The screenshot shows a terminal session within the Cockpit interface. The terminal window has a title bar showing 'root@primary:~'. The main area of the terminal is black, indicating it is a standard text-based terminal. A small 'Reset' button is located in the top right corner of the terminal window.

For Red Hat Enterprise Linux Atomic Host systems, there are additional features in the Cockpit interface. See [Cockpit Interface Specific to Atomic Host](#).


### 3.1.1. Adding secondary systems

Once you log in to the primary server, you will be able to connect to secondary servers. These secondary systems need to have:


- The **cockpit** packages installed.
- An SSH server running and available on port 22 that supports password or key-based authentication.

To add a new secondary server:

1. From the "Dashboard" tab next to the system name, click the plus button.
2. Enter IP of the server you are adding and choose a color label for it.
3. Click the "Add" button.

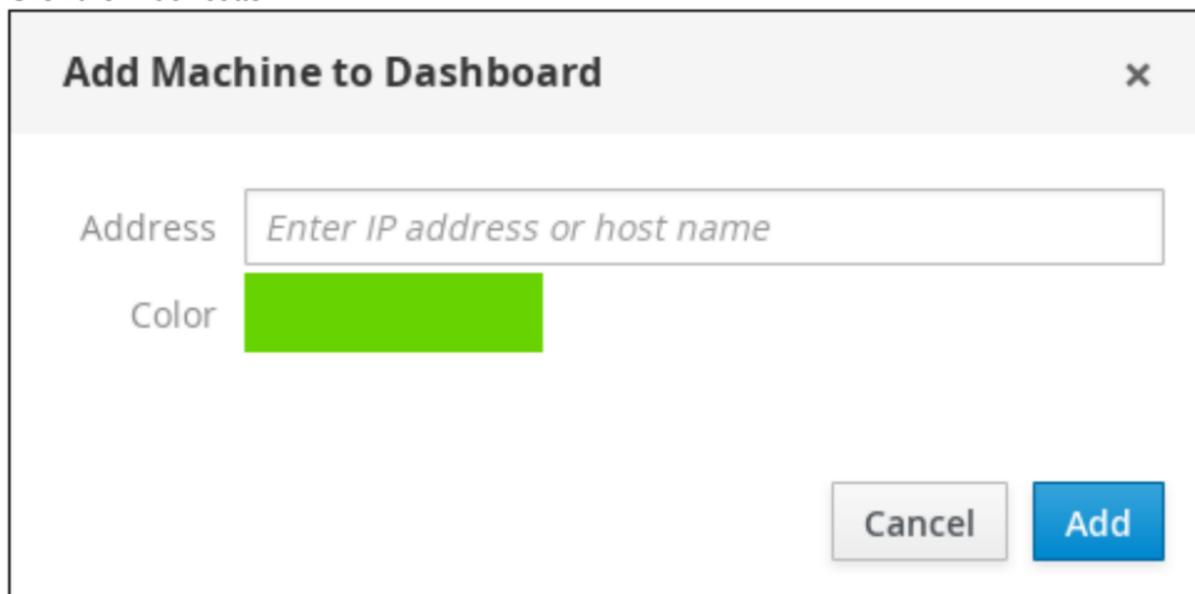

4. Log in to the system with a user name and password:

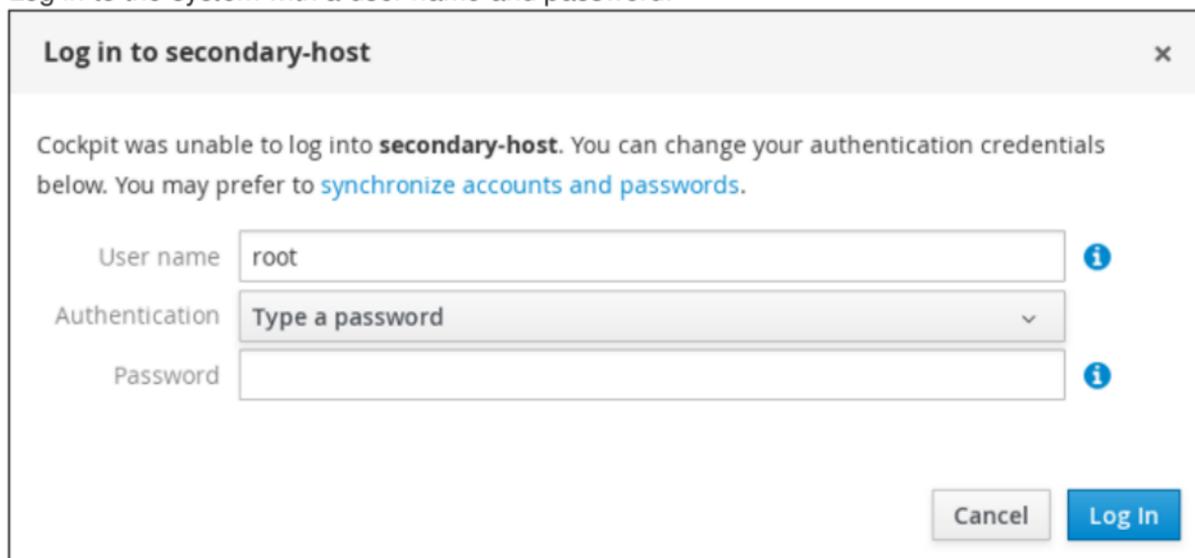


## Configuring Key-Based Authentication

If you have keys generated on the primary server, you need to add them to the target server, in the `~/.ssh/authorized_keys` file. If you do not have keys, use the following command:

```
$ ssh-keygen
```

Next, copy the contents of the `~/.ssh/id_rsa.pub` file to the `~/.ssh/authorized_keys` file **on the target server**. Then, return to the user interface on the primary server, click the top right corner menu with the user name on it, choose **Authentication**, and enable the preloaded key.

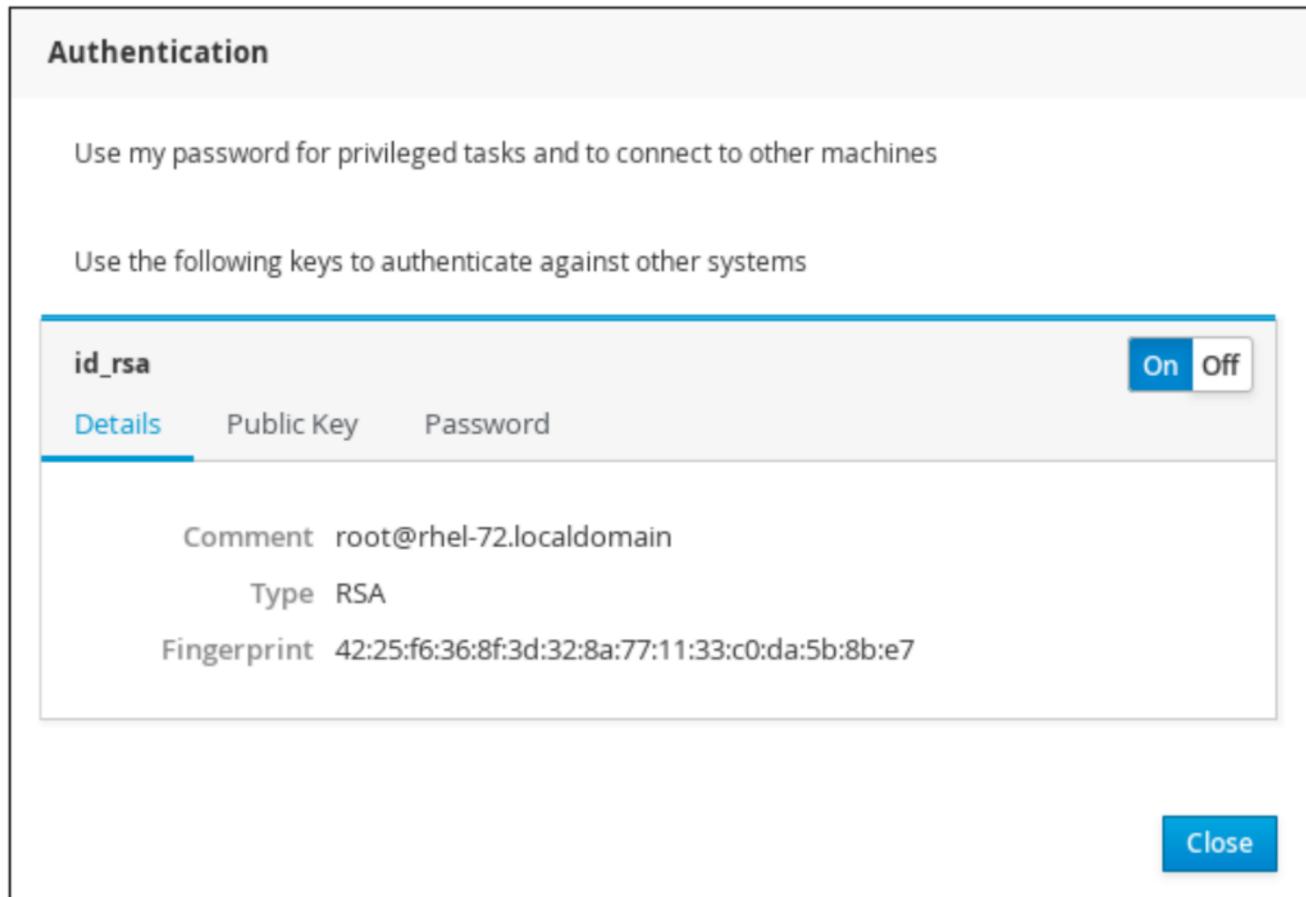

After you type in the IP when adding the new system to the Dashboard, change the **Authentication** type to **Use available credentials**.

### 3.1.2. Logging into other systems through Cockpit

On the login screen, you can also choose an alternate host to connect to.


The alternate host needs to have:

- SSH listening on port 443
- the `cockpit-bridge` package and all relevant subpackages to interact with the system, such as `cockpit-system` installed. The packages should be the same version as in the Cockpit server.

To connect to an alternate host:

1. Type in your user name and password from that alternate host and click **Other Options**.
2. In the entry field type the IP address of the new host and click **Log In**.
3. Provide the SSH fingerprint and click **Log In** again.

Now you are able to browse the new system. Cockpit uses SSH to authenticate you against that host, so you do not need to configure anything else on the new system.

**NOTE**

If the new machine is not known to Cockpit, and you get the **Refusing to connect. Host is unknown** error, use the following command to allow connections from unknown hosts:

```
ssh-keyscan -H [ip_address] >> /var/lib/cockpit/known_hosts
```

### 3.1.3. Logging into a system via a Bastion Host

On the Cockpit login screen you can choose an alternate host to connect to. Cockpit uses SSH to authenticate you against that host and to display the admin interface for that host.

Although browsers cannot use SSH directly to connect to machines or authenticate against them, Cockpit can make this happen. Only one host needs to have Cockpit listen on port 9090 available to browsers over TLS. Other hosts only need to have SSH accessible on the usual port 22.

## 3.2. CHANGING THE COCKPIT PORT

To change the Cockpit port:

1. If required, create the `/etc/systemd/system/websocket.cockpit.d` directory and its parent directories:

```
# mkdir -p /etc/systemd/system/websocket.cockpit.d/
```

2. Create the `/etc/systemd/system/websocket.cockpit.d/listen.conf` file with these contents:

```
[Socket]
ListenStream=9898
```

3. Allow the new port through the firewall:

```
# firewall-cmd --add-port=9898/tcp
# firewall-cmd --permanent --add-port=9898/tcp
```

4. If you have SELinux enabled, change the default SELinux policy to allow the `websm_port_t` domain to listen on the TCP 9898 port:

```
$ sudo semanage port -a -t websm_port_t -p tcp 9898
```

If the port is already defined by some other part of the SELinux policy, use the `-m` argument instead of `-a` to modify the definition:

```
$ sudo semanage port -m -t websm_port_t -p tcp 9898
```

1. To make the changes take effect, run the following commands:

```
$ sudo systemctl daemon-reload
$ sudo systemctl restart cockpit.socket
```

You can now use the address with the newly assigned port in the web browser.


For changing port on a Red Hat Enterprise Linux Atomic Host system, see [Changing the Cockpit port on Atomic Host](#).

### 3.3. ENABLING MORE COCKPIT FEATURES

You can add more Cockpit features by installing additional cockpit-\* packages using yum

# CHAPTER 4. COCKPIT ON RED HAT ENTERPRISE LINUX ATOMIC HOST

A Cockpit server can run on Red Hat Enterprise Linux Atomic Host, and Atomic Host servers can be monitored and administered using Cockpit. Additionally, Cockpit can control life cycle of container instances and manipulate container images.



## NOTE

Cockpit does not yet support Kubernetes on Red Hat Enterprise Linux or Red Hat Enterprise Linux Atomic Host servers.

This chapter describes Cockpit features specific to Atomic Host.

## 4.1. INSTALLING COCKPIT ON ATOMIC HOST

To install Cockpit on Atomic Host:

1. Pull the **cockpit-ws** image:

```
# atomic install rhel7/cockpit-ws
```

2. Run the **cockpit-ws** image:

```
# atomic run rhel7/cockpit-ws
```

Now you can log into Cockpit. See [Opening the Interface](#) for instructions.

## 4.2. COCKPIT INTERFACE SPECIFIC TO ATOMIC HOST

In addition to information about systems presented in [Getting to know the Cockpit interface](#), extra tabs appear on Atomic Host systems:

**Containers:** Lists all images available on the system, all running and non-running containers, combined CPU & memory usage graphs, and a storage usage bar. See [Working with Containers](#) for more information on using this tab.

**RED HAT ENTERPRISE LINUX SERVER**

System Services **Containers** Logs Networking SELinux Accounts Diagnostic repo... Kernel dump c... Software Updat... Subscriptions Terminal

Images and running containers Type to filter...

% Combined CPU usage

MiB Combined memory usage

12.8 GiB Free 1.9 / 14.7 GiB

[Configure storage...](#)

## Containers

Name	Image	Command	CPU	Memory	State
rhel-tools	4bc4f634f159	/usr/bin/bash	0%	9.6 MiB	running

## Images

[Get new image](#)

Name	Created	Size
registry.access.redhat.com/rhscl/mariadb-100-rhel7:latest	21 days ago	375.2 MiB
registry.access.redhat.com/rhel7/rhel-tools:latest	21 days ago	1.3 GiB

**Software Updates:** Shows the available OSTrees on the system. You can also check for a newer tree, or roll back to a previous version.

The screenshot shows the 'Operating System Updates' section of the Cockpit interface. On the left, a sidebar lists various system management tabs: System, Services, Containers, Logs, Networking, SELinux, Accounts, Diagnostic repo..., Kernel dump c..., Software Upda..., Subscriptions, and Terminal. The 'Software Upda...' tab is currently selected.

The main area displays two operating system images:

- rhel-atomic-host 7.3.5** (Running):
  - Operating Sys...: rhel-atomic-host
  - Version: 7.3.5
  - Released: 18 days ago
  - Origin: rhel-atomic-host-ostree:rhel-atomic-host/7/x86\_64/standard
- rhel-atomic-host 7.3.3** (Available):
  - Operating Sys...: rhel-atomic-host
  - Version: 7.3.3
  - Released: 3 months ago
  - Origin: rhel-atomic-host-ostree:rhel-atomic-host/7/x86\_64/standard
  - Removals: 1 package
  - Downgrades: 113 packages

A 'Check for Updates' button is located at the top right of the update list.

#### 4.2.1. Working with Containers

The **Containers** tab presents you with a UI to interact with your Atomic Host images and containers. Apart from the system resources graphs, there are lists of all images you have locally on the system as well as all running and non-running containers.

**Download an image.** Click the "Get new image" button from the images list to the right and enter an image name or a keyword. Choose an image and click "Download".

**Image Search**

rhel6	This platform image provides a minimal runtime to build, run and deploy Red Hat Enterprise Linux 6 applications as a container on a Red Hat Enterprise Linux 7 and Red Hat Enterprise Linux 7 Atomic host.
rhel6.5	This platform image provides a minimal runtime to build, run and deploy Red Hat Enterprise Linux 6.5 applications as a container on a Red Hat Enterprise Linux 7 and Red Hat Enterprise Linux 7 Atomic host.
rhel6.6	This platform image provides a minimal runtime to build, run and deploy Red Hat Enterprise Linux 6.6 applications as a container on a Red Hat Enterprise Linux 7 and Red Hat Enterprise Linux 7 Atomic host.

**Starting and stopping containers.** From the "Containers" list, you can start and stop containers using the buttons on the right side. Use the drop-down menu to see all or filter out the non-running containers.

Containers						All <input type="button" value="▼"/>
Name	Image	Command	CPU	Memory	<input checked="" type="checkbox"/>	
angry_bardeen	996a8c56b96fa06719f6114c...	/container/atomic-ru...		Stopped	<input type="button" value="▶"/>	
gloomy_saha	996a8c56b96fa06719f6114c...	/container/atomic-ru...	0%	<div style="width: 10px; background-color: blue;"></div> 22.2 MB	<input type="button" value="▀"/>	
rhel-tools	c28fabd46c7457b4d20af56f...	sosreport --sysroot /...	87%	<div style="width: 87px; background-color: blue;"></div> 34.6 MB	<input type="button" value="▀"/>	
romantic_lumiere	3fa89512d5bdec7331e743e0...	/bin/rsyslog.sh		Stopped	<input type="button" value="▶"/>	
serene_bhaskara	996a8c56b96fa06719f6114c...	/container/atomic-ru...		Stopped	<input type="button" value="▶"/>	
sharp_mclean	996a8c56b96fa06719f6114c...	/container/atomic-ru...		Stopped	<input type="button" value="▶"/>	
silly_ride	996a8c56b96fa06719f6114c...	/container/atomic-ru...		Stopped	<input type="button" value="▶"/>	

**Click on a container to inspect it.** Shows the state, the command executed, the container's and image's IDs, a timestamp, as well as the container's own terminal:

Container: mariadb\_container
[Start](#)
[Stop](#)
[Restart](#)
[Delete](#)
[Commit](#)

---

Id: 6a5f8ecfb371f47aefb945f99a062076001b355ee44f692fb660460bddc08667  
 Created: 2017-06-20T12:10:16.792690907Z  
 Image: sha256:084a75509e01d6ea92664b47f5aaa7758f08e0f3487a1b5d86734860790b2802  
 Command: container-entrypoint run-mysqld  
 State: Up since 2017-06-20T12:10:17.574543433Z  
 Restart Policy: No  
 IP Address: 172.17.0.2  
 IP Prefix Length: 16  
 Gateway: 172.17.0.1  
 MAC Address: 02:42:ac:11:00:02

Memory usage: 138.7 MiB  
 CPU usage: 0% 1024 shares

[Change resource limits](#)

---

```

--> 12:10:24      Sourcing post-init.sh ...
--> 12:10:24      Shutting down MySQL ...
170620 12:10:25 [Note] InnoDB: Waiting for page_cleaner to finish flushing of buffer pool
170620 12:10:27 [Note] InnoDB: Shutdown completed; log sequence number 1623589
170620 12:10:27 [Note] /opt/rh/rh-mariadb100/root/usr/libexec/mysqld: Shutdown complete
--> 12:10:27      Cleaning up environment variables MYSQL_USER, MYSQL_PASSWORD,
                  MYSQL_DATABASE and MYSQL_ROOT_PASSWORD ...
--> 12:10:27      Running final exec -- Only MySQL server logs after this point
170620 12:10:27 [Note] /opt/rh/rh-mariadb100/root/usr/libexec/mysqld (mysqld 10
.0.28-MariaDB) starting as process 1 ...
2017-06-20 12:10:27 7fc204b35880 InnoDB: Warning: Using innodb_additional_mem_pool_size is DEPRECATED. This option may be removed in future releases, together
with the option innodb_use_sys_malloc and with the InnoDB's internal memory al

```

**Click on an image to inspect it.** Shows the image's ID, entrypoint and command, and a list of containers based on that image. You can also delete the image from here or run a container from it.

Image: registry.access.redhat.com/rhel7/rhel-tools:latest

**Run** **Delete**

Id: c28fabd46c7457b4d20afd56fc756089e6db5076cce72e9f2a14e6743b046667

Entrypoint:

Command: /usr/bin/bash

Created: 1456808807

Author: Red Hat, Inc.

Ports:

Containers

Name	Image	Command	CPU	Memory
------	-------	---------	-----	--------

**Run a container.** To run a container from an image, either click the triangle button from the right side of the list or choose the image first and then click "Run" from the top right corner. You can then enter the required data for the new container in the following dialog:

### Run Image

Image registry.access.redhat.com/rhel7/rhel-tools:latest

Container Name

Command

Memory limit   512 MB

CPU priority   1024 shares

With terminal

Links  Link to another container  
 alias

Ports  Expose container ports

**Cancel** **Run**