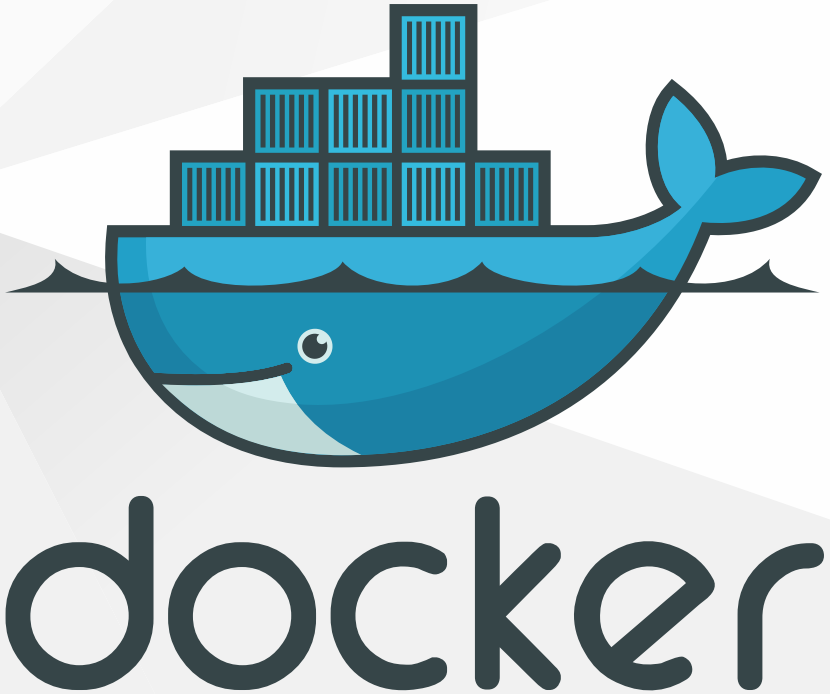

Dockerfile

Pour créer vos conteneurs

https://www.docker.com/

Vous devez créer un fichier `Dockerfile` pour décrire votre conteneur.
`FROM` permet de choisir l'image de base.
Les commandes `RUN` permettent d'initialiser le conteneur.

Dockerfile

```
FROM debian:12

RUN apt-get update
RUN apt install curl wget lsb-release ca-certificates -y
```

Ensuite, vous pouvez utiliser votre conteneur dans un fichier `compose.yml`, comme ci-dessous:
`build: .` indique que le Dockerfile se trouve dans le même répertoire.

compose.yml

```
services:

    web:
        build: .
        ports:
            - 8000:8000
        volumes:
            - ../:/var/www
```

Commandes

Pour construire le conteneur à partir du `Dockerfile`

```
docker compose build web
```

Pour démarrer le conteneur

```
docker compose up
```

Pour ouvrir un terminal

```
docker compose exec web bash
```

Exemple complet

Vous trouverez ci-dessous trois fichiers de configuration pour installer la pile complète (`php8.4`, `composer`, `symfony`, `mariadb`...)

Placez les trois fichiers dans le même répertoire et lancez mes commandes suivantes:

```
docker compose build web
docker compose up
# Pour acceder au shell du conteneur php:
docker exec web bash
```

Dockerfile

```dockerfile
FROM debian:12

RUN apt-get update
RUN apt install curl wget lsb-release ca-certificates -y

# all php versions
RUN curl -sSLo /tmp/debsuryorg-archive-keyring.deb https://packages.sury.org/debsuryorg-archive-keyring.deb
RUN dpkg -i /tmp/debsuryorg-archive-keyring.deb
RUN sh -c 'echo "deb [signed-by=/usr/share/keyrings/deb.sury.org-php.gpg] https://packages.sury.org/php/ $(lsb_release -sc) main" > /etc/apt/sources.list.d/php.list'
RUN apt-get update
RUN apt install php8.4 php8.4-dom php8.4-mysql php8.4-mbstring php8.4-intl php8.4-xml php8.4-gd php8.4-xdebug php8.4-curl php8.4-zip -y

# install git
RUN apt install git -y
RUN git config --global --add safe.directory /var/www

# install symfony-cli
RUN curl -sS https://get.symfony.com/cli/installer | bash
RUN cp /root/.symfony5/bin/symfony /usr/local/bin/

RUN symfony server:ca:install
# To enable TLS (SSL), import /root/.symfony5/certs/rootCA.pem like "Authority Cert" in your navigator

#install composer
RUN wget https://getcomposer.org/installer -O /var/www/composer-setup.php
RUN php /var/www/composer-setup.php
RUN mv composer.phar /usr/bin/composer
RUN chmod +x /usr/bin/composer

COPY xdebug.ini /etc/php/8.4/cli/conf.d/20-xdebug.ini

ENV PHP_MEMORY_LIMIT=1024M

WORKDIR /var/www

ENTRYPOINT ["symfony", "server:start", "--allow-all-ip"]
```

compose.yml

```yaml
services:

    web:
        build: .
        ports:
            - 8000:8000
        volumes:
            - ../:/var/www
        extra_hosts:
            - host.docker.internal:host-gateway

    db:
        image: mariadb:10.6
        restart: always
        environment:
            MYSQL_ROOT_PASSWORD: Afpa1234

    phpmyadmin:
        image: phpmyadmin
        restart: always
        ports:
            - 8080:80
        environment:
            - PMA_ARBITRARY=1

    mailhog:
        image: mailhog/mailhog:latest
        restart: always
        ports:
        - 1025:1025
        - 8025:8025
```

xdebug.ini

```
zend_extension=xdebug

xdebug.mode=debug
xdebug.client_host=host.docker.internal
xdebug.client_port=9003
xdebug.idekey=docker
xdebug.start_with_request=yes
xdebug.discover_client_host=1
# xdebug.log_level=0
```