


# **Attention Pooling for Semantic Sessions and Neural-Gate Neuron Routing**

Xiaonan Wang

Search-Ads Algorithms Related Industry Project When  
Working as a Machine Learning Scientist  
(During Period: 2020.09~2022.07)

# Ranking Model Structure

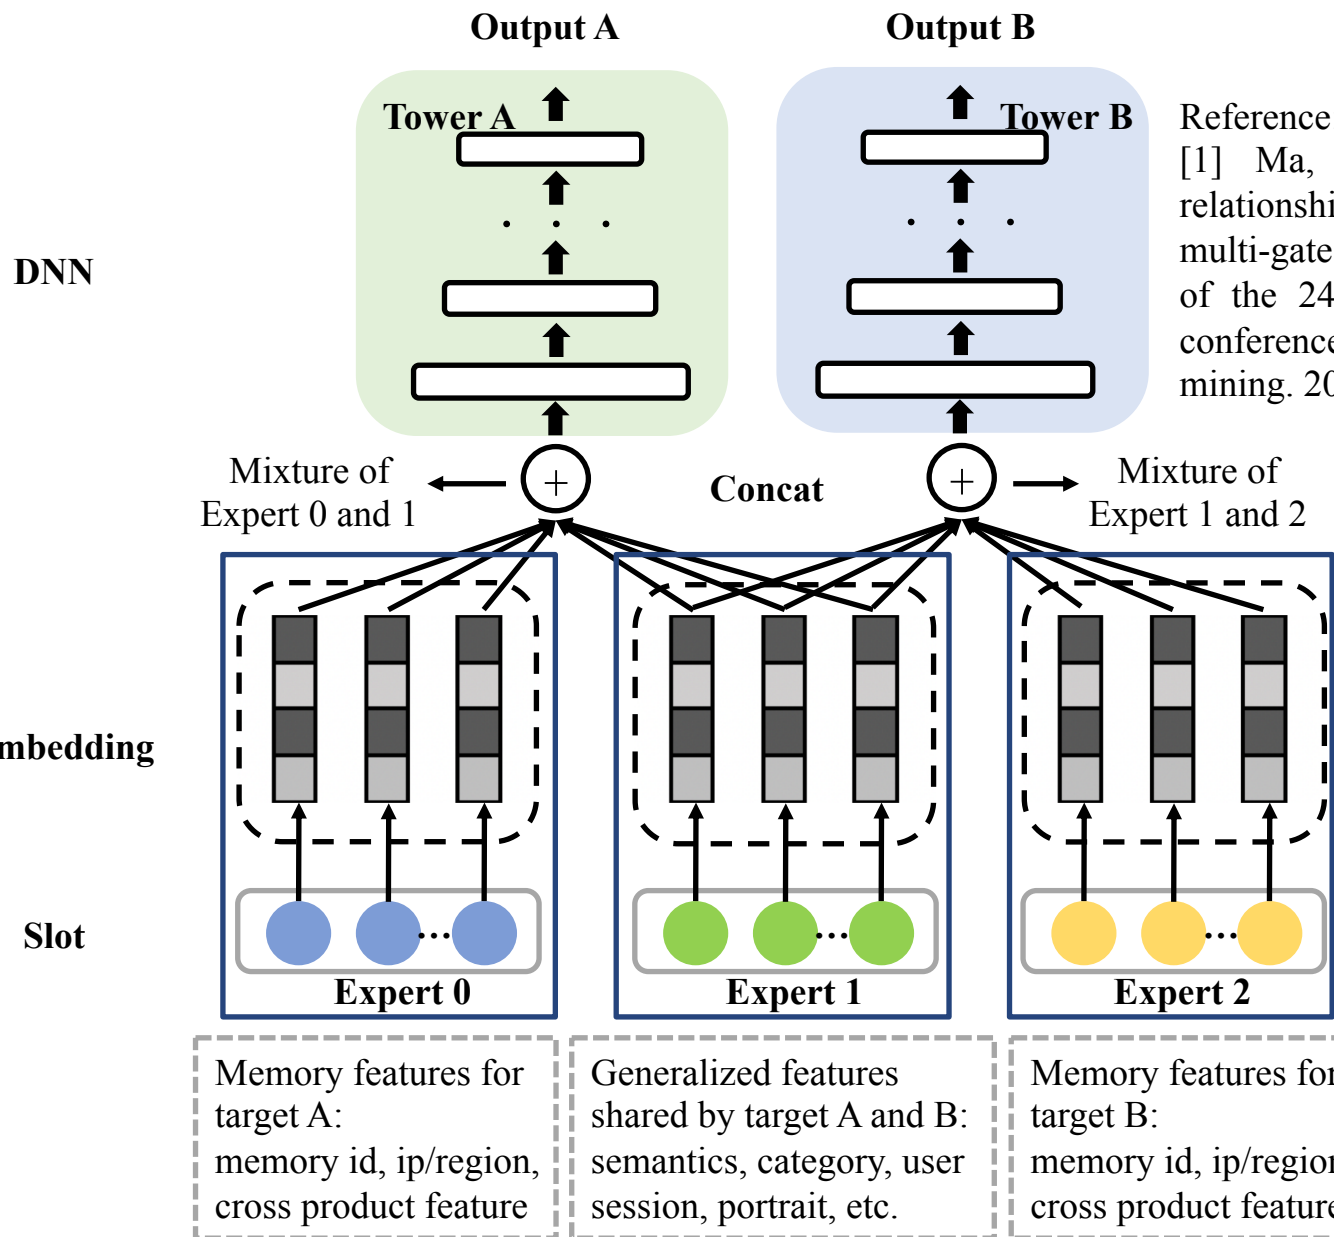


Reference:

[1] Ma, Jiaqi, et al. "Modeling task relationships in multi-task learning with multi-gate mixture-of-experts." Proceedings of the 24th ACM SIGKDD international conference on knowledge discovery & data mining. 2018.


# Semantic Attention Pooling

Base

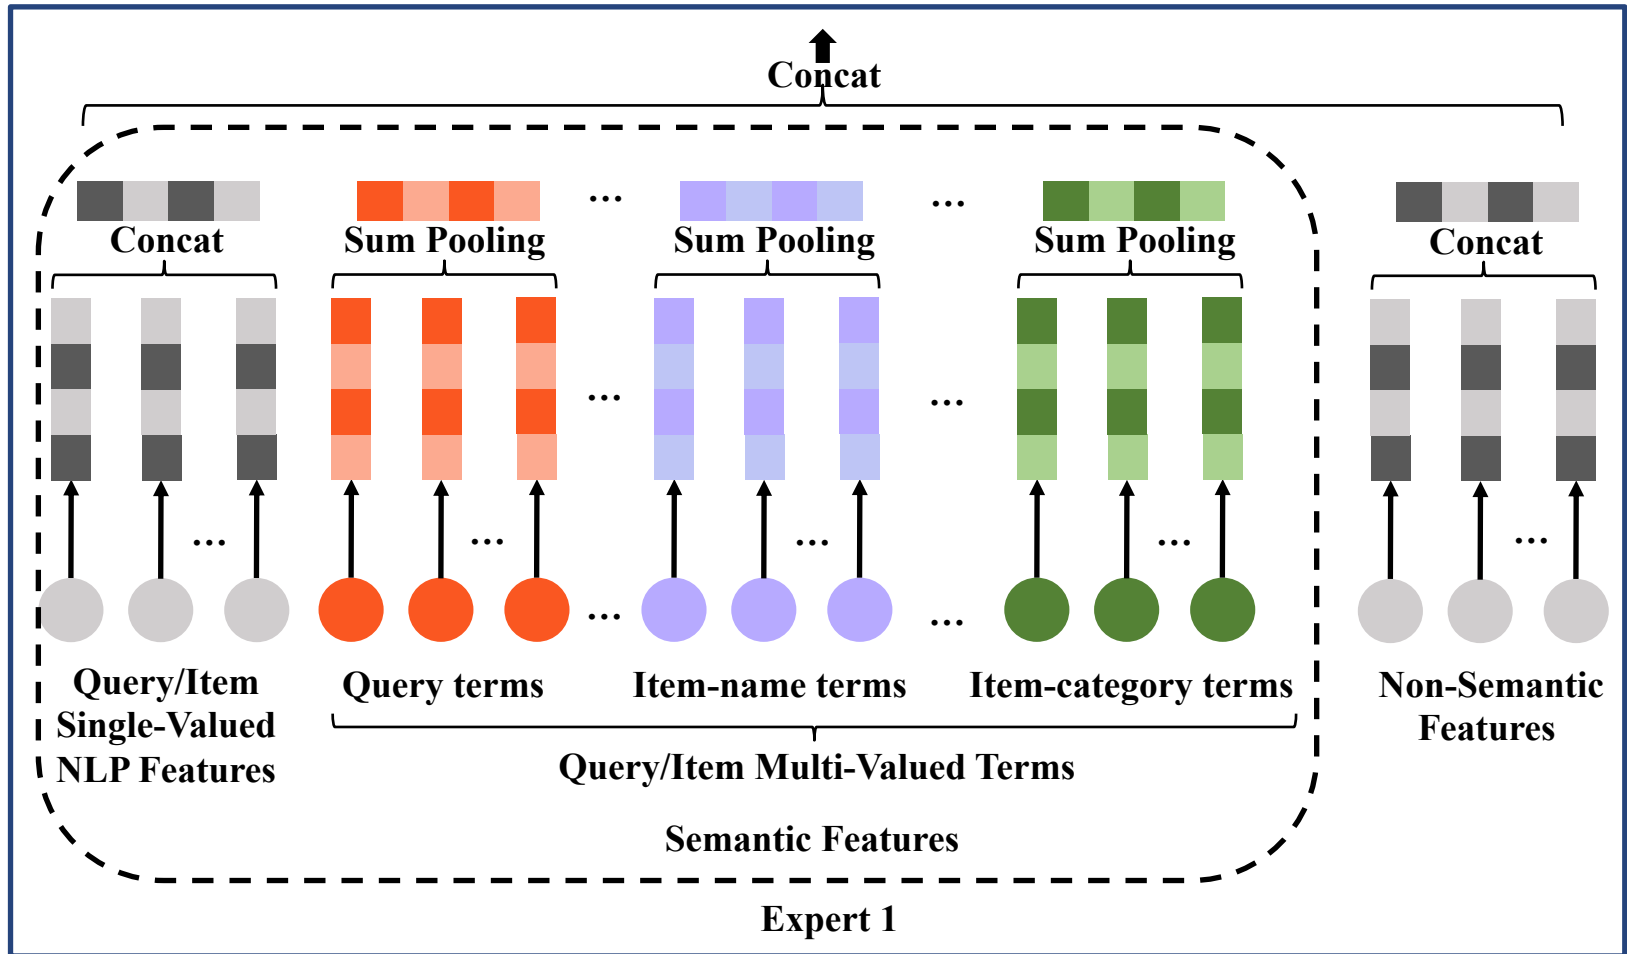


- Query/Item Multi-Valued Terms include: Query terms, Item-name terms, Item-Description Terms, Item-First-Category Terms, Item-Second-Category Terms, Item-Third-Category Terms.
- Query/Item Single-Valued Features: Single-Valued NLP Features, such as Query (NER), Item NER, etc.

# Semantic Attention Pooling

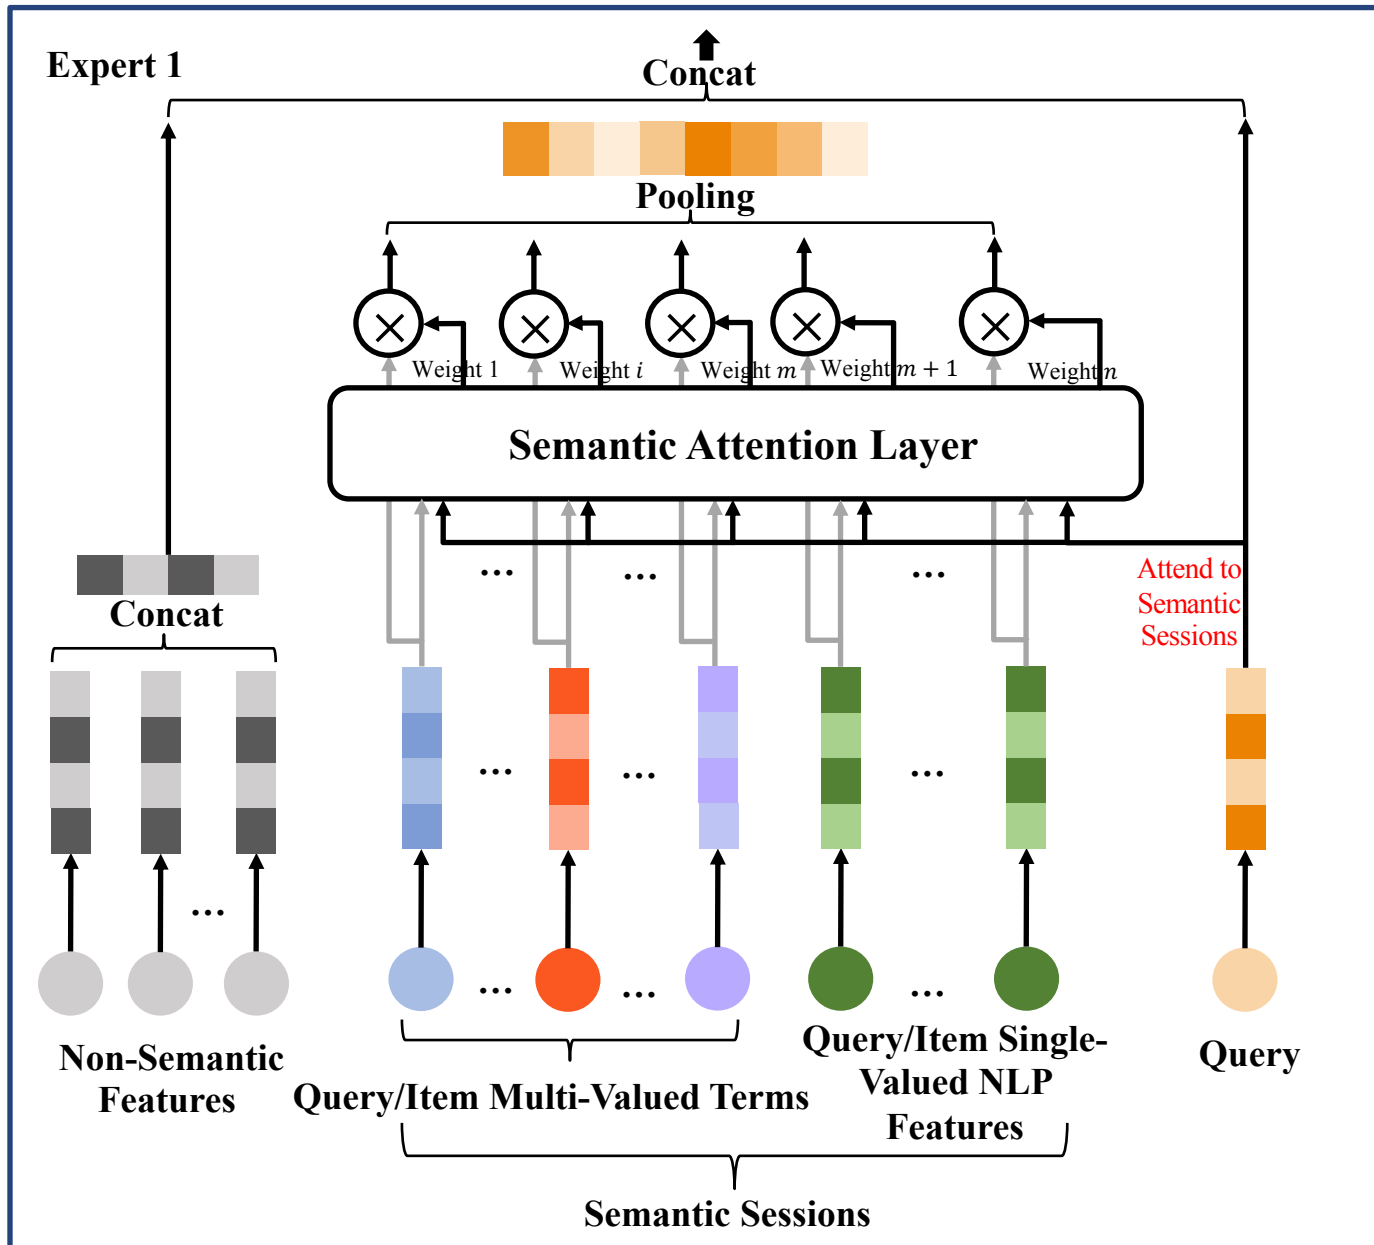


# Semantic Attention Pooling

## Semantic Attention Layer

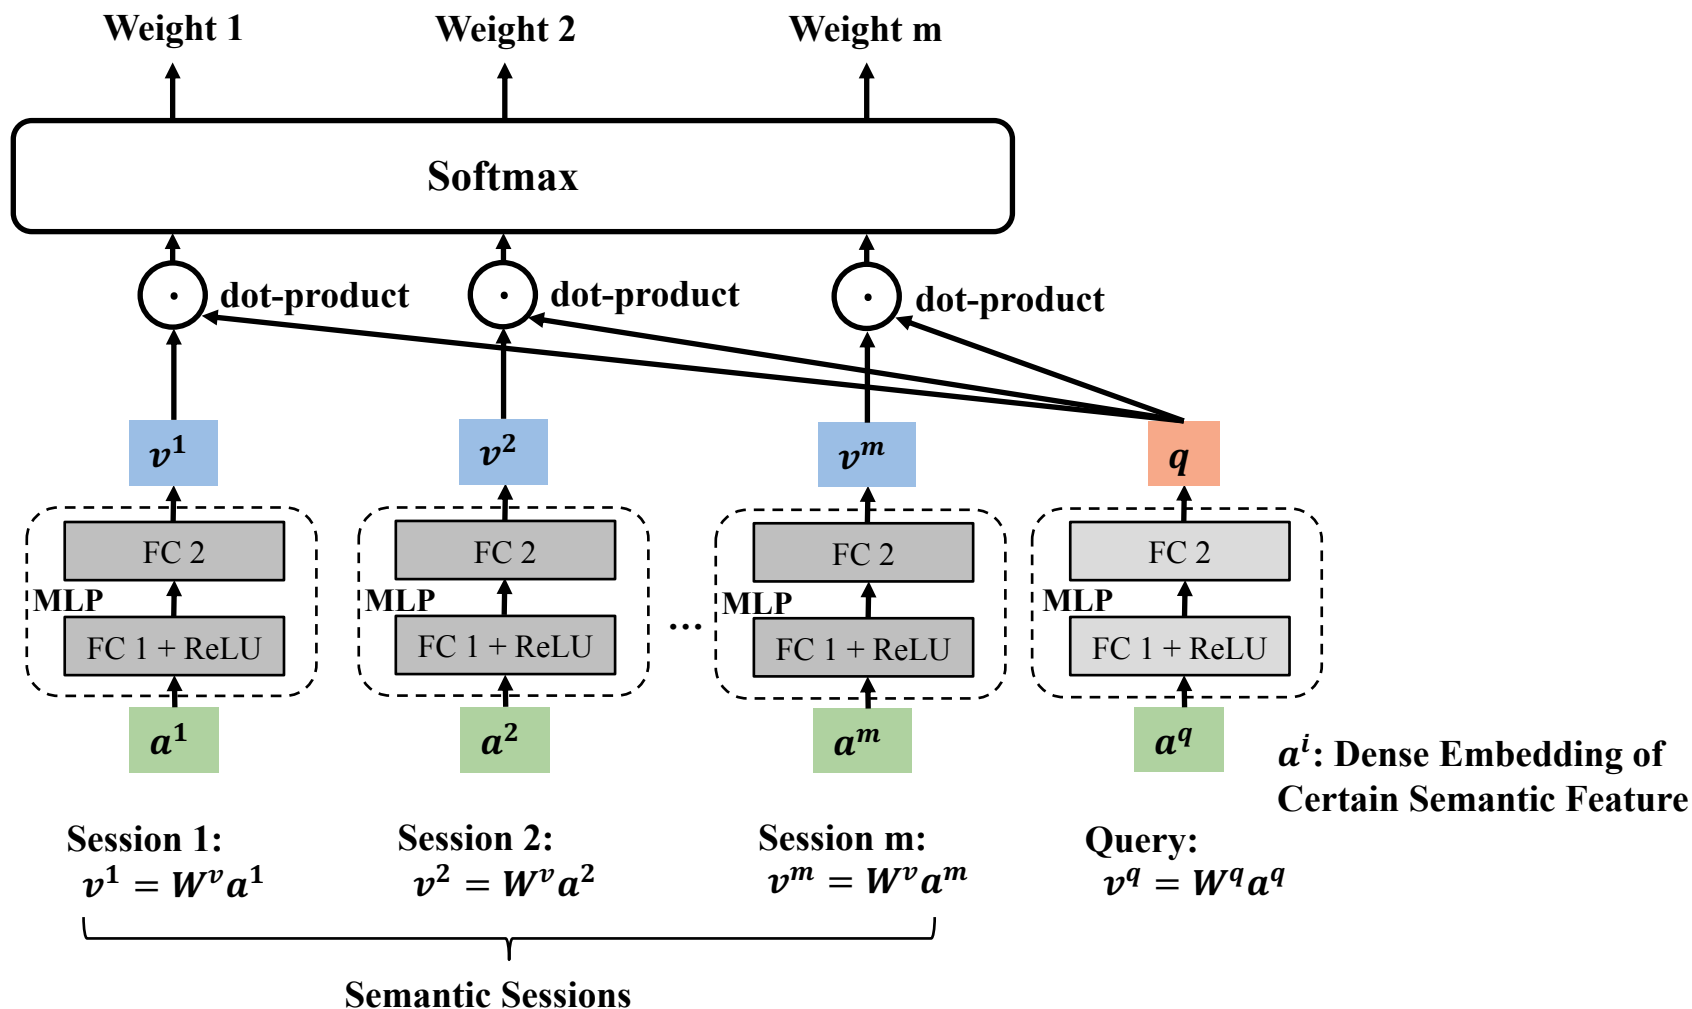

# Neural-Gate Neuron Routing

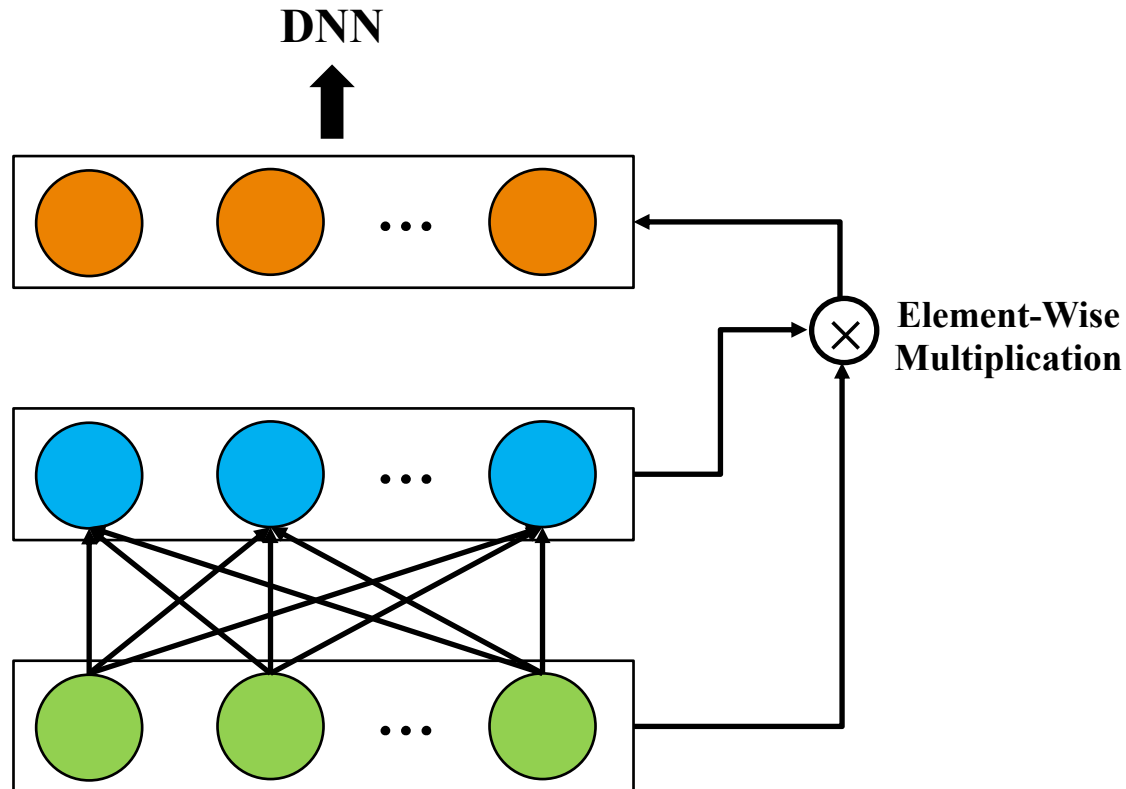

# Summarization

---

## Attention Pooling for Semantic Sessions

- Attention Weighted Sum Pooling for Semantic Sessions
- Query attend to semantic sessions to get relevance between query and each session. The relevance, which means the similarity to user's intention, will be used as sessions' weights.
- By doing this, we had achieved the pruning of the model (decreased from 30 semantic embedding-vectors to 2 semantic embedding-vectors as dnn's inputs) to further prevent overfitting.

## Neural-Gate Neuron Routing

- Environmental awareness of embedding vector granularity.