



**FAKULTA  
INFORMAČNÍCH  
TECHNOLOGIÍ  
ČVUT V PRAZE**

## **Event Planner - Copy**

### **Design**

Documentation of a project for the purpose of the course BIE-SI1.

Authors:



## Contents

1. Architecture	3
1.1 app	3
1.2 controller	3
1.3 entity	3
1.4 exception	4
1.5 fit.biesp.oneplan	4
1.6 model	4
1.7 Package1	4
1.8 repository	4
1.9 security	5
1.10 service	5
1.11 web	5
2. Design Model	6
2.1 app	6
2.2 data	6
2.2.1 db	7
2.2.1.1 Event	7
2.2.1.2 Friend	7
2.2.1.3 Invitation	8
2.2.1.4 Location	8
2.2.1.5 Money Transfer	8
2.2.1.6 Person	8
2.2.1.7 User	8
2.2.2 entity	8
2.2.2.1 Event	9
2.2.2.2 Friend	9
2.2.2.3 Invitation	9
2.2.2.4 Location	10
2.2.2.5 Money Transfer	10
2.2.2.6 Person	10
2.2.2.7 User	10
2.2.3 Model	10
2.2.3.1 EventModel	11
2.2.3.2 FriendModel	11
2.2.3.3 LocationModel	11
2.2.3.4 LoginModel	12
2.2.3.5 PersonModel	12
2.2.3.6 UserModel	12
2.2.3.7 UserResistrationModel	12
2.3 web	13
3. Realization Model	14
3.1 Event Creation	14
3.2 List of Events	14
3.3 User Registration	15

## 1. Architecture

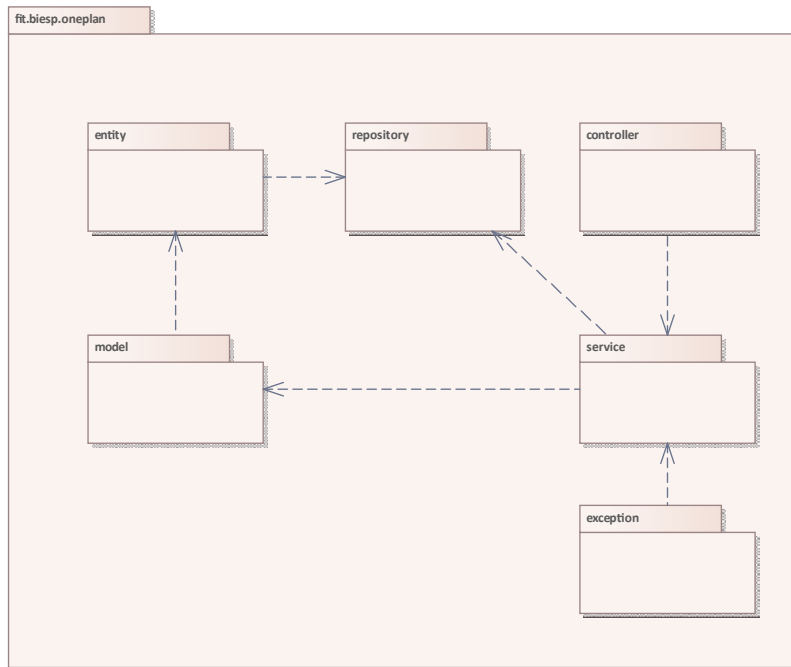


Figure 1 - Architecture

Architecture defines the boundaries between parts of the app and the responsibilities each part should have. There are several data classes, entity is used to store information in the database, while DAO classes are used to transfer information between user and the application. HTTP requests are handled by controller classes. Service classes are used for logic of the app and data manipulations. Repository interfaces extend CrudRepository and used for connection with a database. Exceptions are handled by exception classes.

### 1.1 app

### 1.2 controller

Used for HTTP requests handling.

### 1.3 entity

Entities are used to store information in a database.

Figure 2 - entity

## **1.4 exception**

Used for exceptions that might occur.

Figure 3 - exception

## **1.5 fit.biesp.oneplan**

Figure 4 - fit.biesp.oneplan

## **1.6 model**

Model classes used to transfer information between user and the application

Figure 5 - model

## **1.7 Package1**

## **1.8 repository**

Used for connection with a database.

Figure 6 - repository

## **1.9 security**

Used for secure user log in and registration.

Figure 7 - security

## **1.10 service**

Implementation of app logic and data manipulations.

Figure 8 - service

## **1.11 web**

## 2. Design Model

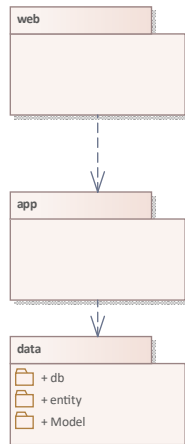


Figure 9 - Design Model

### 2.1 app

Figure 10 - app

### 2.2 data

This package contains the classes and packages of the data layer.

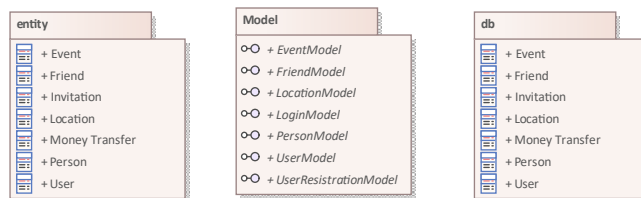


Figure 11 - data

This diagram shows the classes and packages of the data layer.

## 2.2.1 db

This package contains implementation of the data persistence using the PostgreSQL database storage.

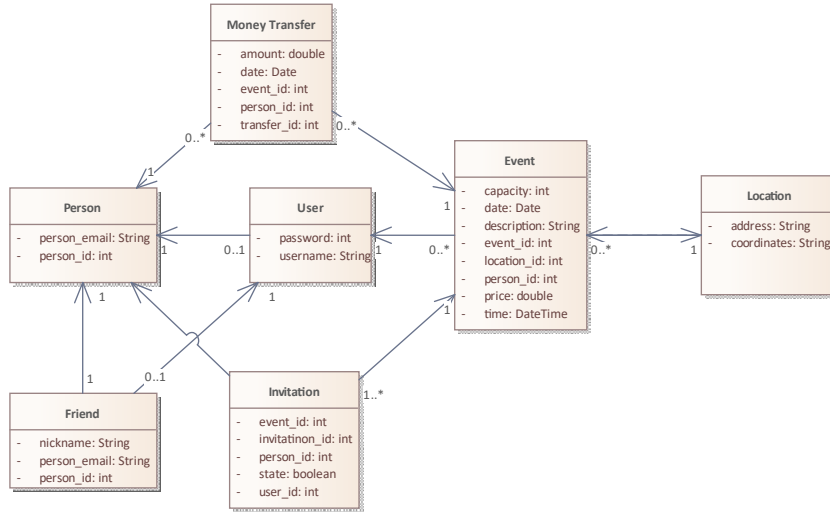


Figure 12 - db

This diagram shows the classes of the entities, defining the data objects synchronized with a persistent storage.

### 2.2.1.1 Event

The EVENT entity serves as a data holder for the data about event stored in a persistent storage.

Event represents a definition of an event and its details.

Event defines its capacity , date , description , unique event\_id , time and price.

Attribute name	Data type	Description
capacity	int	
date	Date	
description	String	
event_id	int	
location_id	int	
person_id	int	
price	double	
time	DateTime	

### 2.2.1.2 Friend

The Friend entity serves as a data holder for the data about a friend stored in a persistent storage.

Attribute name	Data type	Description
nickname	String	
person_email	String	
person_id	int	

### 2.2.1.3 Invitation

The INVITATION entity serves as a data holder for the data about invitations to the event stored in a persistent storage.

Attribute name	Data type	Description
event_id	int	
invitation_id	int	
person_id	int	
state	boolean	
user_id	int	

### 2.2.1.4 Location

The LOCATION entity serves as a data holder for the data about location of the event stored in a persistent storage.

Attribute name	Data type	Description
address	String	
coordinates	String	

### 2.2.1.5 Money Transfer

The MONEY TRANSFER entity serves as a data holder for the data about money transfers stored in a persistent storage.

Attribute name	Data type	Description
amount	double	
date	Date	
event_id	int	
person_id	int	
transfer_id	int	

### 2.2.1.6 Person

The Person entity serves as a data holder for the data about person stored in a persistent storage.  
Person represents information about a person which may be an user or guest attendee.

Attribute name	Data type	Description
person_email	String	
person_id	int	

### 2.2.1.7 User

The User entity serves as a data holder for the data about user stored in a persistent storage.  
User is a person that can participate in creation of an event by creating it or organizing it.  
A single user can create many events and participate in many others.

Attribute name	Data type	Description
password	int	
username	String	

### 2.2.2 entity

This package contains the classes of the entities, defining the data objects synchronized with a persistent storage.



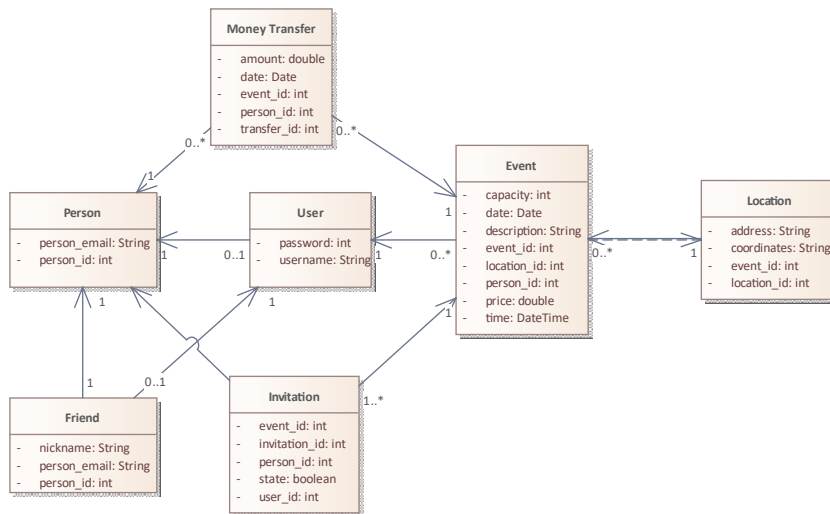


Figure 13 - entity

This diagram shows the classes of the entities, defining the data objects synchronized with a persistent storage.

### 2.2.2.1 Event

The EVENT entity serves as a data holder for the data about event stored in a persistent storage.

Event represents a definition of an event and its details.

Event defines its capacity , date , description , unique event\_id , time and price.

Attribute name	Data type	Description
capacity	int	
date	Date	
description	String	
event_id	int	
location_id	int	
person_id	int	
price	double	
time	DateTime	

### 2.2.2.2 Friend

The Friend entity serves as a data holder for the data about a friend stored in a persistent storage.

Attribute name	Data type	Description
nickname	String	
person_email	String	
person_id	int	

### 2.2.2.3 Invitation

The INVITATION entity serves as a data holder for the data about invitations to the event stored in a persistent storage.



Attribute name	Data type	Description
event_id	int	
invitation_id	int	
person_id	int	
state	boolean	
user_id	int	

#### 2.2.2.4 Location

The LOCATION entity serves as a data holder for the data about location of the event stored in a persistent storage.

Attribute name	Data type	Description
address	String	
coordinates	String	
event_id	int	
location_id	int	

#### 2.2.2.5 Money Transfer

The MONEY TRANSFER entity serves as a data holder for the data about money transfers stored in a persistent storage.

Attribute name	Data type	Description
amount	double	
date	Date	
event_id	int	
person_id	int	
transfer_id	int	

#### 2.2.2.6 Person

The Person entity serves as a data holder for the data about person stored in a persistent storage.

Person represents information about a person which may be an user or guest attendee.

Attribute name	Data type	Description
person_email	String	
person_id	int	

#### 2.2.2.7 User

The User entity serves as a data holder for the data about user stored in a persistent storage.

User is a person that can participate in creation of an event by creating it or organizing it.

A single user can create many events and participate in many others.

Attribute name	Data type	Description
password	int	
username	String	

### 2.2.3 Model

This package defines the interfaces for DAOs - Data access objects - responsible for retrieving data from the persistent storage and persisting the changes. It maps the database tables to entities of the system.

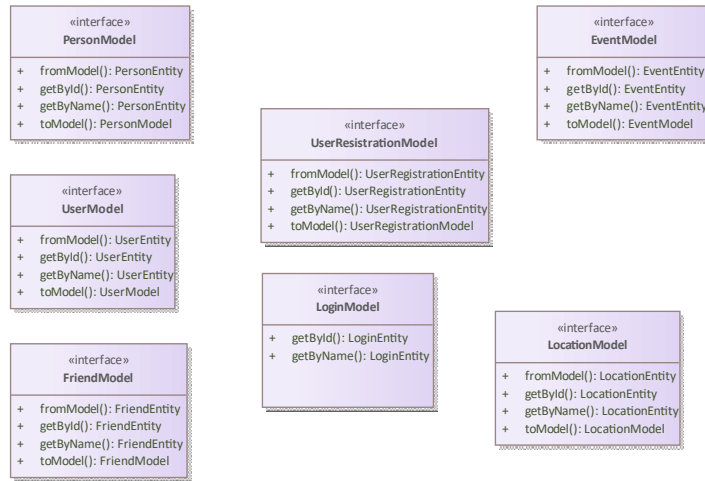


Figure 14 - model

This diagram shows the interfaces for DAOs.

### 2.2.3.1 EventModel

Interface defining the operations available for persistence of events

Method name	Return type	Description
fromModel	EventEntity	
getById	EventEntity	
getByName	EventEntity	
toModel	EventModel	

### 2.2.3.2 FriendModel

Interface defining the operations available for persistence of a friend

Method name	Return type	Description
fromModel	FriendEntity	
getById	FriendEntity	
getByName	FriendEntity	
toModel	FriendModel	

### 2.2.3.3 LocationModel

Interface defining the operations available for persistence of locations

Method name	Return type	Description
fromModel	LocationEntity	
getById	LocationEntity	
getName	LocationEntity	
toModel	LocationModel	

#### 2.2.3.4 LoginModel

Interface defining the operations available for persistence of login of a user

Method name	Return type	Description
getById	LoginEntity	
getName	LoginEntity	

#### 2.2.3.5 PersonModel

Interface defining the operations available for persistence of a person.

Method name	Return type	Description
fromModel	PersonEntity	
getById	PersonEntity	
getName	PersonEntity	
toModel	PersonModel	

#### 2.2.3.6 UserModel

Interface defining the operations available for persistence of a user

Method name	Return type	Description
fromModel	UserEntity	
getById	UserEntity	
getName	UserEntity	
toModel	UserModel	

#### 2.2.3.7 UserRegistrationModel

Interface defining the operations available for persistence of registration of a user

Method name	Return type	Description
fromModel	UserRegistrationEntity	
getById	UserRegistrationEntity	
getByName	UserRegistrationEntity	
toModel	UserRegistrationModel	

## 2.3 web

The web package contains classes implementing the web user interface.

Figure 15 - web

### 3. Realization Model

An implementation of a given input-output behavior.

The realization model describes the realization of important Use Cases in the logic and structure of the system. Such realization is usually described by sequence diagrams consisting of lifelines of various objects and method calls between them.

In this chapter, the realization of some of the use cases of the EVENT PLANNER is described, showing the communication of classes of the Web application

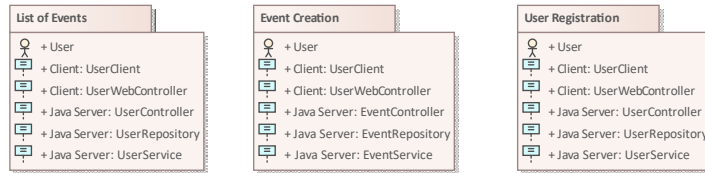


Figure 16 - Realization Model

#### 3.1 Event Creation

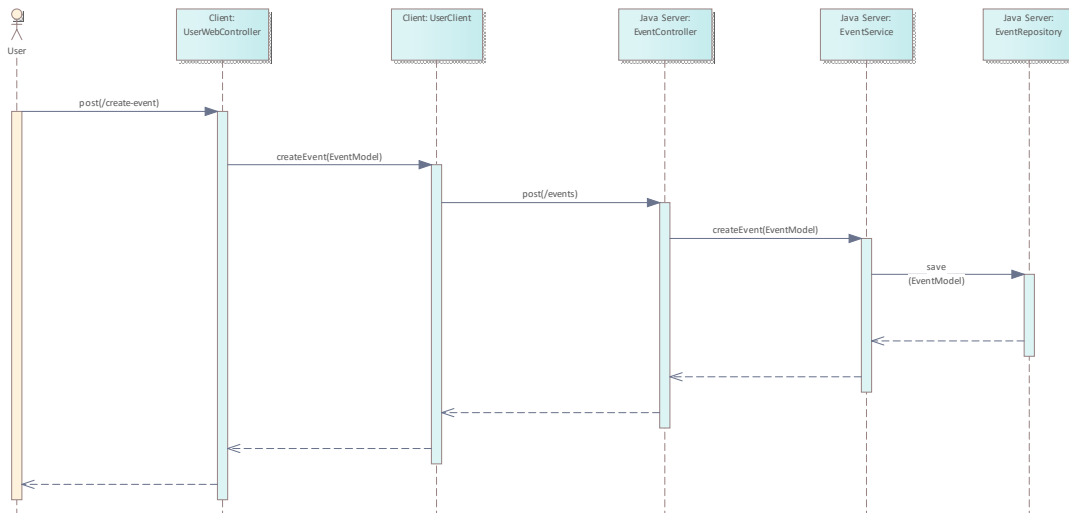


Figure 17 - Event Creation

#### 3.2 List of Events

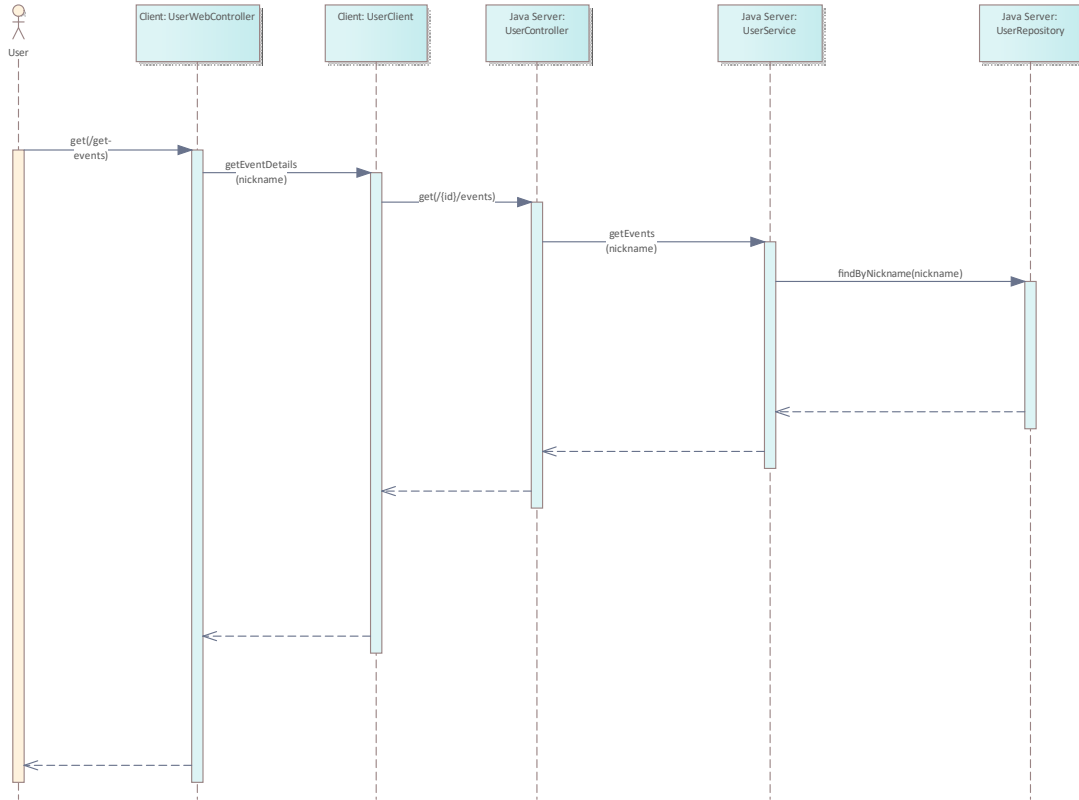


Figure 18 - List of Events

### 3.3 User Registration

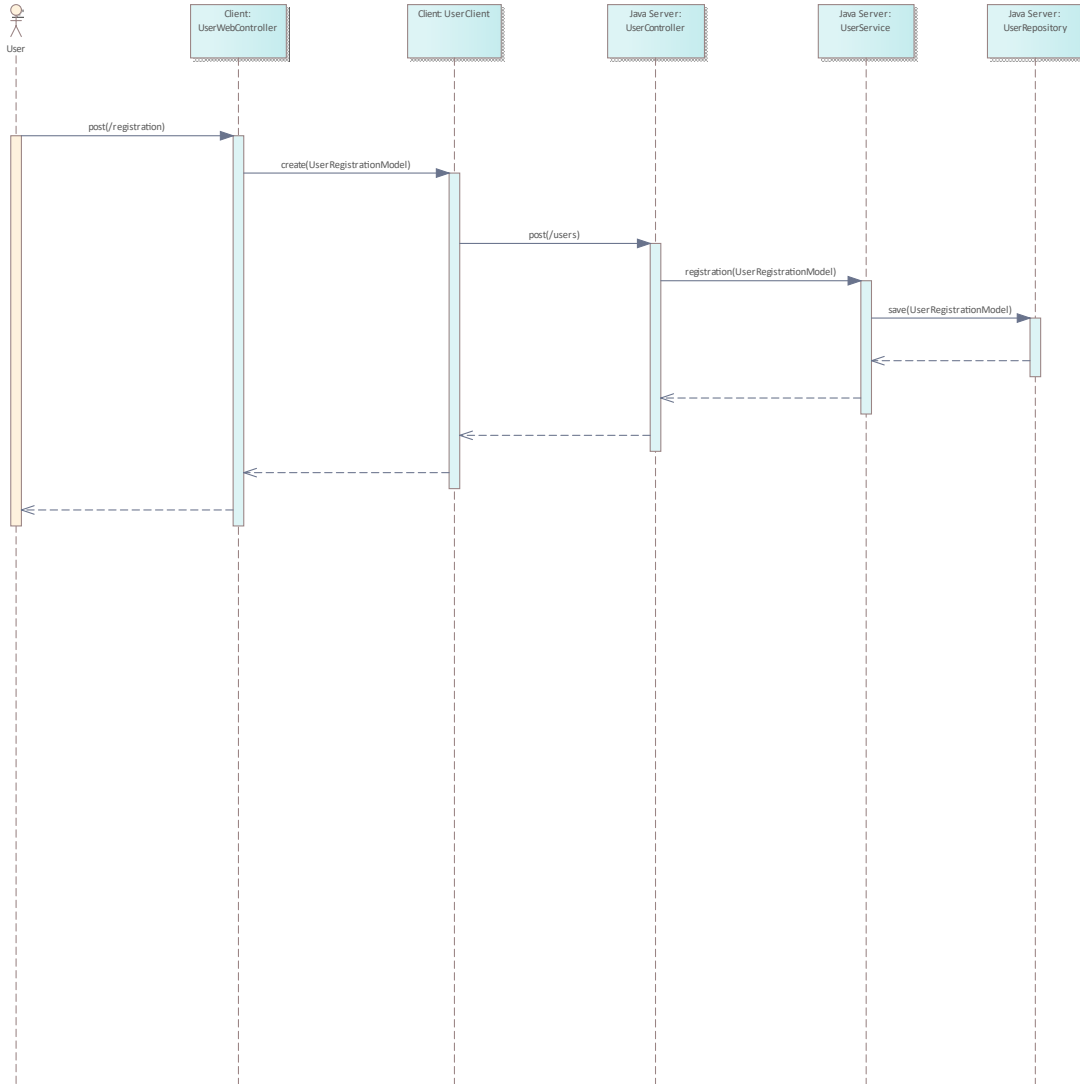


Figure 19 - User Registration





**FAKULTA  
INFORMAČNÍCH  
TECHNOLOGIÍ  
ČVUT V PRAZE**