RAPPORT SUR LA CONFIGURATION DU RECON-NG

I- Introduction

Dans le paysage numérique en constante évolution, la collecte d'informations est une étape cruciale pour comprendre les environnements en ligne, identifier les vulnérabilités potentielles et renforcer la sécurité. C'est dans cette optique que Recon-ng émerge comme un outil essentiel pour les professionnels de la cyber sécurité et les chercheurs en sécurité. Recon-ng, abréviation de "Reconnaissance Next Generation", est une plateforme de reconnaissance et de collecte d'informations sophistiquée, conçue pour simplifier et accélérer le processus de découverte d'informations sur des cibles spécifiques.

II- Configuration

Executons la commande recon-ng dans notre invite de commande comme suit

Fig1

Comme suit on aura le résultat suivant prouvant que la commande a été bien écrite

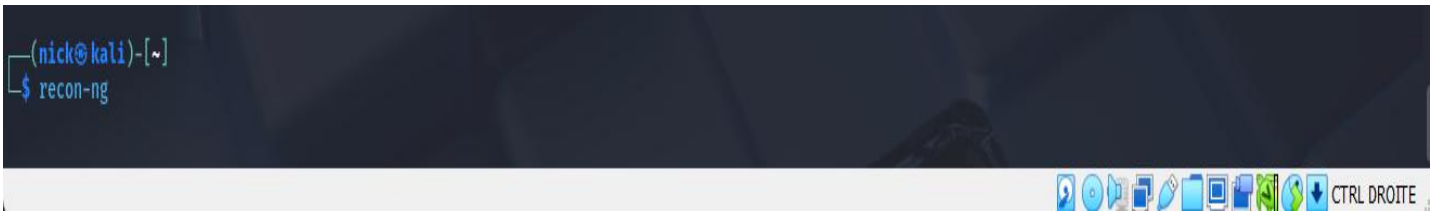

```
┌──(nick㉿kali)-[~]
└─$ recon-ng
[*] Version check disabled.

    Sponsored by...
                          /\
                         / \\ /\
                    /\  /\/  \\V  \/\
                   / \\/ // \\\\\ \\ \/\
                  // // BLACK HILLS \/ \\
                 www.blackhillsinfosec.com

                 www.practisec.com

              [recon-ng v5.1.2, Tim Tomes (@lanmaster53)]

[*] No modules enabled/installed.

[recon-ng][default] > workspaces list

  +----------------------------------+
  | Workspaces |       Modified      |
  +----------------------------------+
  | default    | 2025-04-30 13:36:26 |
  +----------------------------------+

[recon-ng][default] > |
```

Fig2

Maintenant créons notre espace de travail avec la commande workspaces create nom_workspace comme ce qui suit dans notre cas nous utiliserons KPETIGO comme nom_workspace :

```
[recon-ng][default] > workspaces create AHADJITSE
[recon-ng][AHADJITSE] > |
```

Fig3

Vérifions que la création du workspaces à été bien exécuté avec le workspaces list

```
[recon-ng][AHADJITSE] > workspaces list

  +----------------------------------+
  | Workspaces |       Modified      |
  +----------------------------------+
  | AHADJITSE  | 2025-04-30 13:39:11 |
  | default    | 2025-04-30 13:36:26 |
  +----------------------------------+

[recon-ng][AHADJITSE] > |
```

Fig4

Comme le montre la Fig4 la commande a été bien exécutée.

A présent vérifions le schéma de notre base de donné avec la commande bd schema

```
[recon-ng][AHADJITSE] > db schema

  +---------------+
  |    domains    |
  +---------------+
  | domain | TEXT |
  | notes  | TEXT |
  | module | TEXT |
  +---------------+


  +--------------------+
  |     companies      |
  +--------------------+
  | company     | TEXT |
  | description | TEXT |
  | notes       | TEXT |
  | module      | TEXT |
  +--------------------+


  +-----------------+
  |    netblocks    |
  +-----------------+
  | netblock | TEXT |
  | notes    | TEXT |
  | module   | TEXT |
  +-----------------+


  +-----------------------+
  |       locations       |
  +-----------------------+
  | latitude       | TEXT |
  | longitude      | TEXT |
  | street_address | TEXT |
  | notes          | TEXT |
  | module         | TEXT |
  +-----------------------+
```

Fig5

Installons tous les paquets de marketplace avec marketplace install all. Maintenant entrons dans le marketplace whois.

Si ça ne fonctionne pas veuillez réinitialiser recon-ng avec la commande rm -rf ~/.recon-ng

Ensuite on relance recon-ng et on recommence le TP

```
[recon-ng][AHADJITSE] > marketplace search whois
[*] Searching module index for 'whois'...

  +-----------------------------------------------------------------------------------------+
  |                        Path                        | Version |   Status  |  Updated   | D | K |
  +-----------------------------------------------------------------------------------------+
  | recon/companies-domains/viewdns_reverse_whois | 1.1     | installed | 2021-08-24 |   |   |
  | recon/companies-multi/whois_miner             | 1.1     | installed | 2019-10-15 |   |   |
  | recon/domains-companies/whoxy_whois           | 1.1     | installed | 2020-06-24 |   | * |
  | recon/domains-contacts/whois_pocs             | 1.0     | installed | 2019-06-24 |   |   |
  | recon/netblocks-companies/whois_orgs          | 1.0     | installed | 2019-06-24 |   |   |
  +-----------------------------------------------------------------------------------------+

  D = Has dependencies. See info for details.
  K = Requires keys. See info for details.

[recon-ng][AHADJITSE] > |
```

Fig6

Entrons dans le module whois_pocs

```
[recon-ng][AHADJITSE] > marketplace search whois
[*] Searching module index for 'whois'...

  +-----------------------------------------------------------------------------------------+
  |                          Path                          | Version |   Status   |  Updated   | D | K |
  +-----------------------------------------------------------------------------------------+
  | recon/companies-domains/viewdns_reverse_whois | 1.1     | installed | 2021-08-24 |   |   |
  | recon/companies-multi/whois_miner             | 1.1     | installed | 2019-10-15 |   |   |
  | recon/domains-companies/whoxy_whois           | 1.1     | installed | 2020-06-24 |   | * |
  | recon/domains-contacts/whois_pocs             | 1.0     | installed | 2019-06-24 |   |   |
  | recon/netblocks-companies/whois_orgs          | 1.0     | installed | 2019-06-24 |   |   |
  +-----------------------------------------------------------------------------------------+

  D = Has dependencies. See info for details.
  K = Requires keys. See info for details.

[recon-ng][AHADJITSE] > |
```

Fig7

Trouvons ses informations de configuration avec la commande info

```
[recon-ng][AHADJITSE] > modules load recon/domains-contacts/whois_pocs
[recon-ng][AHADJITSE][whois_pocs] > info

      Name: Whois POC Harvester
    Author: Tim Tomes (@lanmaster53)
   Version: 1.0

Description:
  Uses the ARIN Whois RWS to harvest POC data from whois queries for the given domain. Updates the
  'contacts' table with the results.

Options:
  Name    Current Value  Required  Description
  ------  -------------  --------  -----------
  SOURCE  default        yes       source of input (see 'info' for details)

Source Options:
  default        SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs

[recon-ng][AHADJITSE][whois_pocs] > |
```

Fig8

Configurons la Source de sa configuration puis exécutons-la :

- Source =esatogo.com

```
[recon-ng][AHADJITSE][whois_pocs] > options set SOURCE esatogo.com
SOURCE => esatogo.com
[recon-ng][AHADJITSE][whois_pocs] > info

       Name: Whois POC Harvester
     Author: Tim Tomes (@lanmaster53)
    Version: 1.0

Description:
  Uses the ARIN Whois RWS to harvest POC data from whois queries for the given domain. Updates the
  'contacts' table with the results.

Options:
  Name    Current Value  Required  Description
  ------  -------------  --------  -----------
  SOURCE  esatogo.com    yes       source of input (see 'info' for details)

Source Options:
  default        SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs

[recon-ng][AHADJITSE][whois_pocs] > |
```

Fig9

```
[recon-ng][AHADJITSE][whois_pocs] > run

-----------
ESATOGO.COM
-----------
[*] URL: http://whois.arin.net/rest/pocs;domain=esatogo.com
[*] No contacts found.
[recon-ng][AHADJITSE][whois_pocs] >
```

Fig10

- Source = facebook.com

```
[recon-ng][AHADJITSE][whois_pocs] > options set SOURCE facebook.com
SOURCE => facebook.com
[recon-ng][AHADJITSE][whois_pocs] > info

       Name: Whois POC Harvester
     Author: Tim Tomes (@lanmaster53)
    Version: 1.0

Description:
  Uses the ARIN Whois RWS to harvest POC data from whois queries for the given domain. Updates the
  'contacts' table with the results.

Options:
  Name    Current Value  Required  Description
  ------  -------------  --------  -----------
  SOURCE  facebook.com   yes       source of input (see 'info' for details)

Source Options:
  default        SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs
```

Fig11

```
[recon-ng][AHADJITSE][whois_pocs] > run

------------
FACEBOOK.COM
------------
[*] URL: http://whois.arin.net/rest/pocs;domain=facebook.com
[*] URL: http://whois.arin.net/rest/poc/BST184-ARIN
[*] Country: United States
[*] Email: bstout@facebook.com
[*] First_Name: Brandon
[*] Last_Name: Stout
[*] Middle_Name: None
[*] Notes: None
[*] Phone: None
[*] Region: Chicago, IL
[*] Title: Whois contact
[*] ---------------------------------------------------
[*] URL: http://whois.arin.net/rest/poc/OPERA82-ARIN
[*] Country: United States
[*] Email: domain@facebook.com
[*] First_Name: None
[*] Last_Name: Operations
[*] Middle_Name: None
[*] Notes: None
[*] Phone: None
[*] Region: Menlo Park, CA
[*] Title: Whois contact
[*] ---------------------------------------------------

-------
SUMMARY
-------
[*] 2 total (2 new) contacts found.
[recon-ng][AHADJITSE][whois_pocs] > |
```

Fig12

Quittons le mode whois_pocs avec la commande back

```
[recon-ng][AHADJITSE][whois_pocs] > back
[recon-ng][AHADJITSE] > |
```

Fig13

Rentrons à présent dans le marketplace bing avec la commande marketplace search bing

```
[recon-ng][AHADJITSE] > marketplace search bing
[*] Searching module index for 'bing'...

  +-----------------------------------------------------------------------------------------+
  |                          Path                          | Version |   Status   |  Updated   | D | K |
  +-----------------------------------------------------------------------------------------+
  | recon/companies-contacts/bing_linkedin_cache           | 1.0     | installed | 2019-06-24 |   | * |
  | recon/domains-hosts/bing_domain_api                    | 1.0     | installed | 2019-06-24 |   | * |
  | recon/domains-hosts/bing_domain_web                    | 1.1     | installed | 2019-07-04 |   |   |
  | recon/hosts-hosts/bing_ip                              | 1.0     | installed | 2019-06-24 |   | * |
  | recon/profiles-contacts/bing_linkedin_contacts         | 1.2     | installed | 2021-08-24 |   | * |
  +-----------------------------------------------------------------------------------------+

  D = Has dependencies. See info for details.
  K = Requires keys. See info for details.

[recon-ng][AHADJITSE] >
```

Fig14

Executons le module bing_domain_web puis voyons les informations de sa configuration et configurons la SOURCE comme fait précédemment puis exécutons-la

```
[recon-ng][AHADJITSE] > modules load recon/domains-hosts/bing_domain_web
[recon-ng][AHADJITSE][bing_domain_web] > info

       Name: Bing Hostname Enumerator
     Author: Tim Tomes (@lanmaster53)
    Version: 1.1

Description:
  Harvests hosts from Bing.com by using the 'site' search operator. Updates the 'hosts' table with the
  results.

Options:
  Name    Current Value  Required  Description
  ------  -------------  --------  -----------
  SOURCE  default        yes       source of input (see 'info' for details)

Source Options:
  default        SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs

[recon-ng][AHADJITSE][bing_domain_web] > |
```

Fig15

```
[recon-ng][AHADJITSE][bing_domain_web] > options set SOURCE facebook.com
SOURCE => facebook.com
[recon-ng][AHADJITSE][bing_domain_web] > info

       Name: Bing Hostname Enumerator
     Author: Tim Tomes (@lanmaster53)
    Version: 1.1

Description:
  Harvests hosts from Bing.com by using the 'site' search operator. Updates the 'hosts' table with the
  results.

Options:
  Name    Current Value  Required  Description
  ------  -------------  --------  -----------
  SOURCE  facebook.com   yes       source of input (see 'info' for details)

Source Options:
  default        SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs

[recon-ng][AHADJITSE][bing_domain_web] > |
```

Fig16

```
[recon-ng][AHADJITSE][bing_domain_web] > run

------------
FACEBOOK.COM
------------
[*] URL: https://www.bing.com/search?first=0&q=domain%3Afacebook.com
[recon-ng][AHADJITSE][bing_domain_web] > |
```

Fig17

Quittons le module domain_web avec le back et entrons dans le marketplace brute avec marketplace search brute puis le module host_brute

```
[recon-ng][AHADJITSE] > marketplace search brute
[*] Searching module index for 'brute'...

  +-----------------------------------------------------------------------------+
  |                 Path                 | Version |   Status   |  Updated   | D | K |
  +-----------------------------------------------------------------------------+
  | exploitation/injection/xpath_bruter | 1.2     | installed | 2019-10-08 |   |   |
  | recon/domains-domains/brute_suffix  | 1.1     | installed | 2020-05-17 |   |   |
  | recon/domains-hosts/brute_hosts     | 1.0     | installed | 2019-06-24 |   |   |
  +-----------------------------------------------------------------------------+

  D = Has dependencies. See info for details.
  K = Requires keys. See info for details.

[recon-ng][AHADJITSE] > |
```

Fig18

Voyons ses informations et configurons sa source et exécutons-la avec le run

FIg19

```
[recon-ng][AHADJITSE] > modules load recon/domains-hosts/brute_hosts
[recon-ng][AHADJITSE][brute_hosts] > info

       Name: DNS Hostname Brute Forcer
     Author: Tim Tomes (@lanmaster53)
    Version: 1.0

Description:
  Brute forces host names using DNS. Updates the 'hosts' table with the results.

Options:
  Name      Current Value                          Required  Description
  --------  -------------                          --------  -----------
  SOURCE    default                                yes       source of input (see 'info' for details)
  WORDLIST  /home/nick/.recon-ng/data/hostnames.txt  yes       path to hostname wordlist

Source Options:
  default        SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs

[recon-ng][AHADJITSE][brute_hosts] > |
```

```
[recon-ng][AHADJITSE][brute_hosts] > options set SOURCE facebook.com
SOURCE => facebook.com
[recon-ng][AHADJITSE][brute_hosts] > info

       Name: DNS Hostname Brute Forcer
     Author: Tim Tomes (@lanmaster53)
    Version: 1.0

Description:
  Brute forces host names using DNS. Updates the 'hosts' table with the results.

Options:
  Name      Current Value                          Required  Description
  --------  -------------                          --------  -----------
  SOURCE    facebook.com                           yes       source of input (see 'info' for details)
  WORDLIST  /home/nick/.recon-ng/data/hostnames.txt  yes       path to hostname wordlist

Source Options:
  default        SELECT DISTINCT domain FROM domains WHERE domain IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs

[recon-ng][AHADJITSE][brute_hosts] > |
```

Fig20

```
kali [En fonction] - Oracle VM VirtualBox
Fichier  Machine  Écran  Entrée  Périphériques  Aide
Applications  Emplacements  30 avr 14:11  3 %  35 %  0,0 ko  0,0 ko
nick@kali: ~
[*] Country: None
[*] Host: z.facebook.com
[*] Ip_Address: None
[*] Latitude: None
[*] Longitude: None
[*] Notes: None
[*] Region: None
[*] ----------------------------------------------------
[*] z.facebook.com => (CNAME) z-m.c10r.facebook.com
[*] Country: None
[*] Host: z-m.c10r.facebook.com
[*] Ip_Address: None
[*] Latitude: None
[*] Longitude: None
[*] Notes: None
[*] Region: None
[*] ----------------------------------------------------
[*] Country: None
[*] Host: z.facebook.com
[*] Ip_Address: None
[*] Latitude: None
[*] Longitude: None
[*] Notes: None
[*] Region: None
[*] ----------------------------------------------------
[*] z.facebook.com => (A) 102.132.104.37
[*] Country: None
[*] Host: z.facebook.com
[*] Ip_Address: 102.132.104.37
[*] Latitude: None
[*] Longitude: None
[*] Notes: None
[*] Region: None
[*] ----------------------------------------------------

-------
SUMMARY
-------
[*] 415 total (234 new) hosts found.
[recon-ng][AHADJITSE][brute_hosts] > |
```

Utilisons la commande back pour quitter le module brute_hosts et cherchons le marketplace interesting et ouvrons le module interesting_files

```
[recon-ng][AHADJITSE][brute_hosts] > back
[recon-ng][AHADJITSE] > marketplace search interesting
[*] Searching module index for 'interesting'...

  +------------------------------------------------------------------------------------+
  |                      Path                      | Version |   Status  |  Updated   | D | K |
  +------------------------------------------------------------------------------------+
  | discovery/info_disclosure/interesting_files | 1.2     | installed | 2021-10-04 |   |   |
  +------------------------------------------------------------------------------------+

  D = Has dependencies. See info for details.
  K = Requires keys. See info for details.

[recon-ng][AHADJITSE] >
```

Fig21

```
[recon-ng][AHADJITSE] > modules load discovery/info_disclosure/interesting_files
[recon-ng][AHADJITSE][interesting_files] > info

      Name: Interesting File Finder
    Author: Tim Tomes (@lanmaster53), thrapt (thrapt@gmail.com), Jay Turla (@shipcod3), and Mark Jeffery
   Version: 1.2

Description:
  Checks hosts for interesting files in predictable locations.

Options:
  Name      Current Value                                          Required  Description
  --------  -------------                                          --------  -----------
  CSV_FILE  /home/nick/.recon-ng/data/interesting_files_verify.csv  yes       custom filename map
  DOWNLOAD  True                                                   yes       download discovered files
  PORT      80                                                     yes       request port
  PROTOCOL  http                                                   yes       request protocol
  SOURCE    default                                                yes       source of input (see 'info' f
or details)

Source Options:
  default        SELECT DISTINCT host FROM hosts WHERE host IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs

Comments:
  * Files: robots.txt, sitemap.xml, sitemap.xml.gz, crossdomain.xml, phpinfo.php, test.php, elmah.axd,
  server-status, jmx-console/, admin-console/, web-console/
  * CSV Default: /home/nick/.recon-ng/data/interesting_files_verify.csv
  * Google Dorks:
    - inurl:robots.txt ext:txt
    - inurl:elmah.axd ext:axd intitle:"Error log for"
    - inurl:server-status "Apache Status"

[recon-ng][AHADJITSE][interesting_files] >
```

Comme nous pouvons le voir on a plusieurs options qu'on peut paramétrer mais nous allons nous contentez de changer seulement la SOURCE en prenant facebook.com

```
[recon-ng][AHADJITSE][interesting_files] > options set SOURCE facebook.com
SOURCE => facebook.com
[recon-ng][AHADJITSE][interesting_files] > info

      Name: Interesting File Finder
    Author: Tim Tomes (@lanmaster53), thrapt (thrapt@gmail.com), Jay Turla (@shipcod3), and Mark Jeffery
   Version: 1.2

Description:
  Checks hosts for interesting files in predictable locations.

Options:
  Name      Current Value                                          Required  Description
  --------  -------------                                          --------  -----------
  CSV_FILE  /home/nick/.recon-ng/data/interesting_files_verify.csv  yes       custom filename map
  DOWNLOAD  True                                                   yes       download discovered files
  PORT      80                                                     yes       request port
  PROTOCOL  http                                                   yes       request protocol
  SOURCE    facebook.com                                           yes       source of input (see 'info' f
or details)

Source Options:
  default        SELECT DISTINCT host FROM hosts WHERE host IS NOT NULL
  <string>       string representing a single input
  <path>         path to a file containing a list of inputs
  query <sql>    database query returning one column of inputs

Comments:
  * Files: robots.txt, sitemap.xml, sitemap.xml.gz, crossdomain.xml, phpinfo.php, test.php, elmah.axd,
  server-status, jmx-console/, admin-console/, web-console/
  * CSV Default: /home/nick/.recon-ng/data/interesting_files_verify.csv
  * Google Dorks:
    - inurl:robots.txt ext:txt
    - inurl:elmah.axd ext:axd intitle:"Error log for"
    - inurl:server-status "Apache Status"

[recon-ng][AHADJITSE][interesting_files] >
```

Fig22

Maintenant que la cofiguration est terminée exécutons la avec le run

```
[recon-ng][AHADJITSE][interesting_files] > run
[*] http://facebook.com:80/robots.txt => Error
[*] http://facebook.com:80/sitemap.xml => Error
[*] http://facebook.com:80/sitemap.xml.gz => Error
[*] http://facebook.com:80/crossdomain.xml => Error
[*] http://facebook.com:80/phpinfo.php => Error
[*] http://facebook.com:80/test.php => Error
[*] http://facebook.com:80/elmah.axd => Error
[*] http://facebook.com:80/server-status => Error
[*] http://facebook.com:80/jmx-console/ => Error
[*] http://facebook.com:80/admin-console/ => Error
[*] http://facebook.com:80/web-console/ => Error
[*] 0 interesting files found.
[recon-ng][AHADJITSE][interesting_files] > run
[*] http://facebook.com:80/robots.txt => Error
```

Fig23

Quittons ce module et cherchons le marketplace reporting module reporting/xml et regardons sa configuration

```
[recon-ng][AHADJITSE][interesting_files] > back
[recon-ng][AHADJITSE] > marketplace search reporting
[*] Searching module index for 'reporting'...

  +-------------------------------------------------------------+
  |         Path         | Version |   Status  |  Updated   | D | K |
  +-------------------------------------------------------------+
  | reporting/csv        | 1.0     | installed | 2019-06-24 |   |   |
  | reporting/html       | 1.0     | installed | 2019-06-24 |   |   |
  | reporting/json       | 1.0     | installed | 2019-06-24 |   |   |
  | reporting/list       | 1.0     | installed | 2019-06-24 |   |   |
  | reporting/proxifier  | 1.0     | installed | 2019-06-24 |   |   |
  | reporting/pushpin    | 1.0     | installed | 2019-06-24 |   | * |
  | reporting/xlsx       | 1.0     | installed | 2019-06-24 |   |   |
  | reporting/xml        | 1.1     | installed | 2019-06-24 |   |   |
  +-------------------------------------------------------------+

  D = Has dependencies. See info for details.
  K = Requires keys. See info for details.

[recon-ng][AHADJITSE] >
```

Fig24

Dans notre cas nous allons configurer l FILENAME comme étant result.xml et le laisser sur le Desktop et on l'exécute

Fig25

```
[recon-ng][AHADJITSE] > modules load reporting/xml
[recon-ng][AHADJITSE][xml] > info

      Name: XML Report Generator
    Author: Eric Humphries (@e2fsck) and Tim Tomes (@lanmaster53)
   Version: 1.1

Description:
  Creates an XML report.

Options:
  Name      Current Value                                        Required  Description
  --------  -------------                                        --------  -----------
  FILENAME  /home/nick/.recon-ng/workspaces/AHADJITSE/results.xml  yes       path and filename for report o
utput
  TABLES    hosts, contacts, credentials                         yes       comma delineated list of table
s

[recon-ng][AHADJITSE][xml] >
```

A présent générons un reporting/html aussi

```
[recon-ng][KPETIGO][interesting_files] > back
[recon-ng][KPETIGO] > marketplace search reporting
[*] Searching module index for 'reporting' ...

  +-------------------------------------------------------------+
  |          Path          | Version |   Status   |  Updated   | D | K |
  +-------------------------------------------------------------+
  | reporting/csv          | 1.0     | installed  | 2019-06-24 |   |   |
  | reporting/html         | 1.0     | installed  | 2019-06-24 |   |   |
  | reporting/json         | 1.0     | installed  | 2019-06-24 |   |   |
  | reporting/list         | 1.0     | installed  | 2019-06-24 |   |   |
  | reporting/proxifier    | 1.0     | installed  | 2019-06-24 |   |   |
  | reporting/pushpin      | 1.0     | installed  | 2019-06-24 |   | * |
  | reporting/xlsx         | 1.0     | installed  | 2019-06-24 |   |   |
  | reporting/xml          | 1.1     | installed  | 2019-06-24 |   |   |
  +-------------------------------------------------------------+

  D = Has dependencies. See info for details.
  K = Requires keys. See info for details.

[recon-ng][KPETIGO] > modules load reporting/html
[recon-ng][KPETIGO][html] > info

      Name: HTML Report Generator
    Author: Tim Tomes (@lanmaster53)
   Version: 1.0

Description:
  Creates an HTML report.

Options:
  Name      Current Value                                       Required  Description
  --------  -------------                                       --------  -----------
  CREATOR                                                       yes       use creator name in the report footer
  CUSTOMER                                                      yes       use customer name in the report header
  FILENAME  /home/kali/.recon-ng/workspaces/KPETIGO/results.html  yes       path and filename for report output
  SANITIZE  True                                                yes       mask sensitive data in the report

[recon-ng][KPETIGO][html] >
```

Fig26

Configurons les options CREATOR CUSTOMER et le FILENAME

```
[recon-ng][KPETIGO][html] > options set CREATOR KPETIGO
CREATOR ⇒ KPETIGO
[recon-ng][KPETIGO][html] > options set CUSTOMER CS
CUSTOMER ⇒ CS
[recon-ng][KPETIGO][html] > options set FILENAME /home/kali/Desktop/rapport1.html
FILENAME ⇒ /home/kali/Desktop/rapport1.html
[recon-ng][KPETIGO][html] > run
[*] Report generated at '/home/kali/Desktop/rapport1.html'.
[recon-ng][KPETIGO][html] >
```

Fig27

Fig28

Comme la Fig26 le montre le reporting/xml et reporting/html se sont bien exécutés ce qui met fin à notre configuration.

III- Conclusion

En conclusion, Recon-ng se révèle être une pièce maîtresse dans l'arsenal des professionnels de la cyber sécurité et des chercheurs en sécurité. Avec sa capacité à collecter des informations de manière ciblée et approfondie à partir de sources publiques, cet outil offre une vue panoramique des cibles potentielles, permettant ainsi de mieux comprendre les vulnérabilités et de prendre des mesures préventives pour renforcer la sécurité.