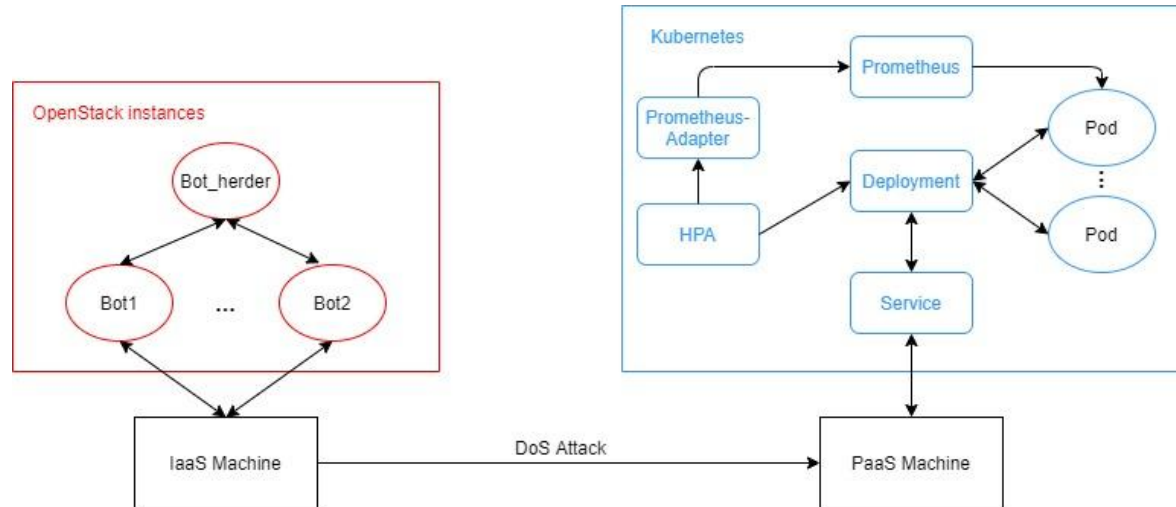# SCENARIO

APPLICATIONS

OPENSTACK

On the OpenStack side there are three instances:
  A. One bot_herder: sends command to *bots* in order to start/stop the DoS attack or close the communication with them.
  B. Two bots: listen on port 9999 the commands sent by the *Bot_herder*.

KUBERNETES

In a single pod contains two containers:
  A. MySQL: runs a MySQL application where some data are stored in a simple database.
  B. Ubuntu: runs a Flask application that allows to retrieve some data from the MySQL container through a GET request.