

interface Karte

name: string

rot: number

grün: number

gelb: number

blau: number

k0 - k12: Karte

s1: number = 4

s2: number = 4

c: string = ""

AlleKarten = [k0, k1... k12]

z: number

i: string = prompt()

z = Number(i)

d: number = 0

A

C

E

B

D

F

G

H

[d < z]

l: number

l = random(15) +

[l = 13 && s1 > 0]

c = Schwarz

s1 --

d --



continue


placeDiv(c, "4", d) +


A

Continue

© Berlitz

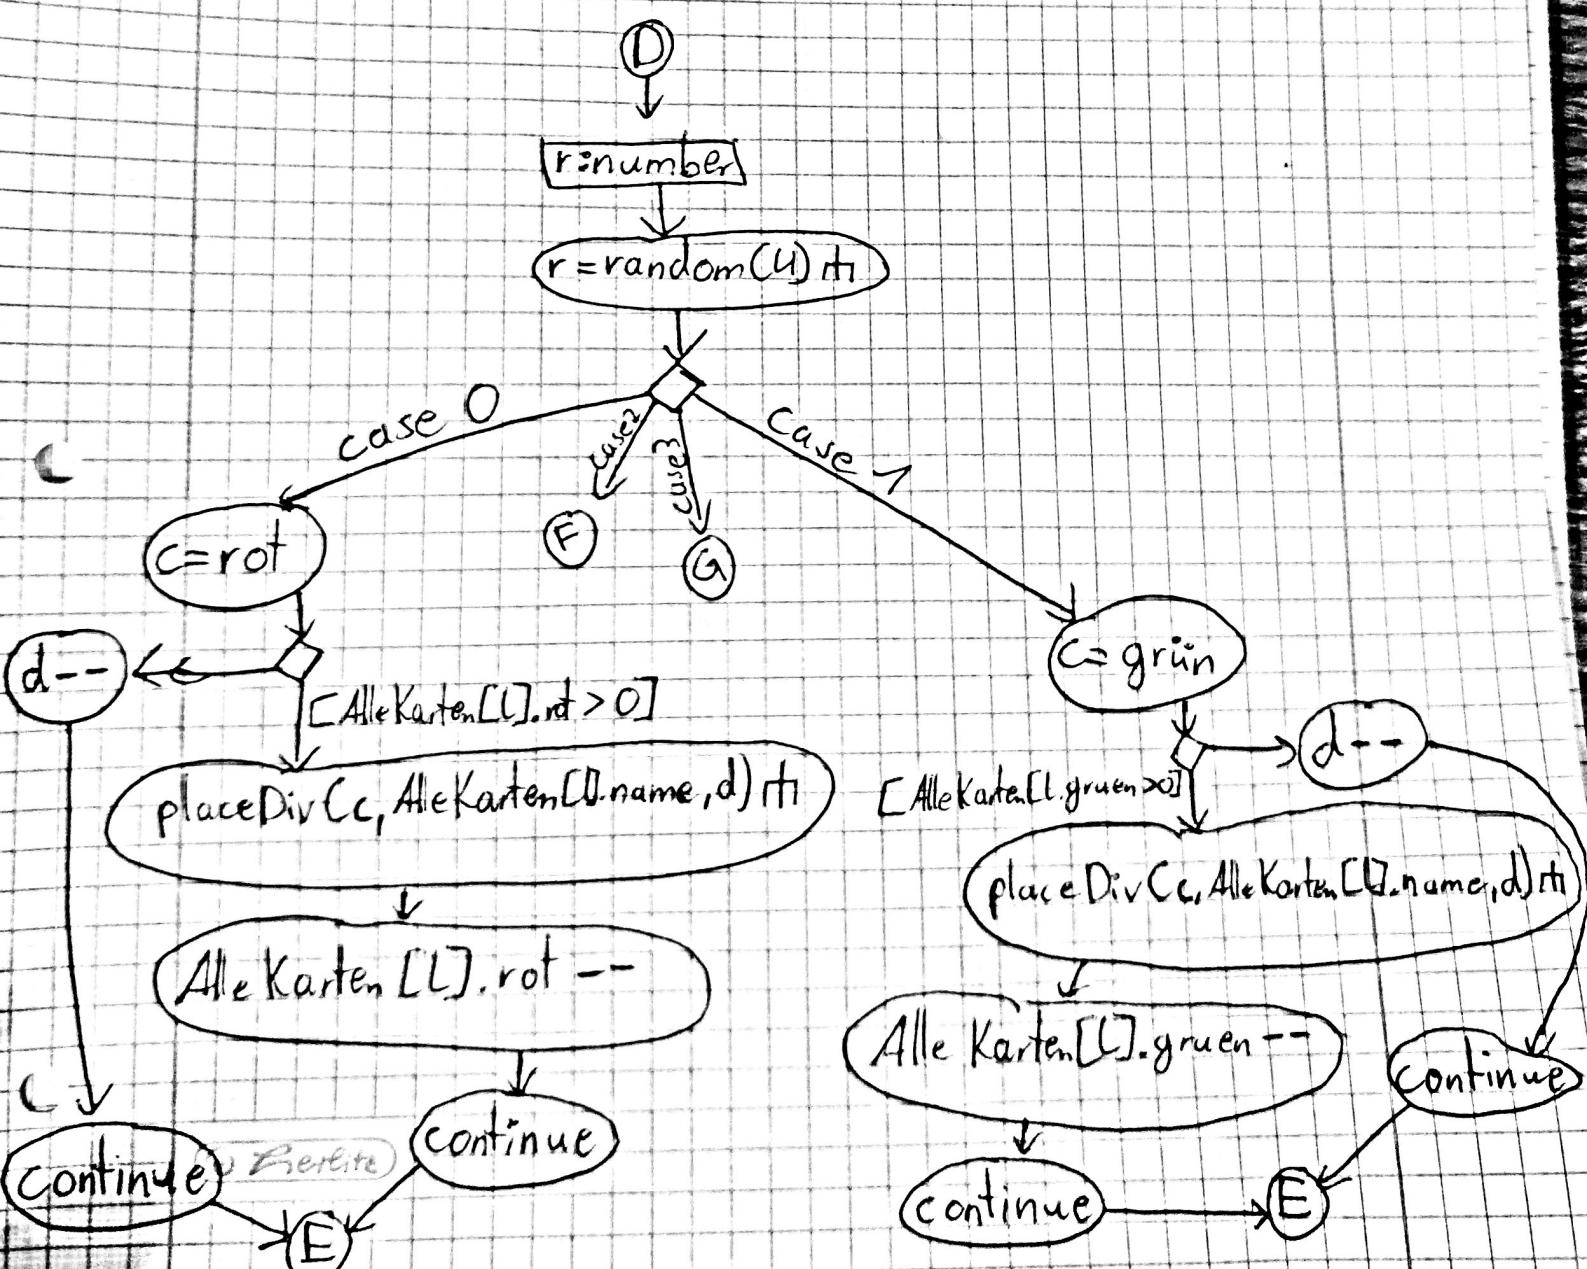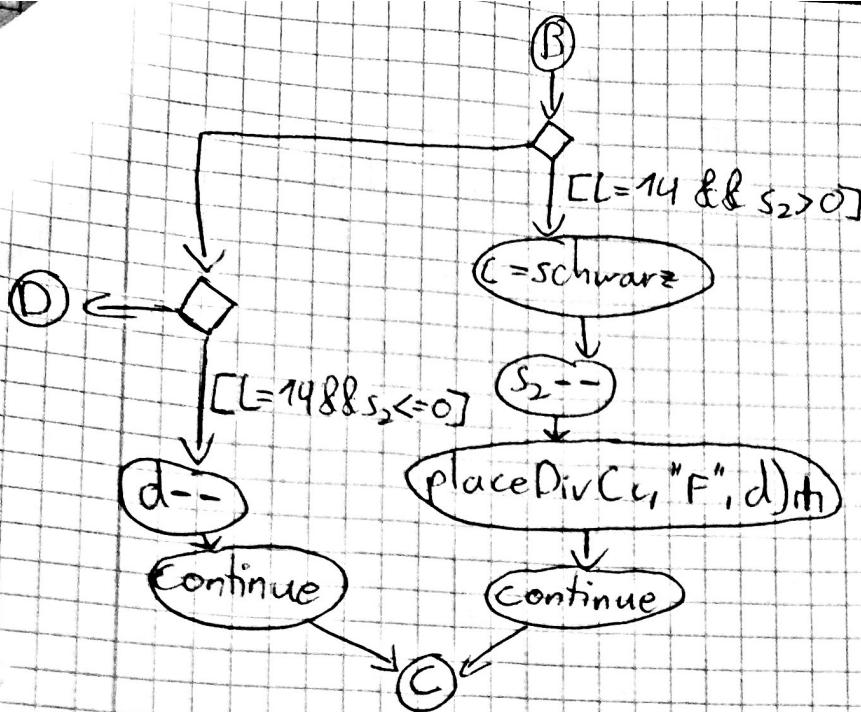

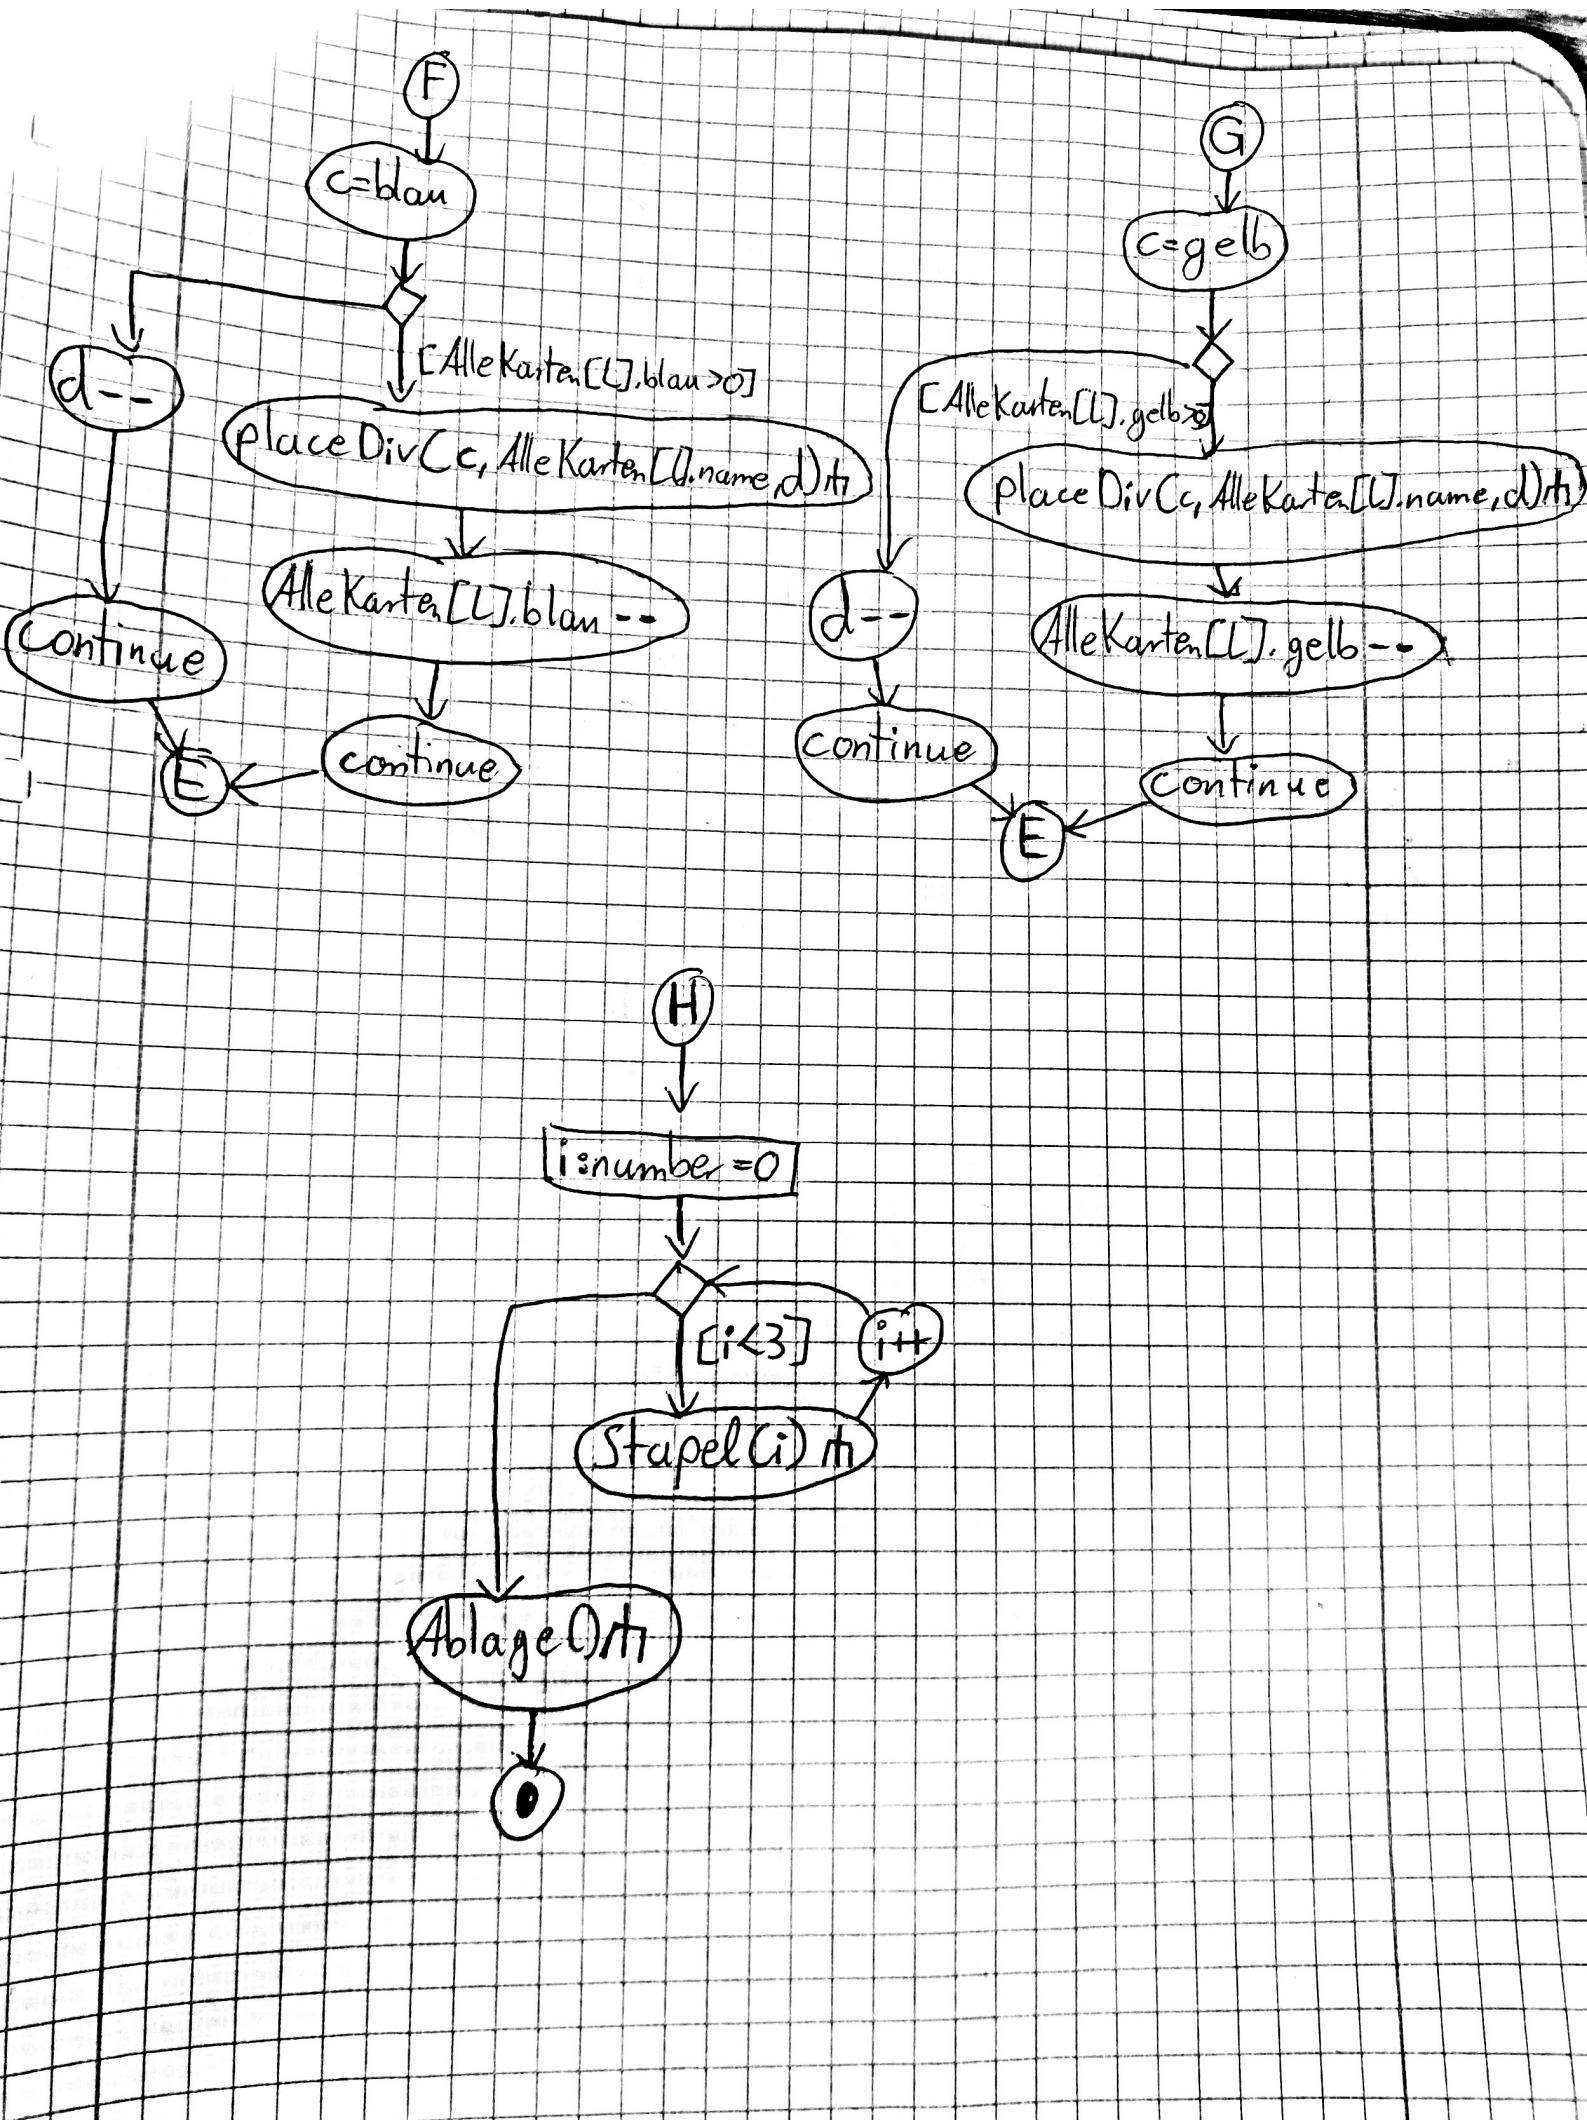

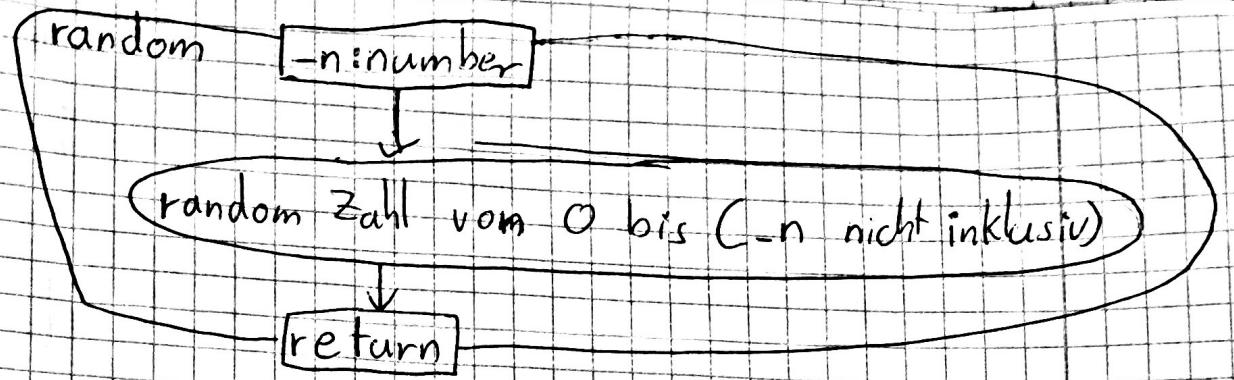

placeDiv

-color:string
-n:string
-x:number


create div Element 'div'

append div to d body


setze div ID in Abhängigkeit von -x

-n in div schreiben durch ID
+ innerHTML

Anpassung der Werte

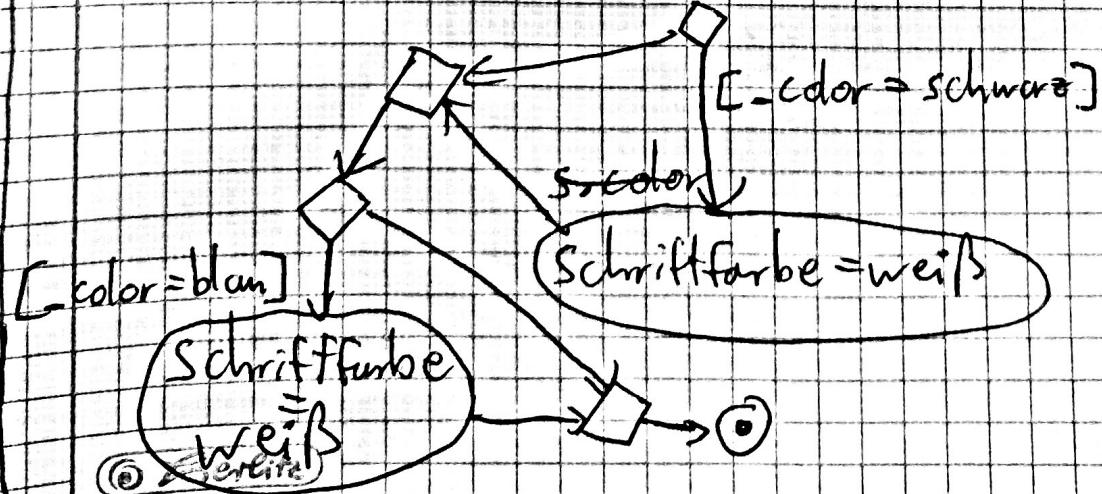

Stack

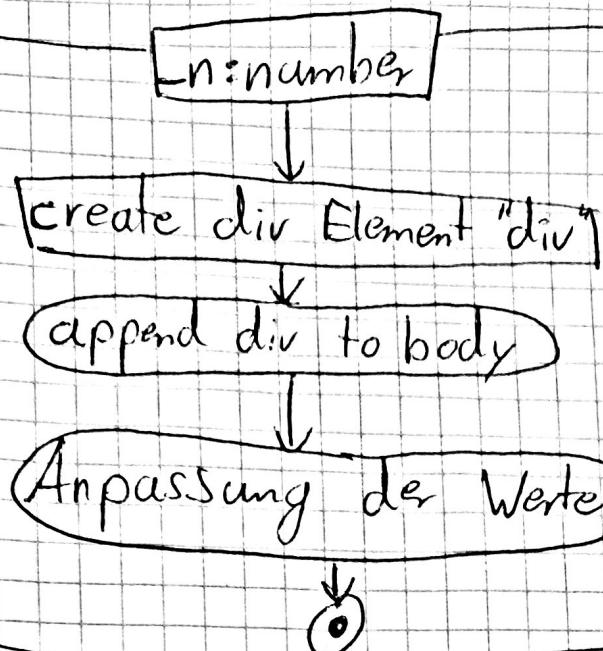

Ablage

