

Trabajo Práctico

Sitio: <https://pokeapi.co>

Tester: Nicolás Rivarola


Herramienta de prueba: Postman

POKEAPI-TEST-01

Servicio “Berry”, intentamos ver la cantidad de “berries”.

Utilizando el método GET

Respuesta; Código 200

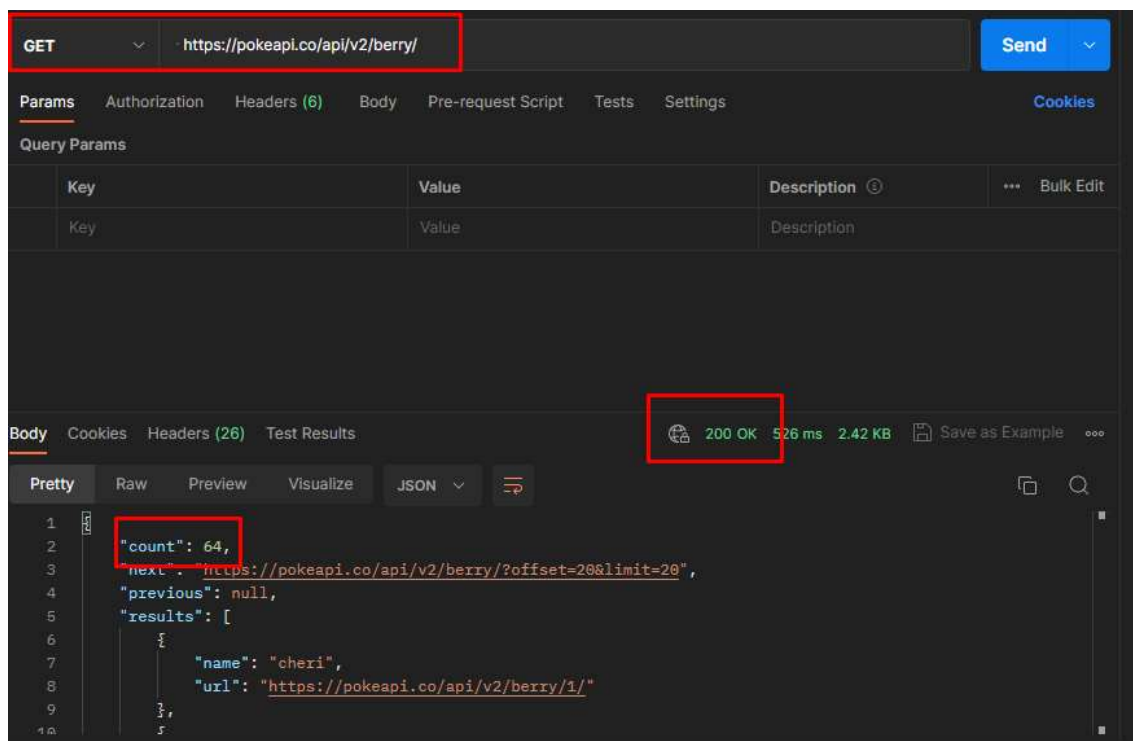

POKEAPI-TEST-02

Servicio “Berry”, intentamos ver el ID (“2”)

Utilizando el método GET

Respuesta; Código 200

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** https://pokeapi.co/api/v2/berry/2
- Status:** 200 OK
- Response Time:** 472 ms
- Response Size:** 1.9 KB
- Response Body (JSON):**

```
{  "growth_time": 3,  "id": 2,  "item": {    "name": "chesto-berry",    "url": "https://pokeapi.co/api/v2/item/127/"  },  "max_harvest": 5,  "name": "chesto",  "natural_gift_power": 60,
```

POKEAPI-TEST-03

Servicio “Berry”, intentamos ver el ID (“0”)

Utilizando el método GET

Respuesta; Código 404

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** https://pokeapi.co/api/v2/berry/0
- Status:** 404 Not Found
- Response Time:** 2.10 s
- Response Size:** 1013 B
- Response Body (Text):**

```
1  Not Found
```

POKEAPI-TEST-04

Servicio “Evolution Triggers”, intentamos ver la cantidad.

Utilizando el método GET

Respuesta; Código 200

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** `https://pokeapi.co/api/v2/evolution-trigger`
- Status:** 200 OK
- Response Body (JSON):**

```
{  "count": 13,  "next": null,  "previous": null,  "results": [    {      "name": "level-up",      "url": "https://pokeapi.co/api/v2/evolution-trigger/1/"    }  ]}
```

POKEAPI-TEST-05

Servicio “Evolution Triggers”, intentamos ver el ID (“14”)

Utilizando el método GET

Respuesta; Código 404

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** `https://pokeapi.co/api/v2/evolution-trigger/14`
- Status:** 404 Not Found
- Response Body (Text):**

```
1  Not Found
```

POKEAPI-TEST-06

Servicio “Machine”, intentamos ver el ID (“200”)

Utilizando el método GET

Respuesta; Código 200

The screenshot shows the Postman interface for a GET request to `https://pokeapi.co/api/v2/machine/200`. The request is highlighted with a red box. The response status is `200 OK`, highlighted with a red box. The response body is displayed in JSON format, with the `"id": 200` field highlighted by a red box.

```
{
  "id": 200,
  "item": {
    "name": "tm10",
    "url": "https://pokeapi.co/api/v2/item/314/"
  },
  "move": {
    "name": "dig",
    "url": "https://pokeapi.co/api/v2/move/91/"
  }
}
```

POKEAPI-TEST-07

Servicio “Machine”, intentamos ver la cantidad, ingresando “/MACHINE”(mayúscula)

Utilizando el método GET

Respuesta; Código 404

The screenshot shows the Postman interface for a GET request to `https://pokeapi.co/api/v2/MACHINE`. The request is highlighted with a red box. The response status is `404 Not Found`, highlighted with a red box. The response body is displayed in text format, showing `1 Not Found`, which is also highlighted by a red box.

```
1 Not Found
```

POKEAPI-TEST-08

Servicio “Machine”, intentamos ver el ID (“1689”)

Utilizando el método GET

Respuesta; Código 404

The screenshot shows the Postman interface for a GET request to `https://pokeapi.co/api/v2/machine/1689`. The response status is **404 Not Found** with a response time of 160 ms and a body size of 1016 B. The response body is displayed in the "Body" tab, showing the text "Not Found".

Key	Value	Description
Key	Value	Description

```
1 Not Found
```

POKEAPI-TEST-09

Servicio “Item”, intentamos ver la cantidad.

Utilizando el método GET

Respuesta; Código 200

The screenshot shows the Postman interface for a GET request to `https://pokeapi.co/api/v2/item/`. The response status is **200 OK** with a response time of 172 ms and a body size of 2.52 KB. The response body is displayed in the "Body" tab, showing the following JSON data:


```
1 {
2   "count": 2050,
3   "next": "https://pokeapi.co/api/v2/item/?offset=20&limit=20",
4   "previous": null,
5   "results": [
6     {
7       "name": "master-ball",
8       "url": "https://pokeapi.co/api/v2/item/1/"
9     },
10  ]
11 }
```

POKEAPI-TEST-10

Servicio “Item”, intentamos ver el ID (“0”)

Utilizando el método GET

Respuesta; Código 404

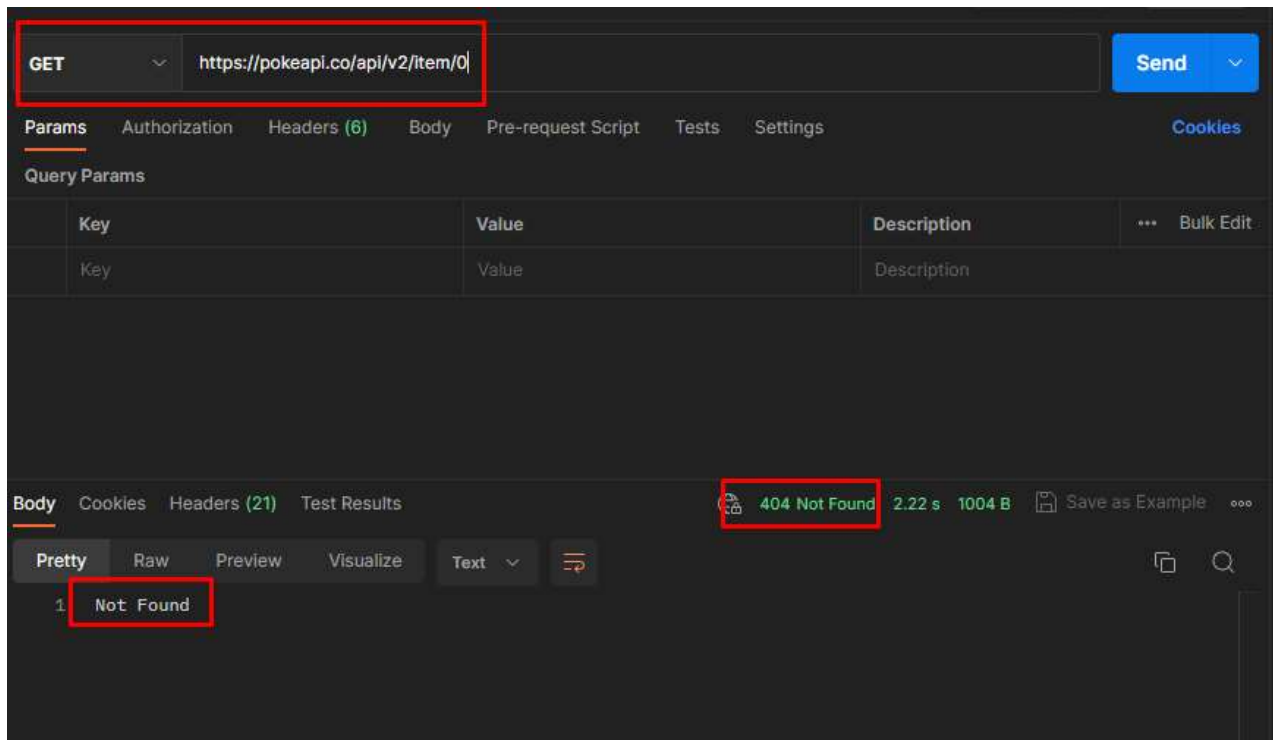

POKEAPI-TEST-11

Servicio “Item”, intentamos ver el ID (“200”)

Utilizando el método POST

Respuesta; Código 404

